



Weatherford

**COMPENSATED SONIC
WITH INTEGRATED TRANSIT TIME**

GRAND MESA OPERATING COMPANY

PHILLIP # 1-26


WILDCAT

GOVE

U.S.A. / KANSAS

2180' FNL & 1707' FWL

NW SW SE NW



PROVINCE/COUNTY

COUNTRY/STATE

LOCATION

SEC

TWP

RGE

26

13S

31W

API Number

15-063-22000

Permit Number

MML

Other Services

MPD/MDN

MAI/MFE

MML

Permanent Datum G.L., Elevation 2851 feet

Log Measured From KB

Drilling Measured From K.B.

Date

03-JUN-2012

Run Number

ONE

Depth Driller

4631.00

Depth Logger

4638.00

First Reading

4625.00

Elevations:
KB 2856.00
DF 2854.00
GL 2851.00

BOREHOLE RECORD

Last Edited: 04-JUN-2012 02:20

Bit Size inches	Depth From feet	Depth To feet
7.875	207.00	4638.00





CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	5.00	207.00	24.00

REMARKS

Tools Ran: MCG, MML, MDN, MPD, MFE, MSS, MAI.
 Hardware Used: MDN Dual Eccentralizer used. MPD 8 inch profile plate used. MFE, MSS and MAI 0.5 inch standoffs used.
 2.71 g/cc Limestone Density Matrix used to calculate porosity.
 All intervals logged and scaled per customer's request.
 Annular volume with 5.5 inch production casing calculated 0 = 192 cu. ft.
 Service order #3534584
 Rig: Murfin Rig # 24
 Engineer: A. Giambalvo
 Operator(s): K. Rinehart

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

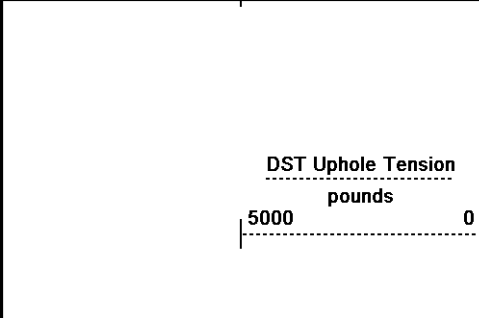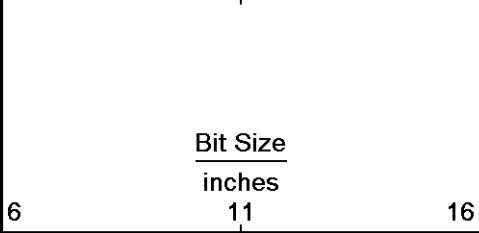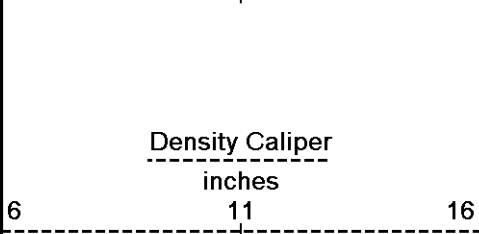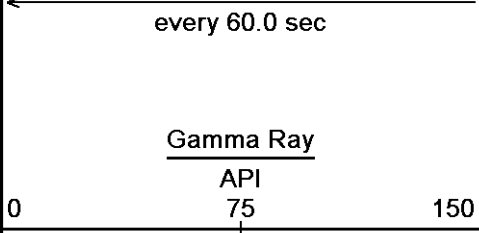

Depth in Feet





Borehole Temp in deg F



Replay Scale 1:240


206


250

240

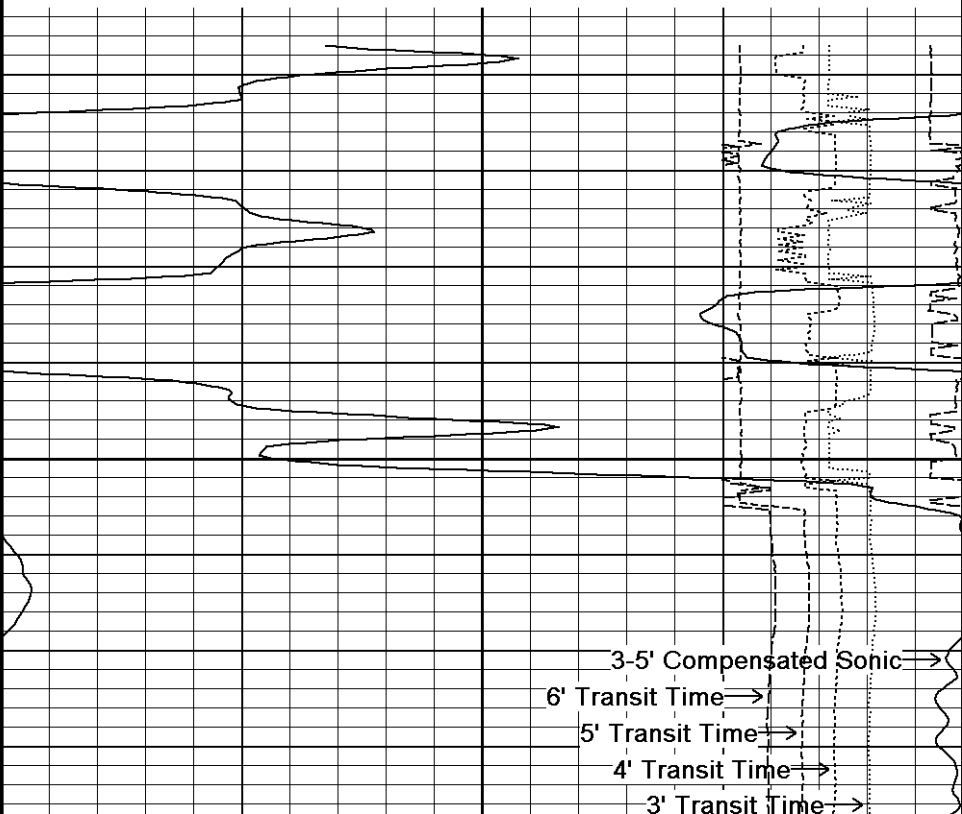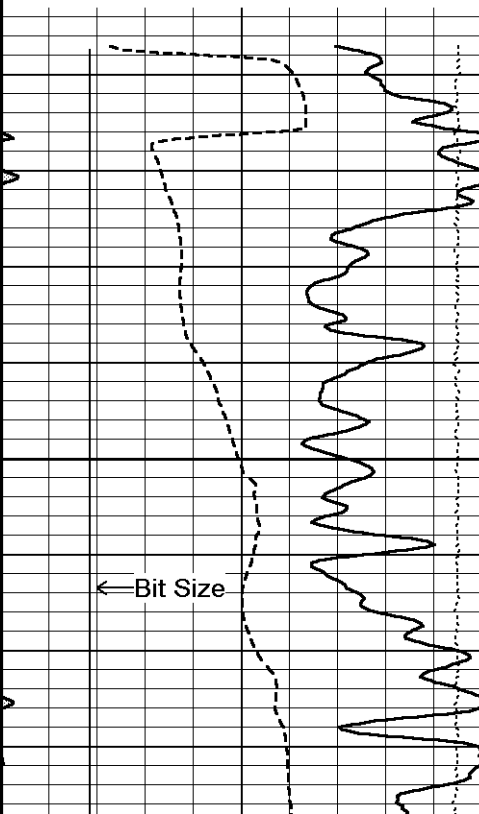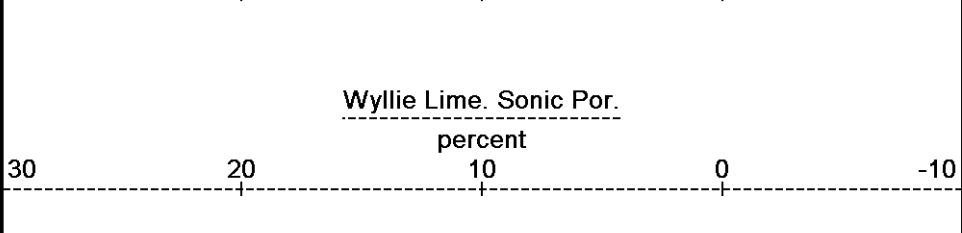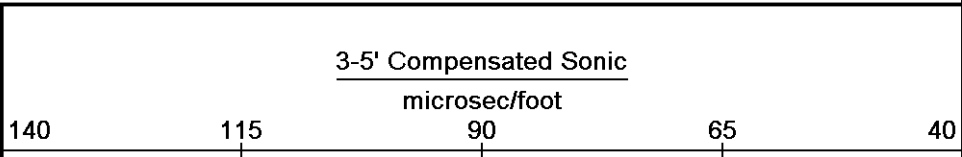


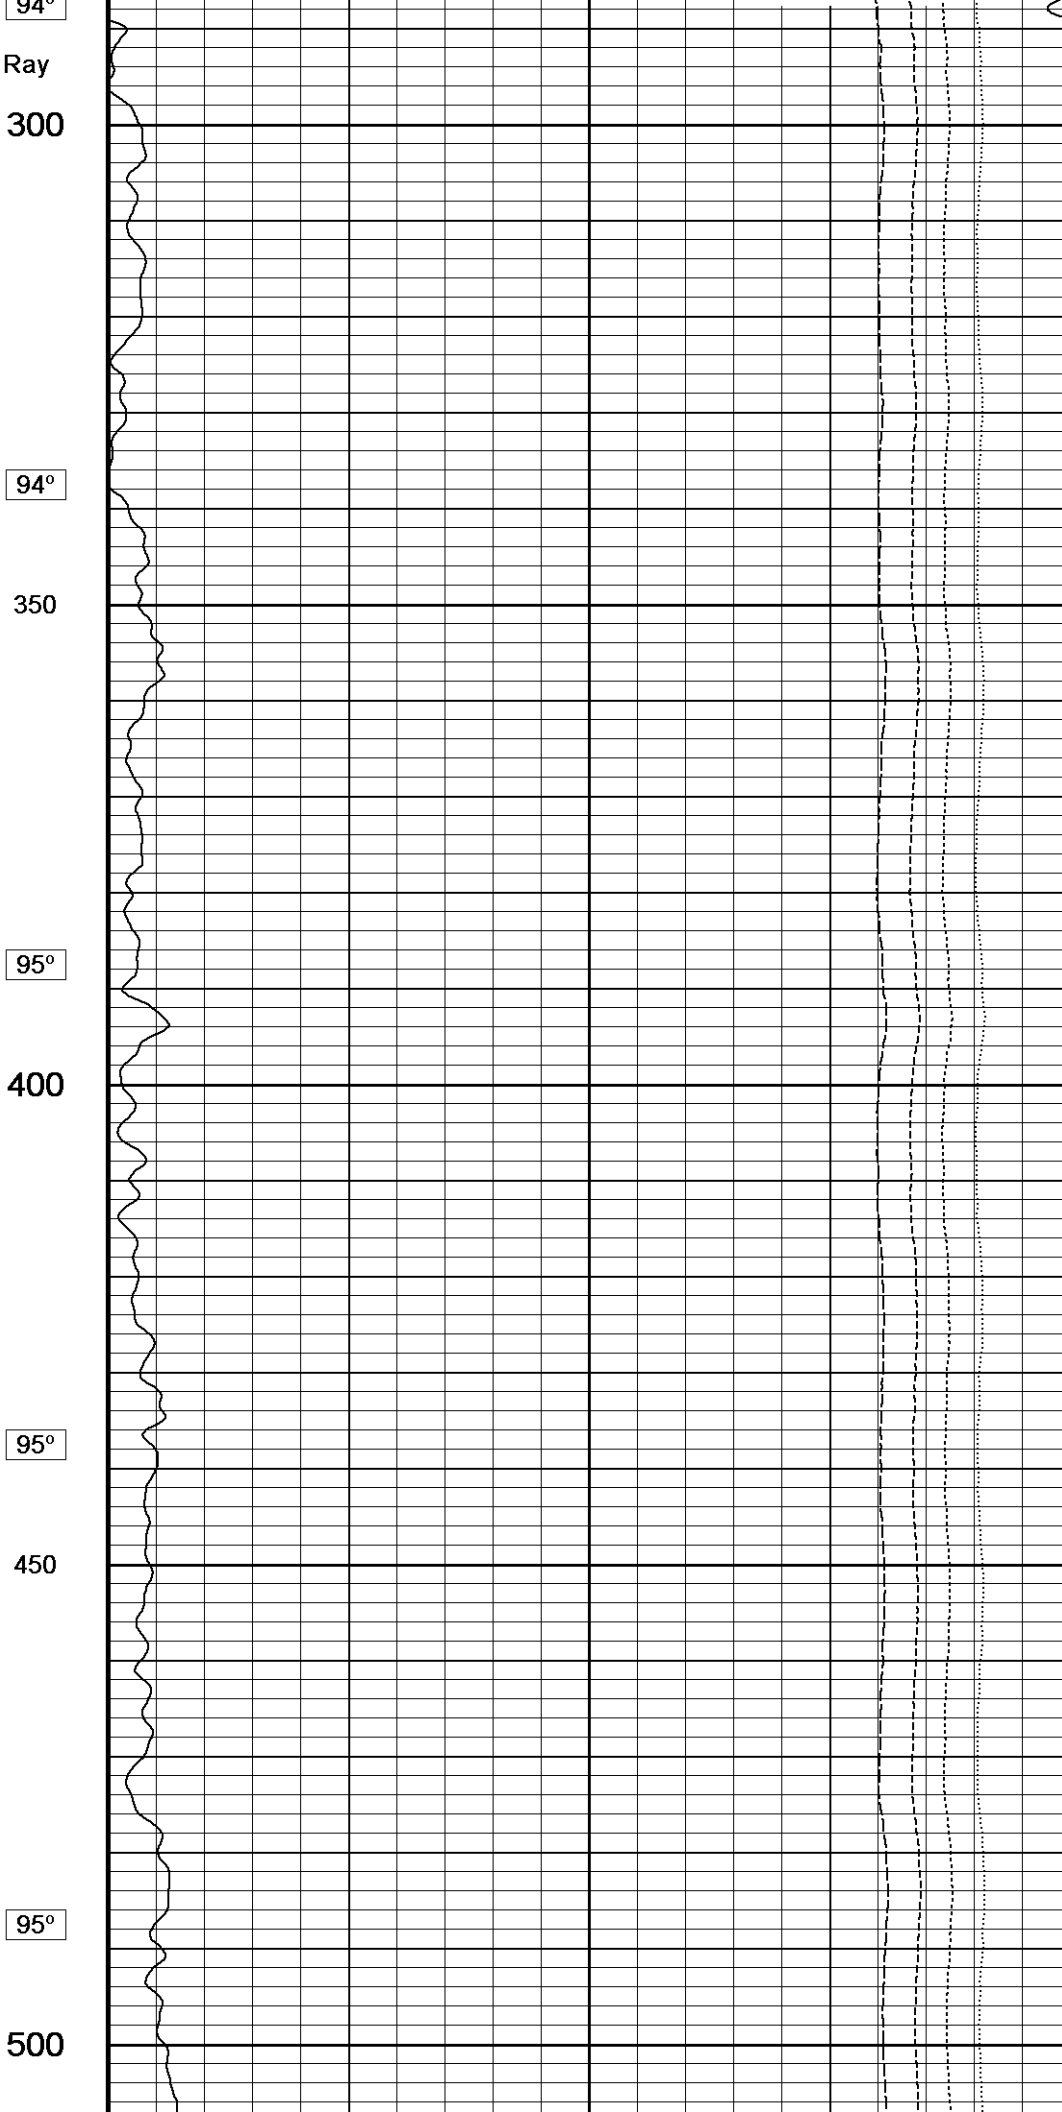
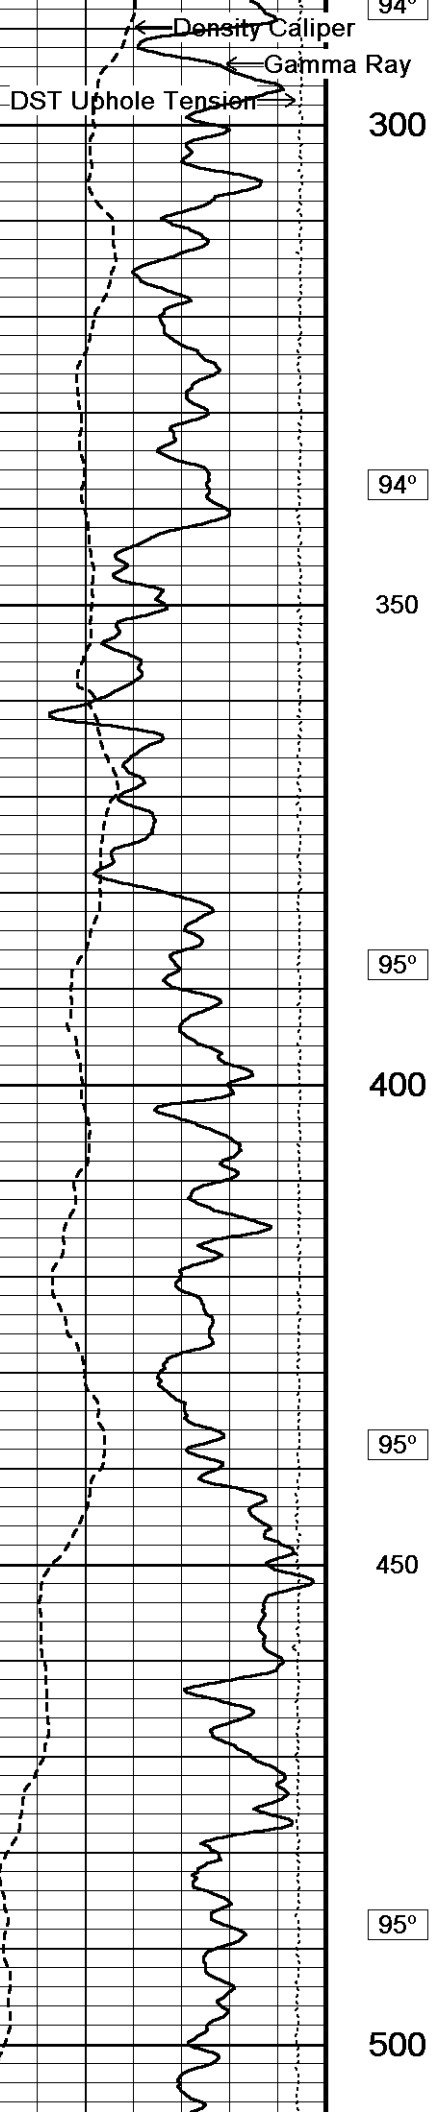


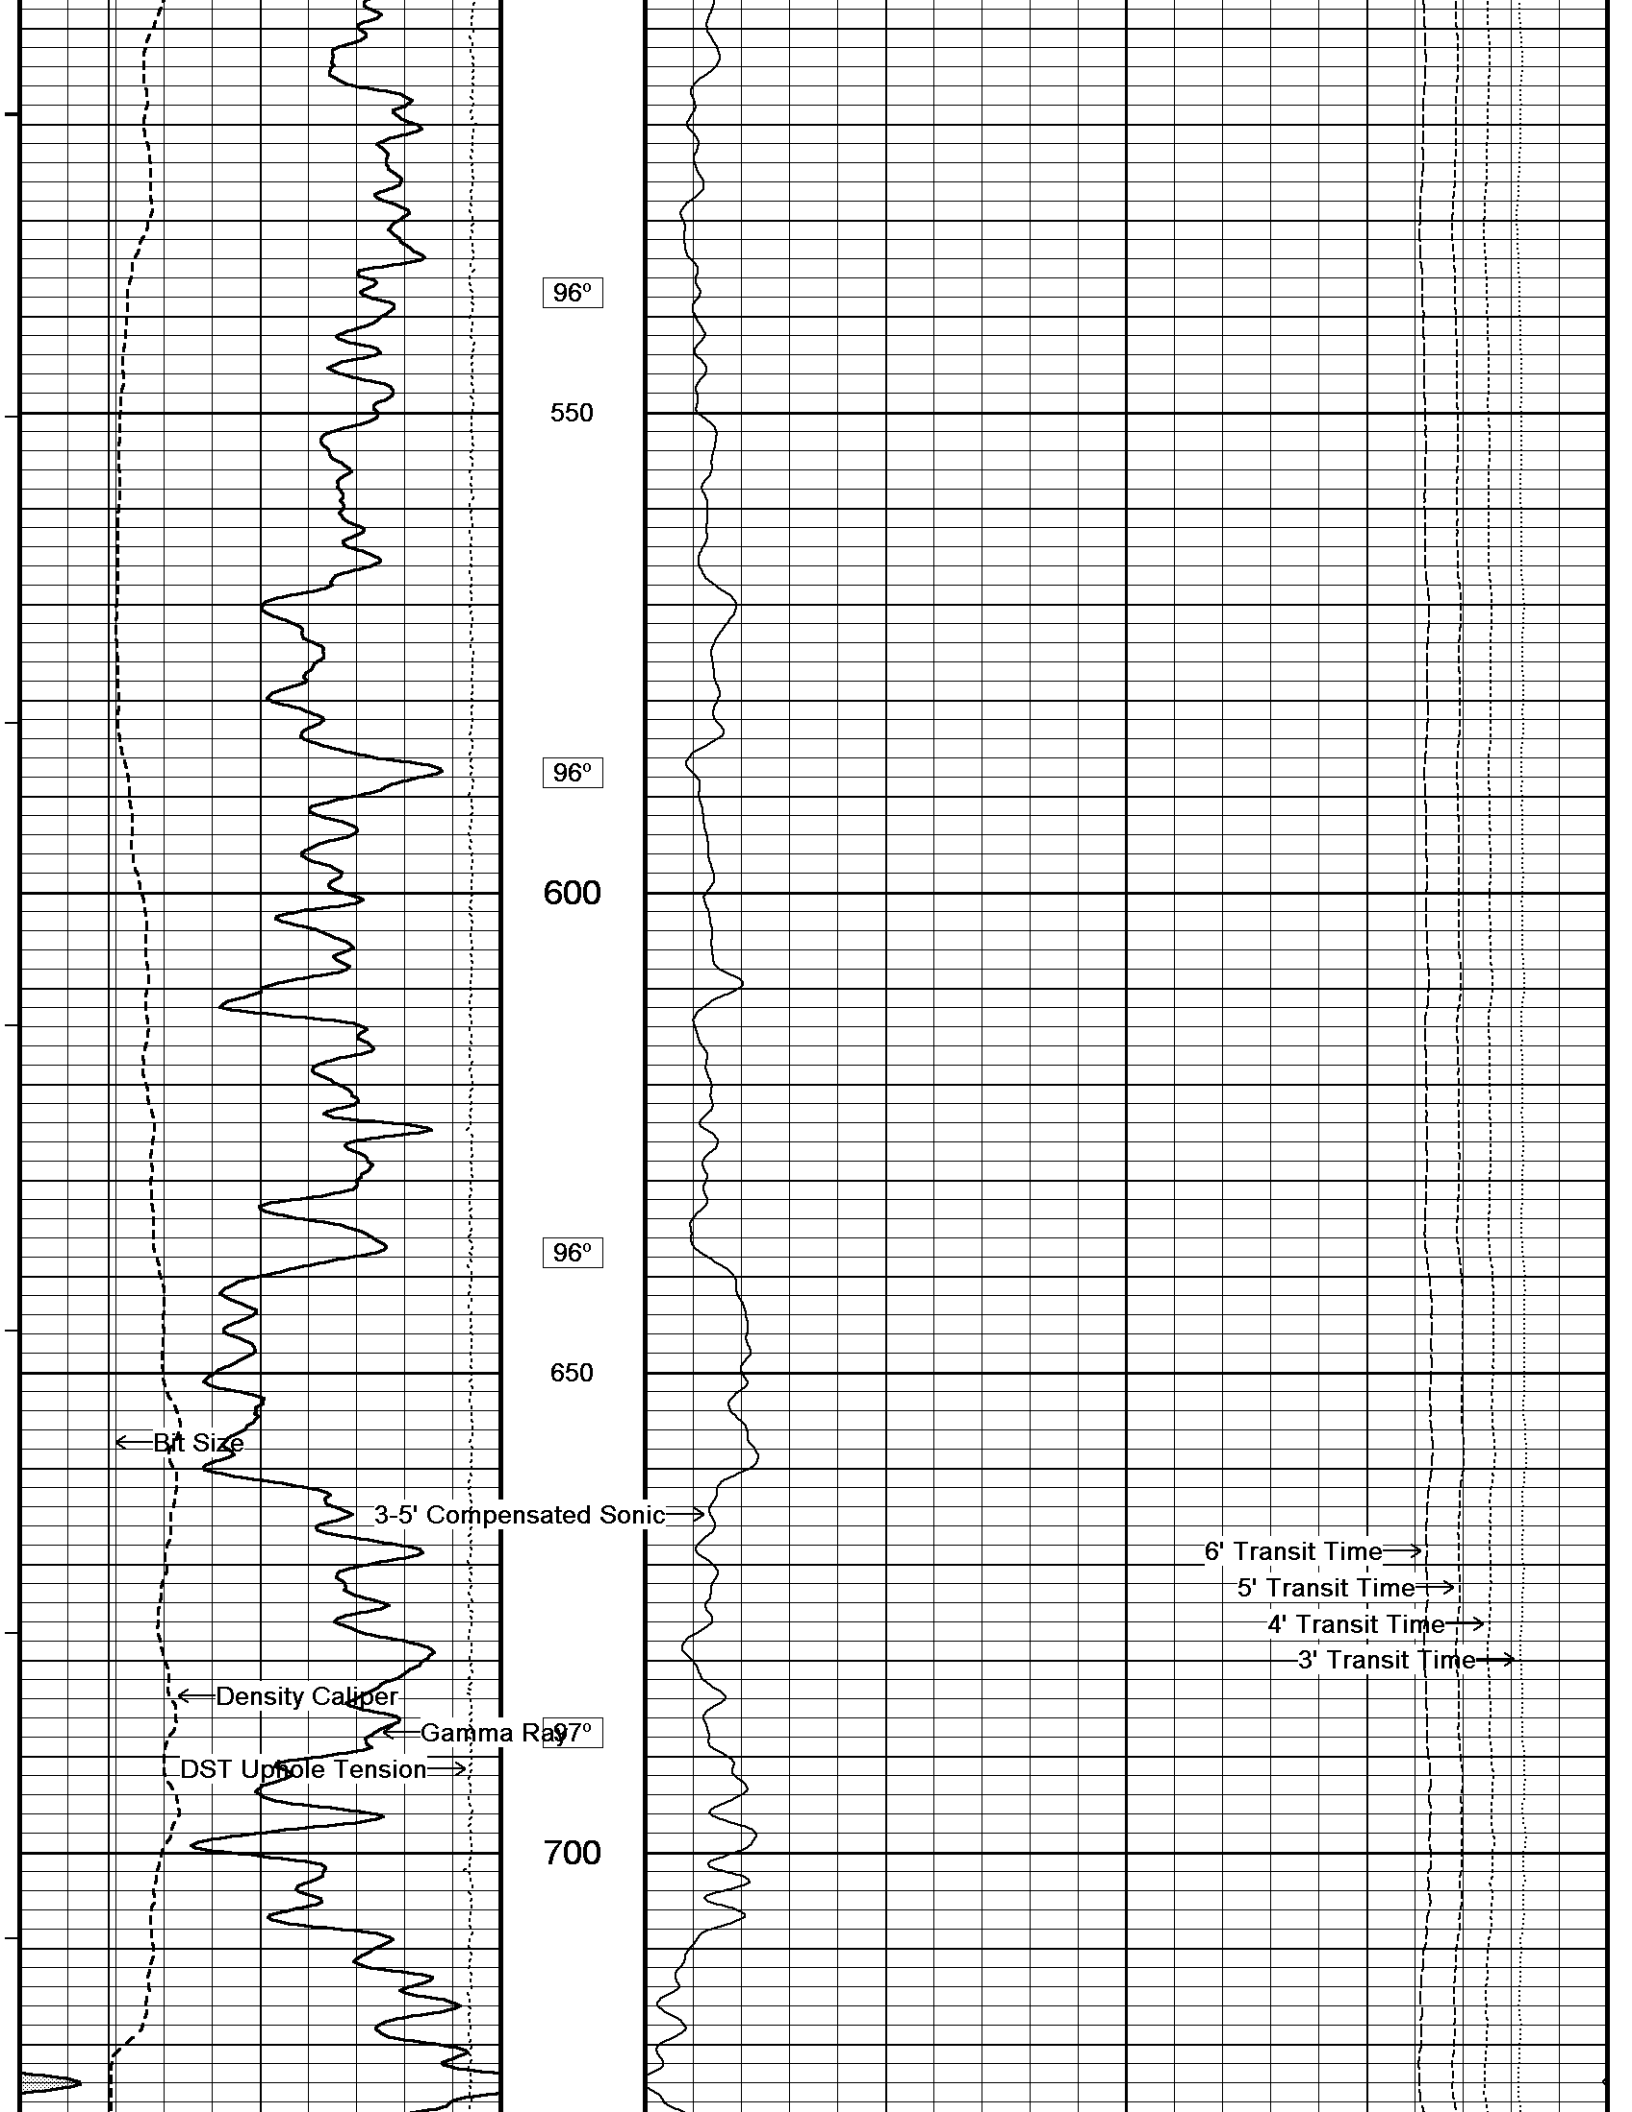


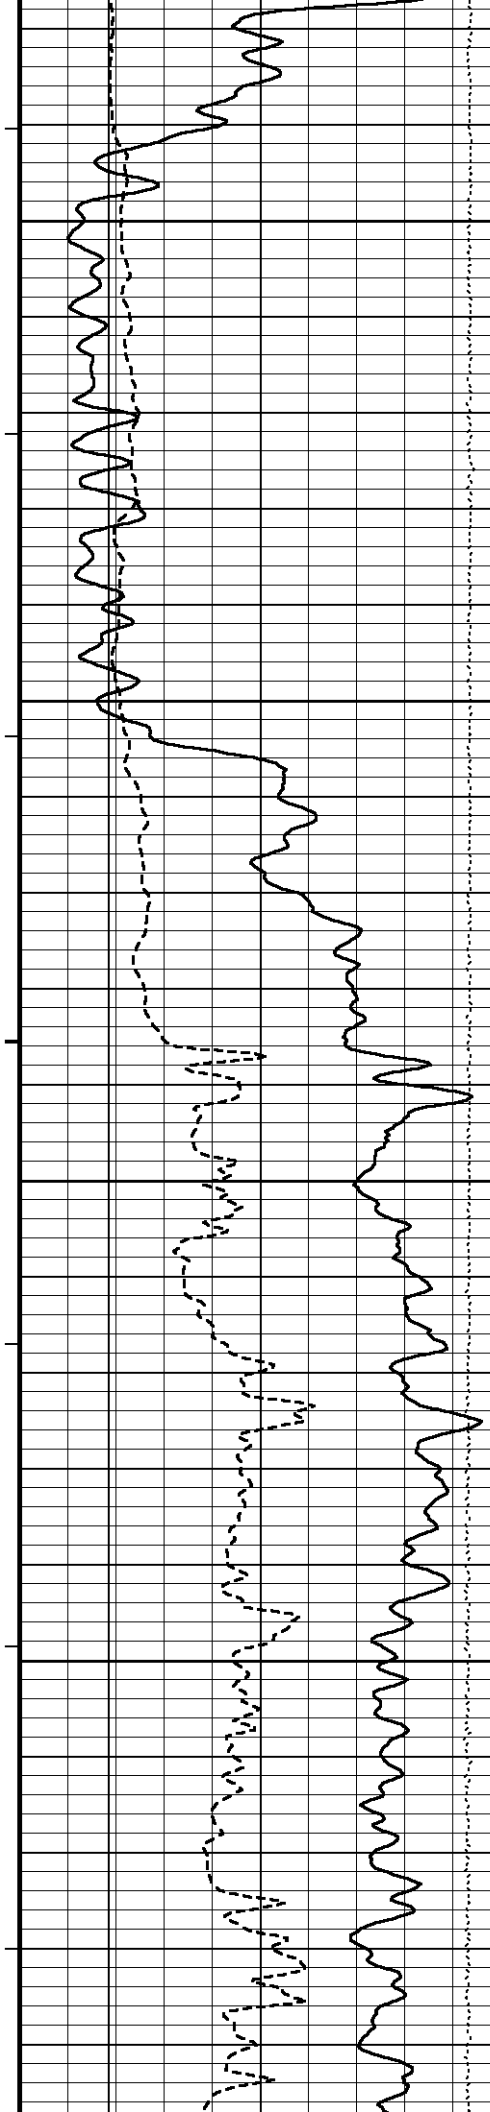

96°
750
97°
800
97°
850
98°
900
99°

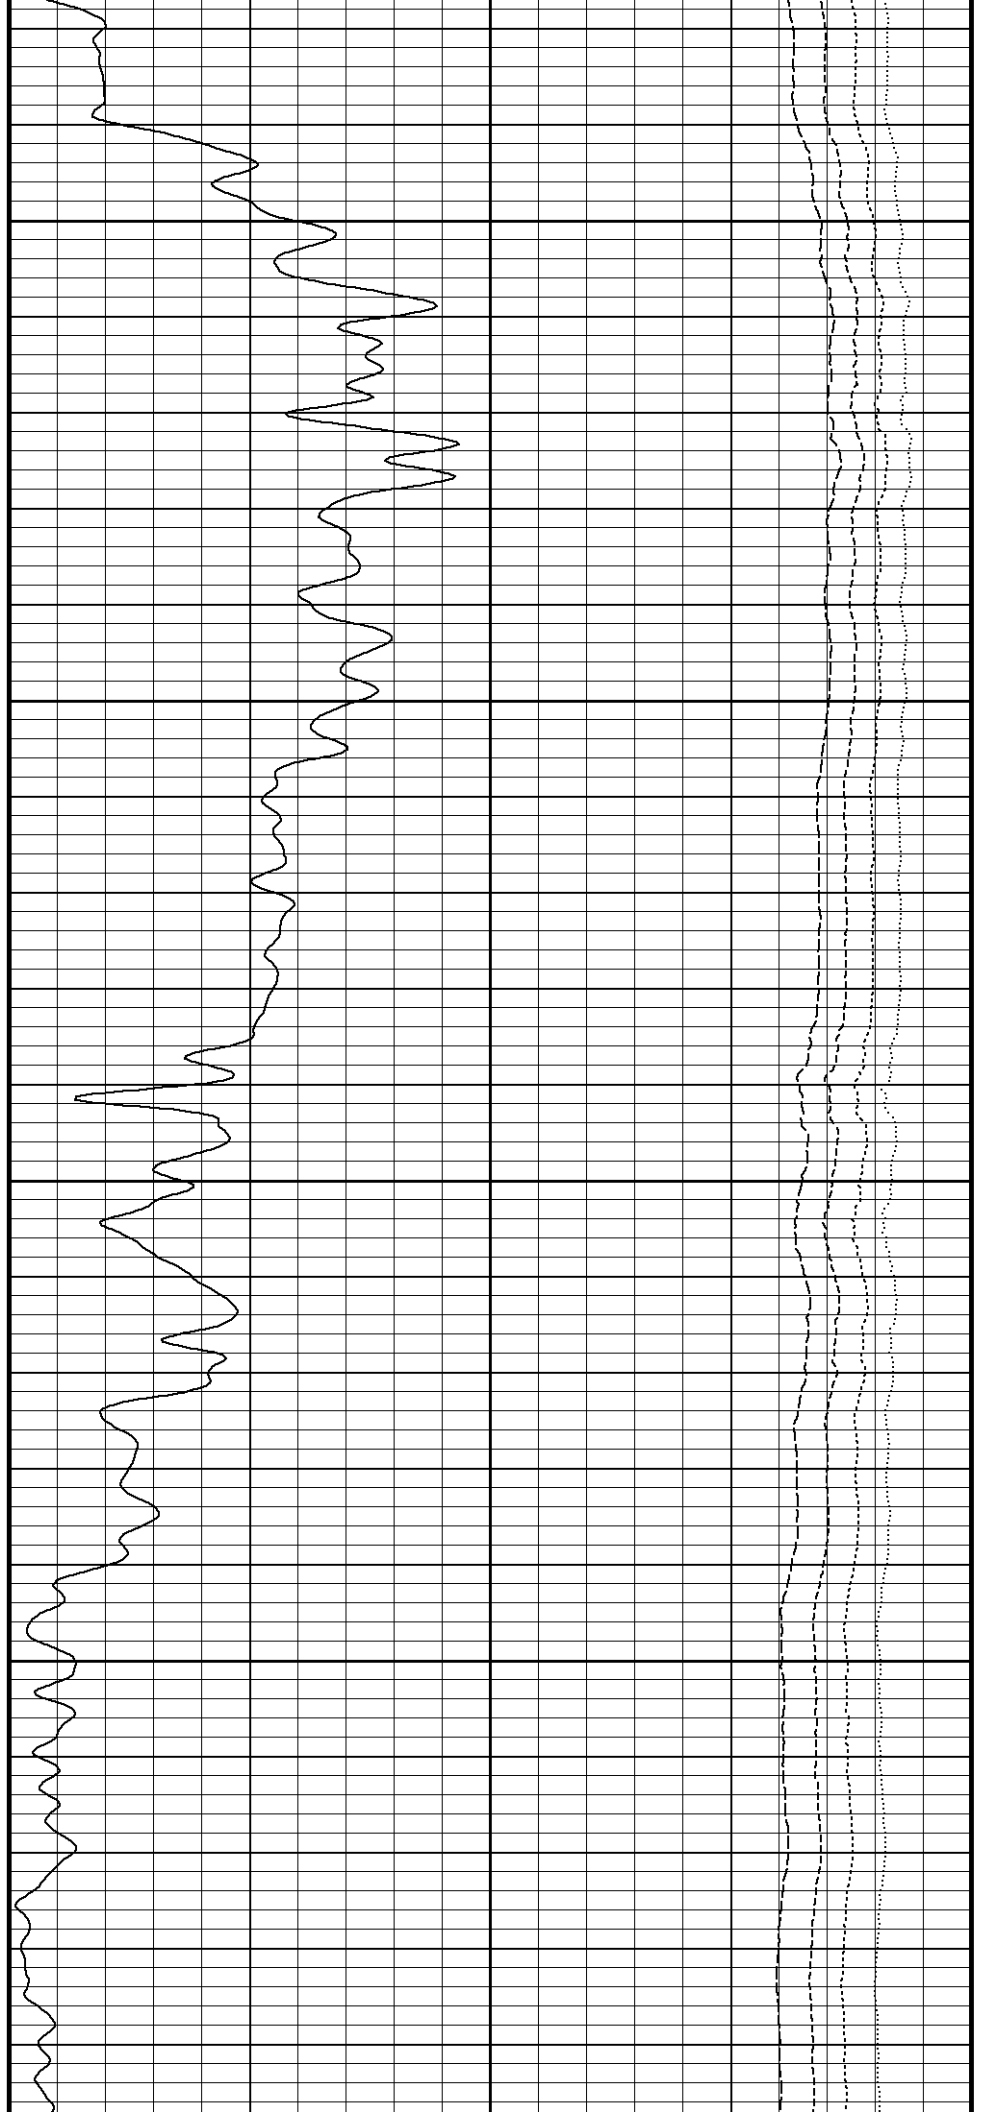

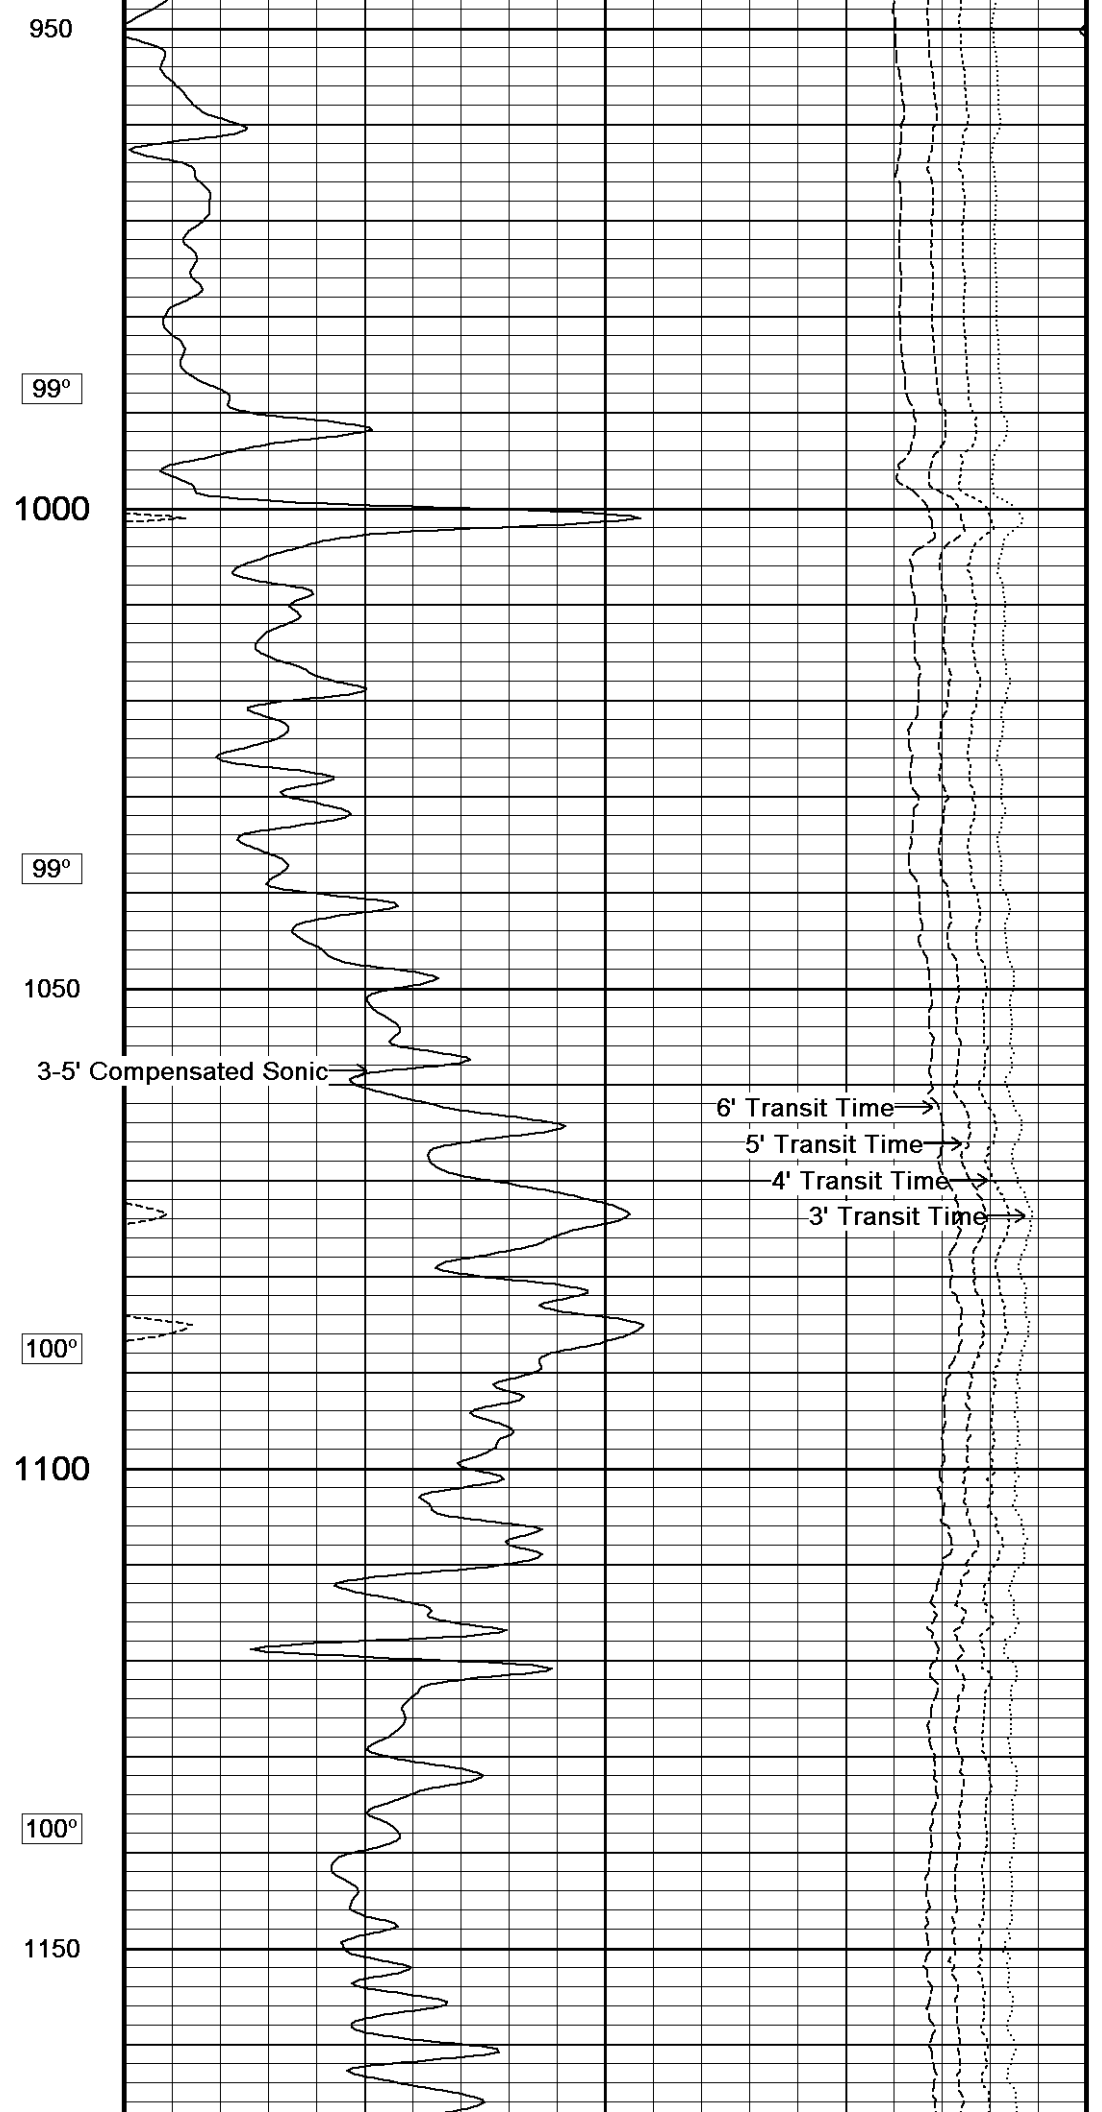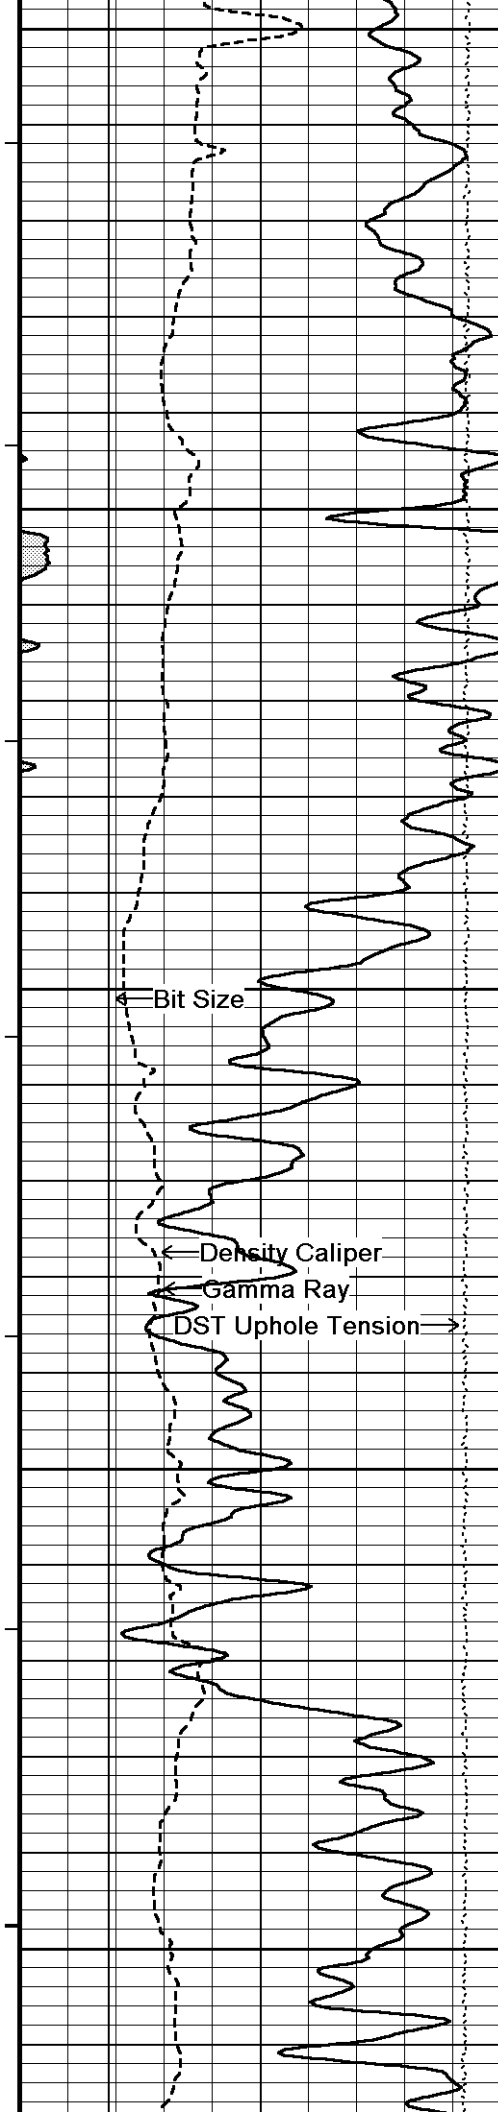

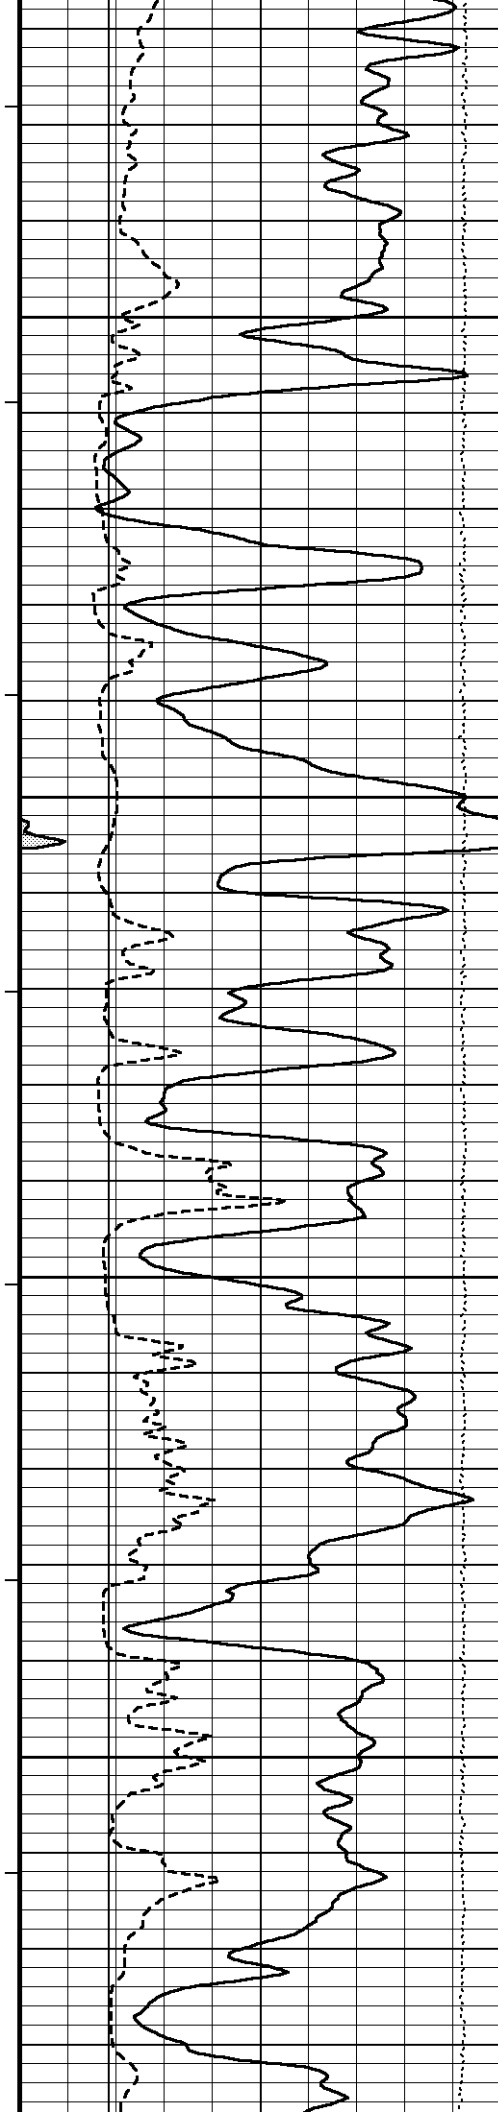

100°

1200

100°

1250


100°


1300


101°


1350


1210

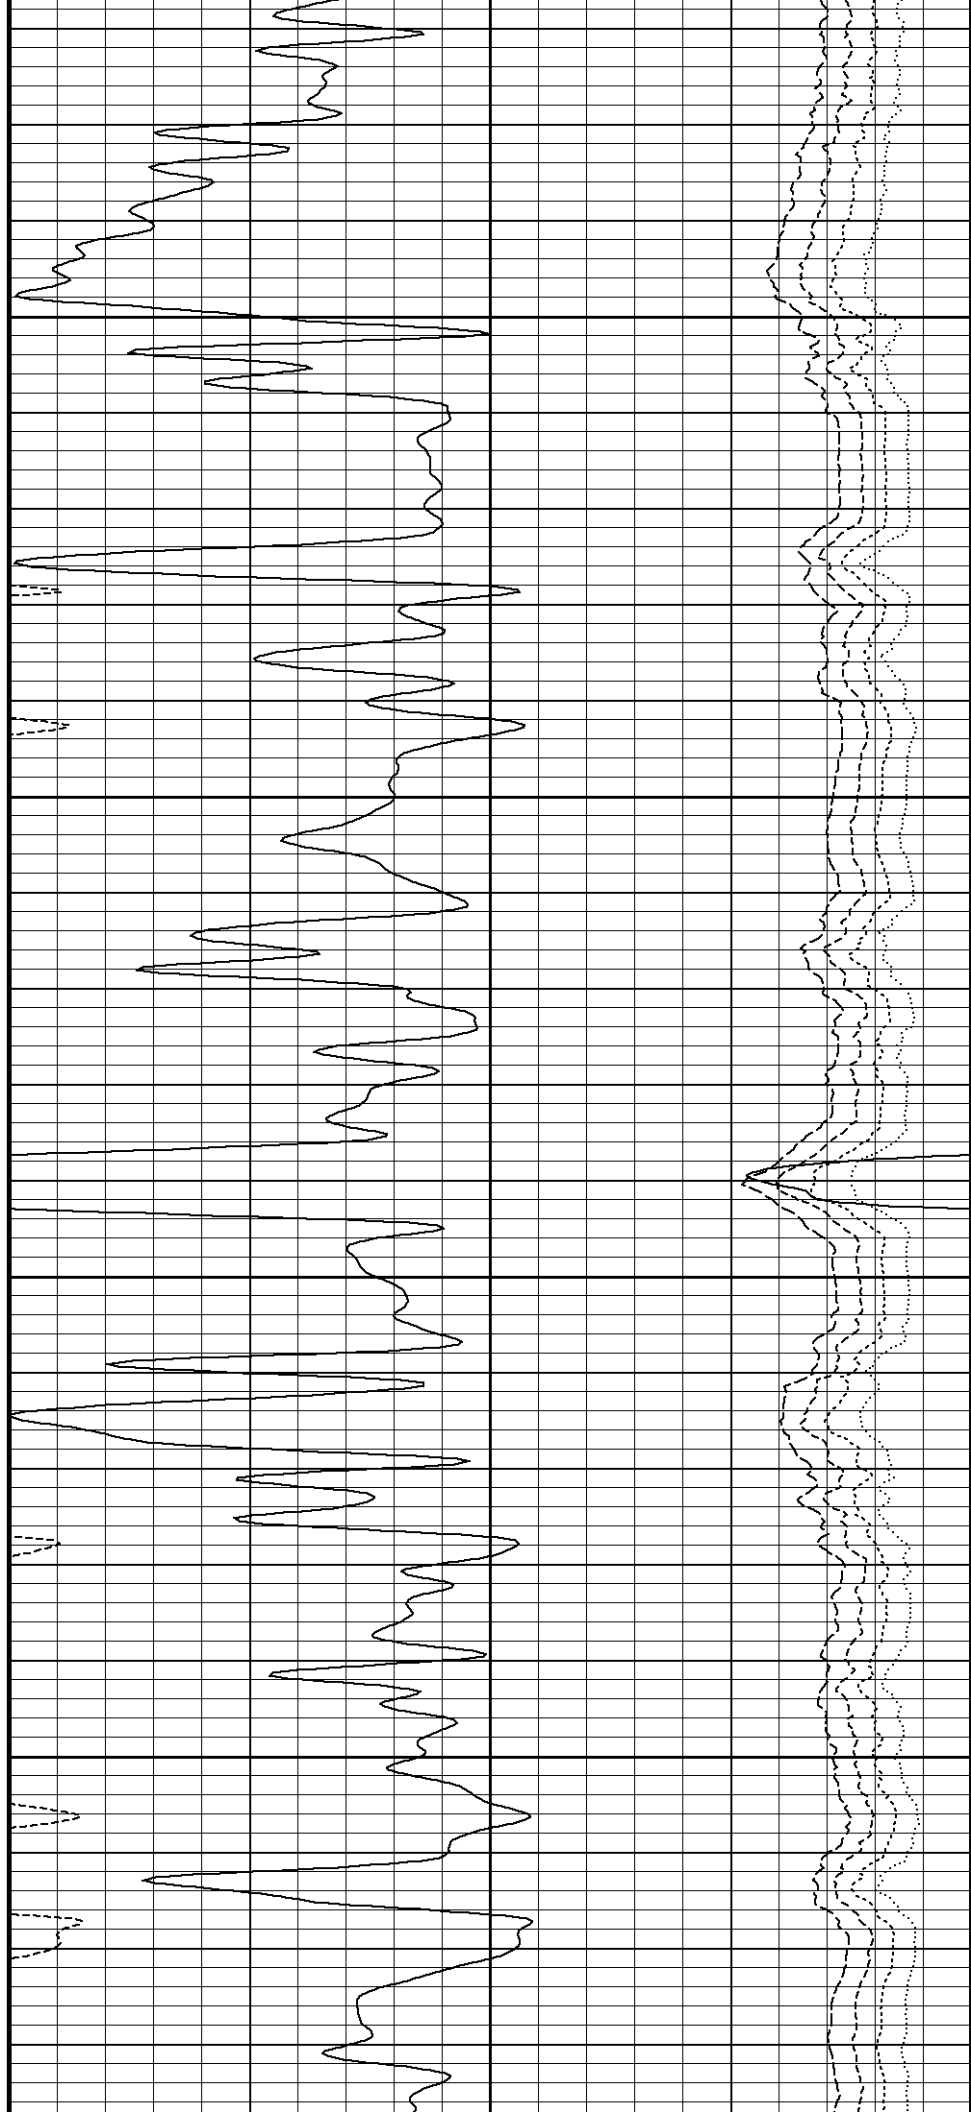


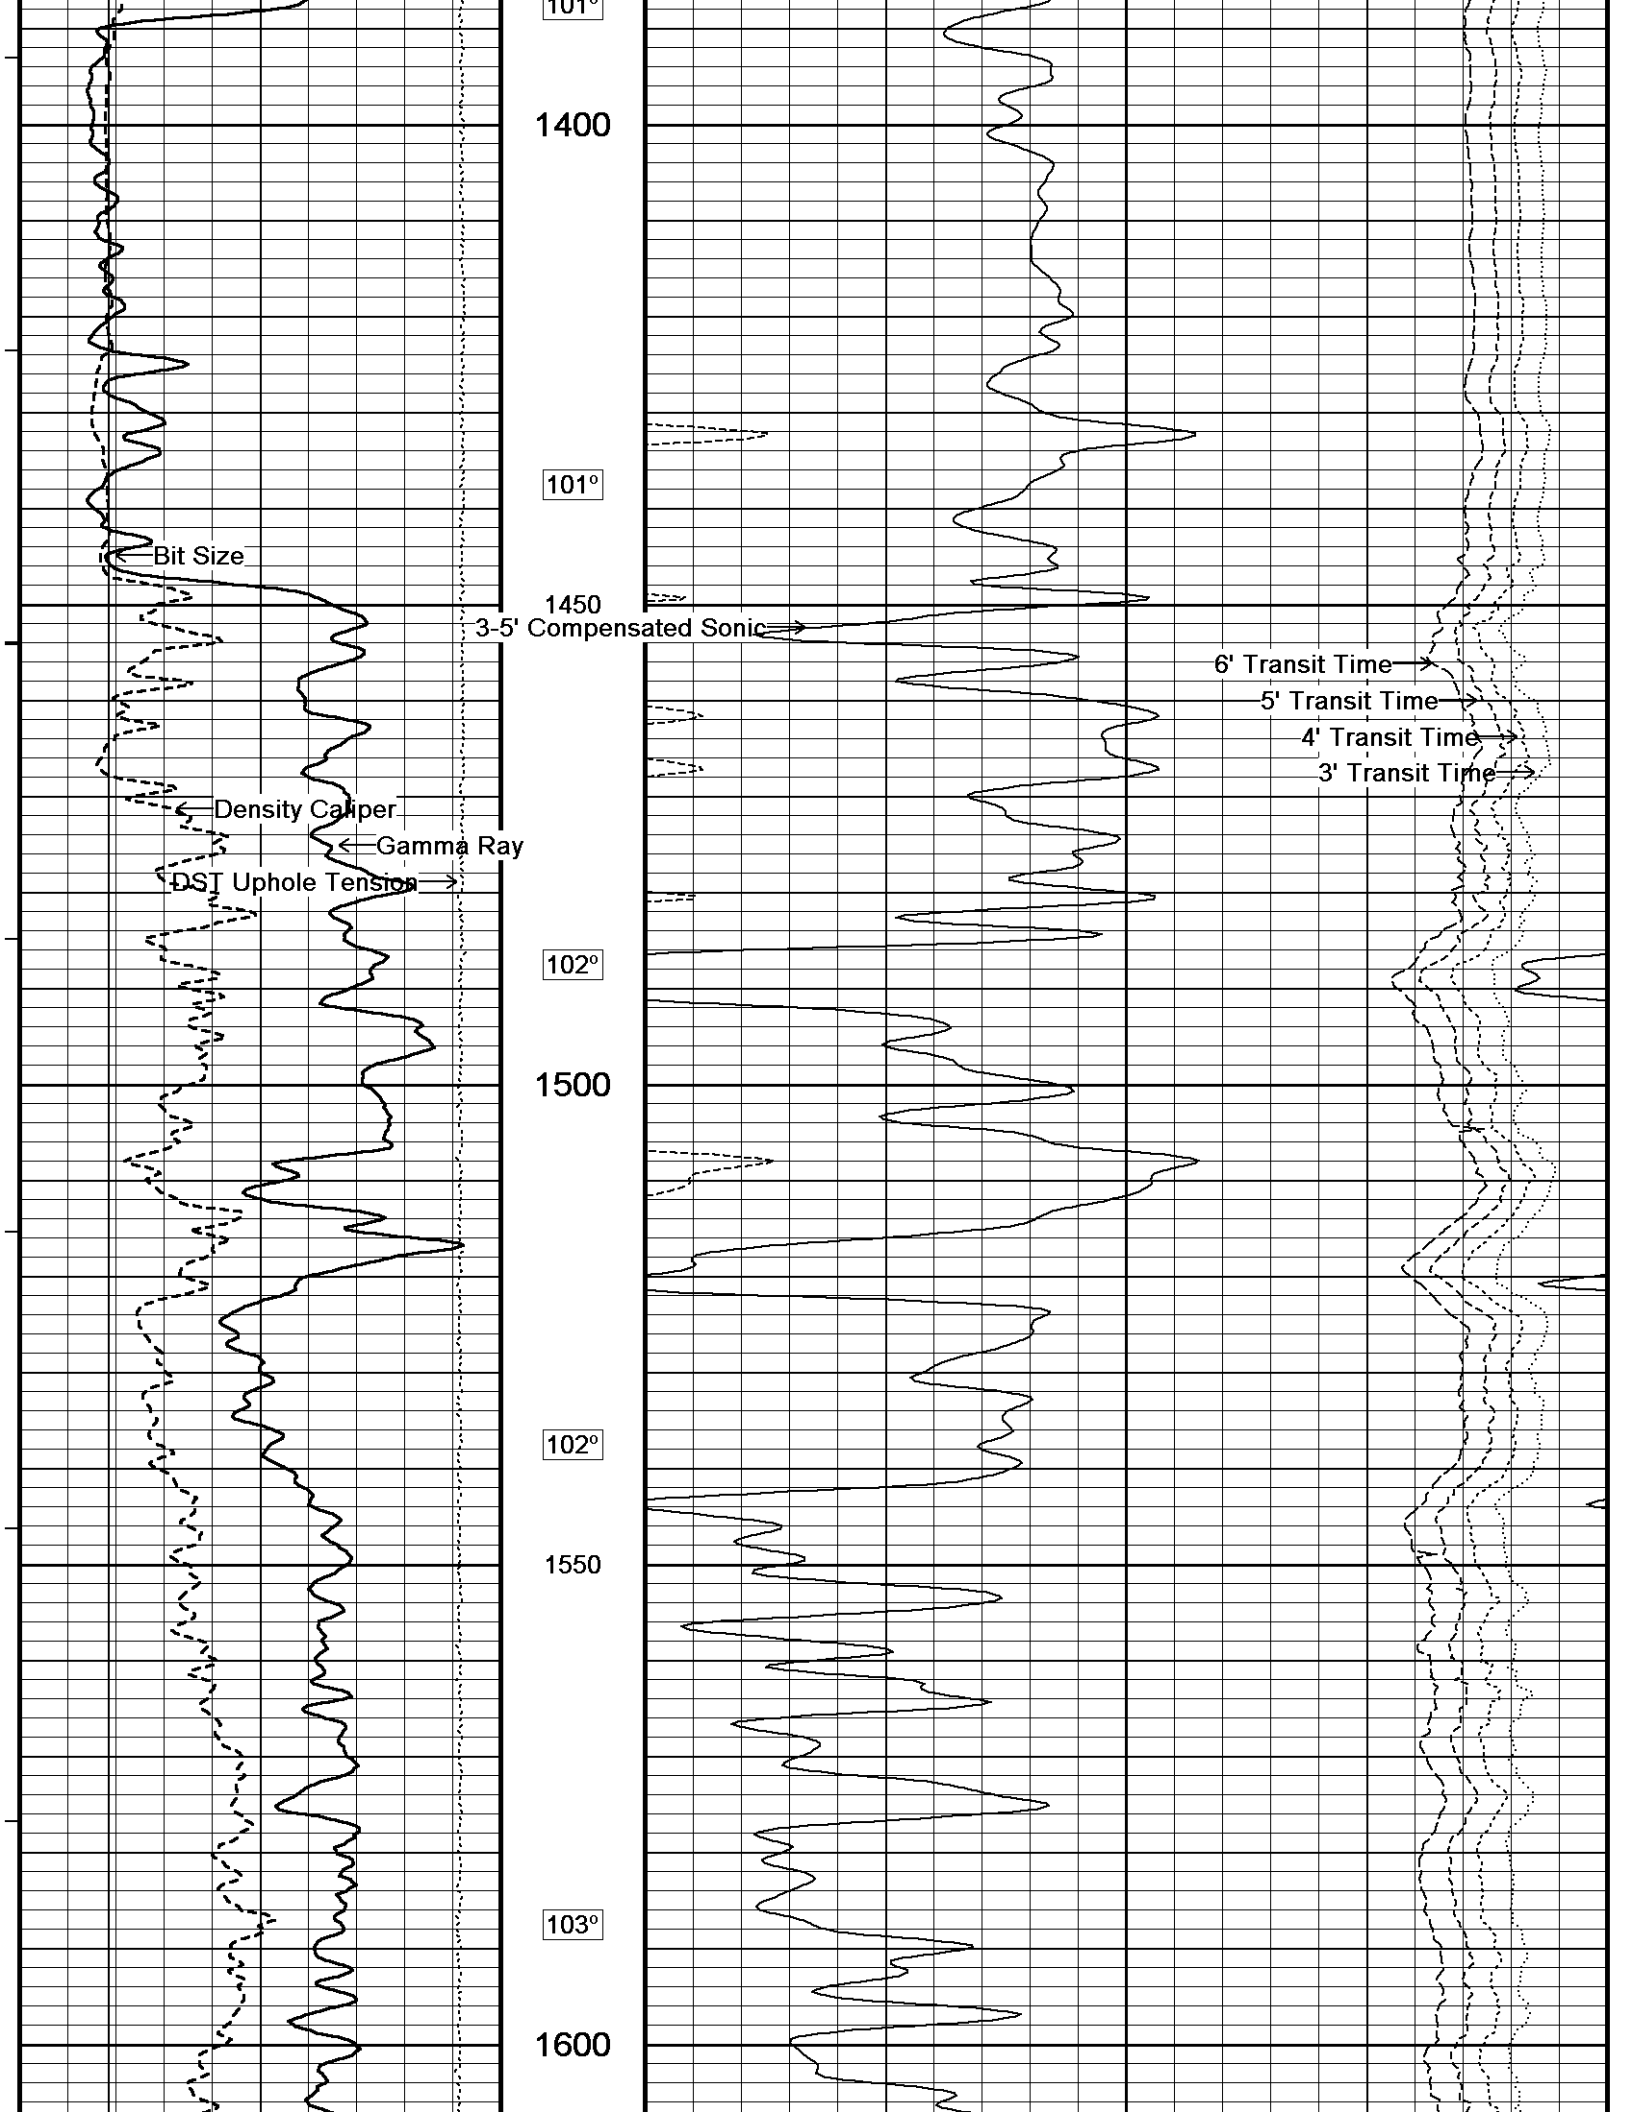


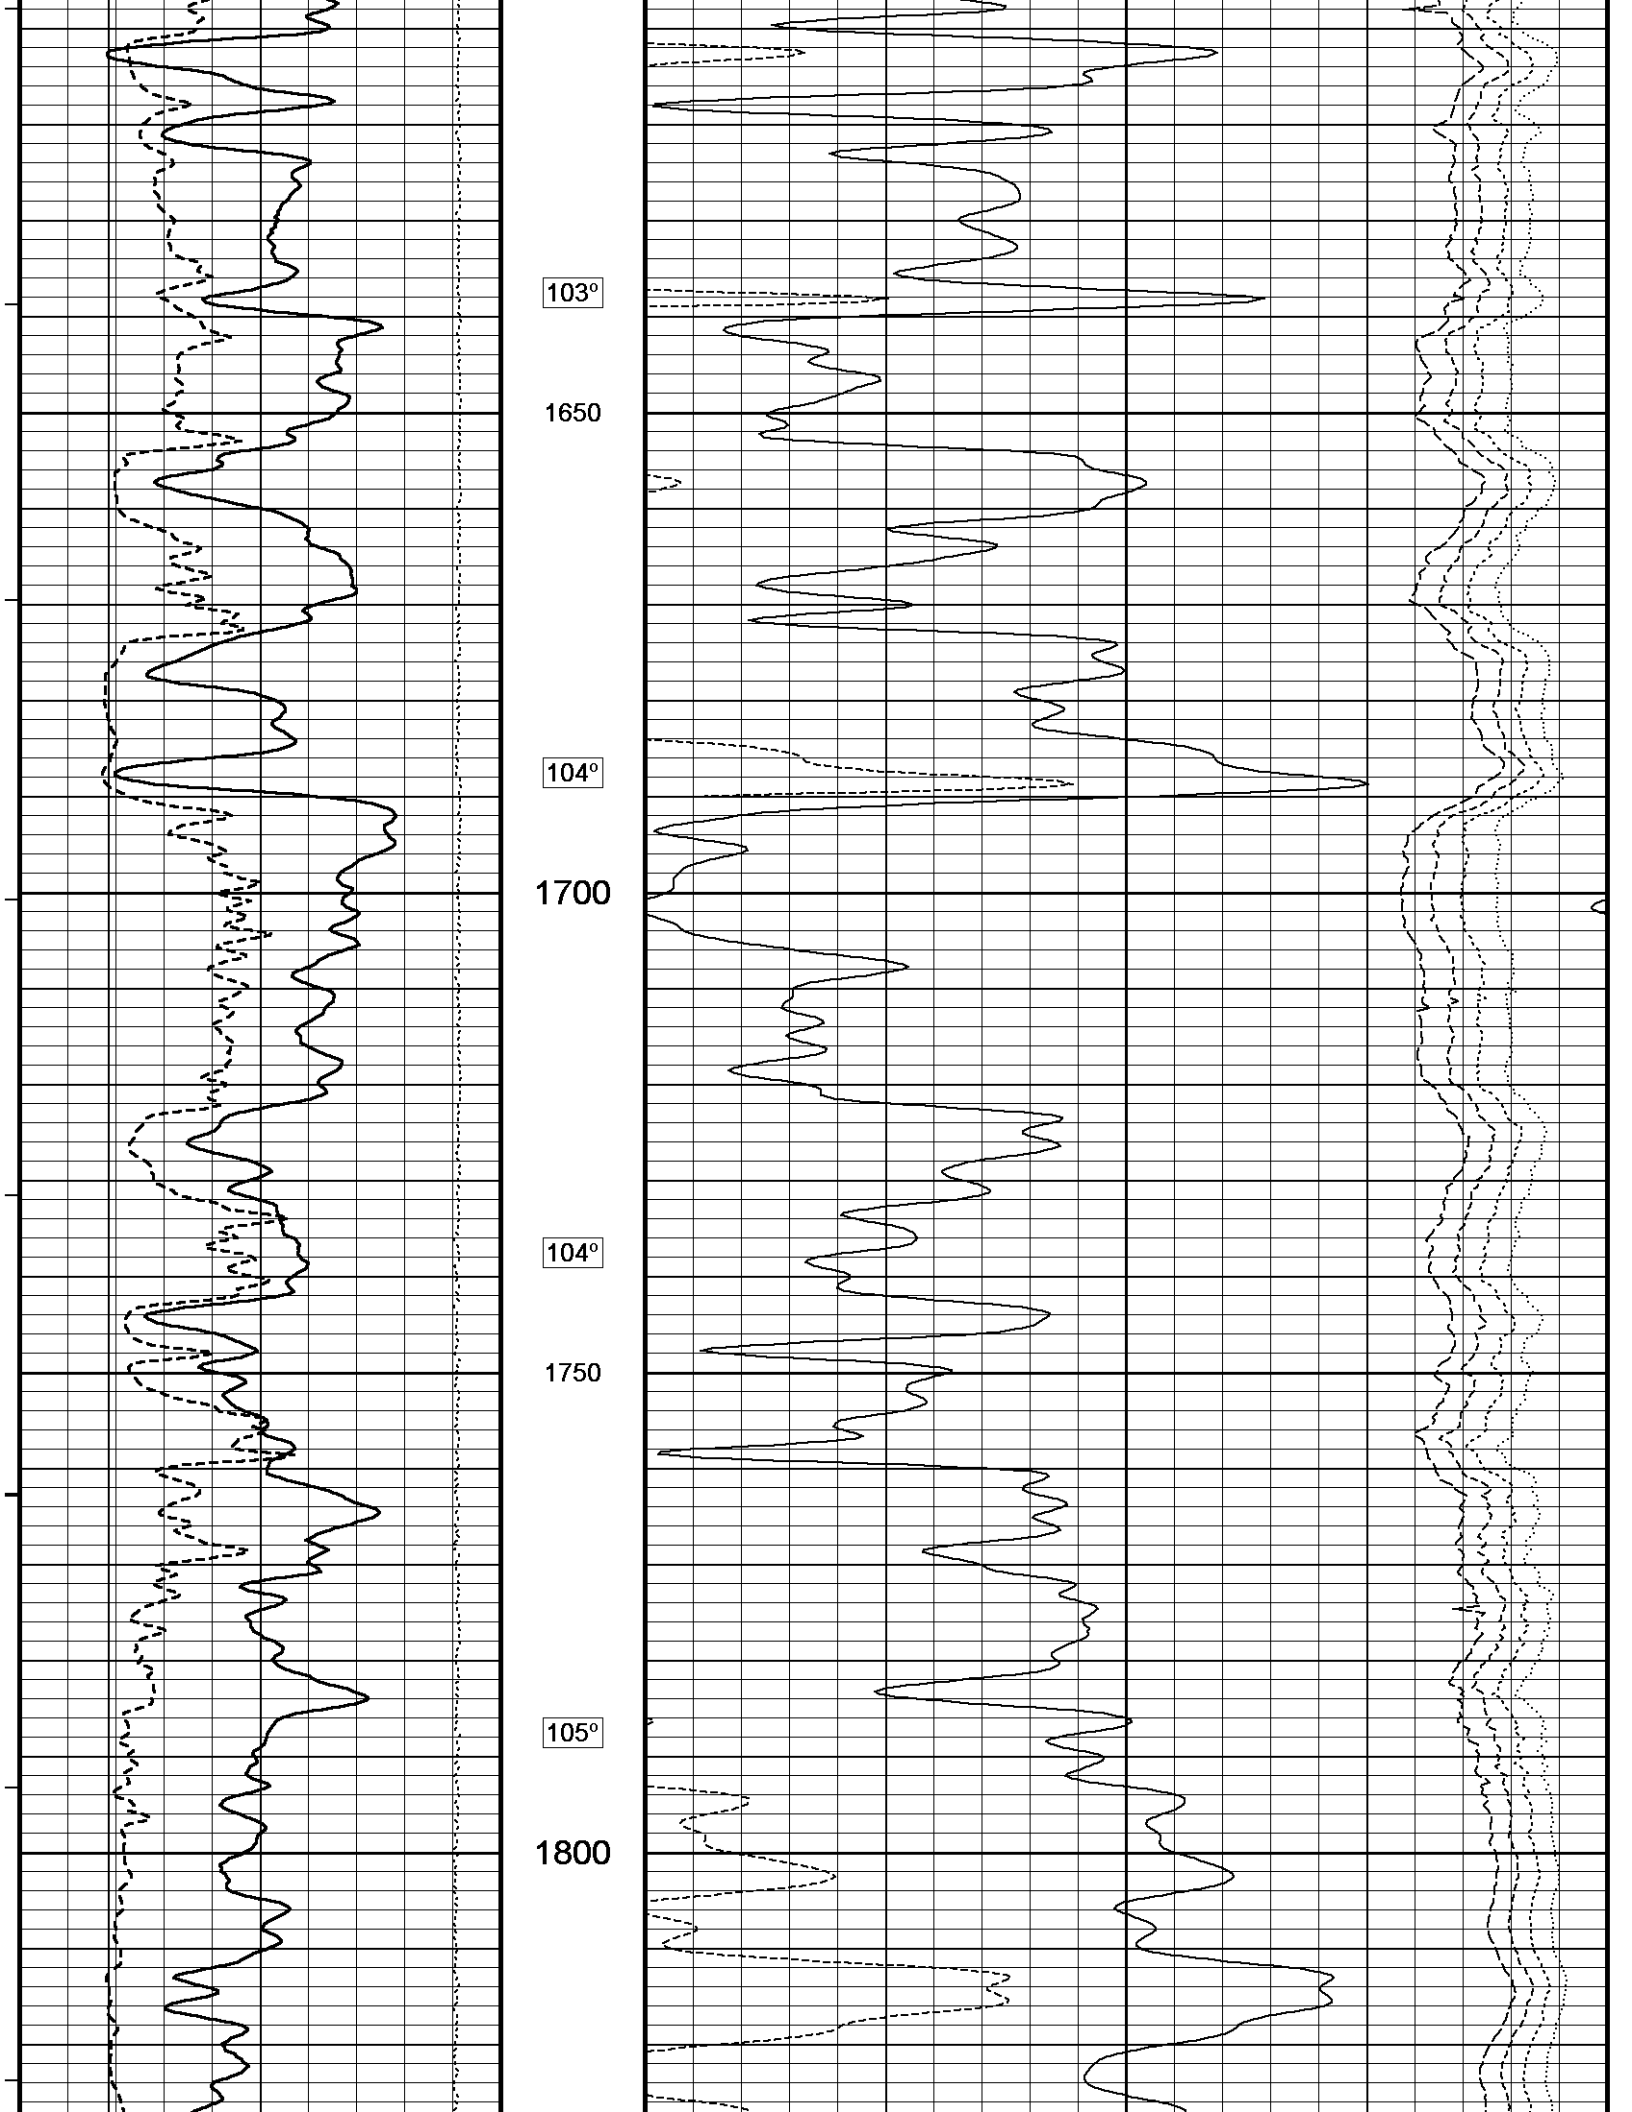


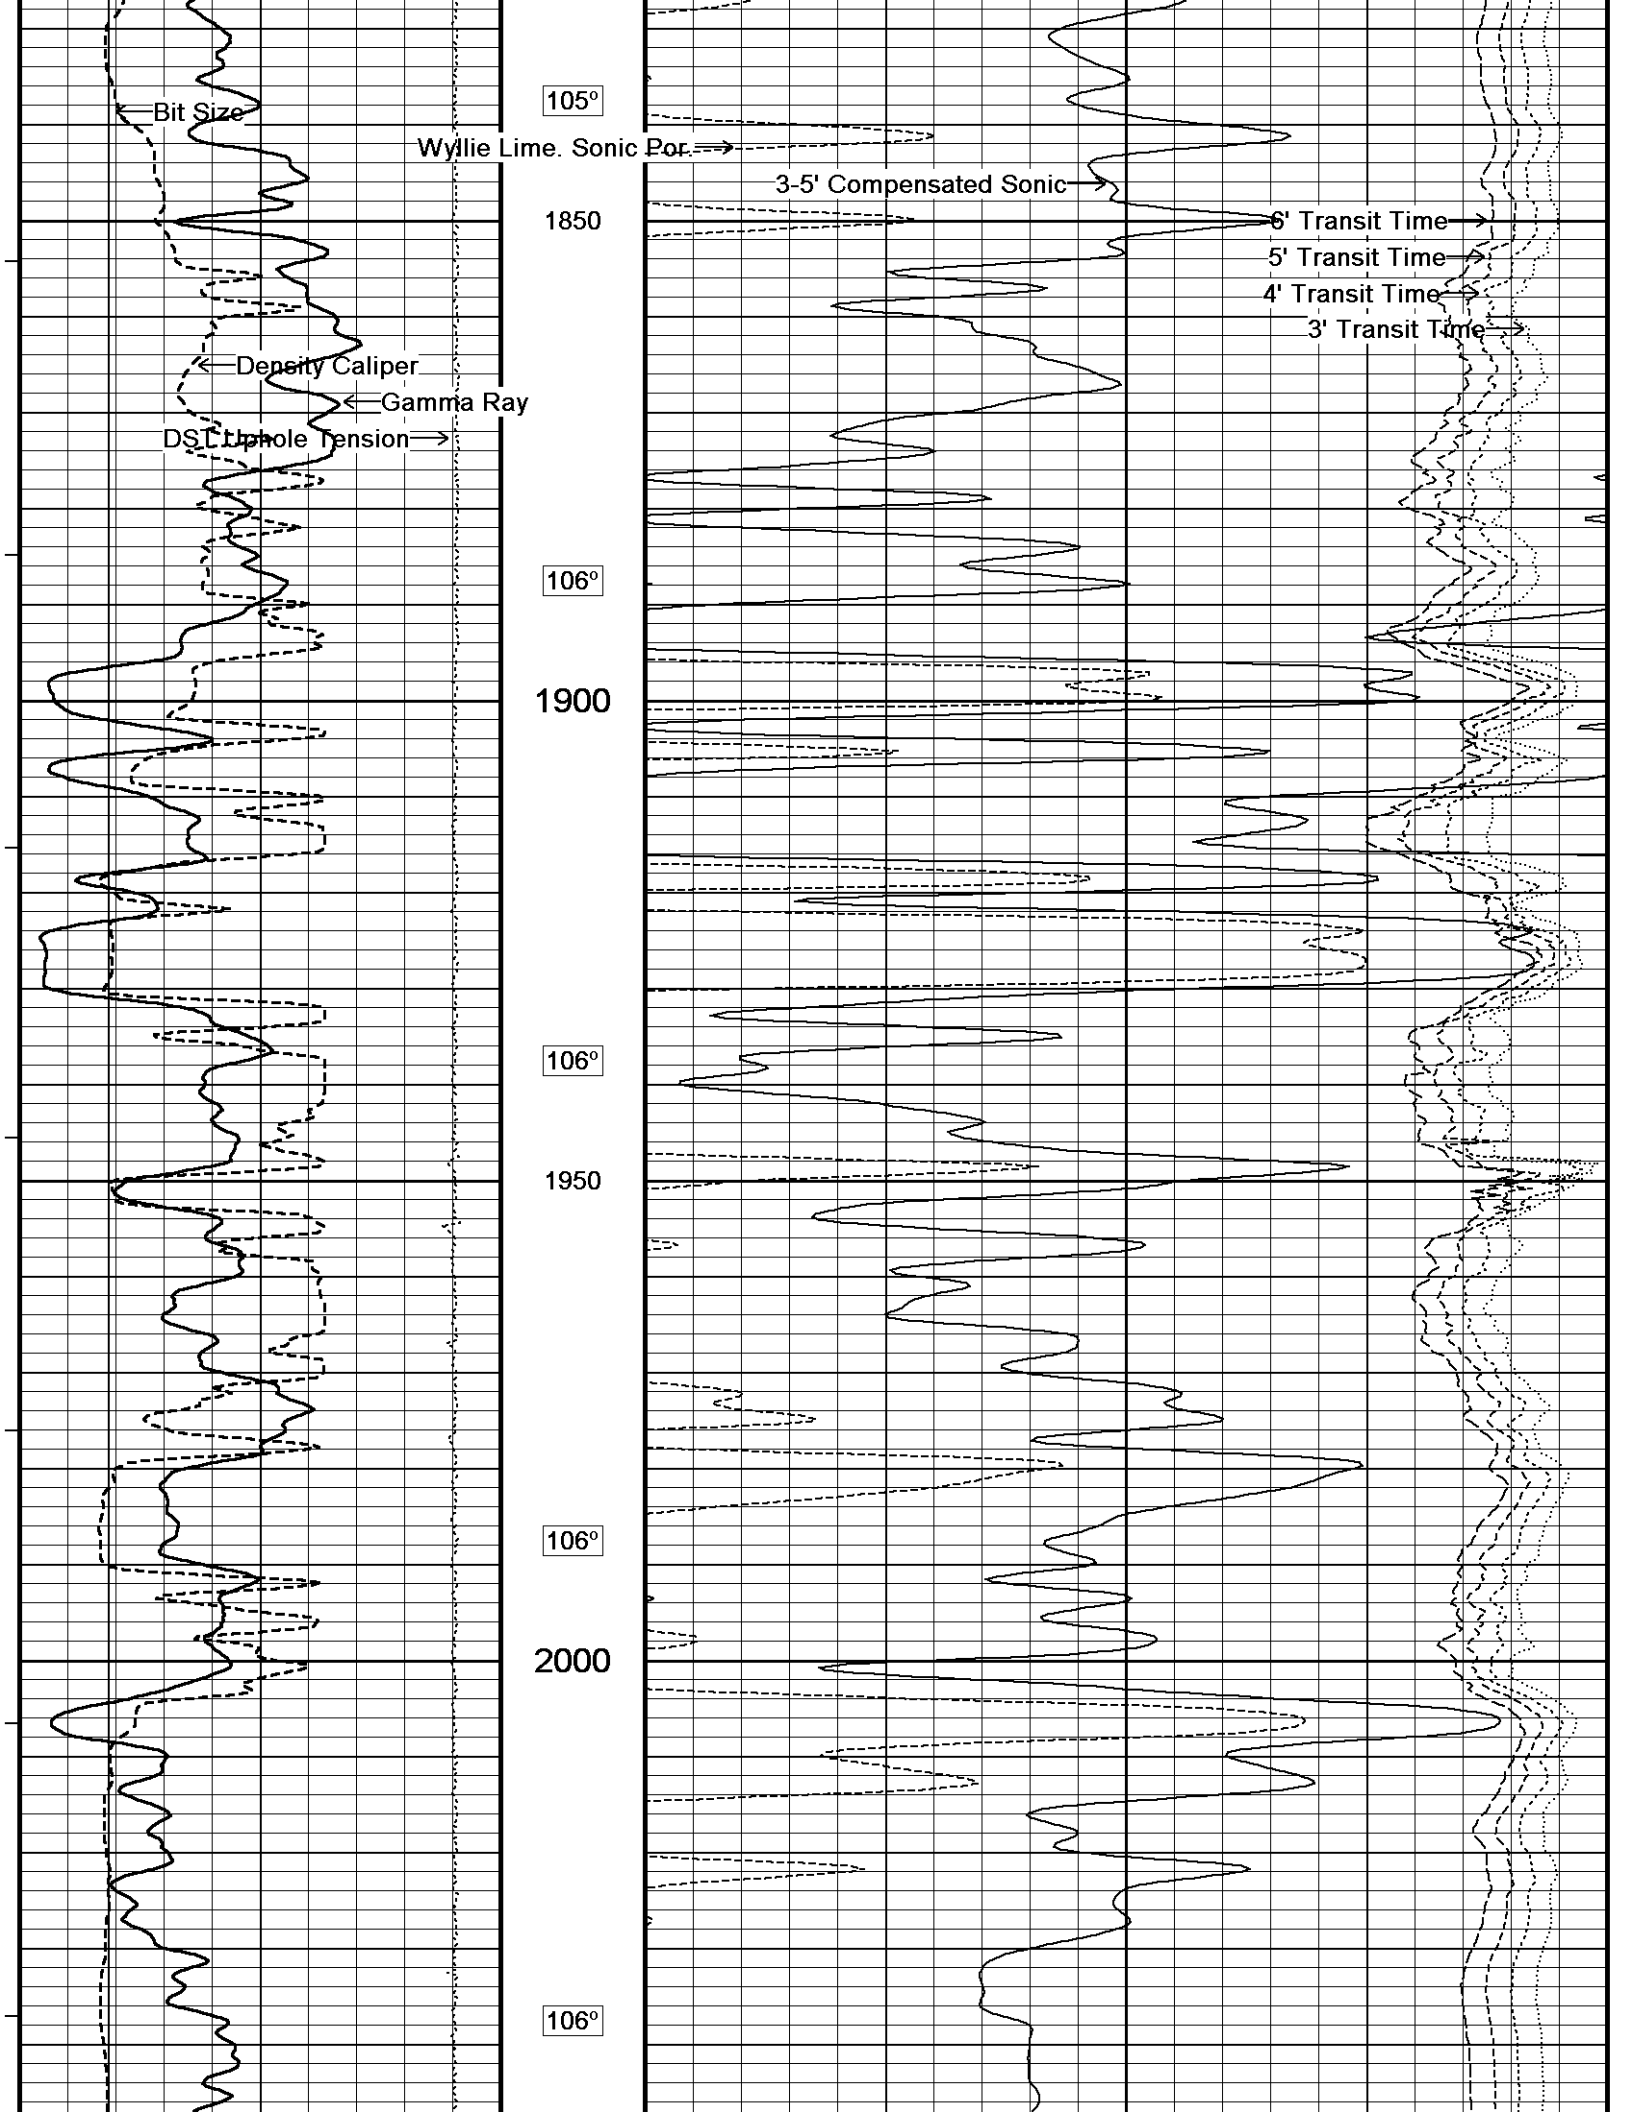

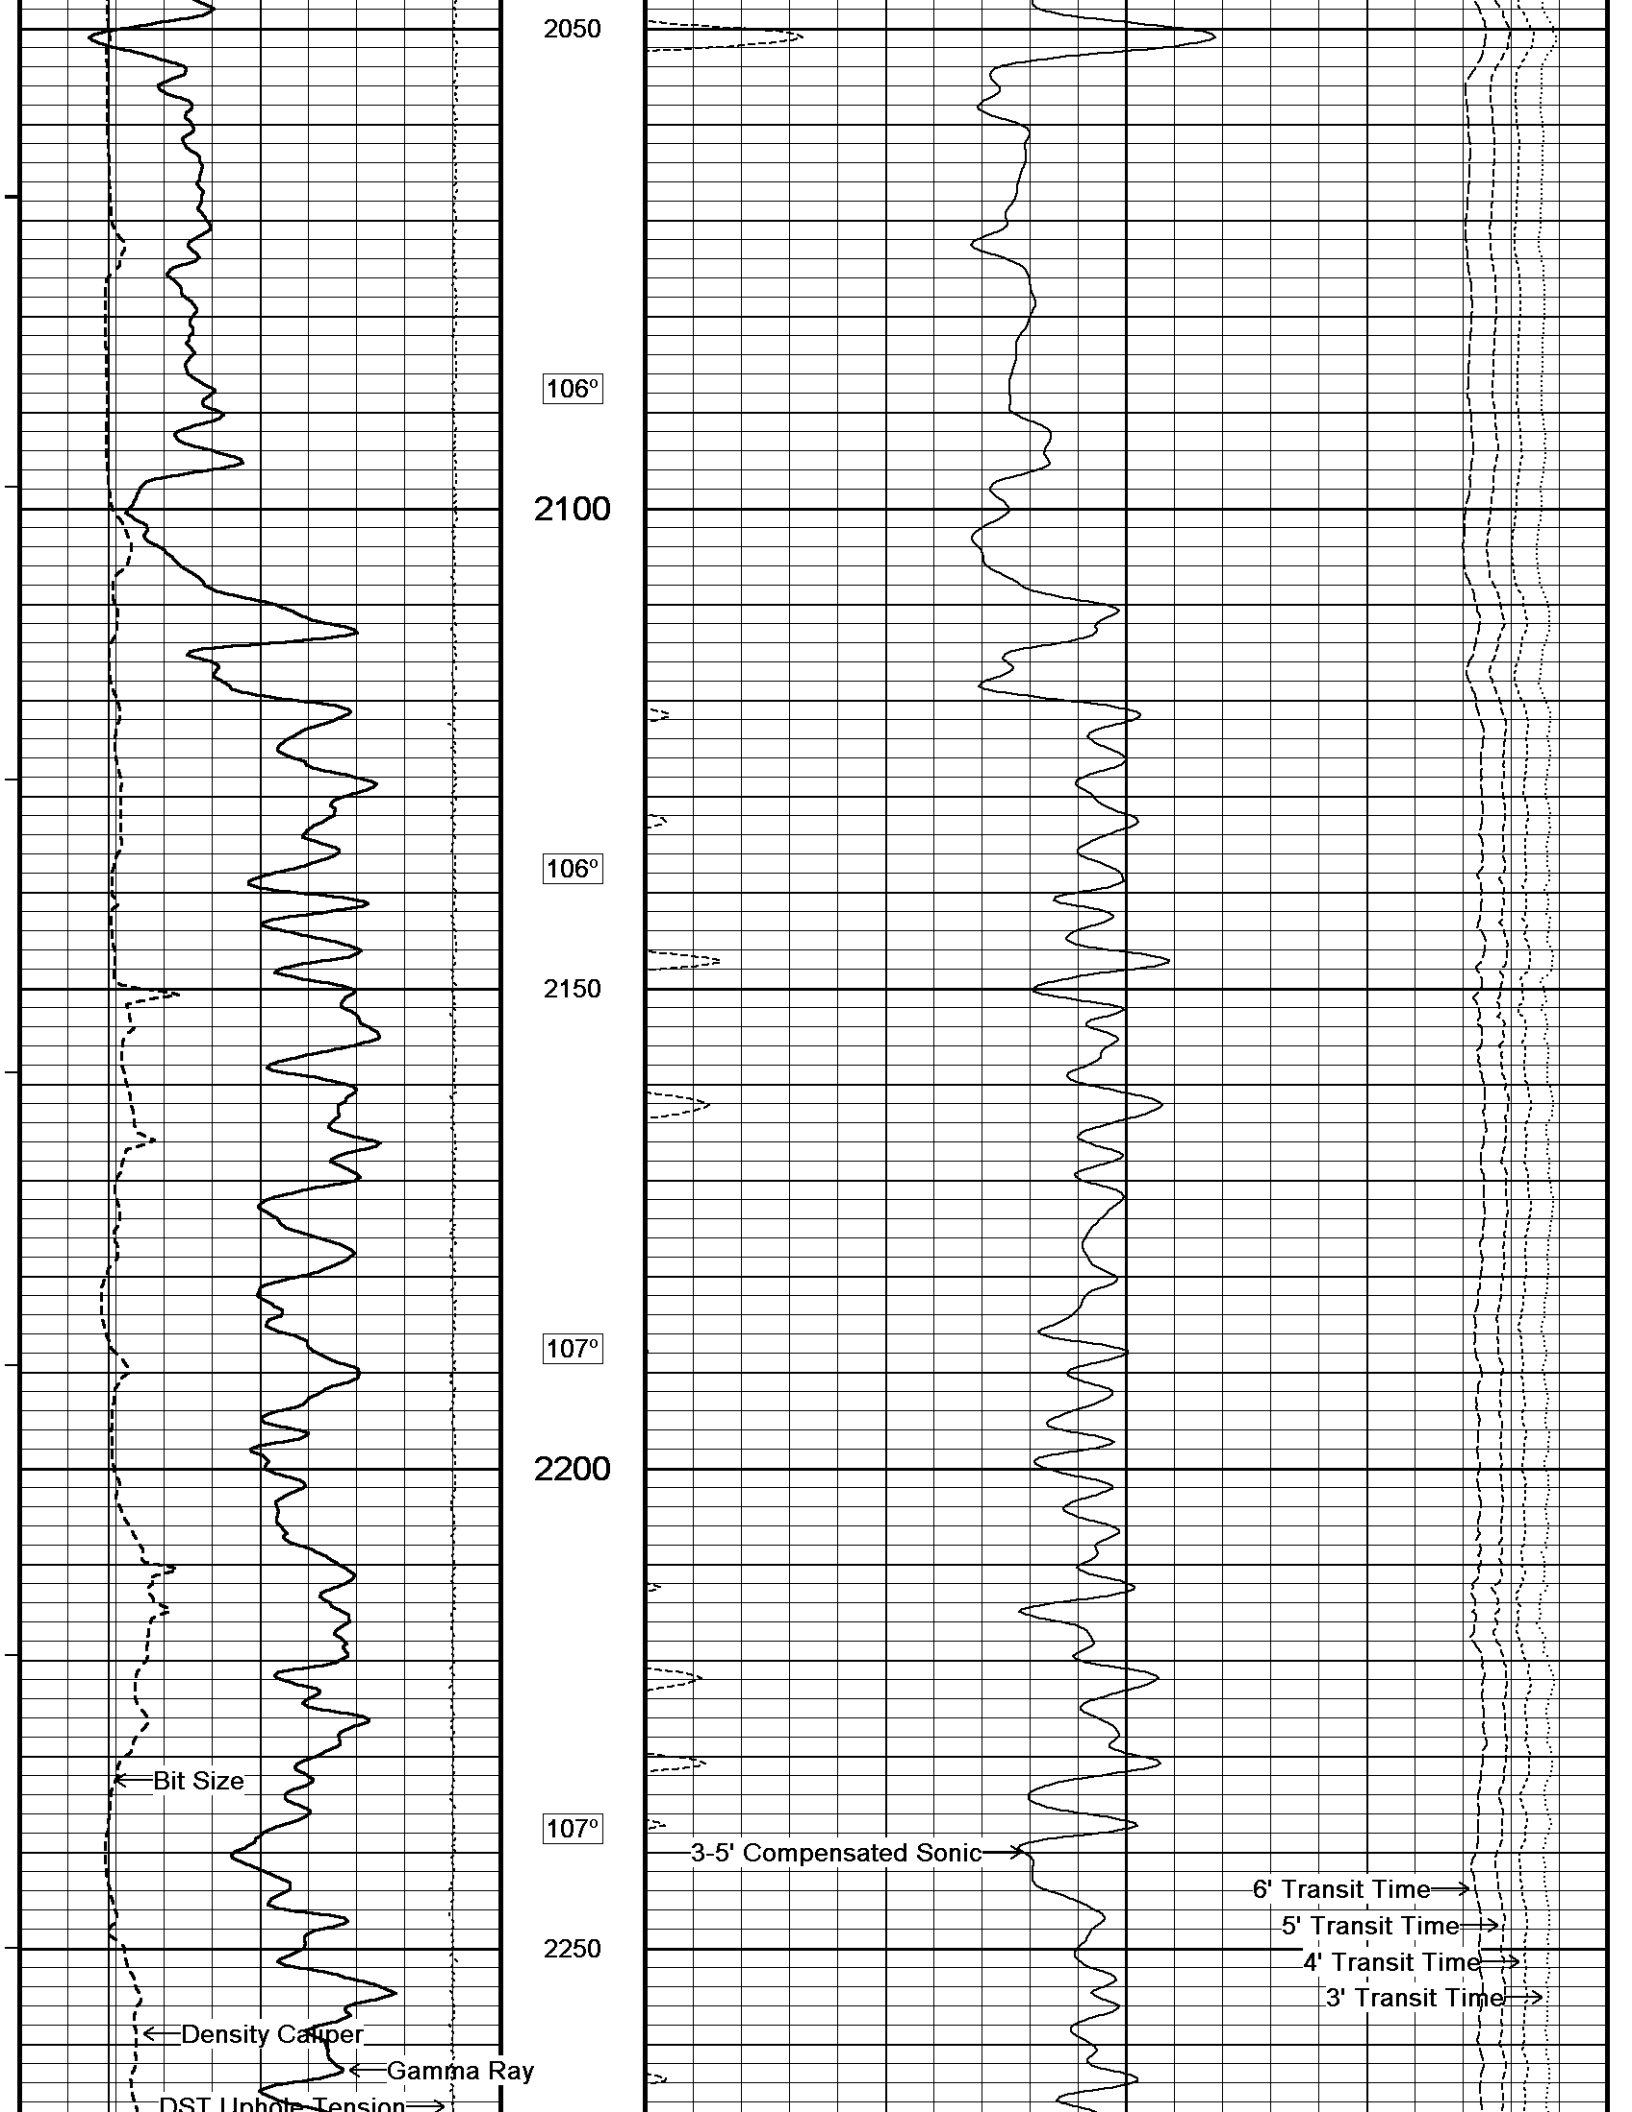

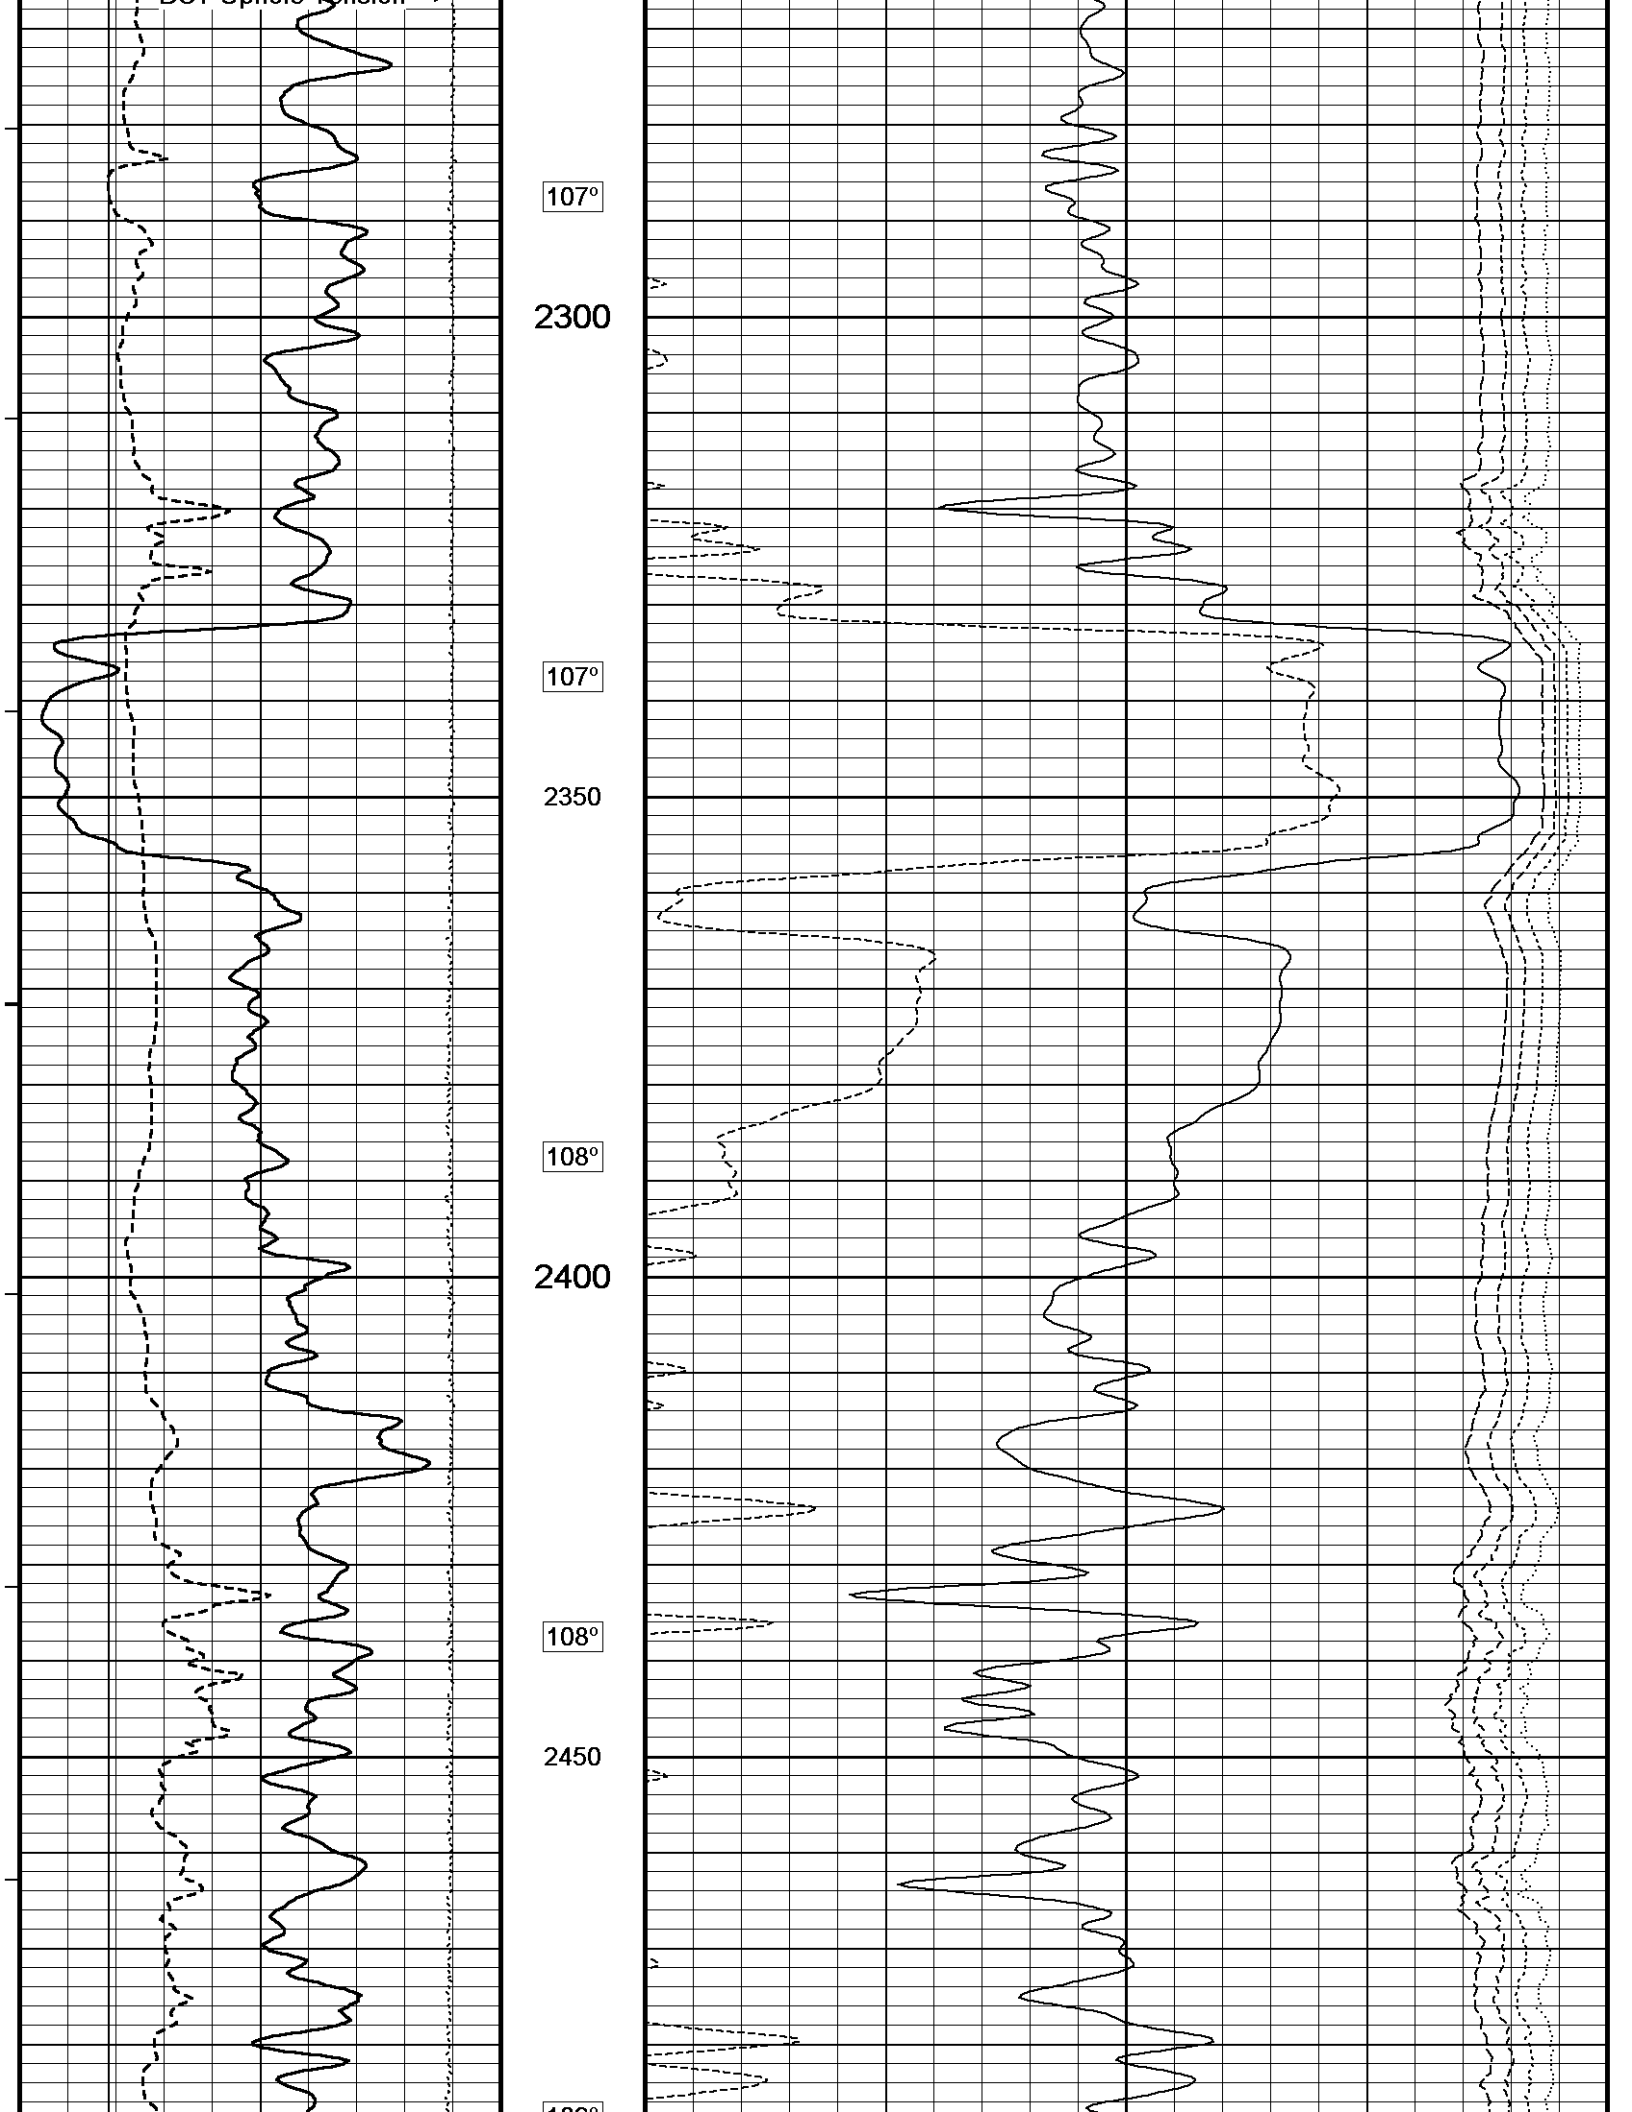

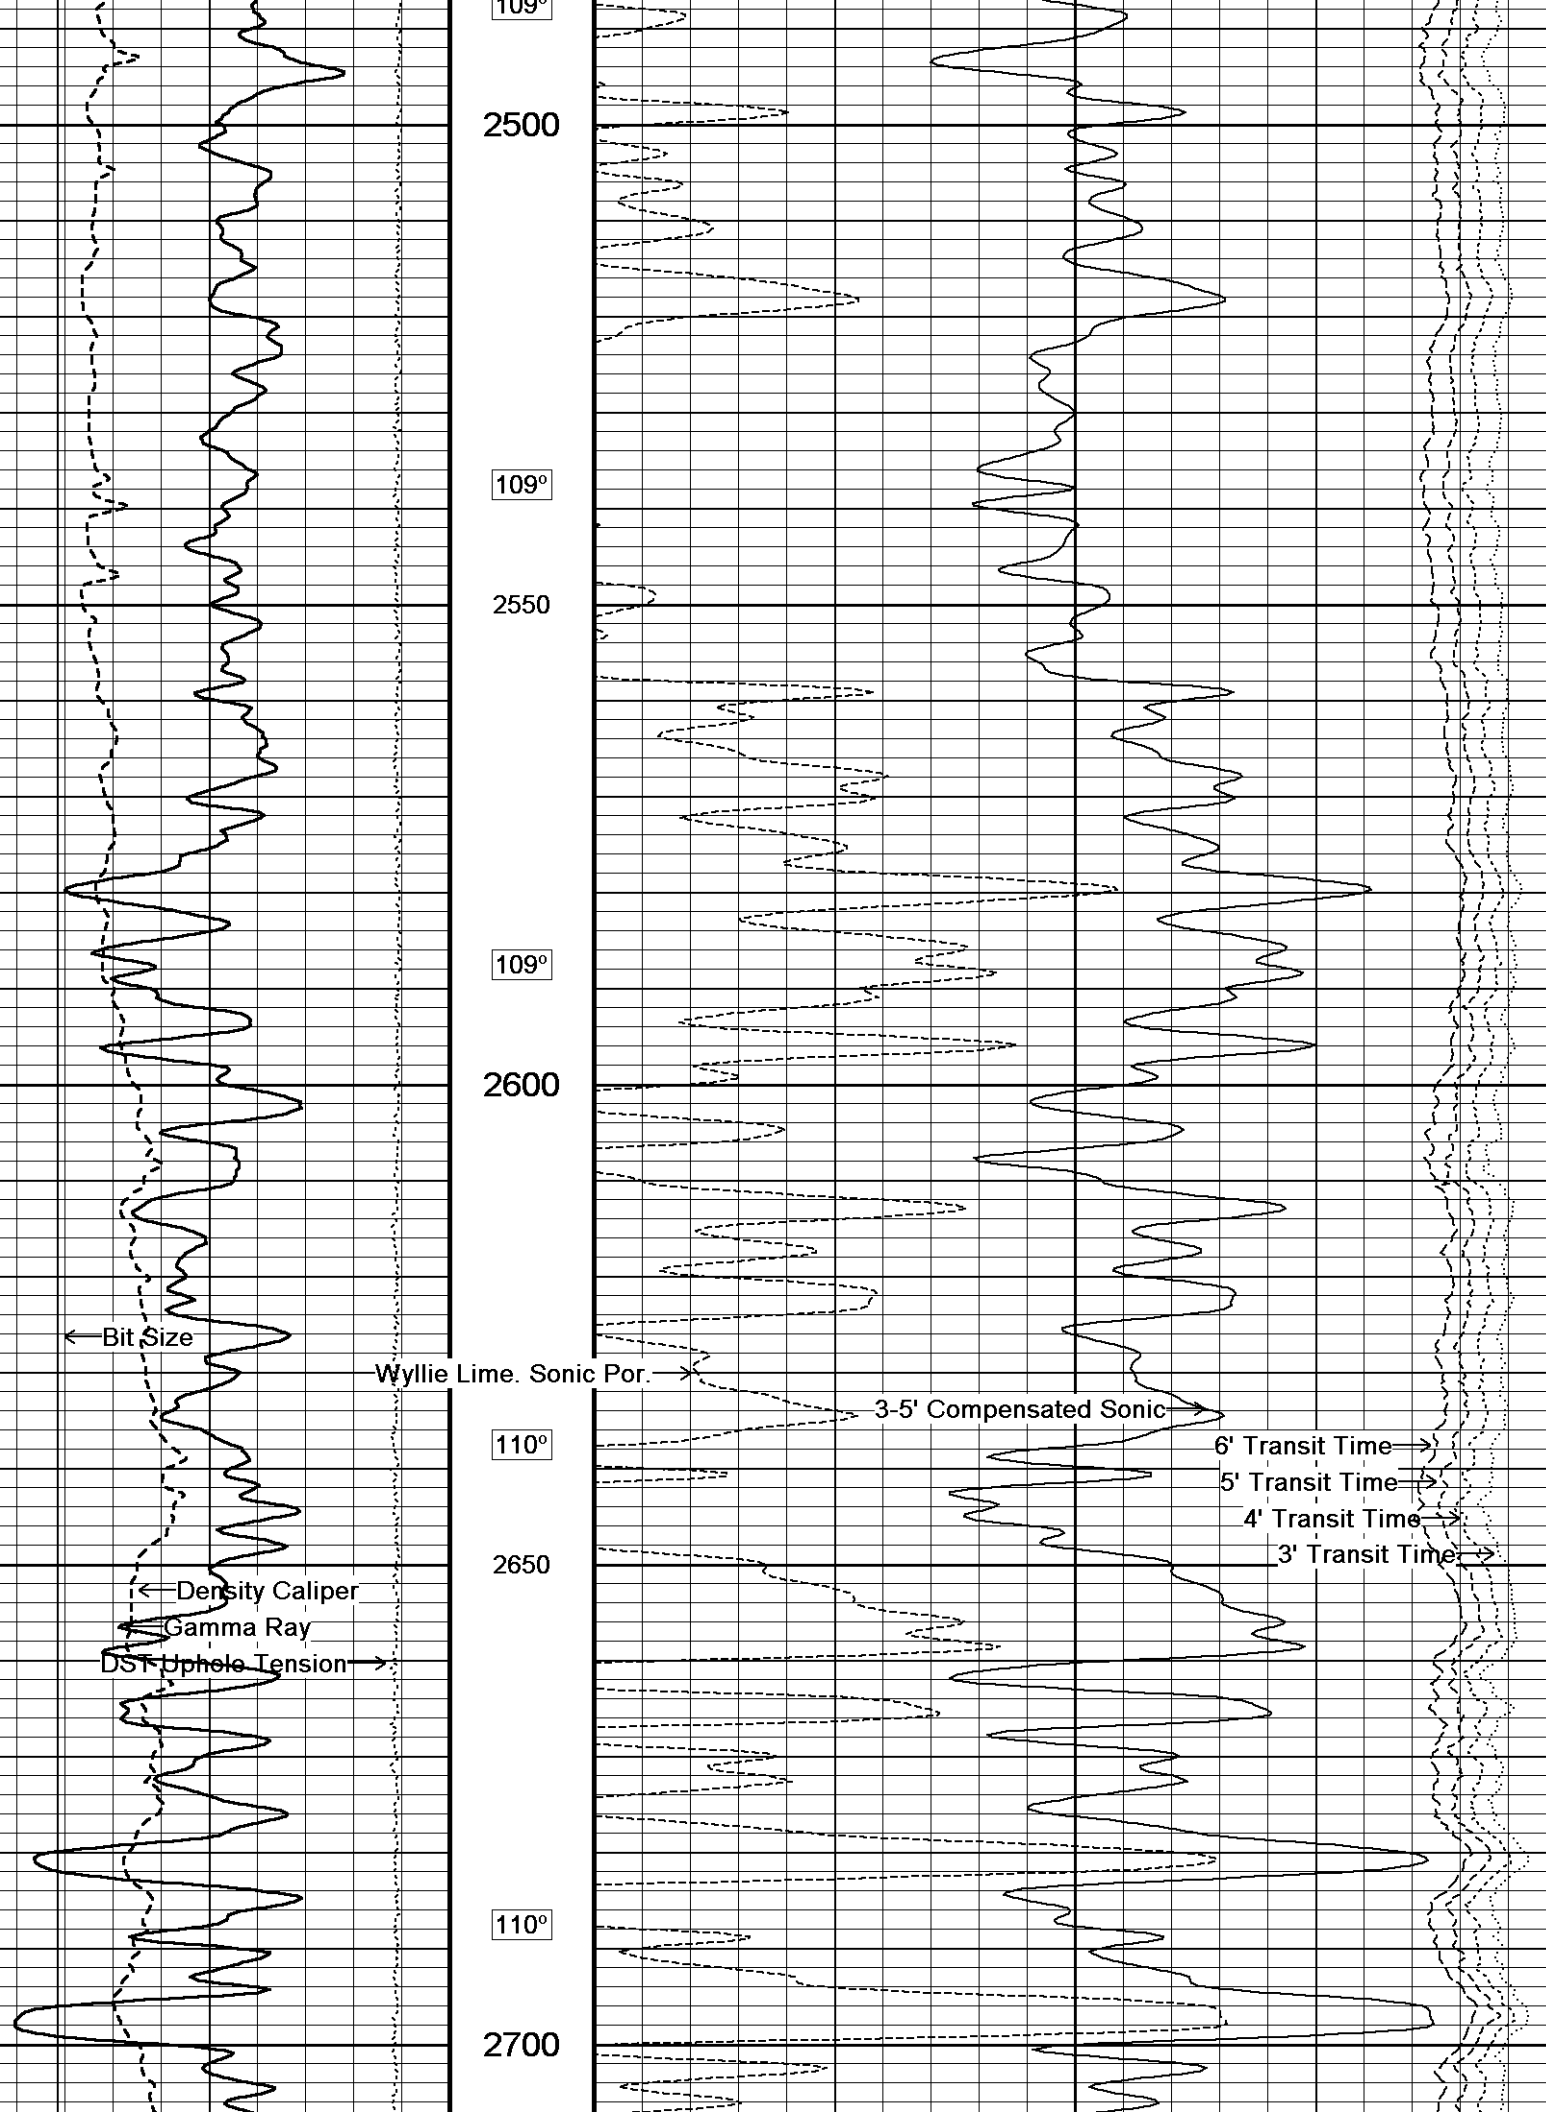

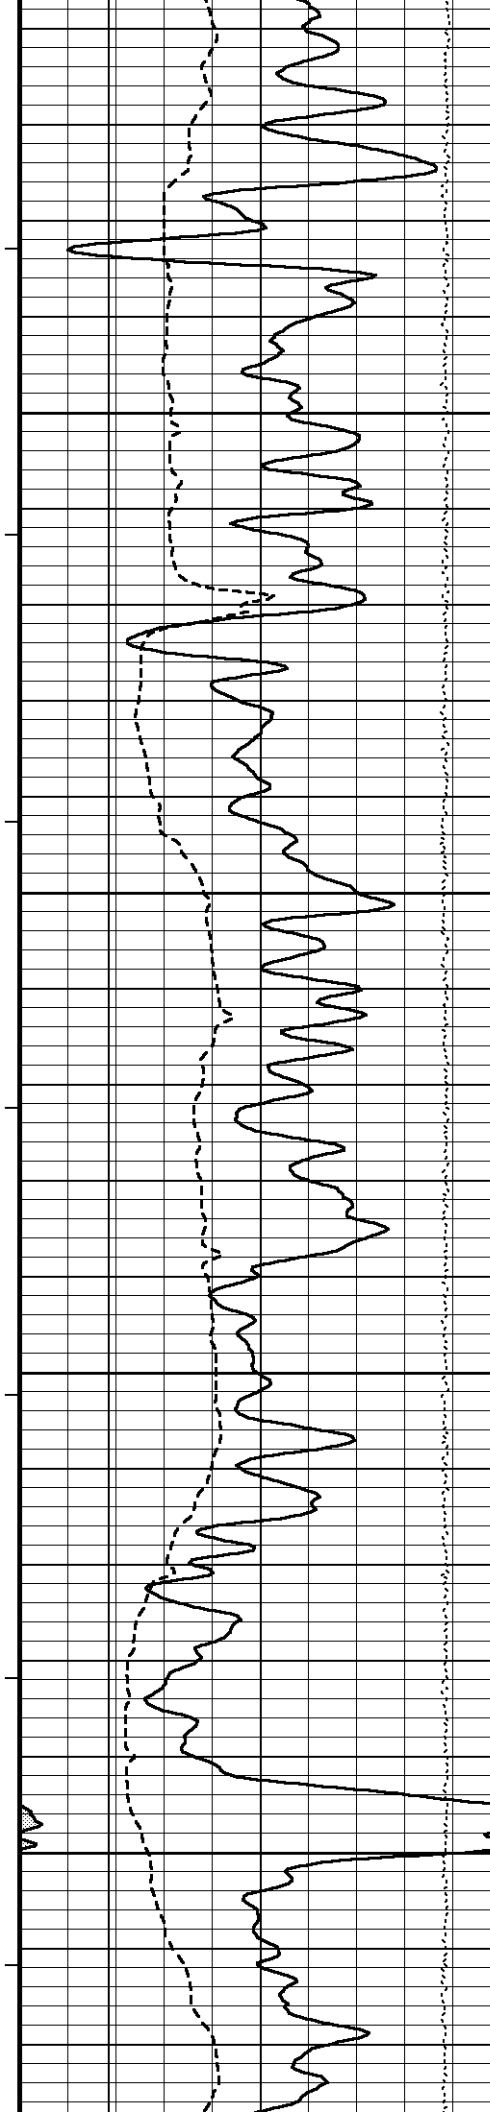

110°

2750

111°


2800



111°

2850

111°

2900

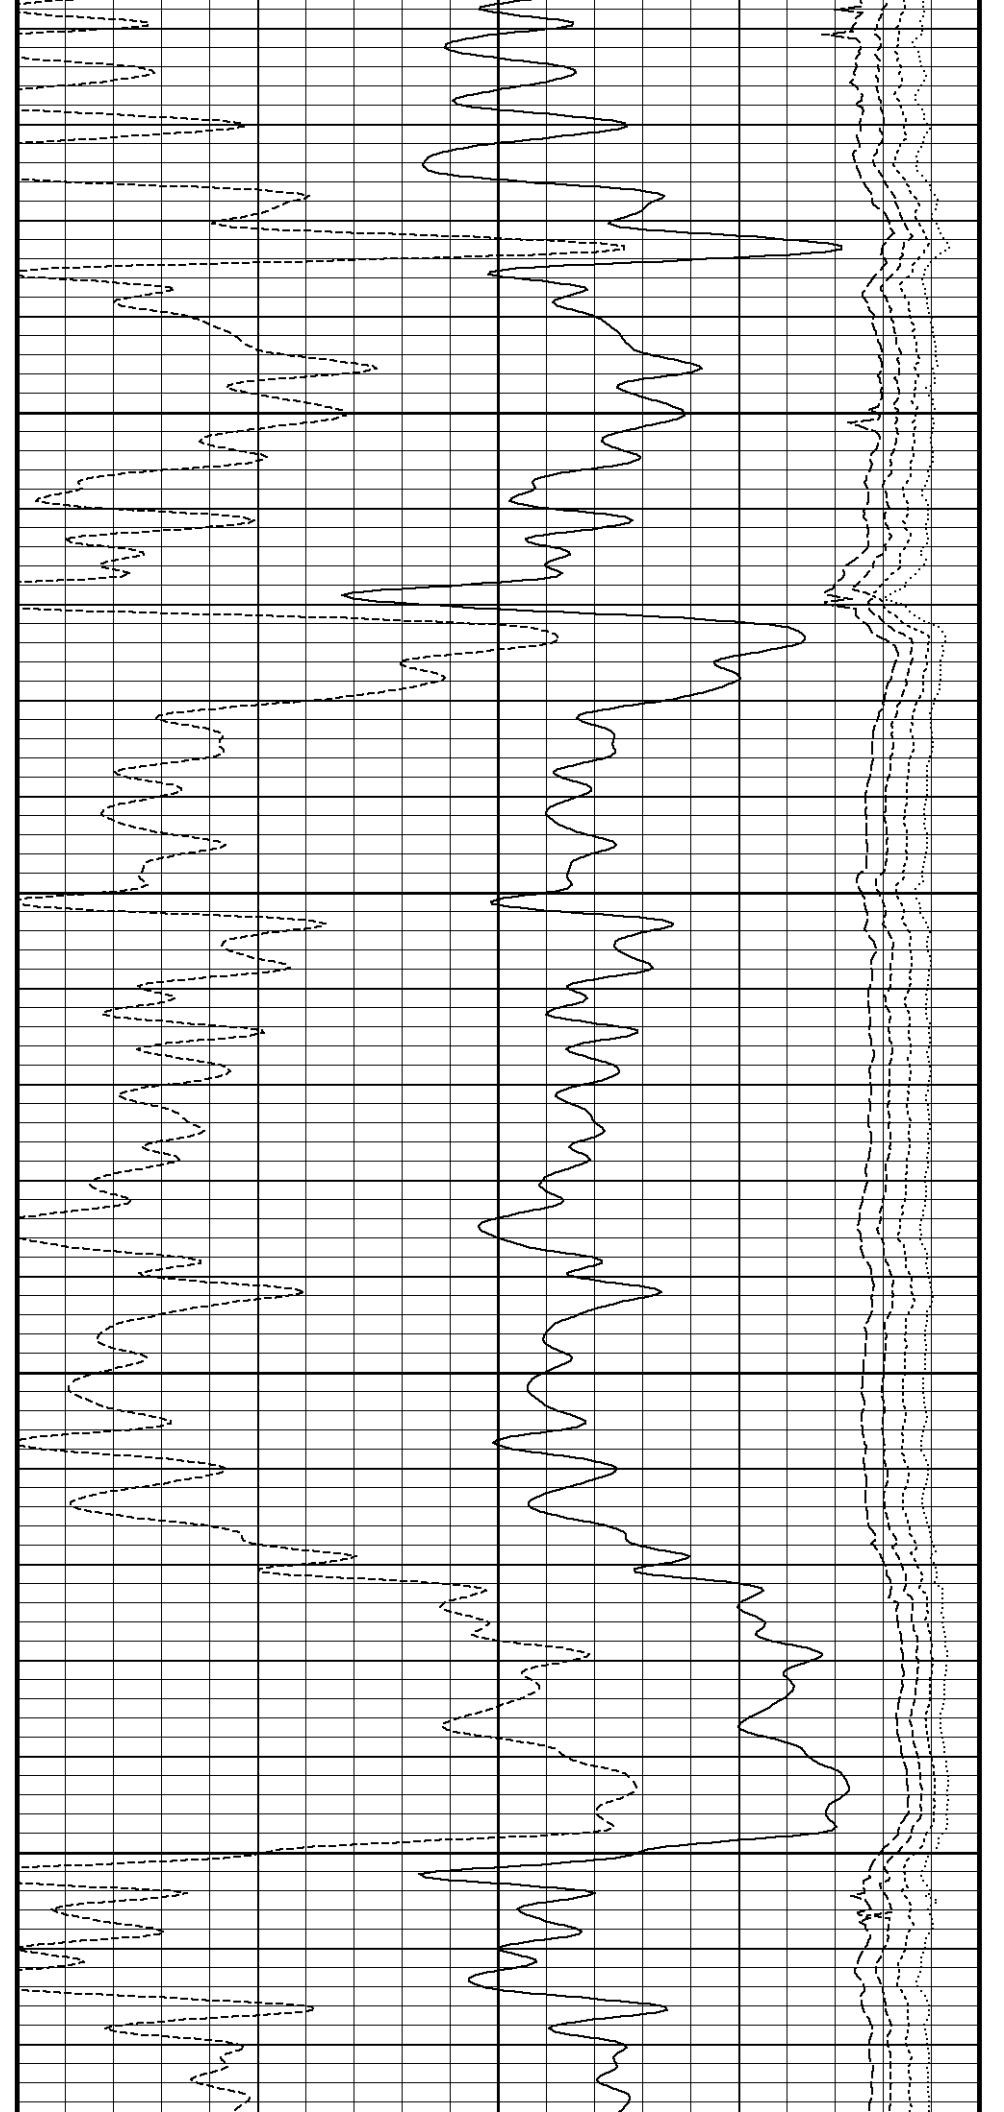

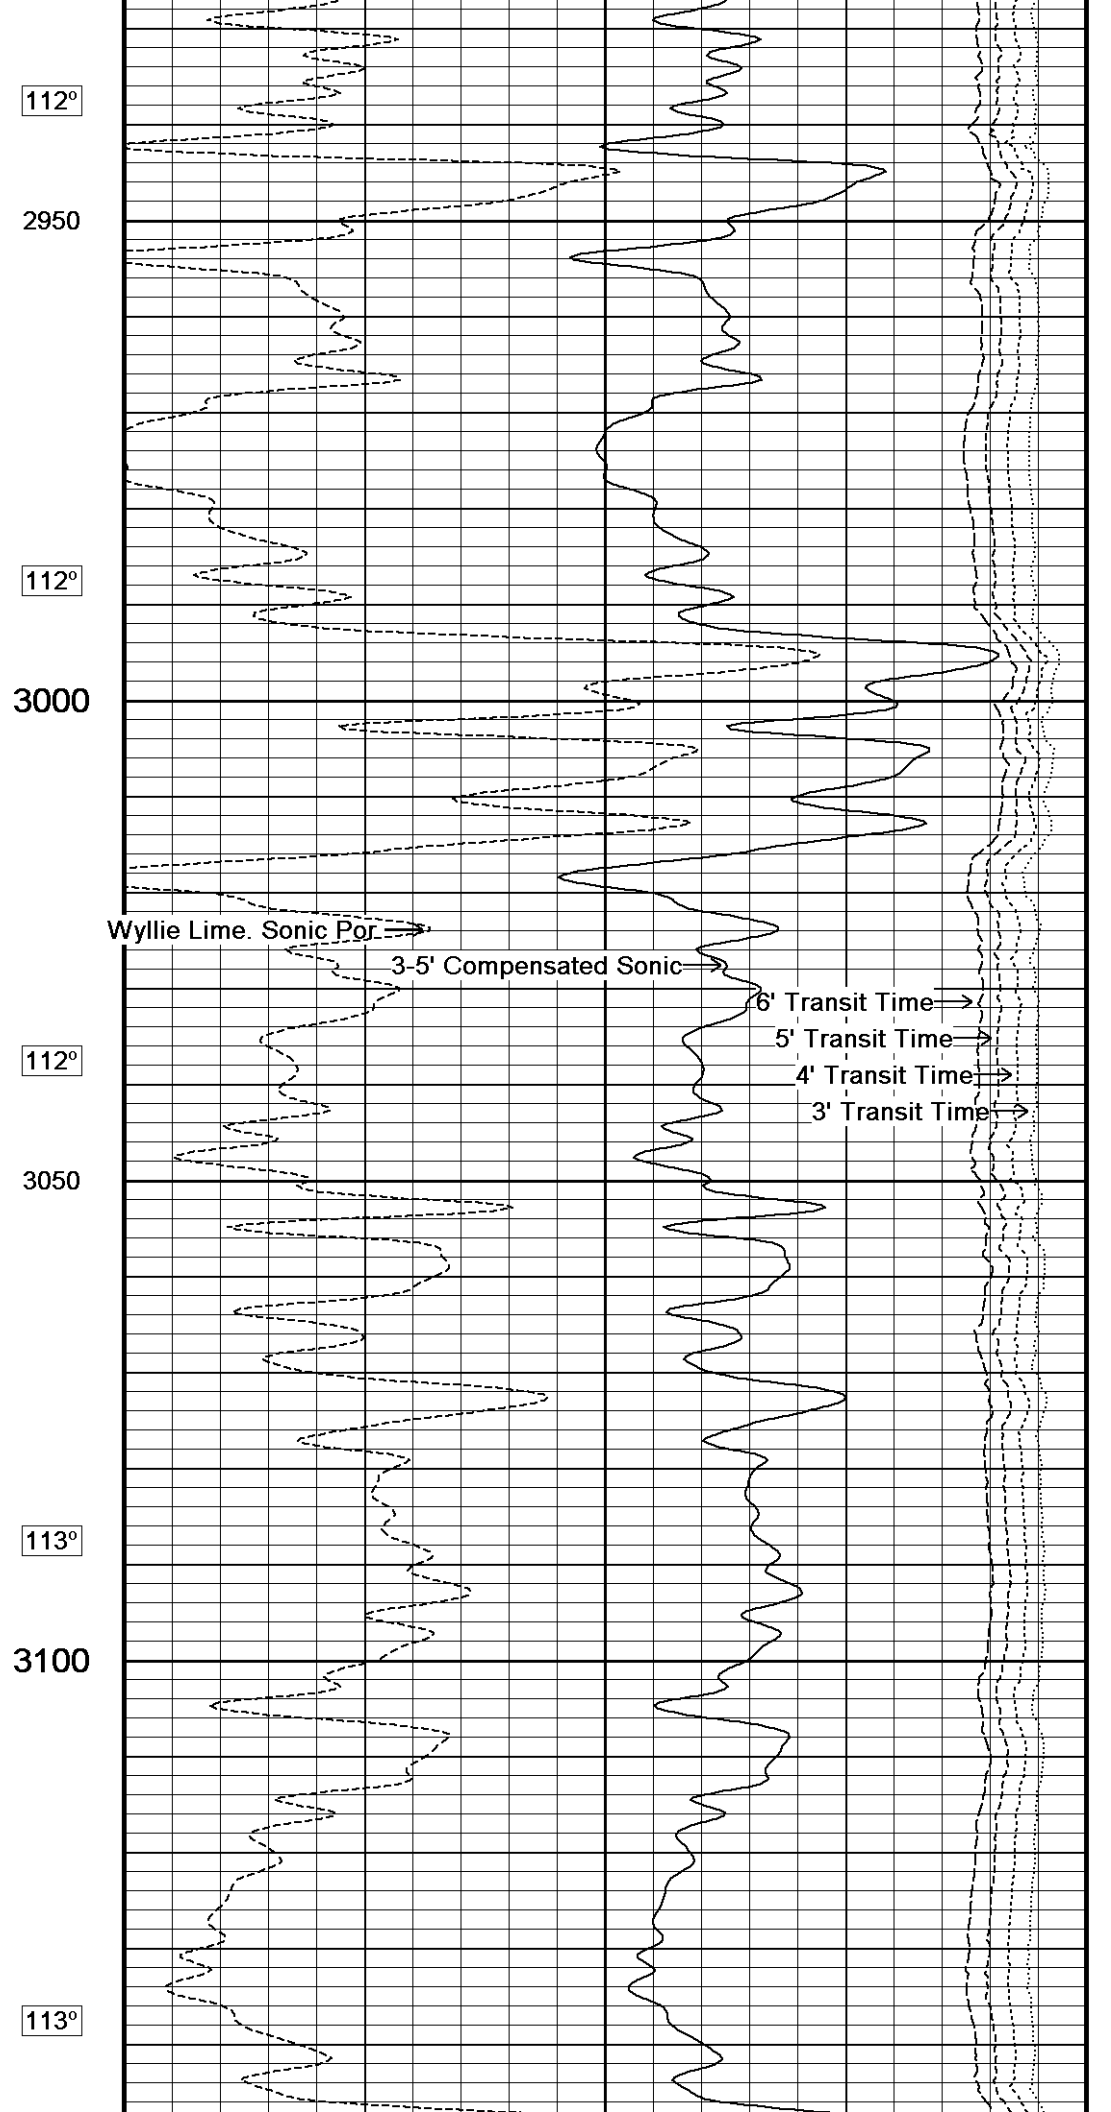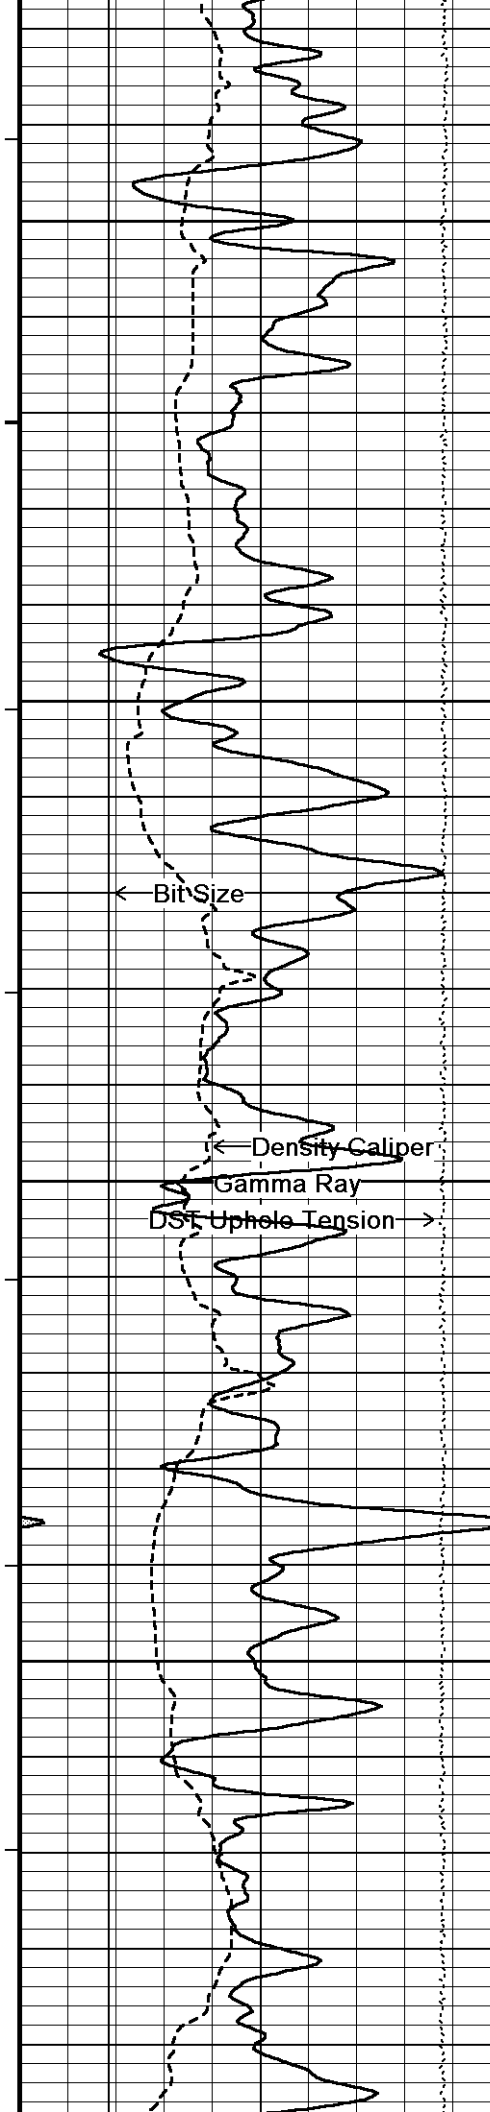

112°

2950

112°

3000

112°

3050

113°

3100

113°

← Bit Size

← Density Caliper

Gamma Ray

DST Uphole Tension →

Wyllie Lime. Sonic Por. →


3-5' Compensated Sonic →

6' Transit Time →

5' Transit Time →

4' Transit Time →

3' Transit Time →

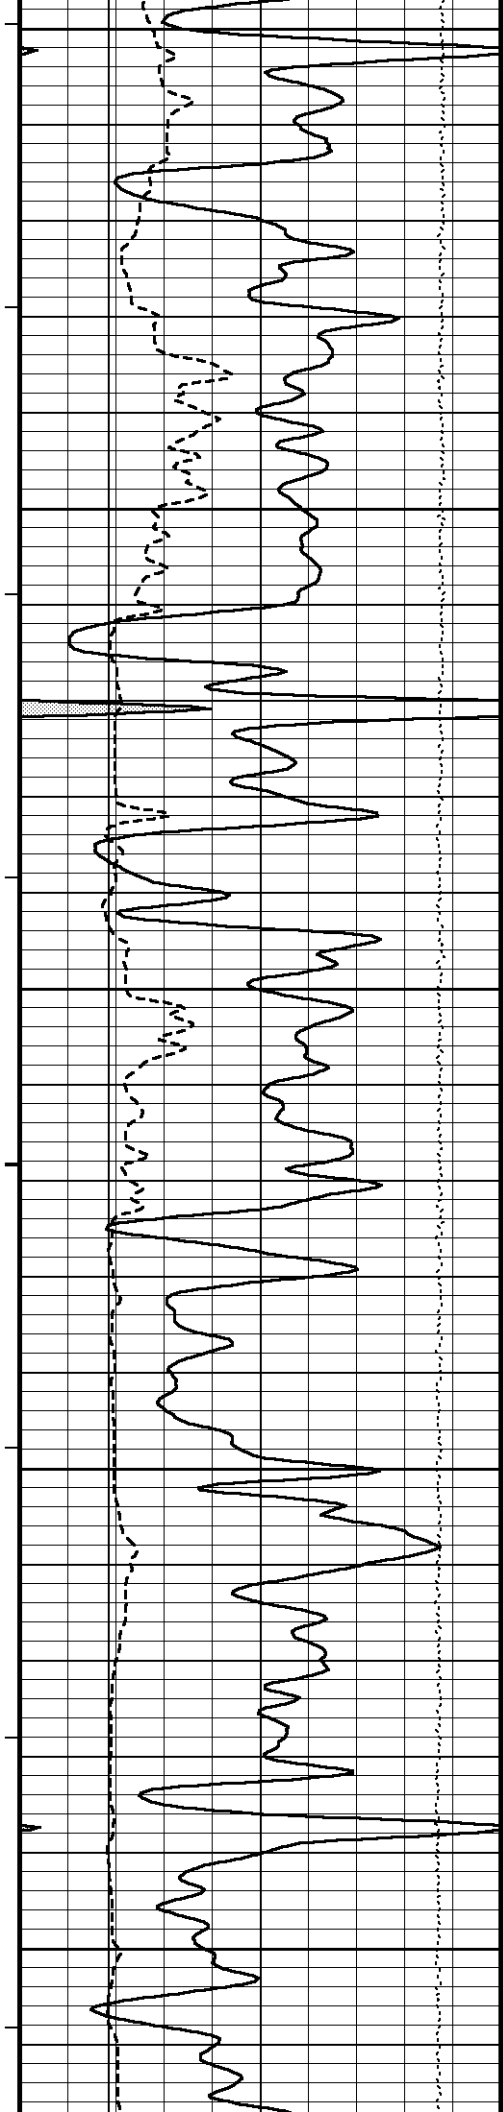

3150

113°

3200

114°


3250


114°

3300

114°

3350

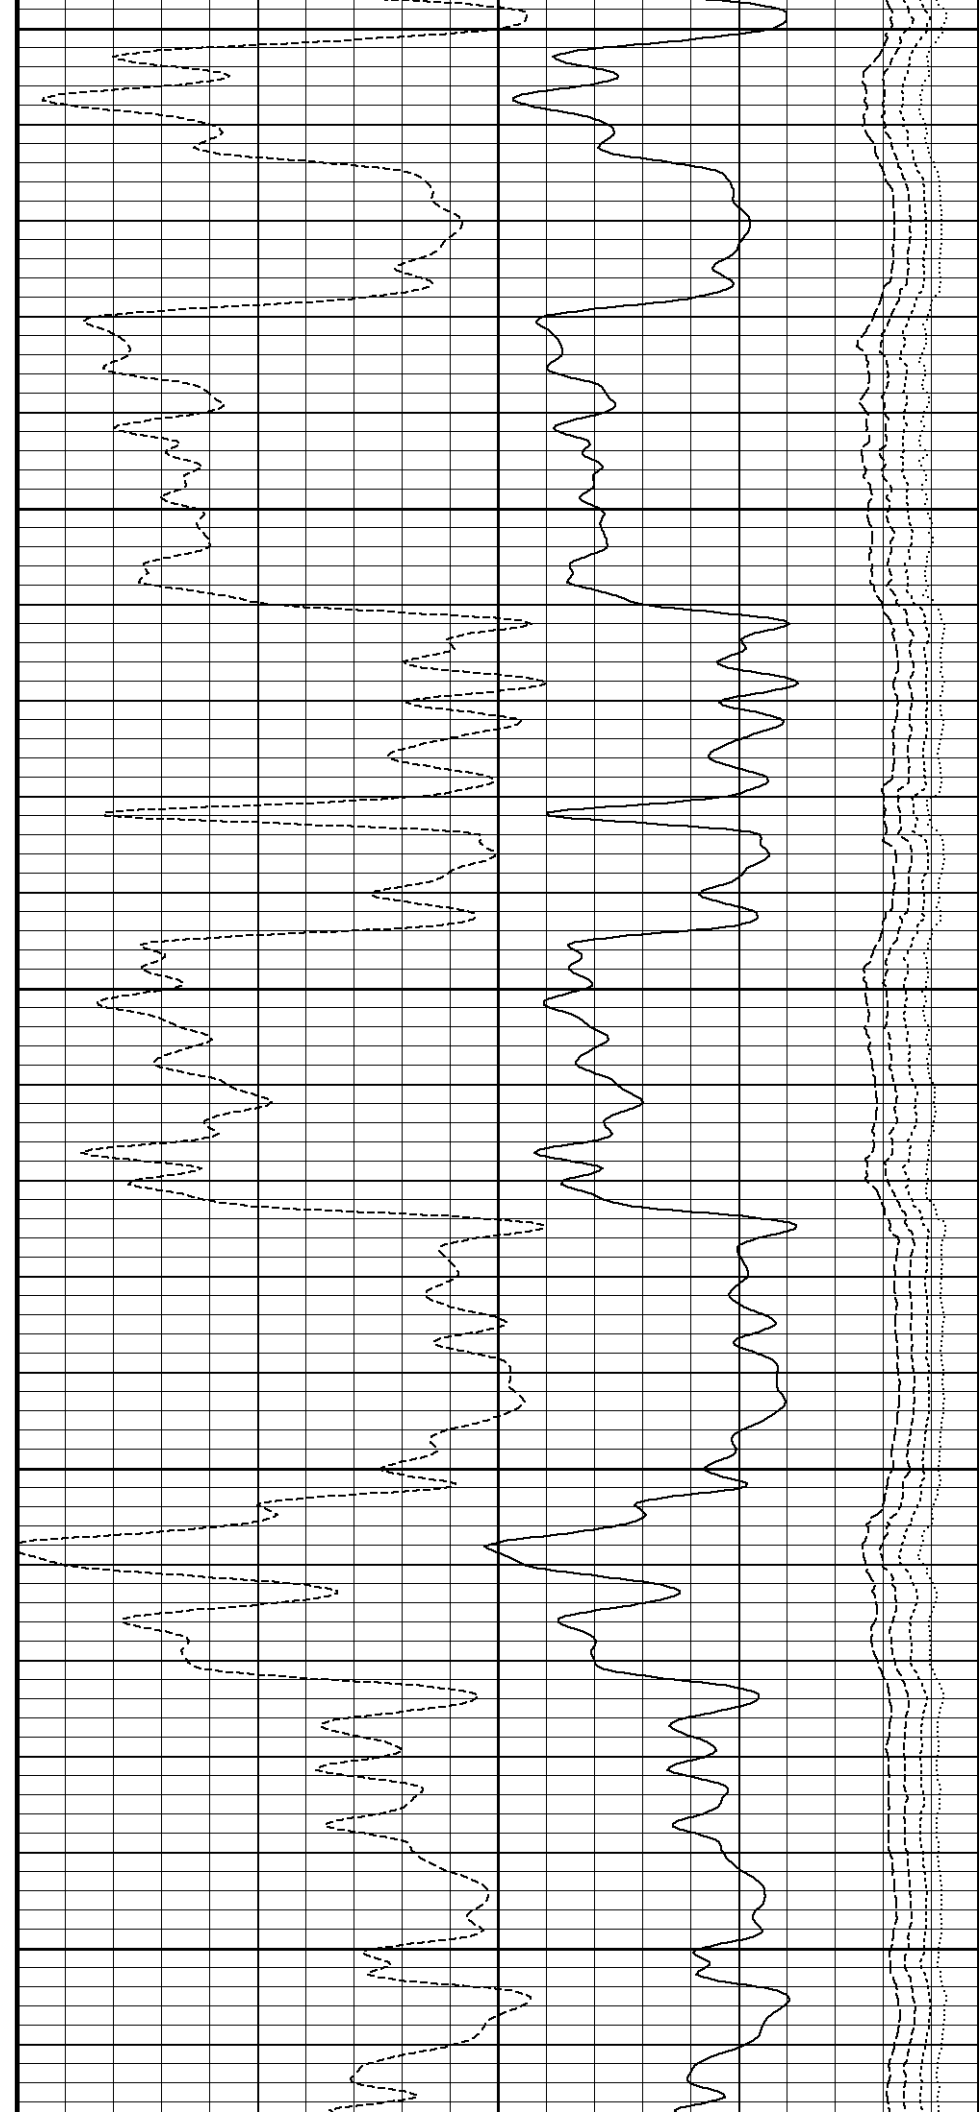

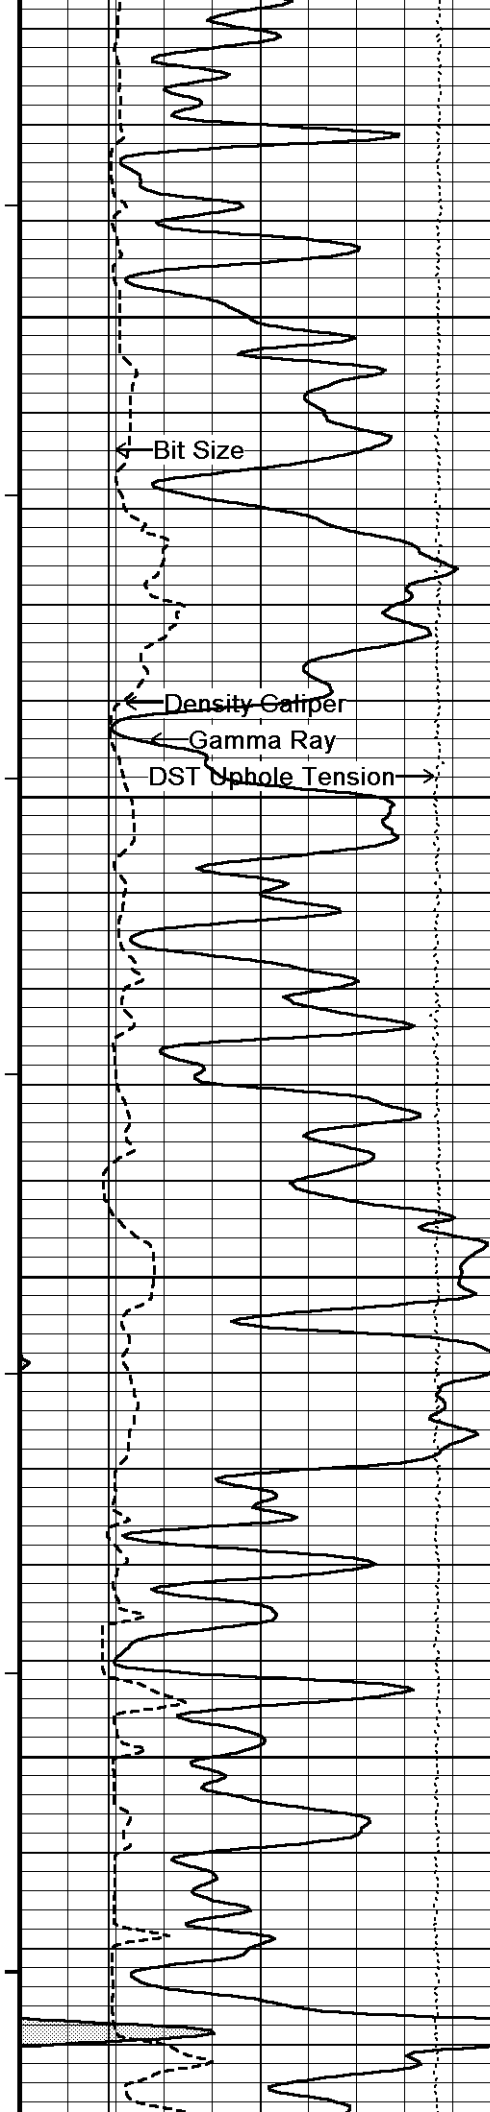

115°

3400

115°

3450


115°


3500

116°

3550

112°

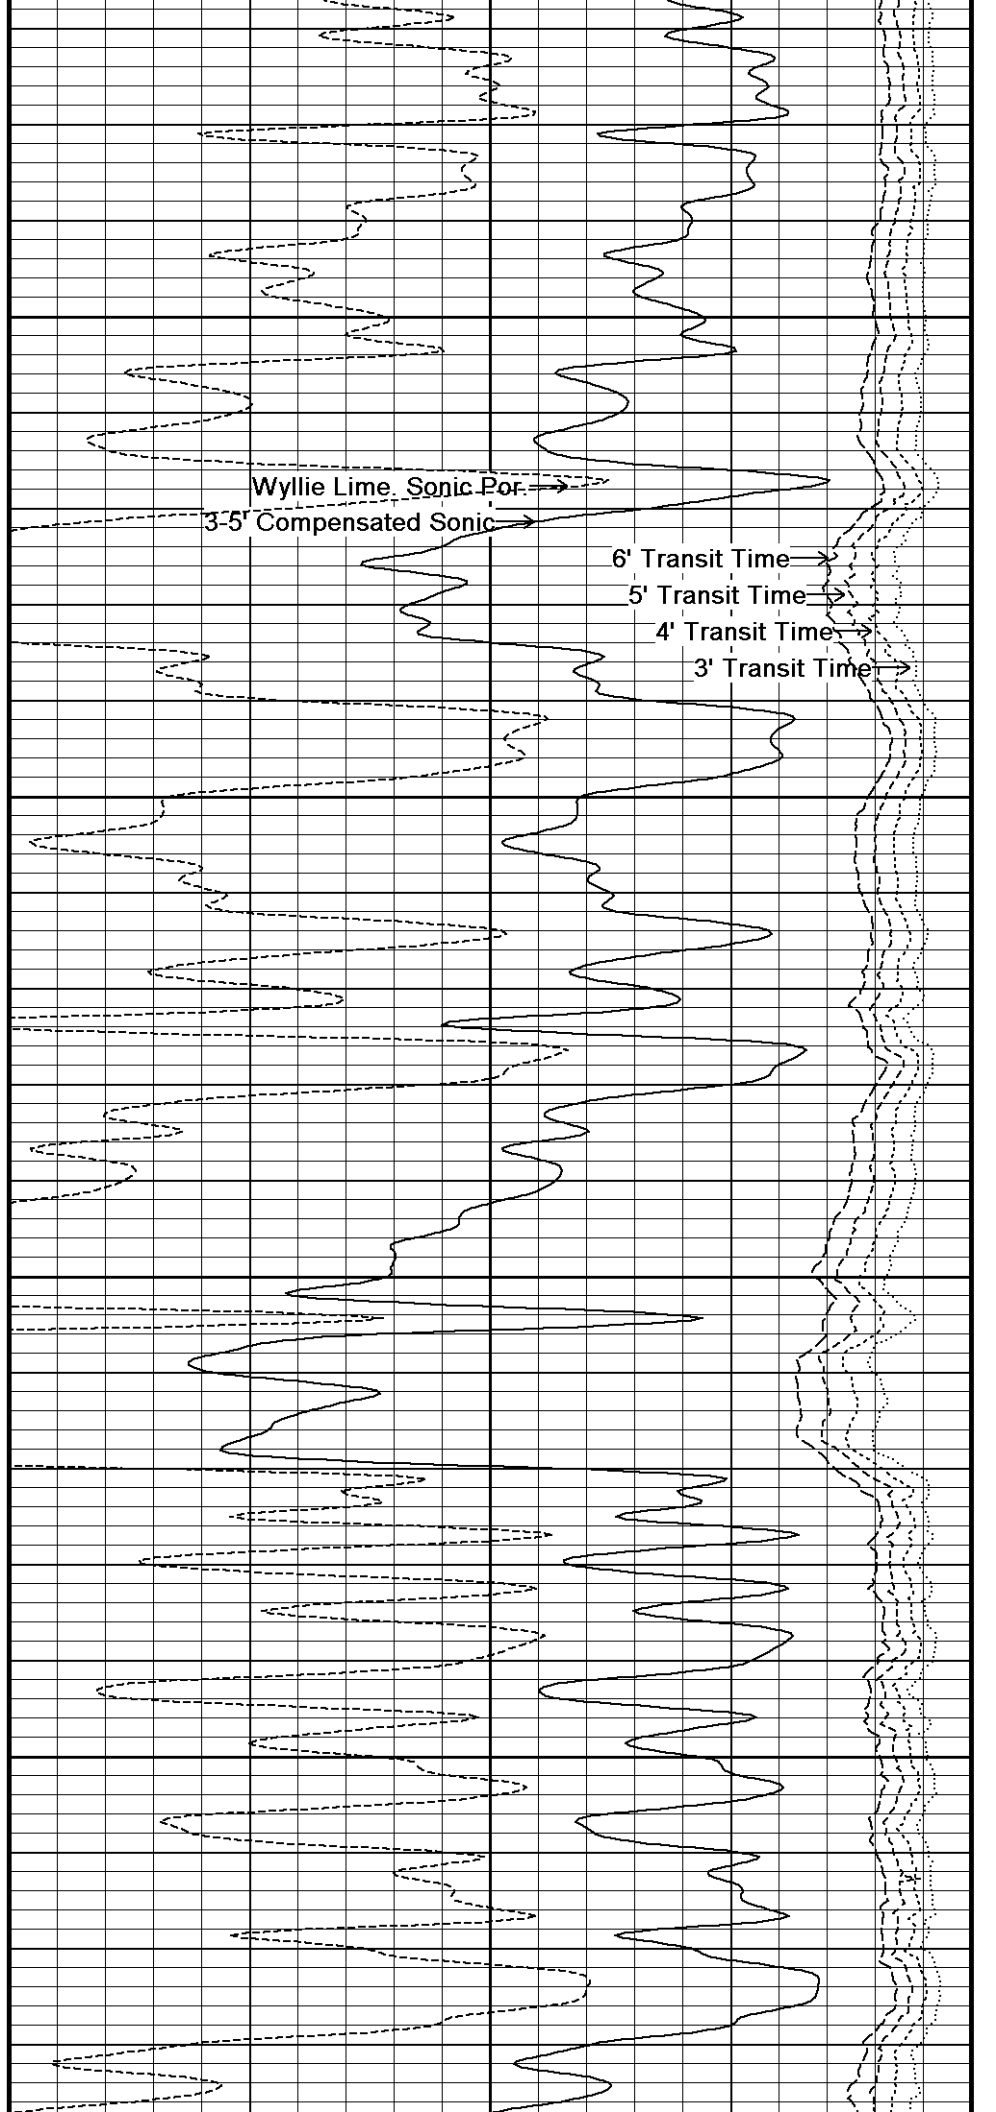

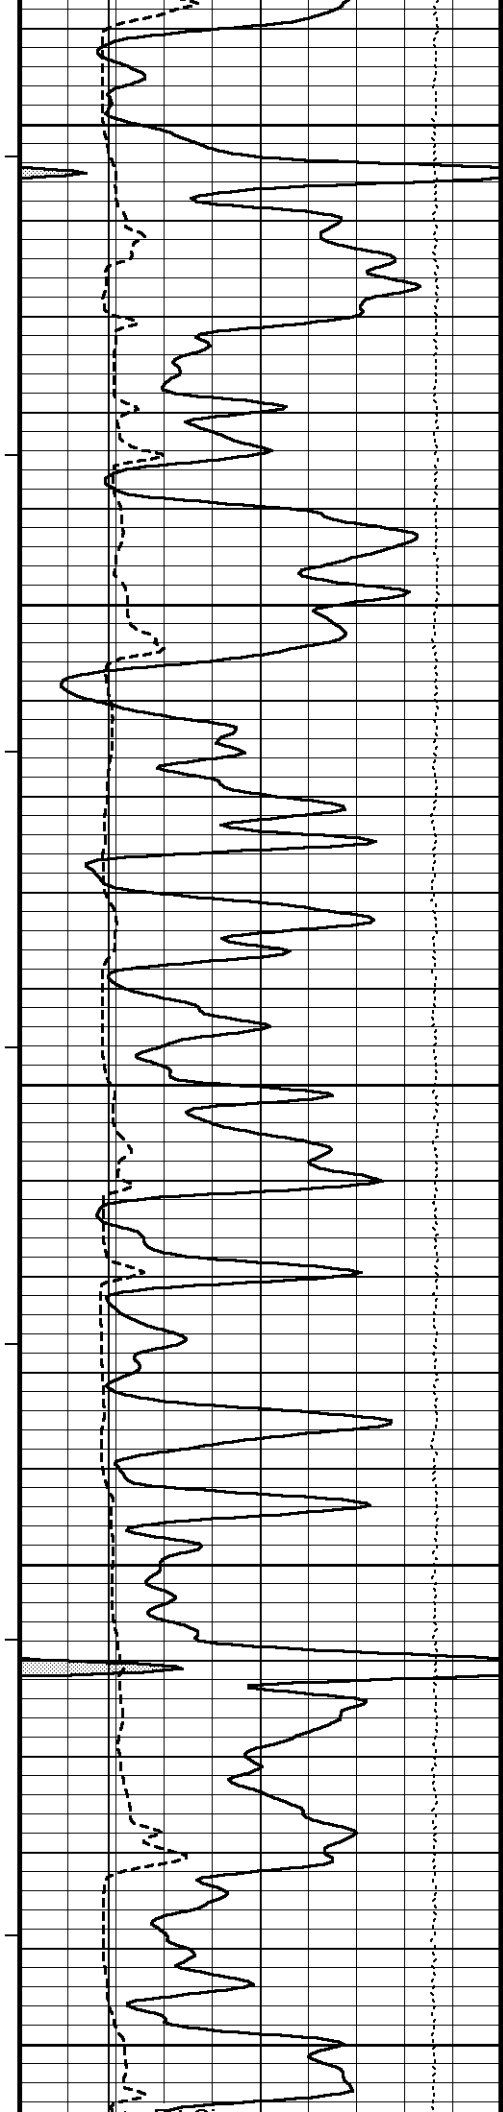

116°

3600

116°

3650

117°


3700


117°

3750

117°

3800

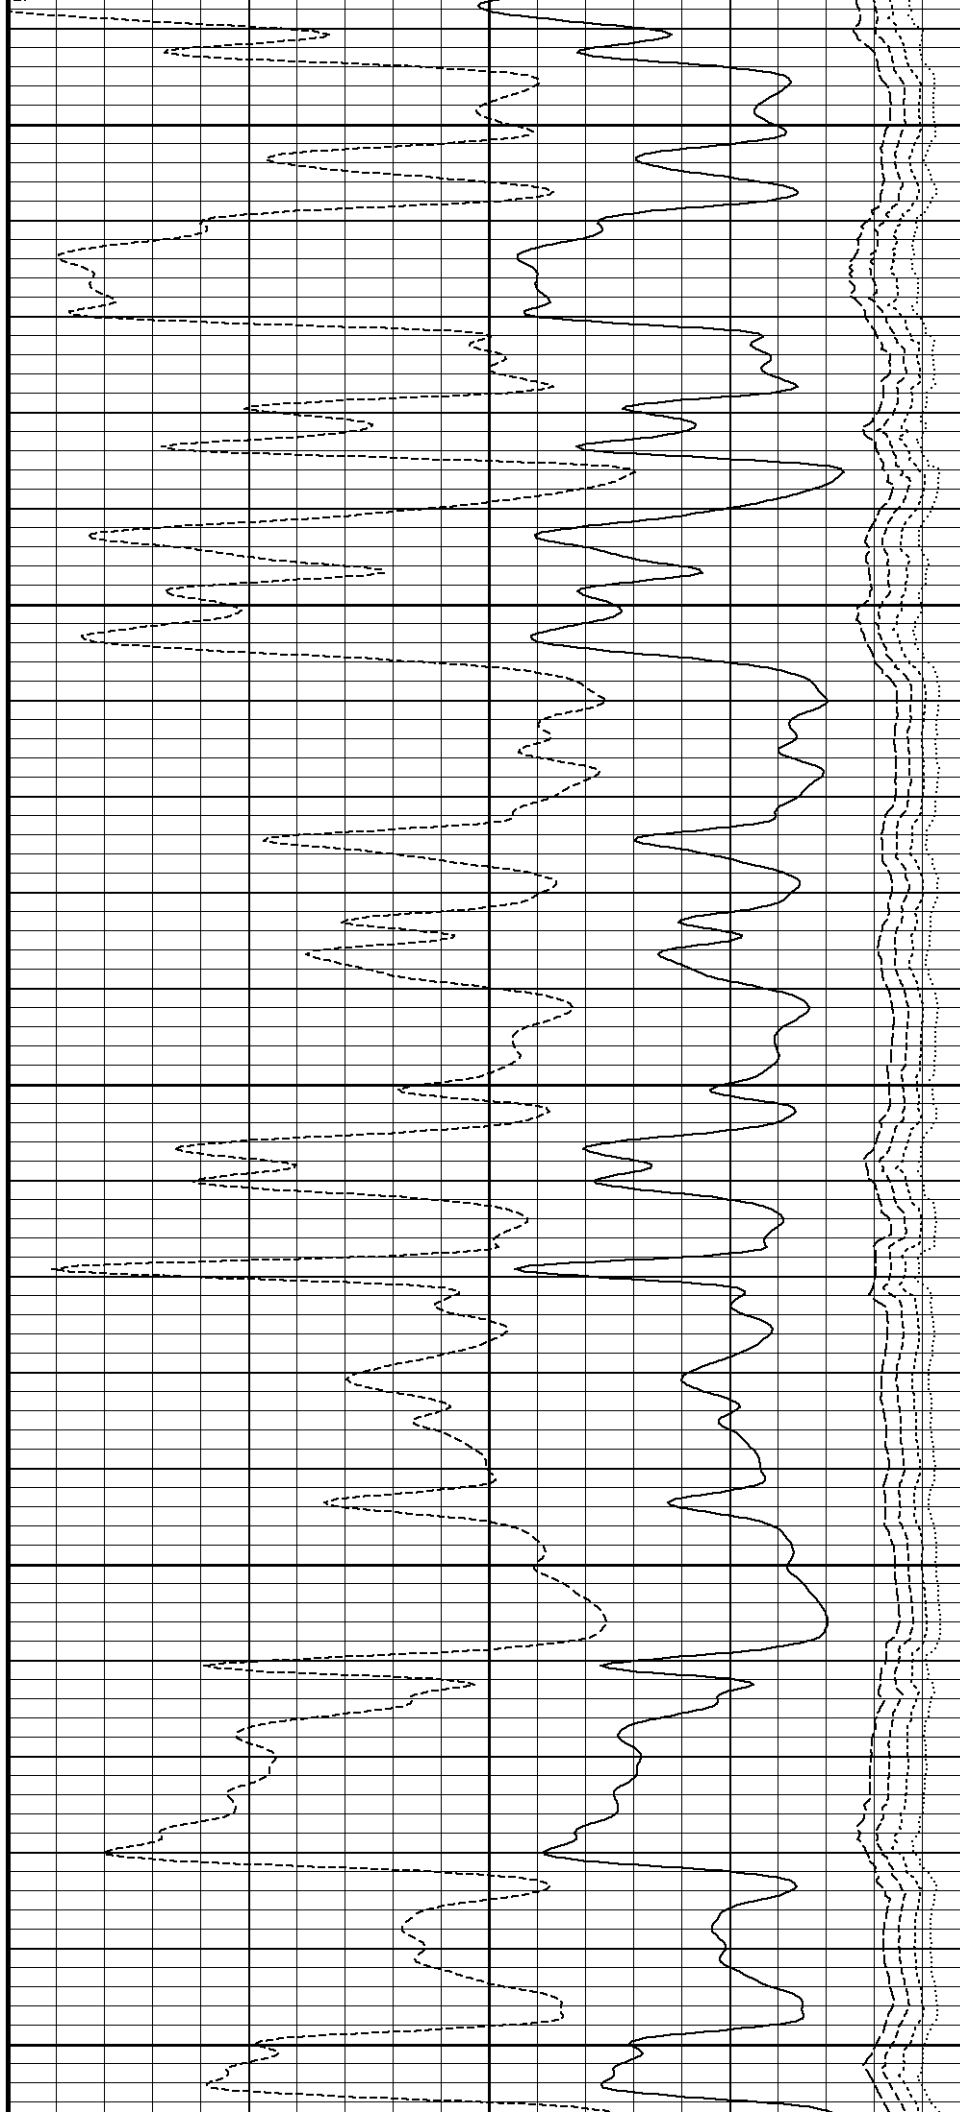

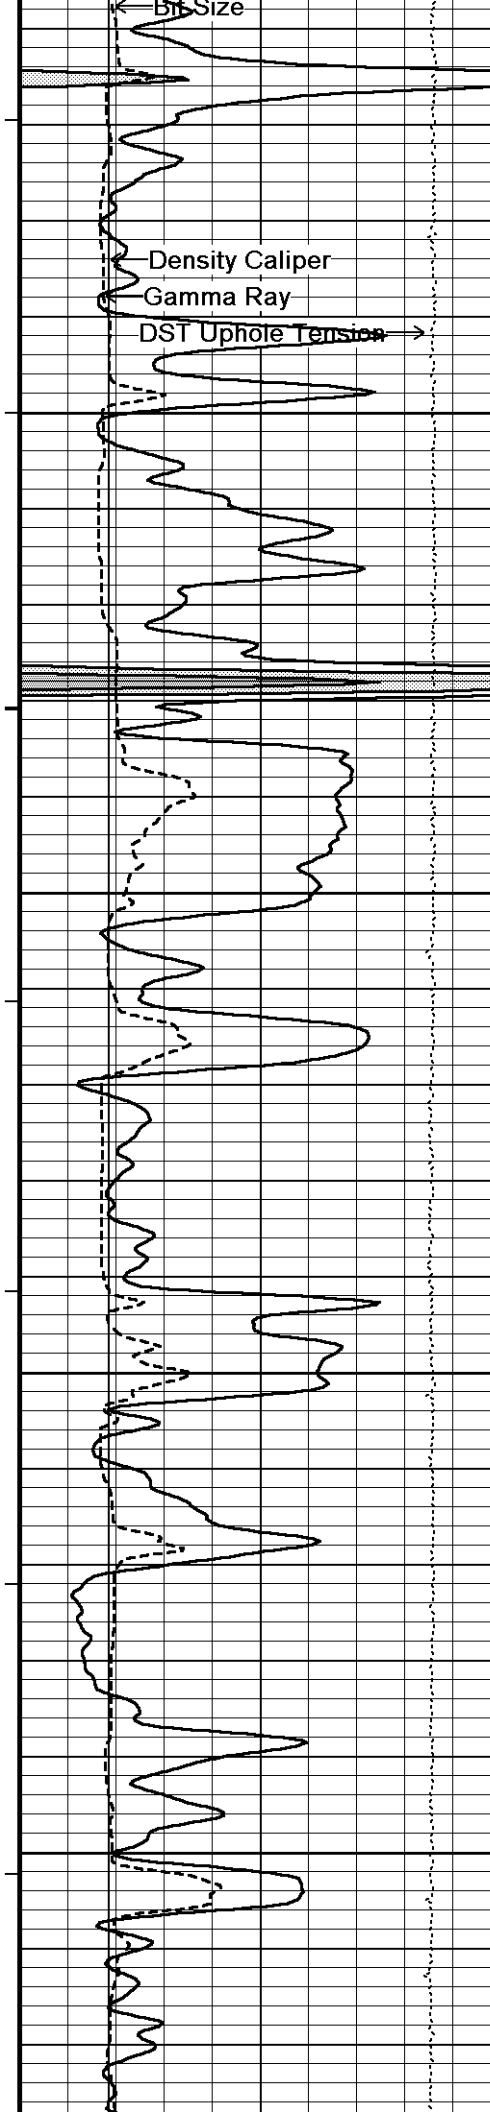

118°

3850

118°


3900


119°


3950

119°


4000

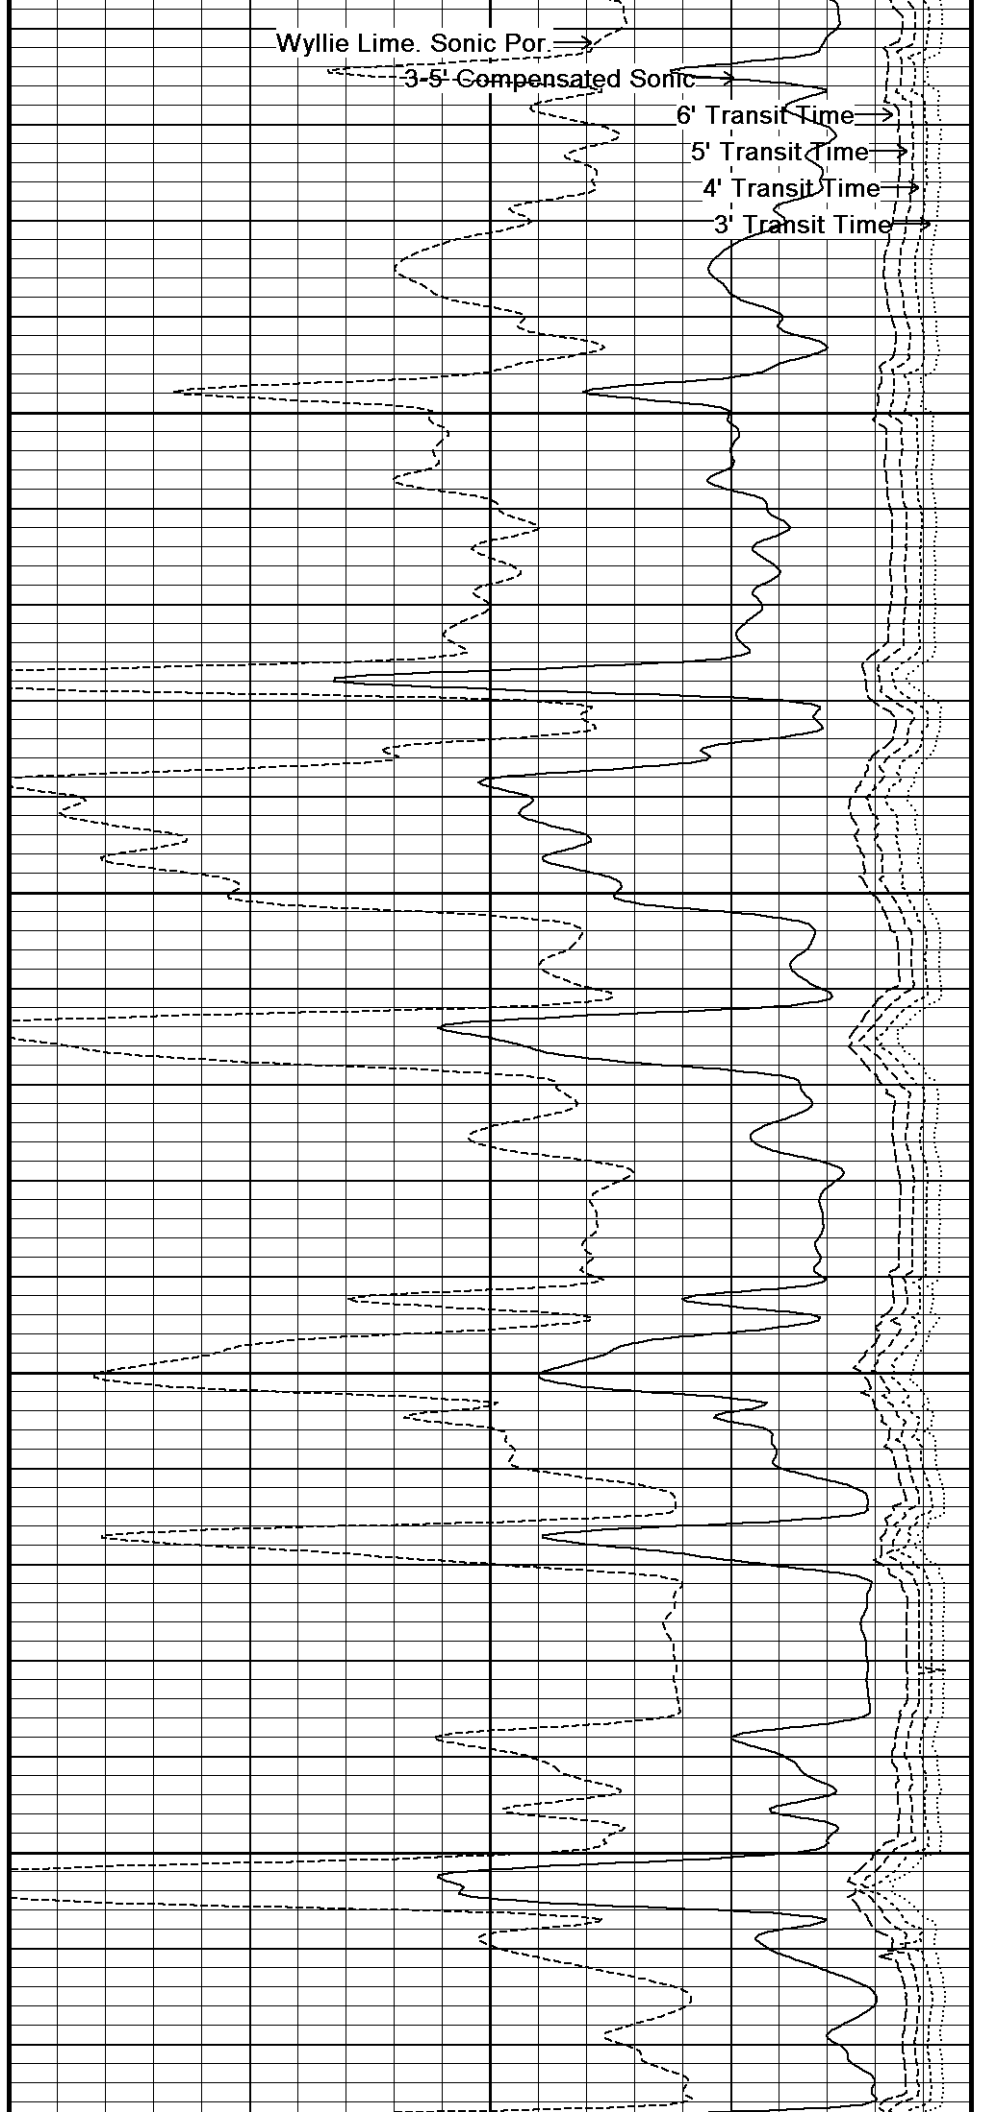


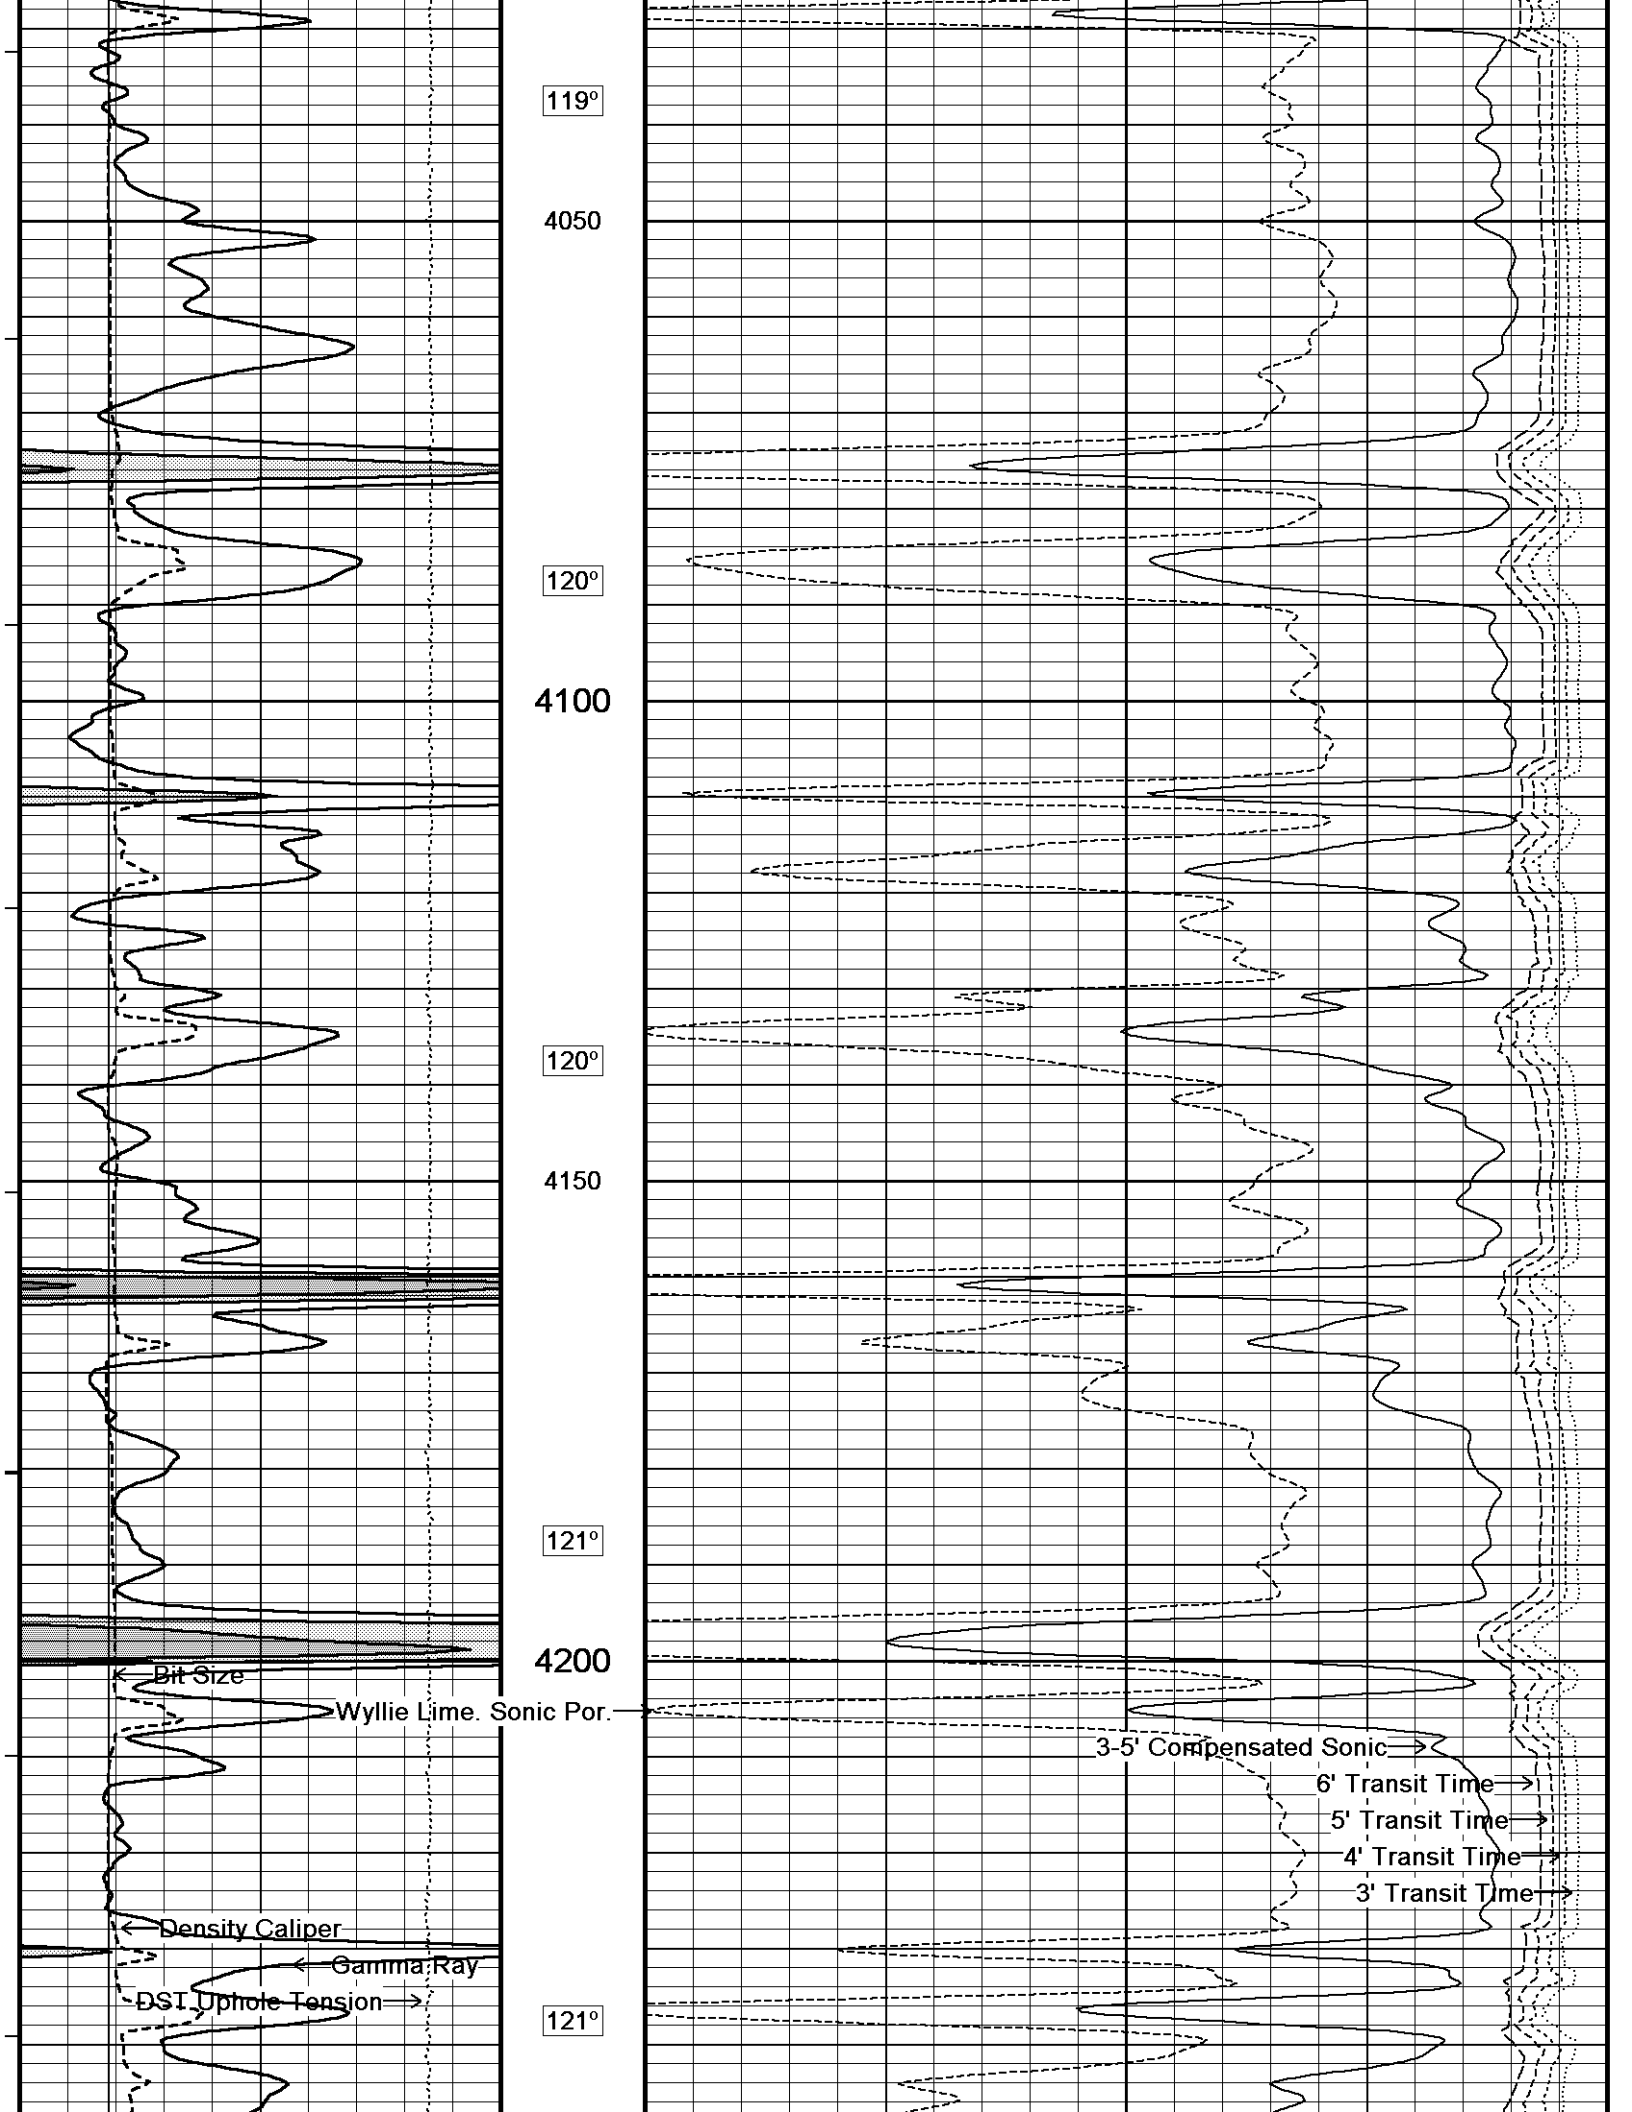

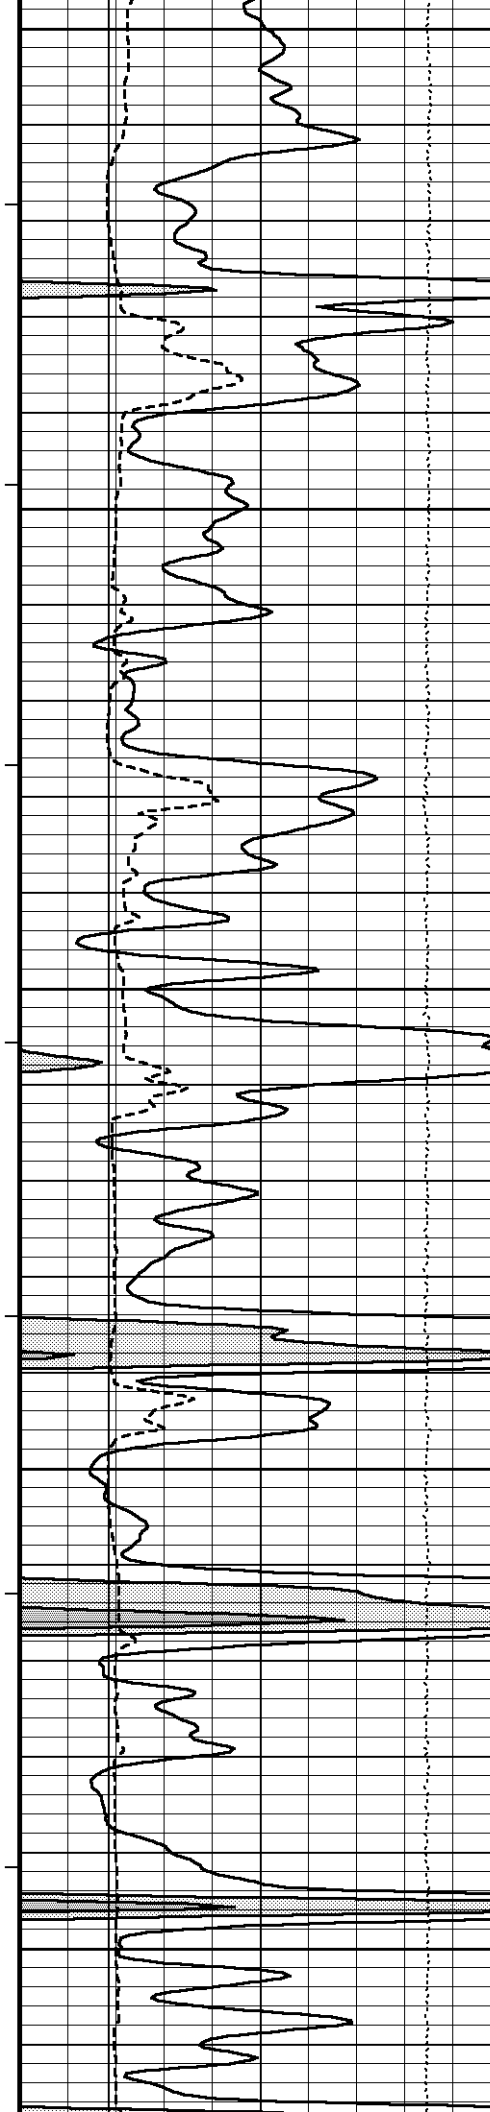

4250
121°
4300
122°
4350
123°
4400
124°
4450

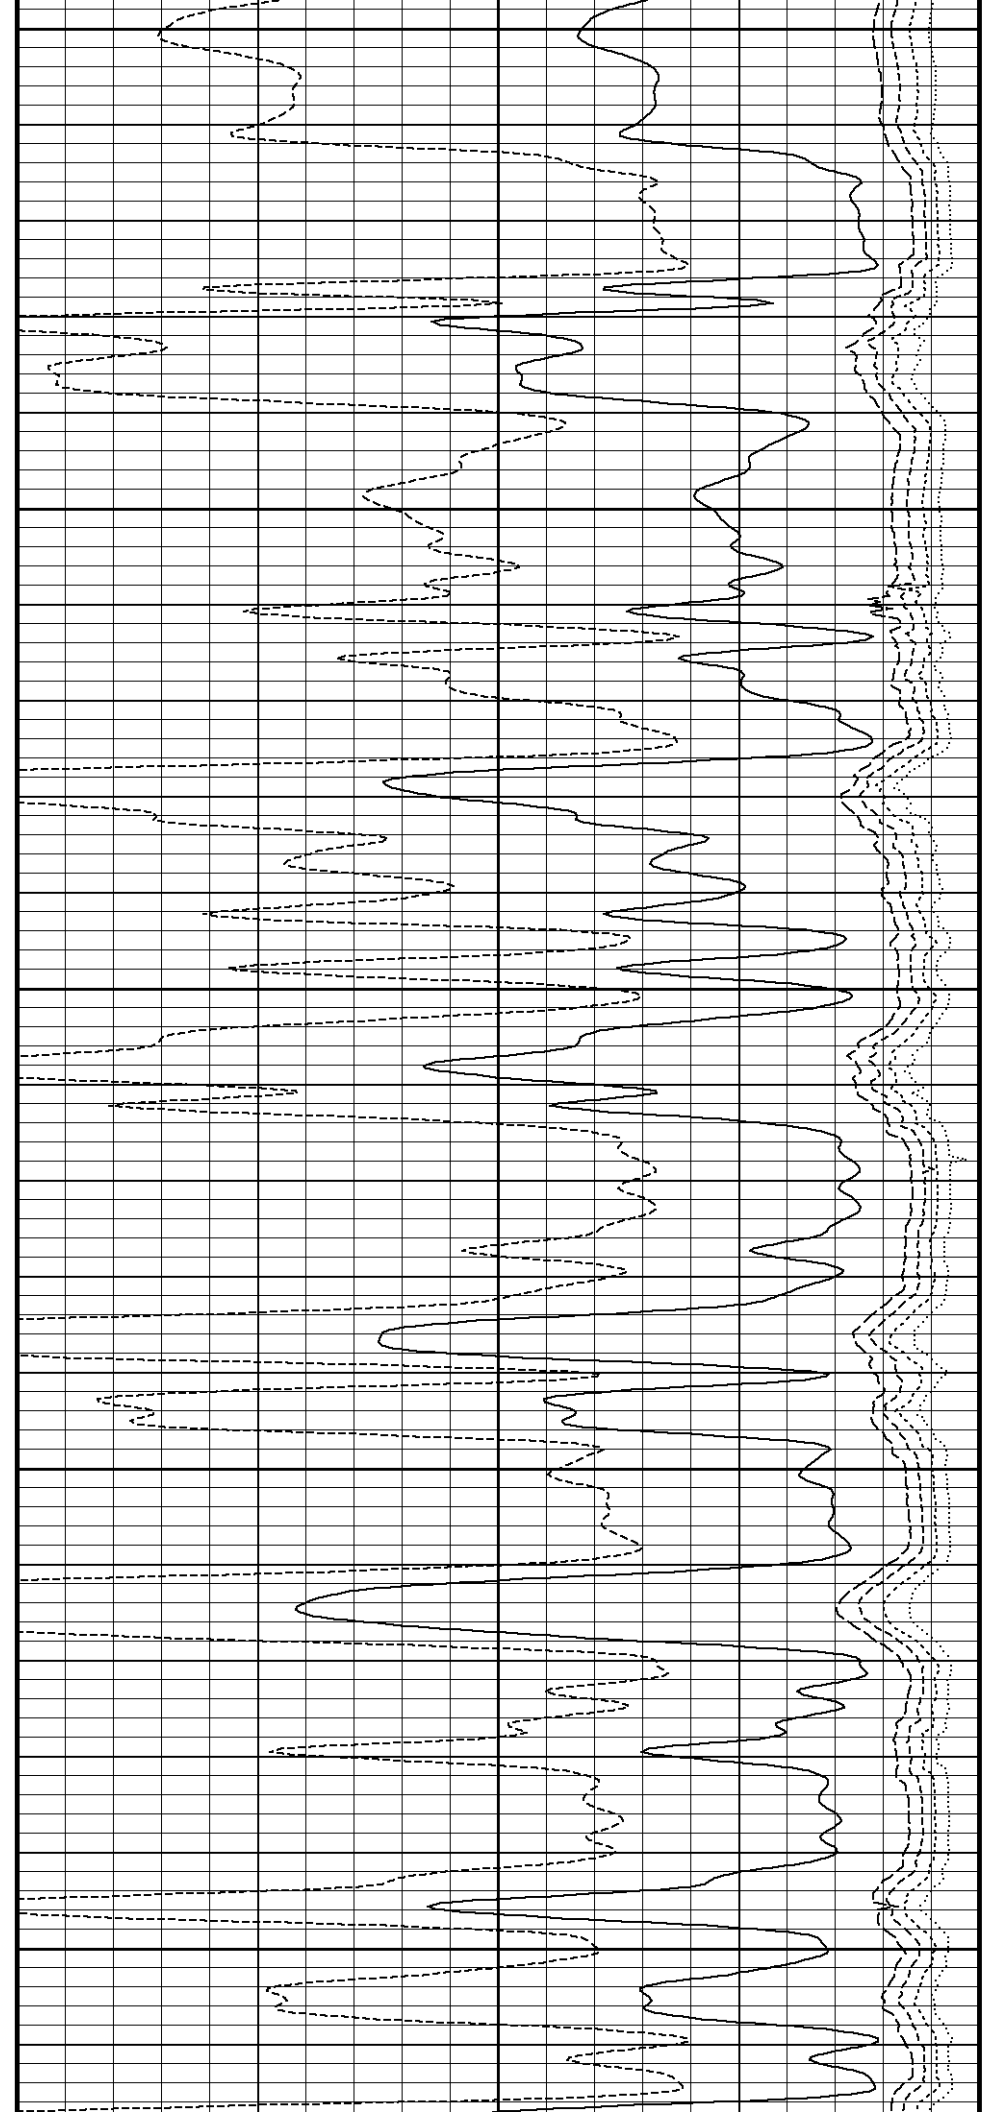

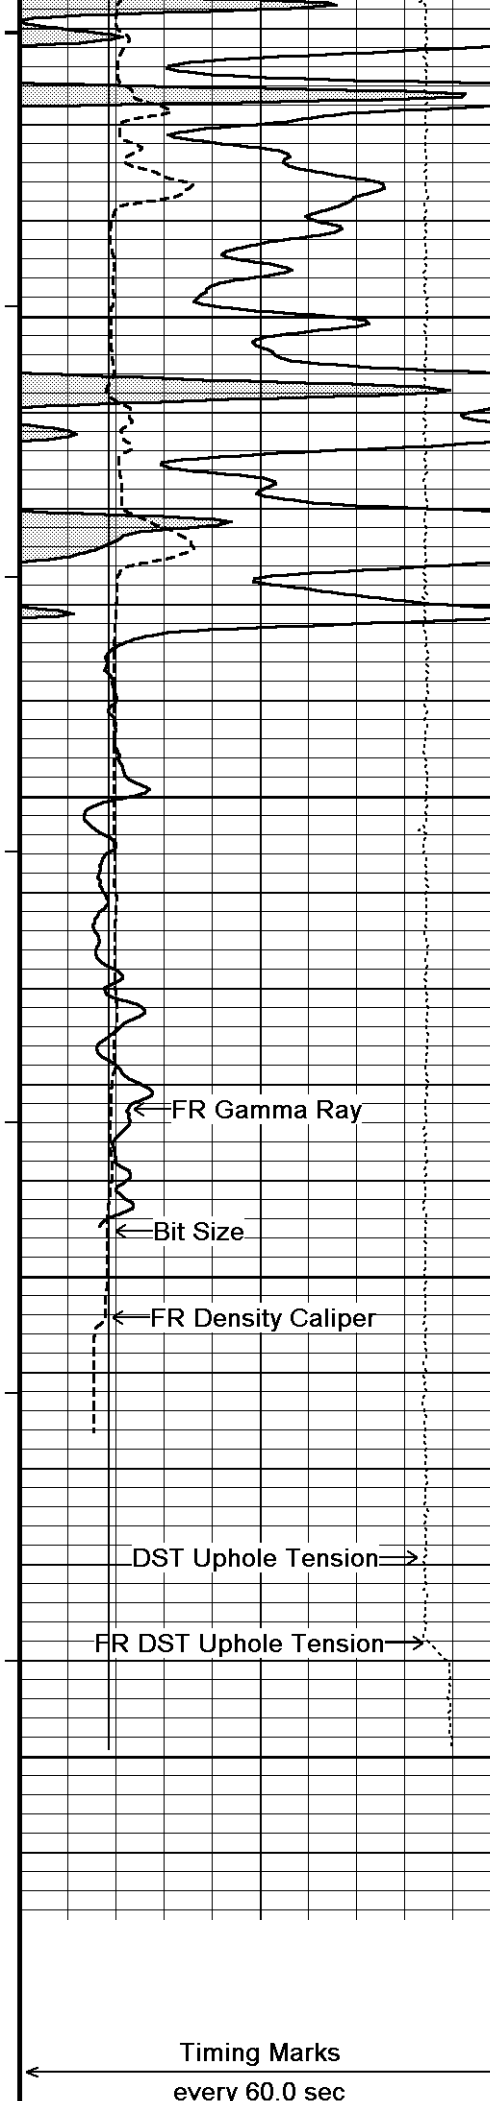

125°

4500

125°

4550


125°

4600

4650

4664


Depth in Feet

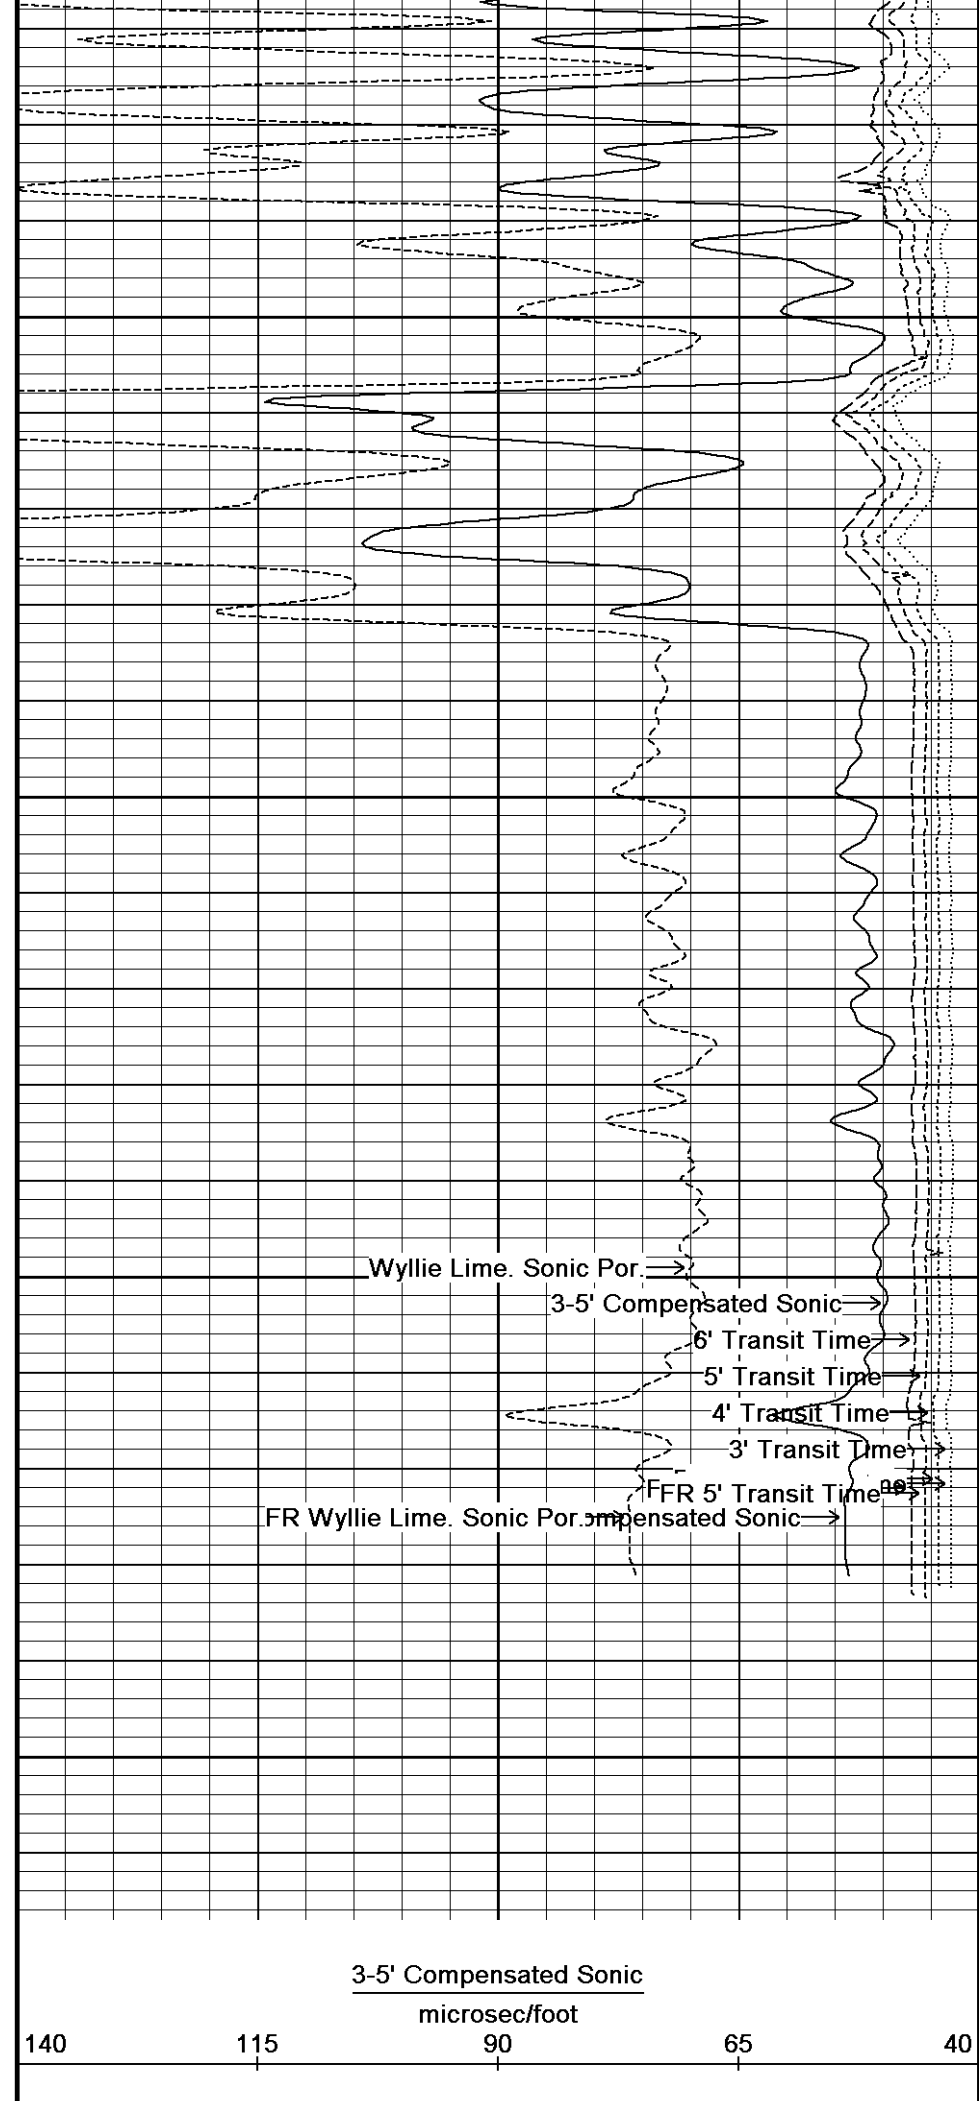

Timing Marks every 60.0 sec

3-5' Compensated Sonic
microsec/foot

140 115 90 65 40

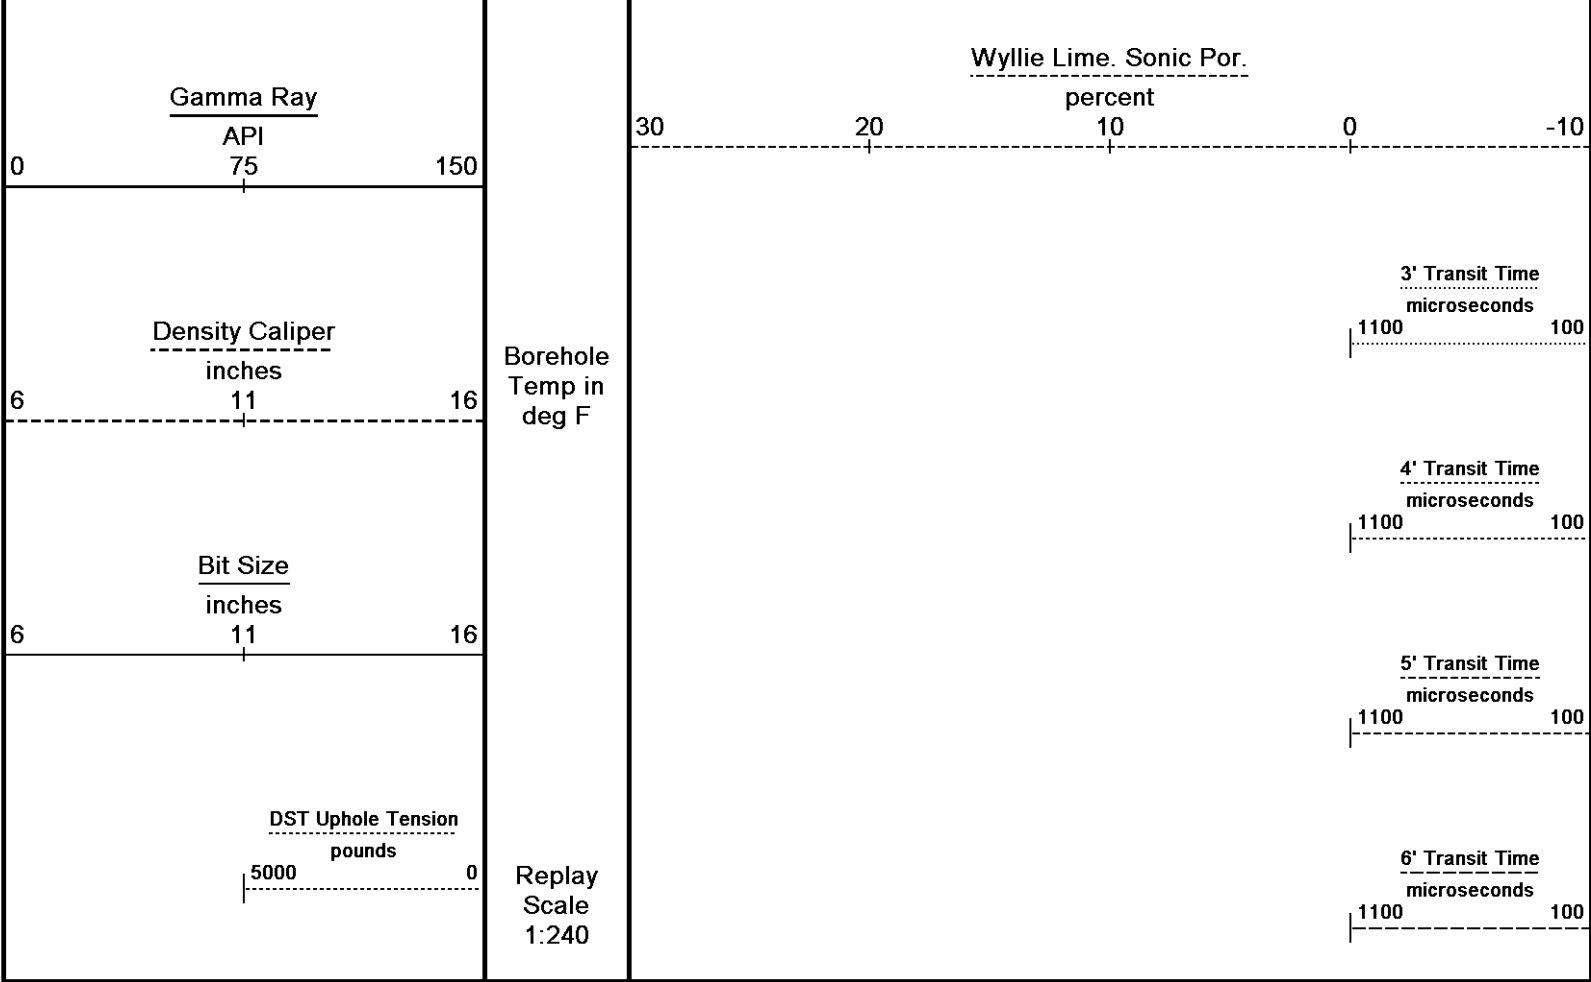


Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Minimus 11.03.4044\Data\Gra...\Grand Mesa Operating Company Phillip # 1-26 Splice.dta
 System Versions: Plotted with 11.03.4044
 Plotted on 04-JUN-2012 02:35
 Recorded on 03-JUN-2012 22:06

↑ **5 INCH MAIN PASS** ↑

↓ **10 INCH HI RESOLUTION** ↓

Depth Based Data - Maximum Sampling Increment 2.5cm
 Filename: C:\Minimus 11.03.4044\Data\Gran...\Grand Mesa Operating Company Phillip # 1-26_006.dta
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044
 Plotted on 04-JUN-2012 02:35
 Recorded on 03-JUN-2012 23:05

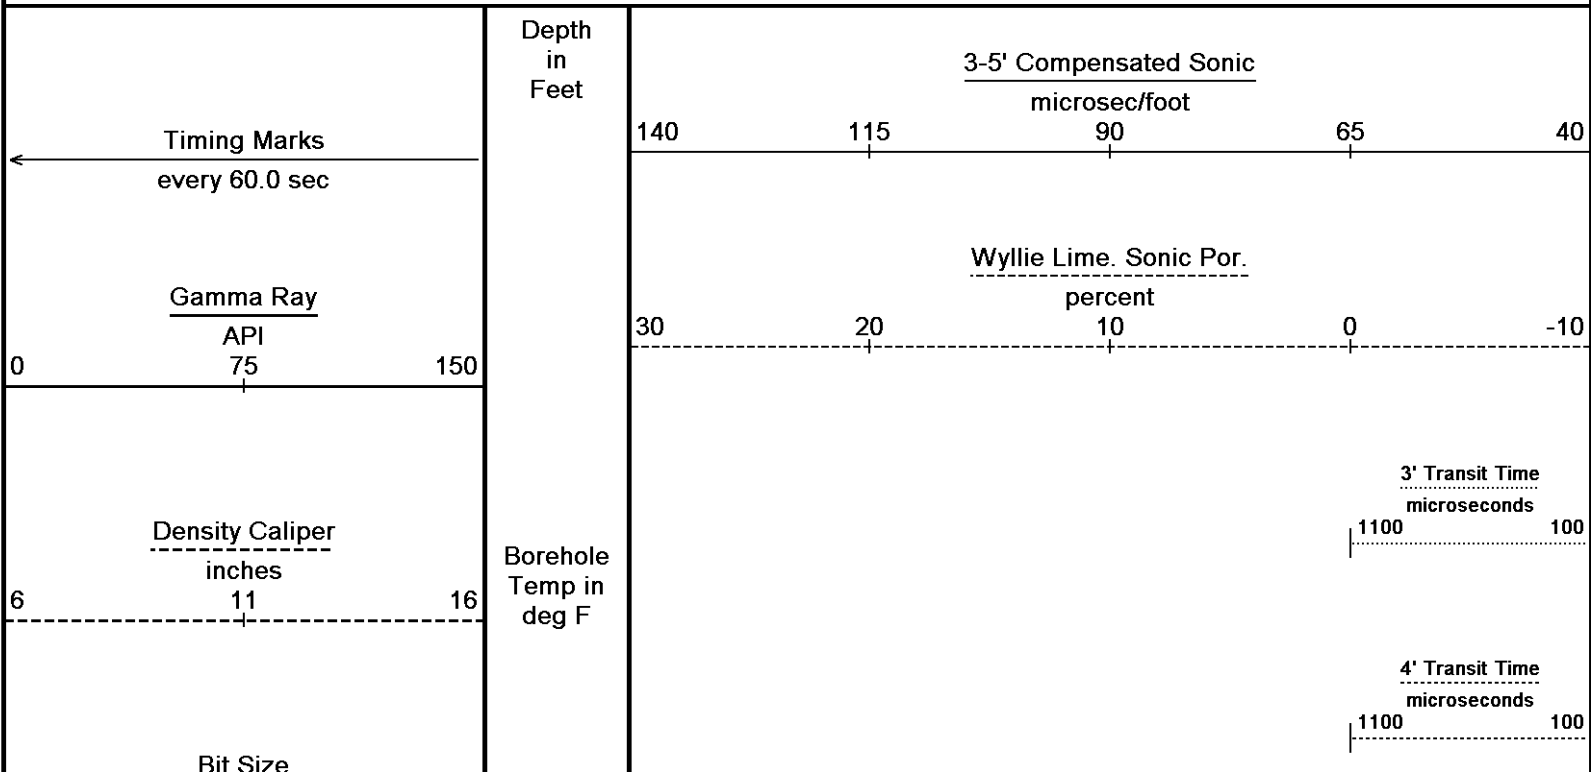

6 inches 11 16

DST Uphole Tension
pounds
5000 0

Replay
Scale
1:120

5' Transit Time
microseconds
1100 100



6' Transit Time
microseconds
1100 100

Gamma Ray
DST Uphole Tension

3850

118°

3900

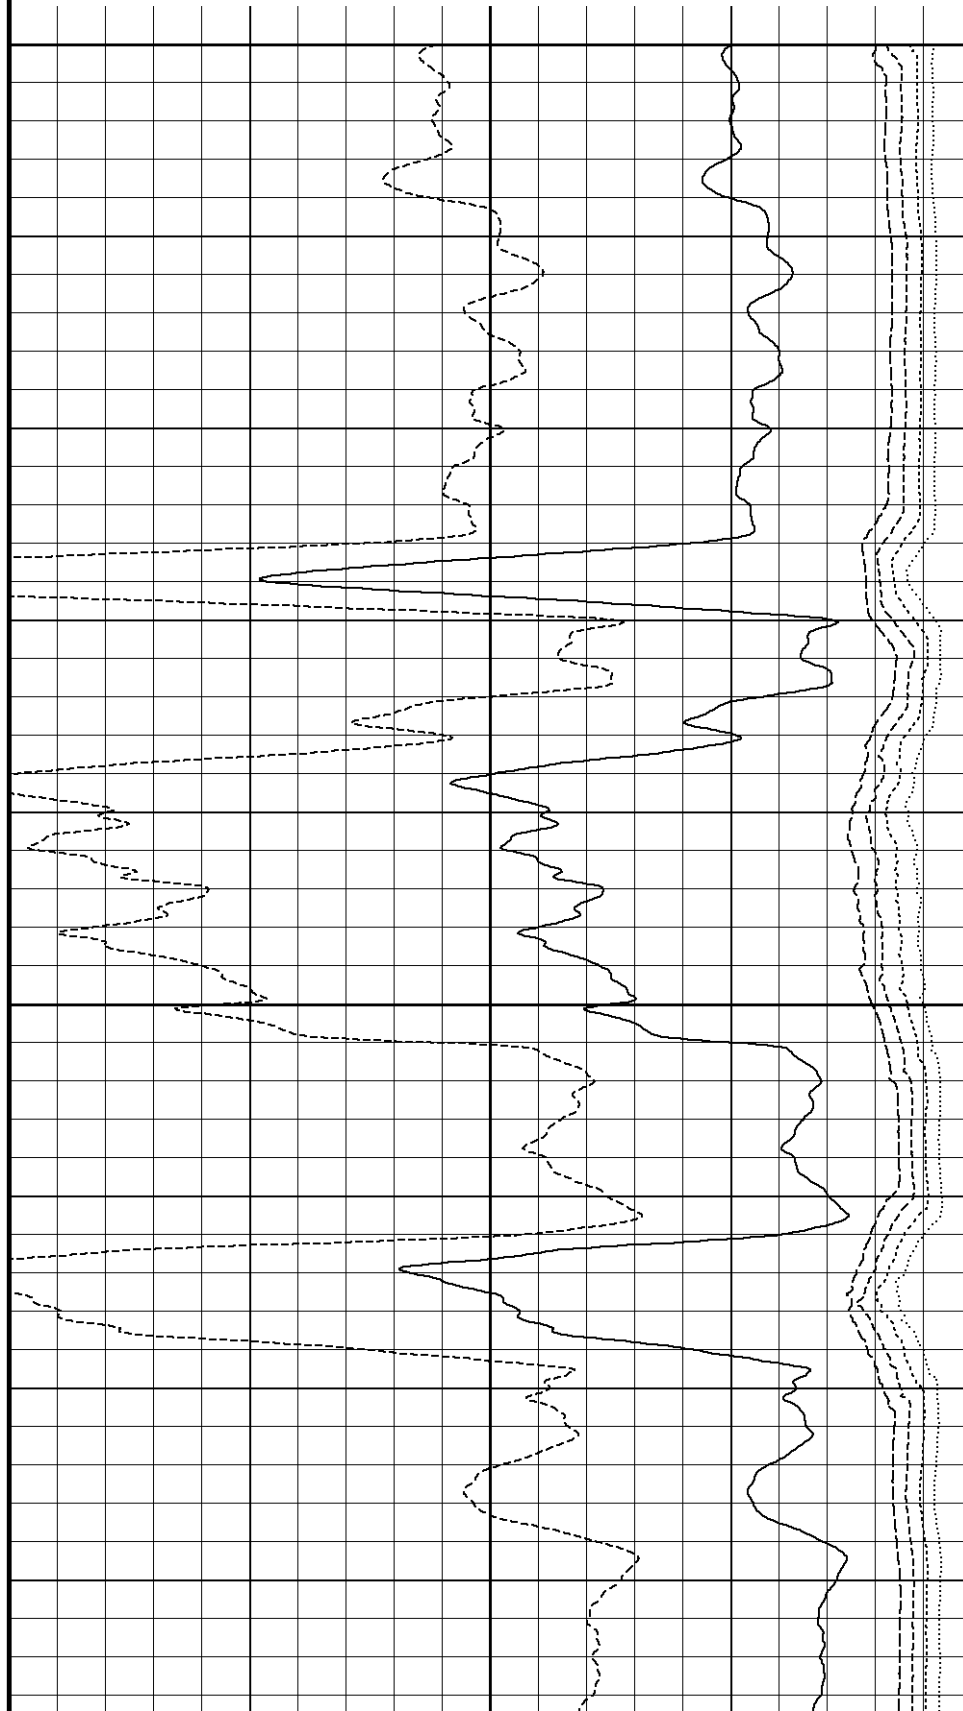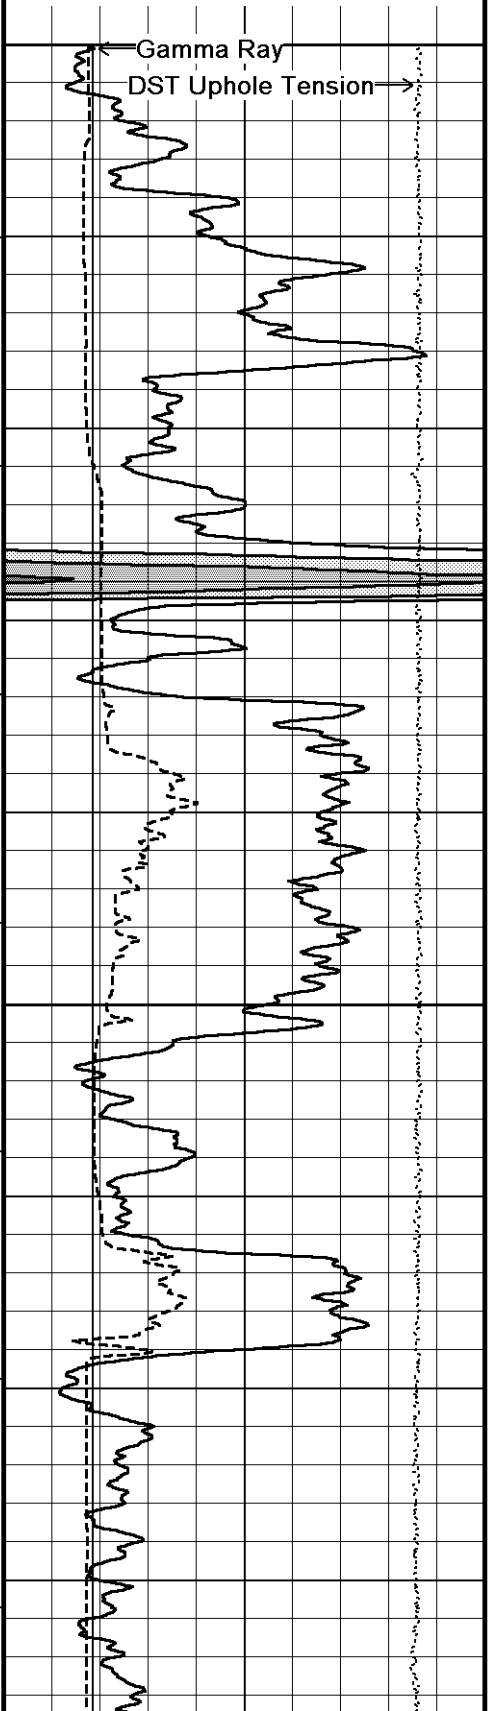



119°

3950

119°

4000

120°

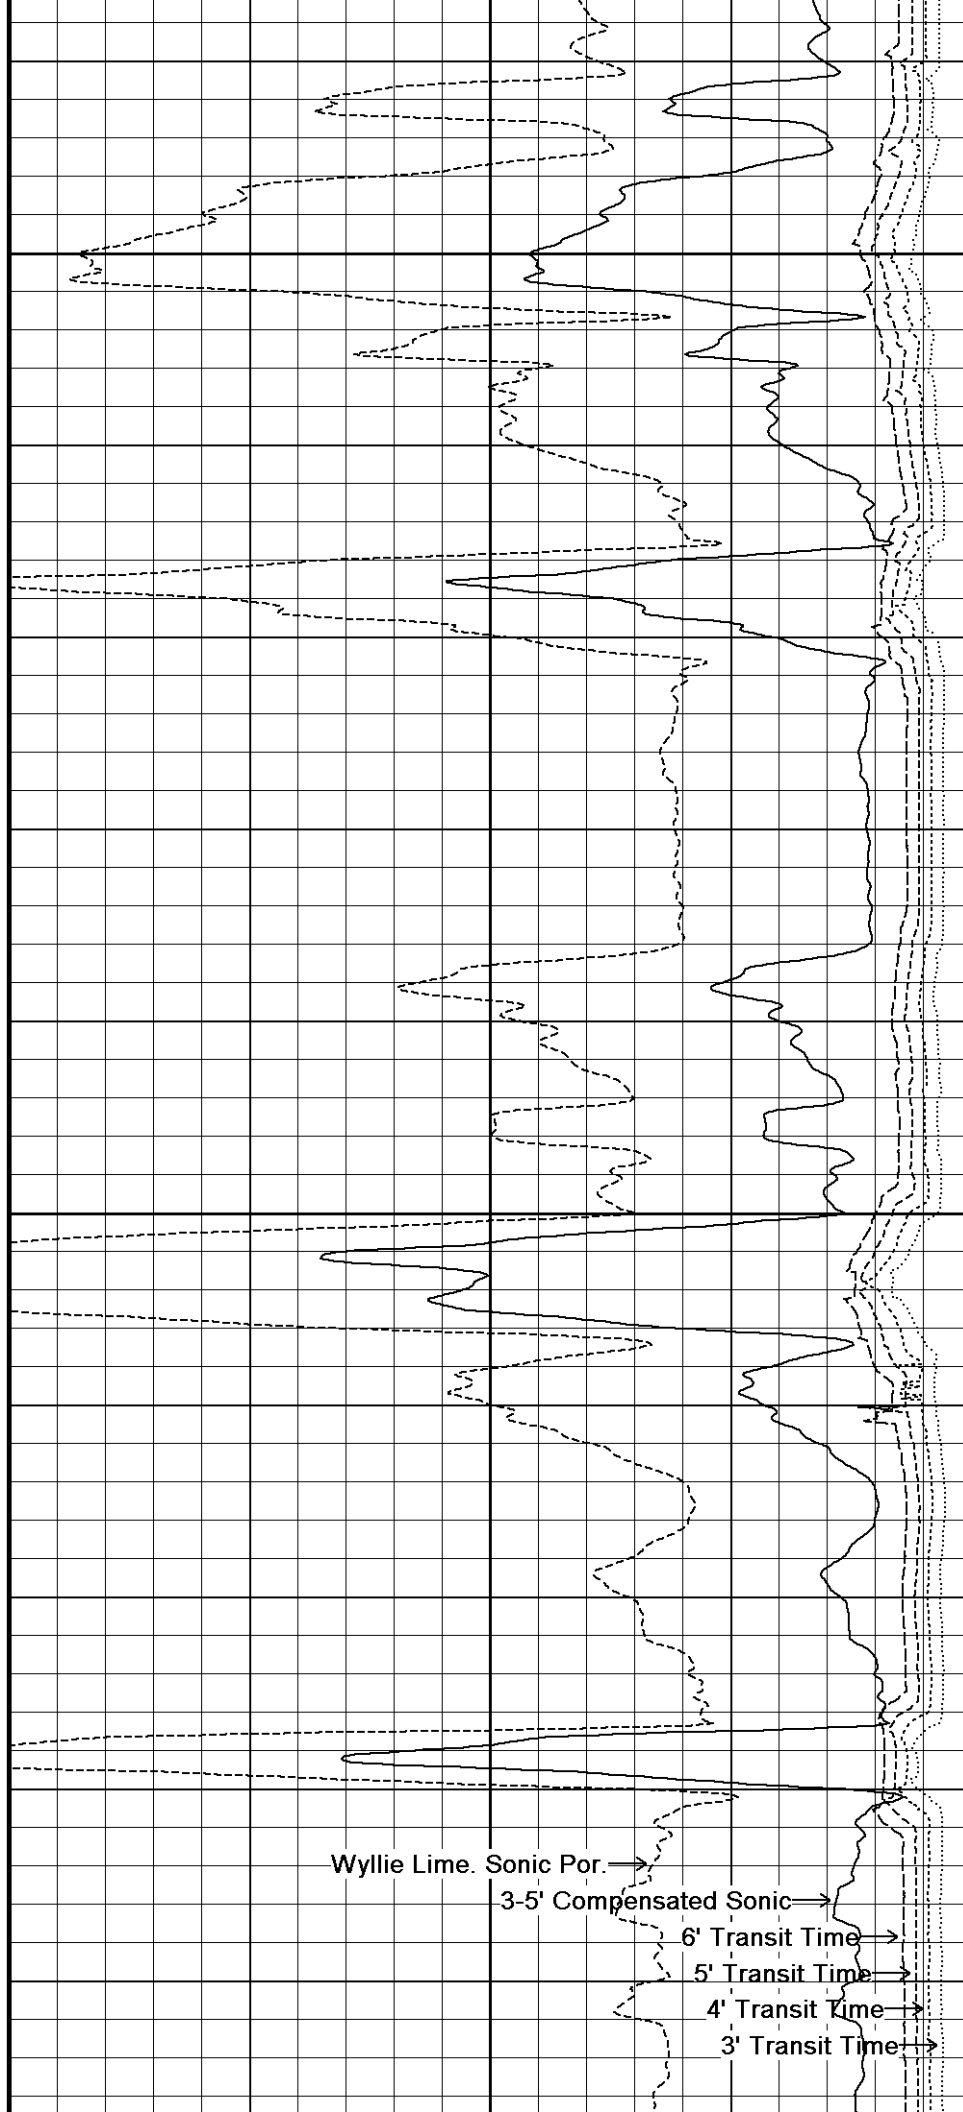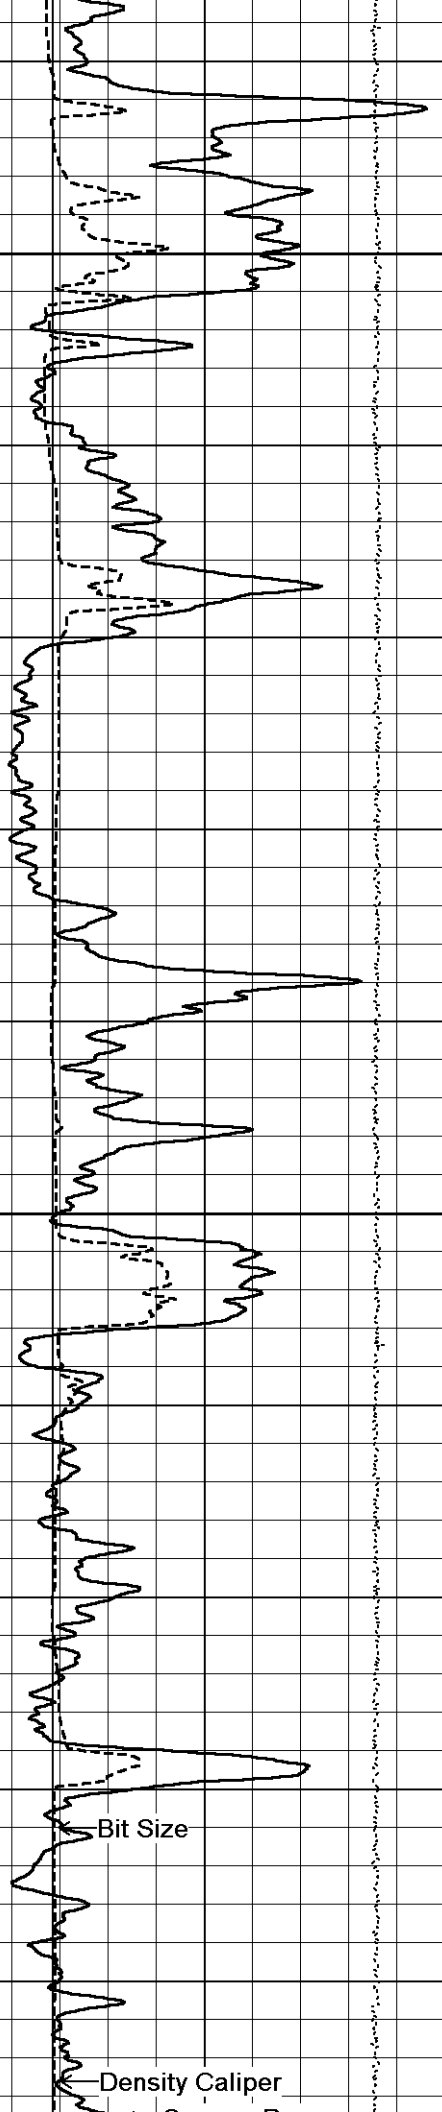

Bit Size

Density Caliper

Wyllie Lime. Sonic Por. →

3-5' Compensated Sonic →

6' Transit Time →

5' Transit Time →

4' Transit Time →

3' Transit Time →




4050


120°

4100

120°

4150

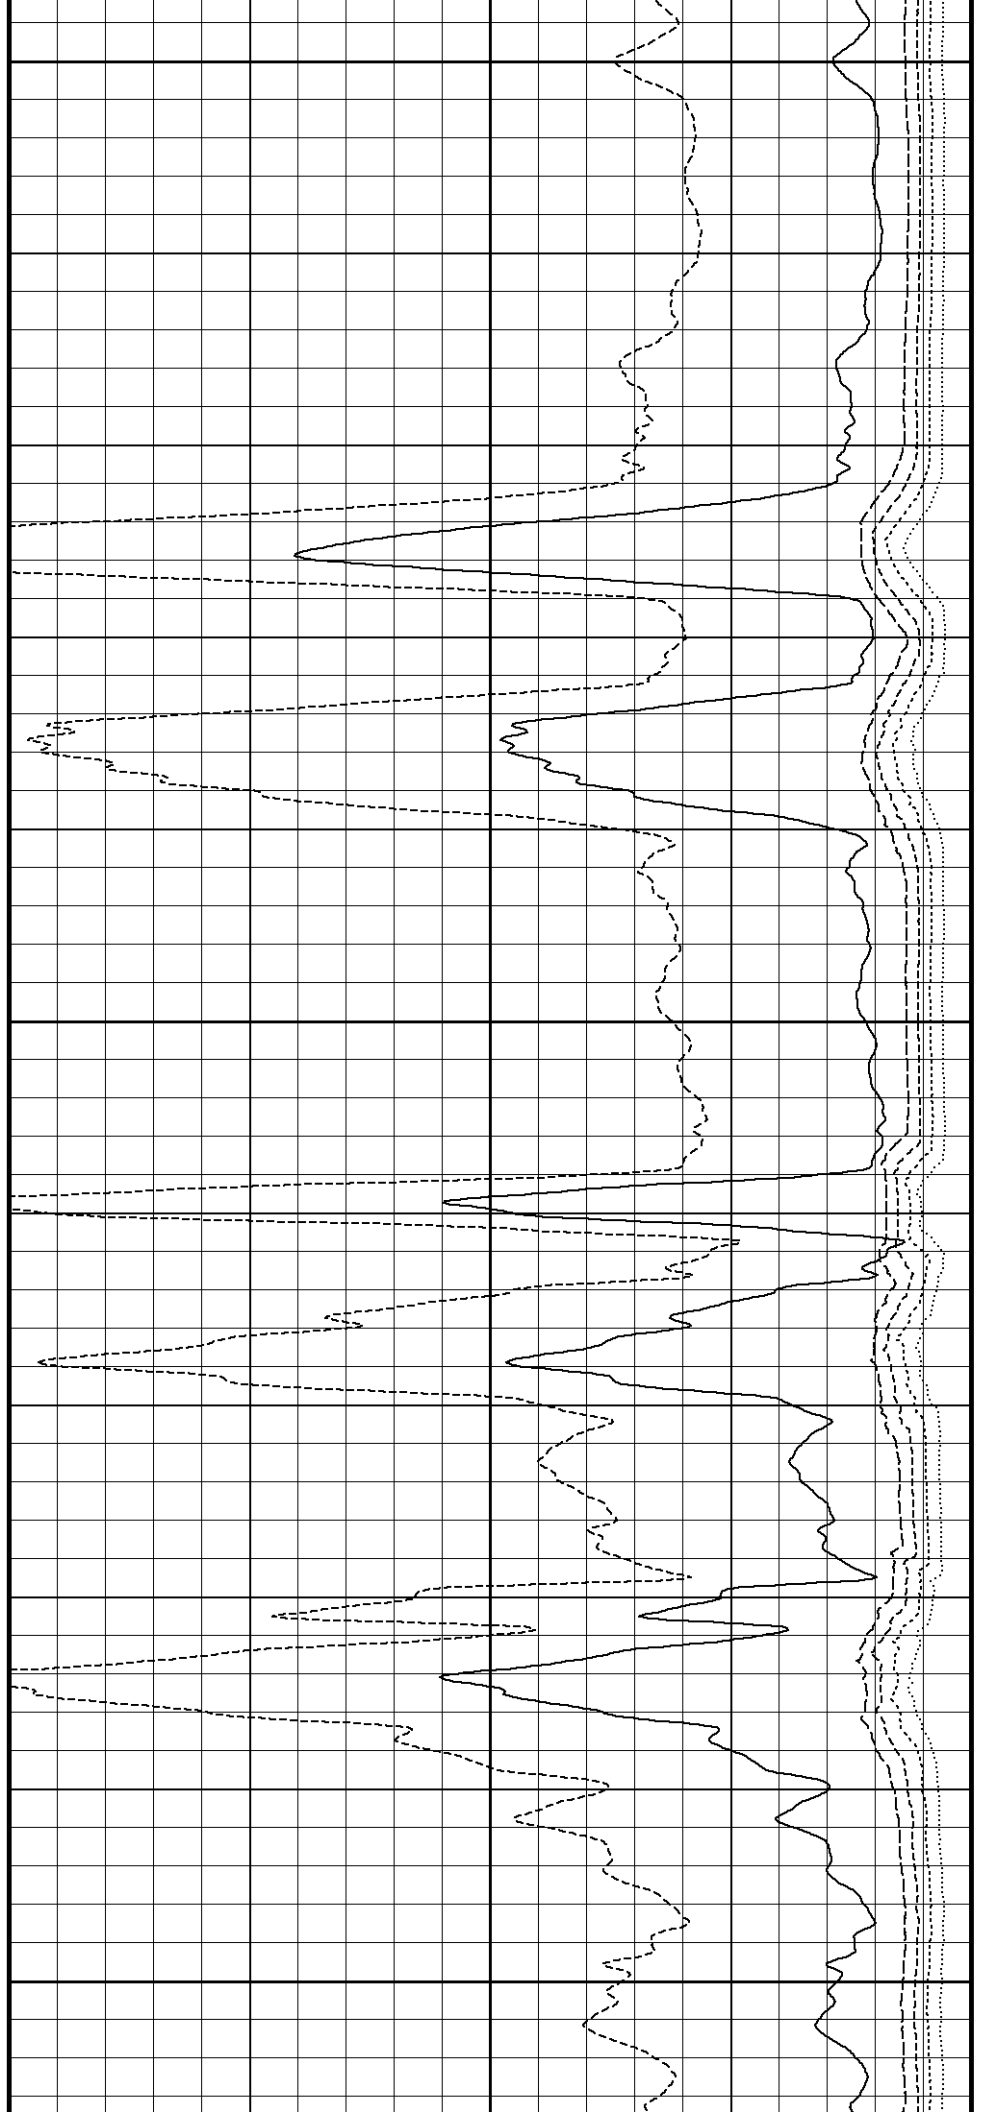

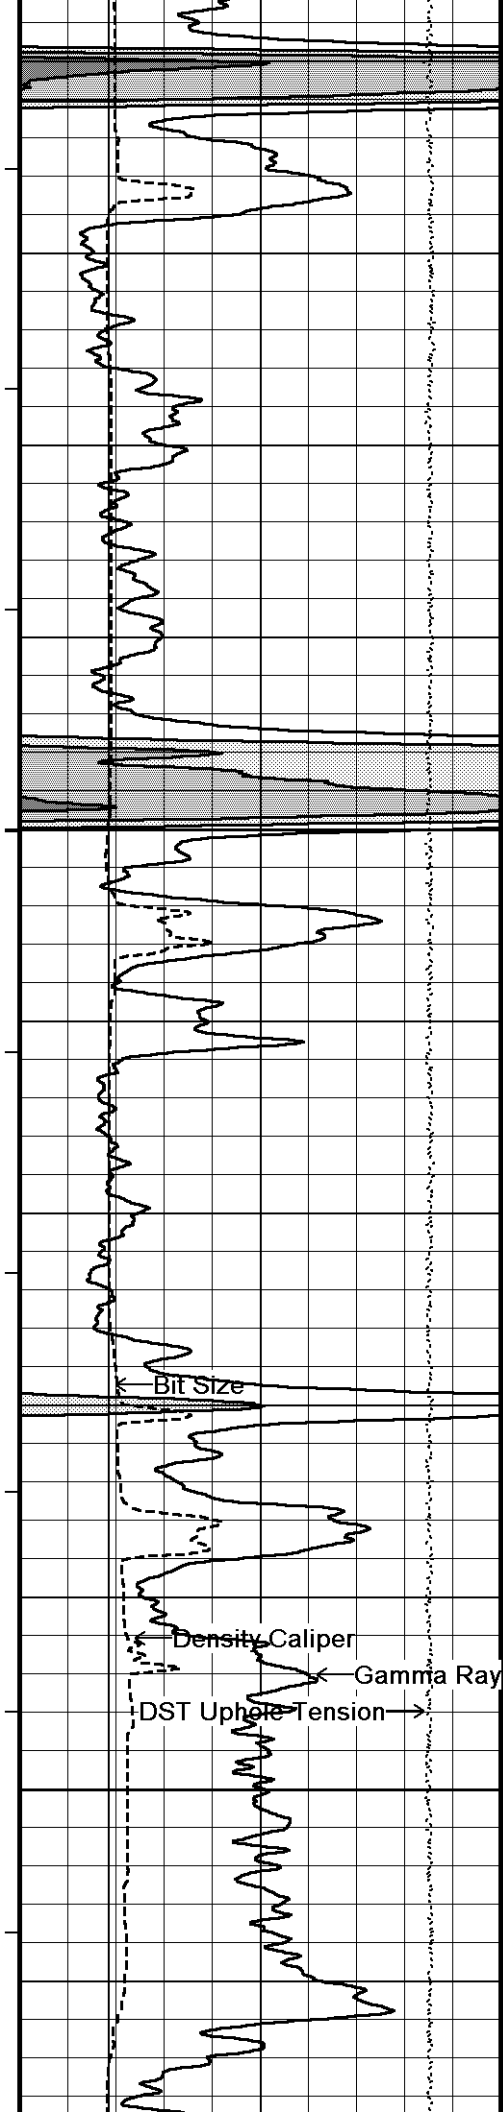


121°

4200

121°

4250

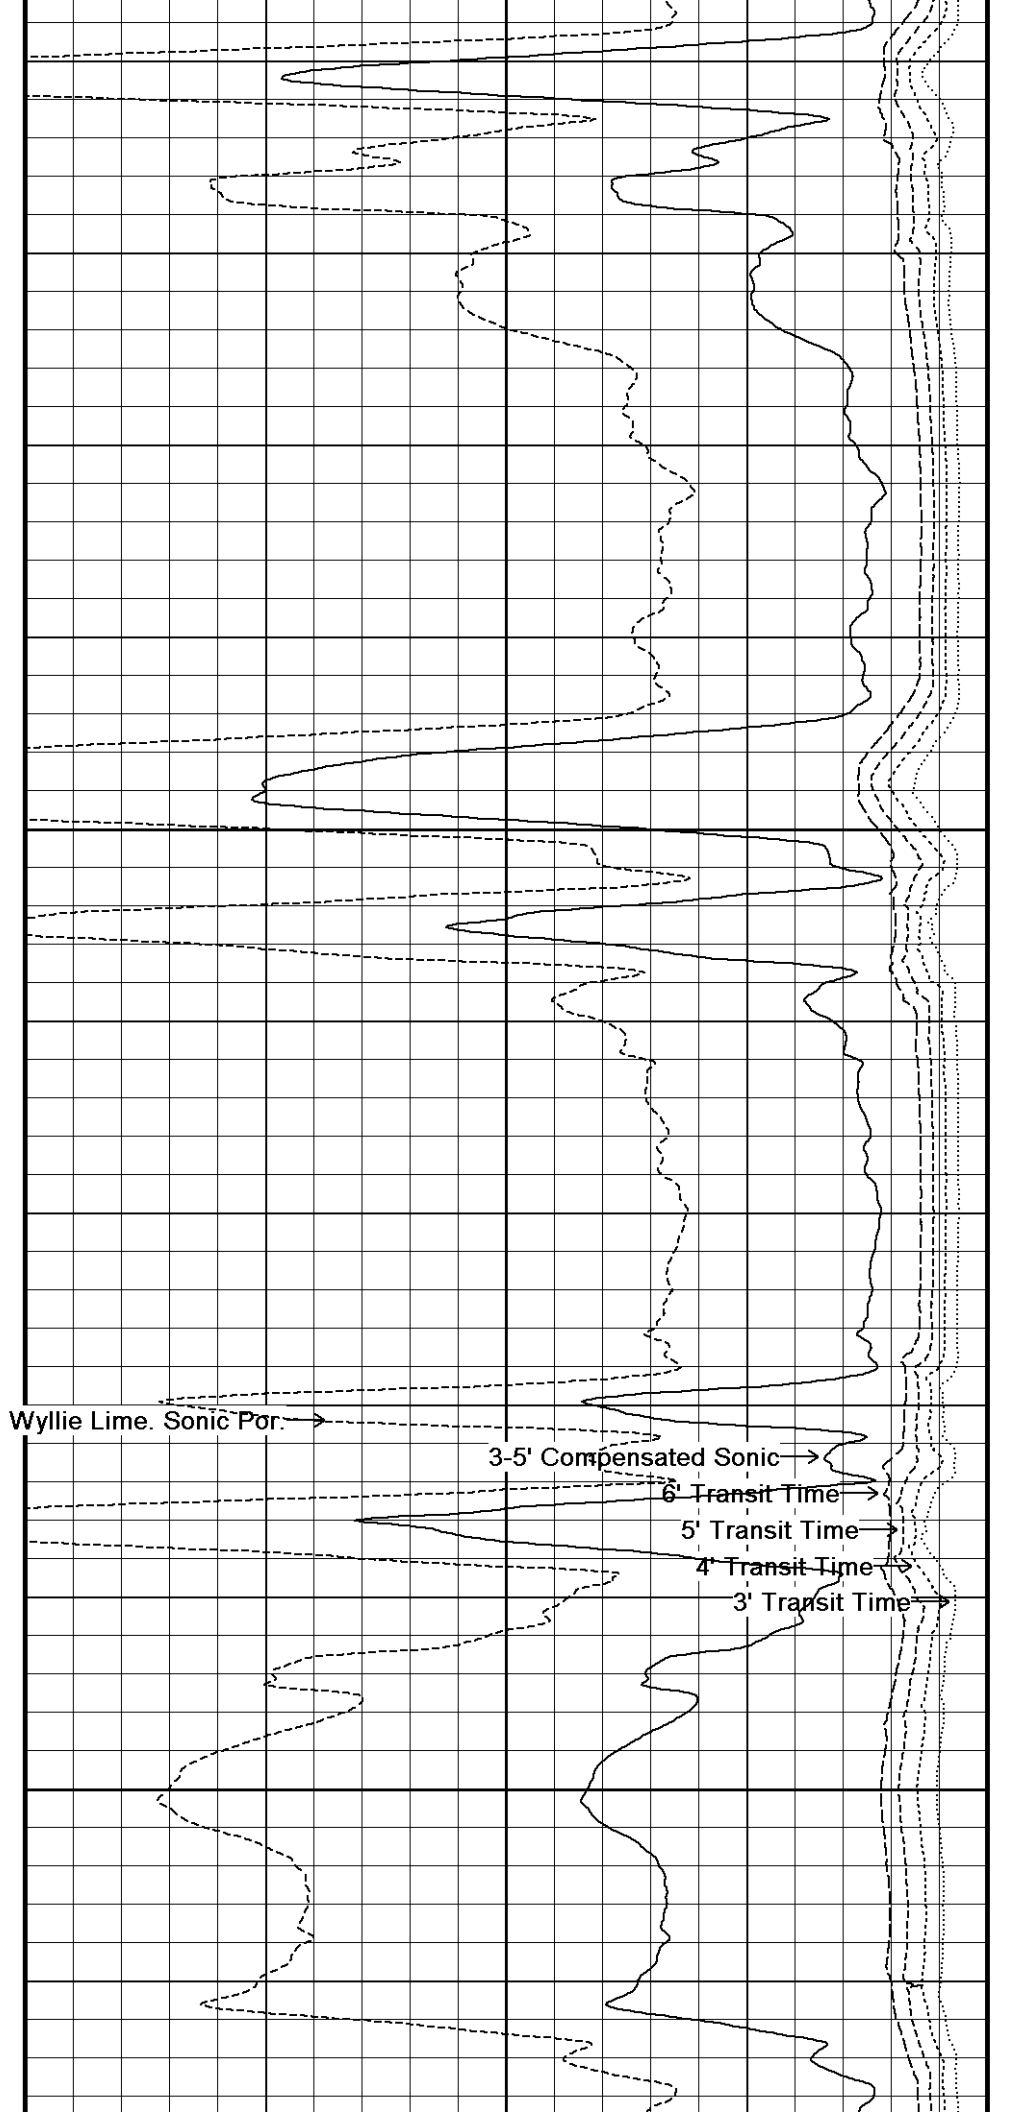

Wyllie Lime. Sonic Por. →


3-5' Compensated Sonic →

6' Transit Time →

5' Transit Time →

4' Transit Time →

3' Transit Time →

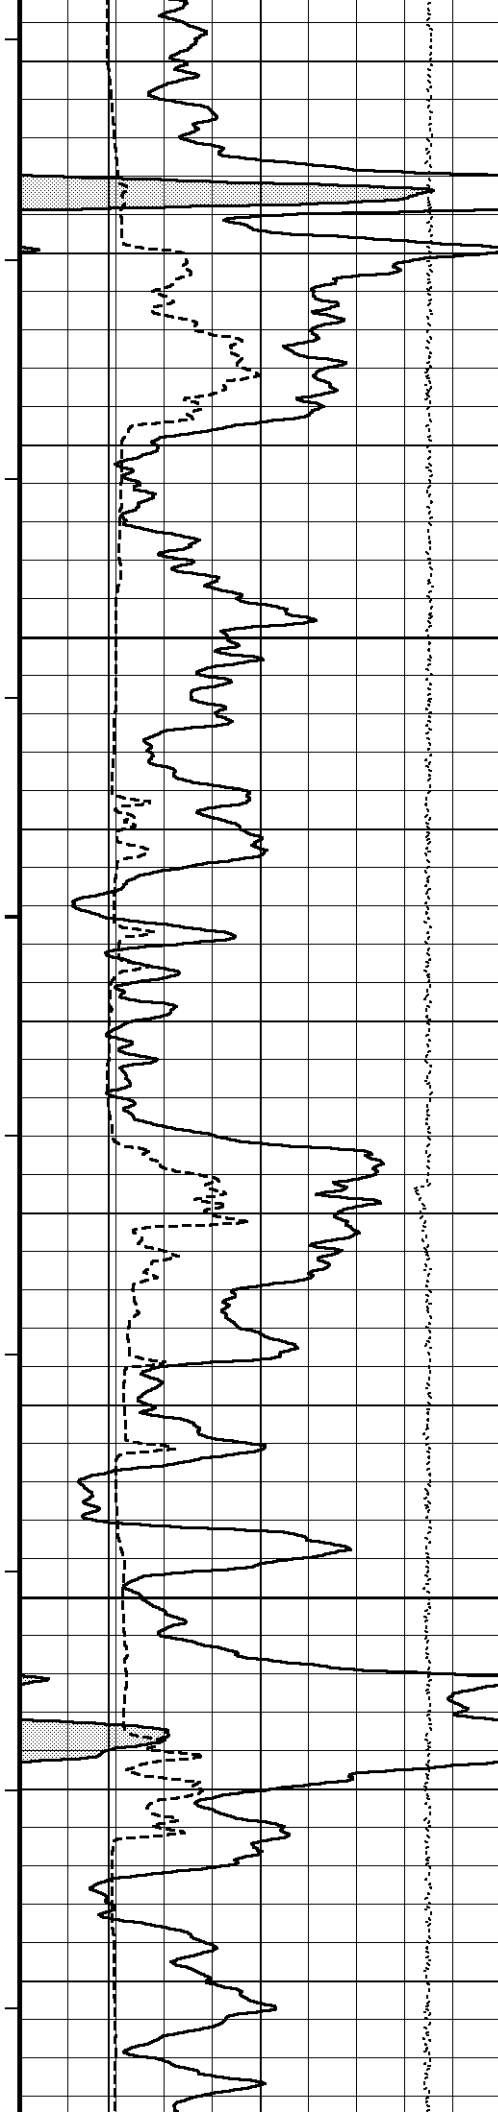



122°

4300

122°

4350

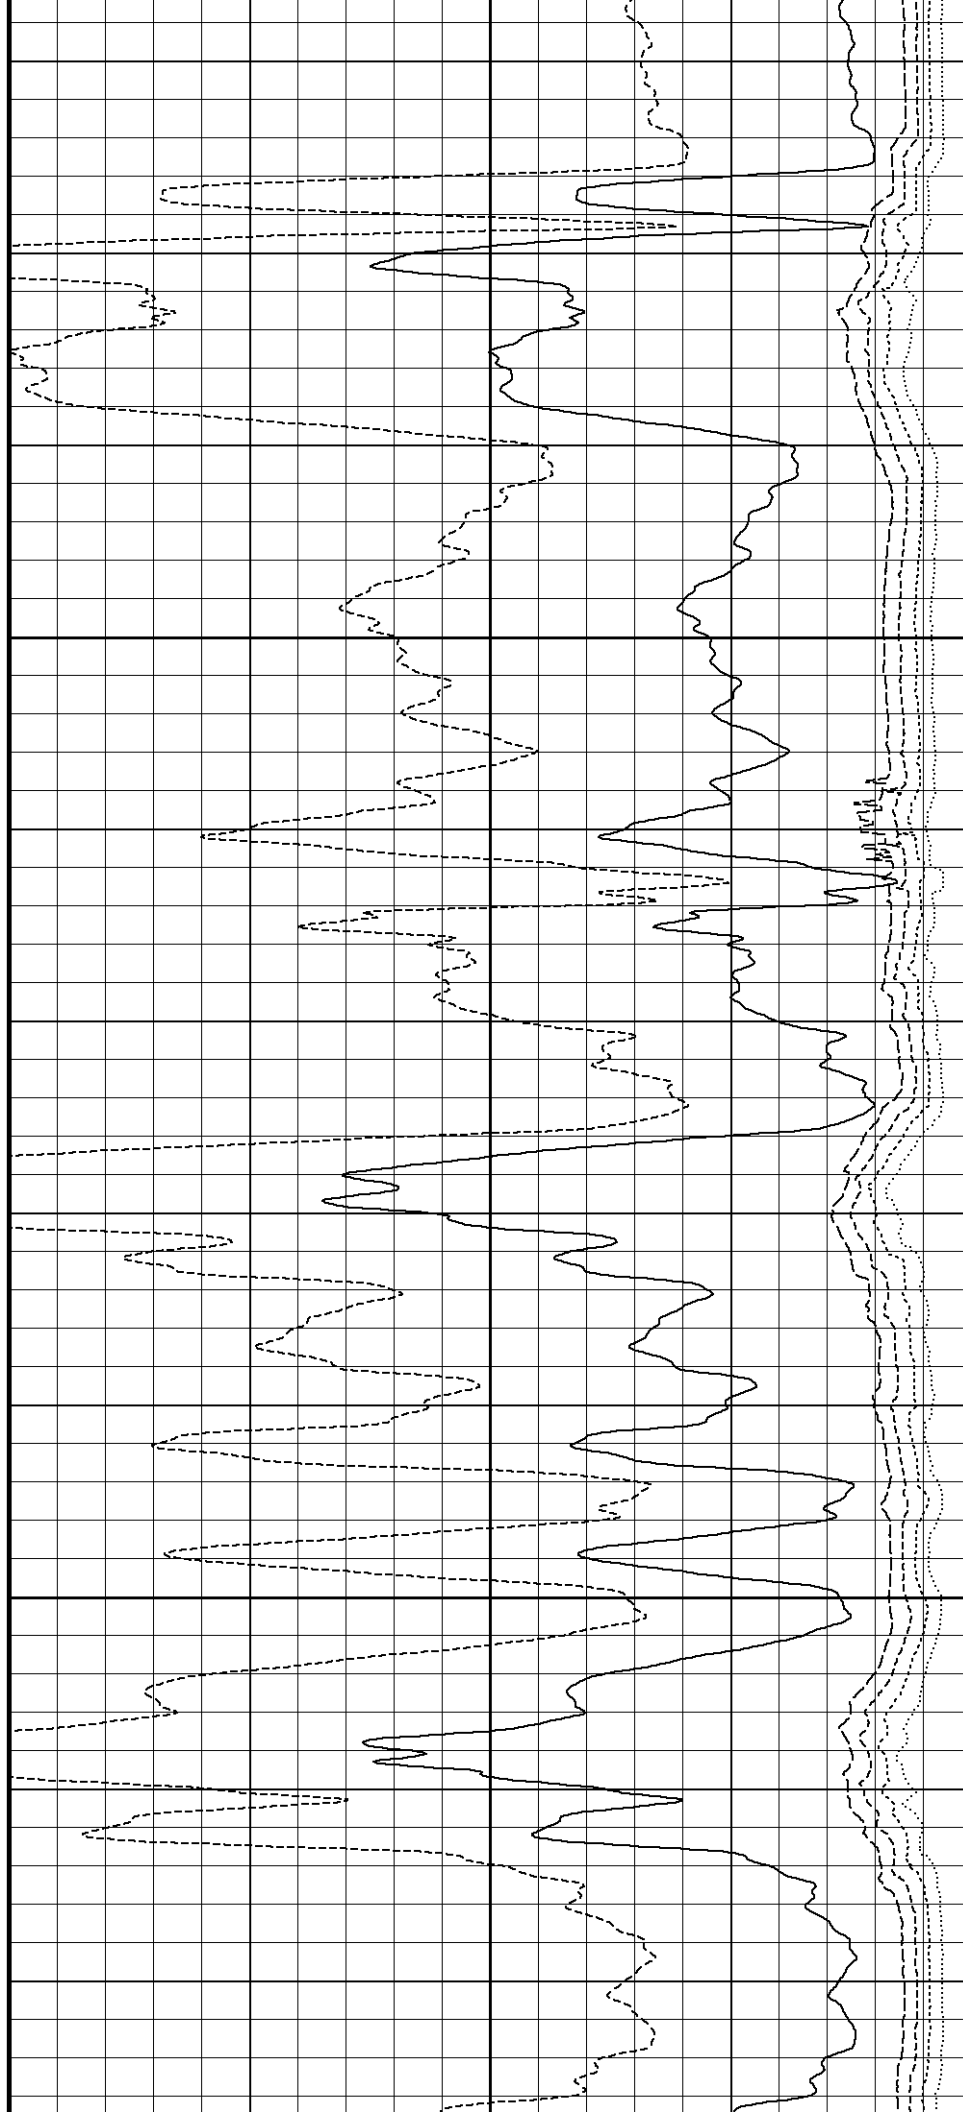

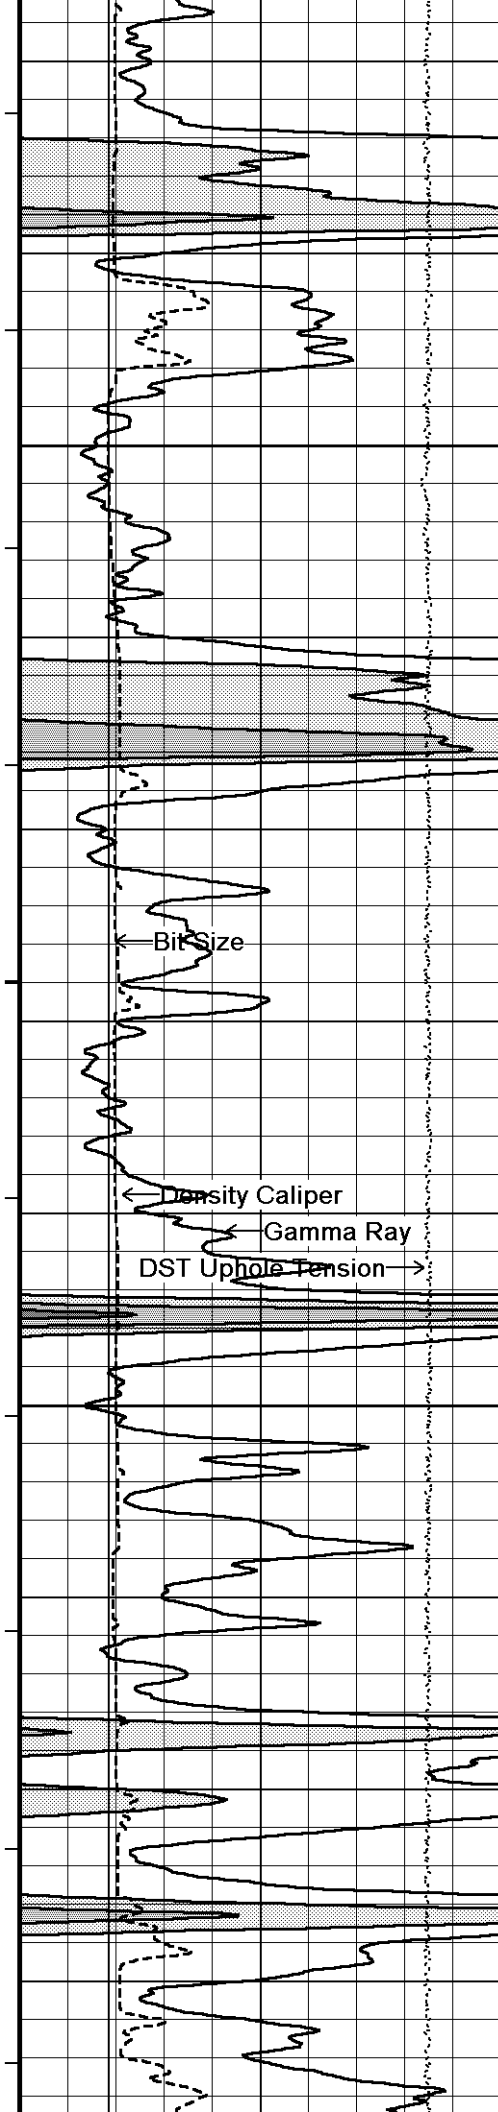



123°

4400

124°

4450

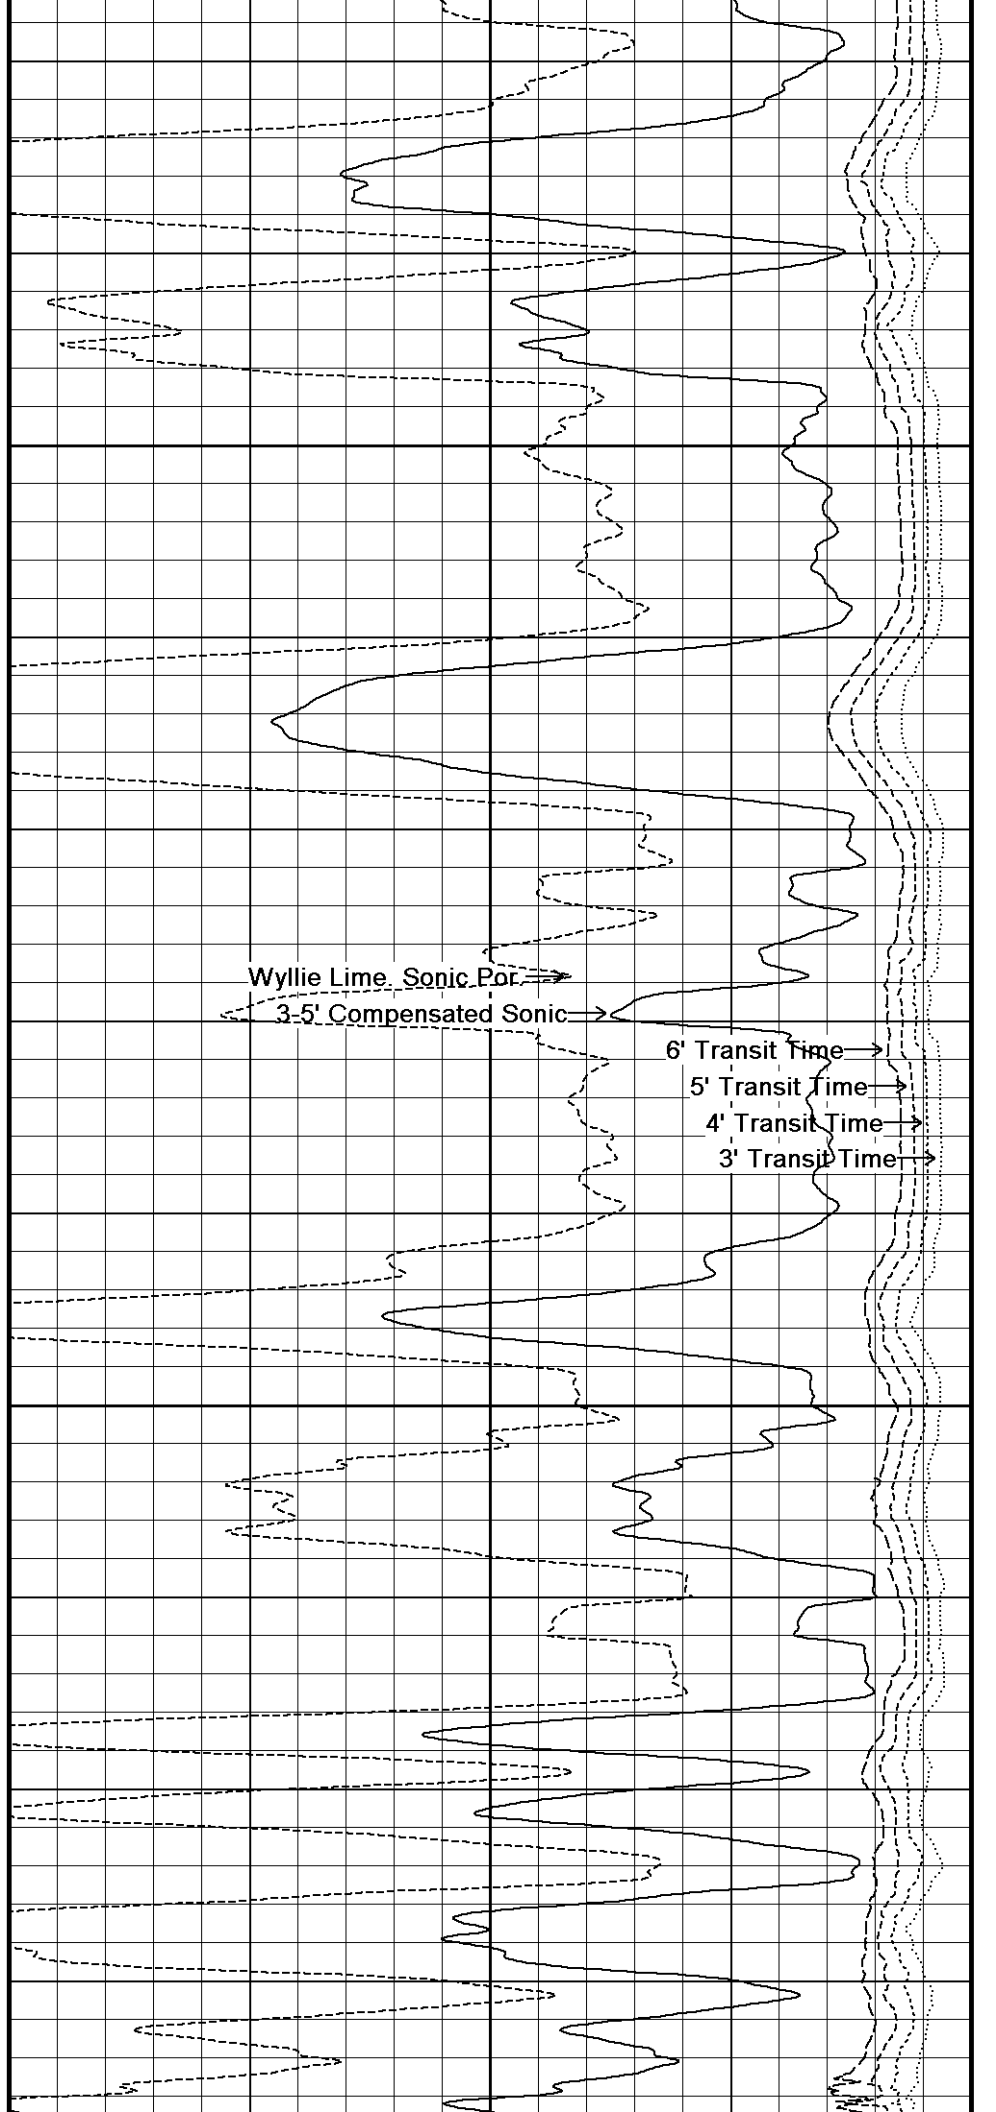

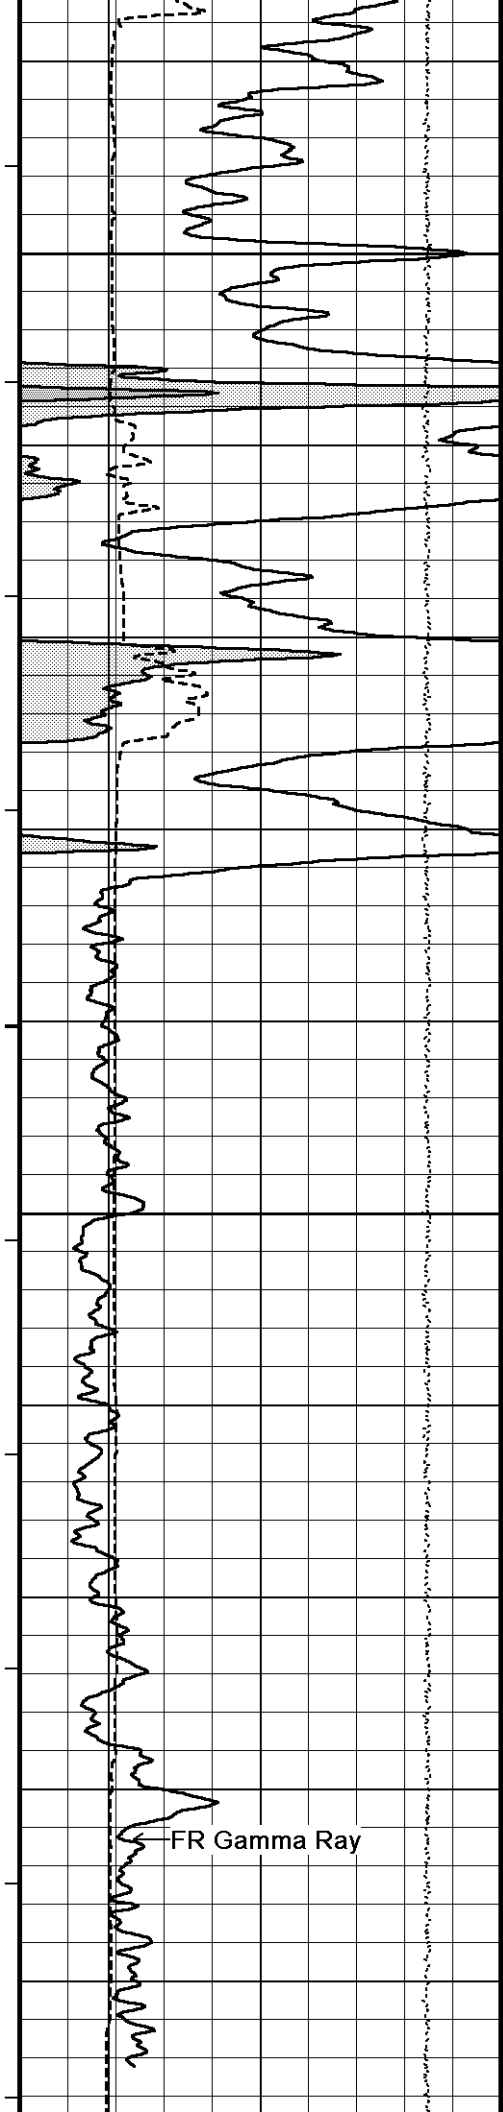


125°

4500

126°

4550

125°

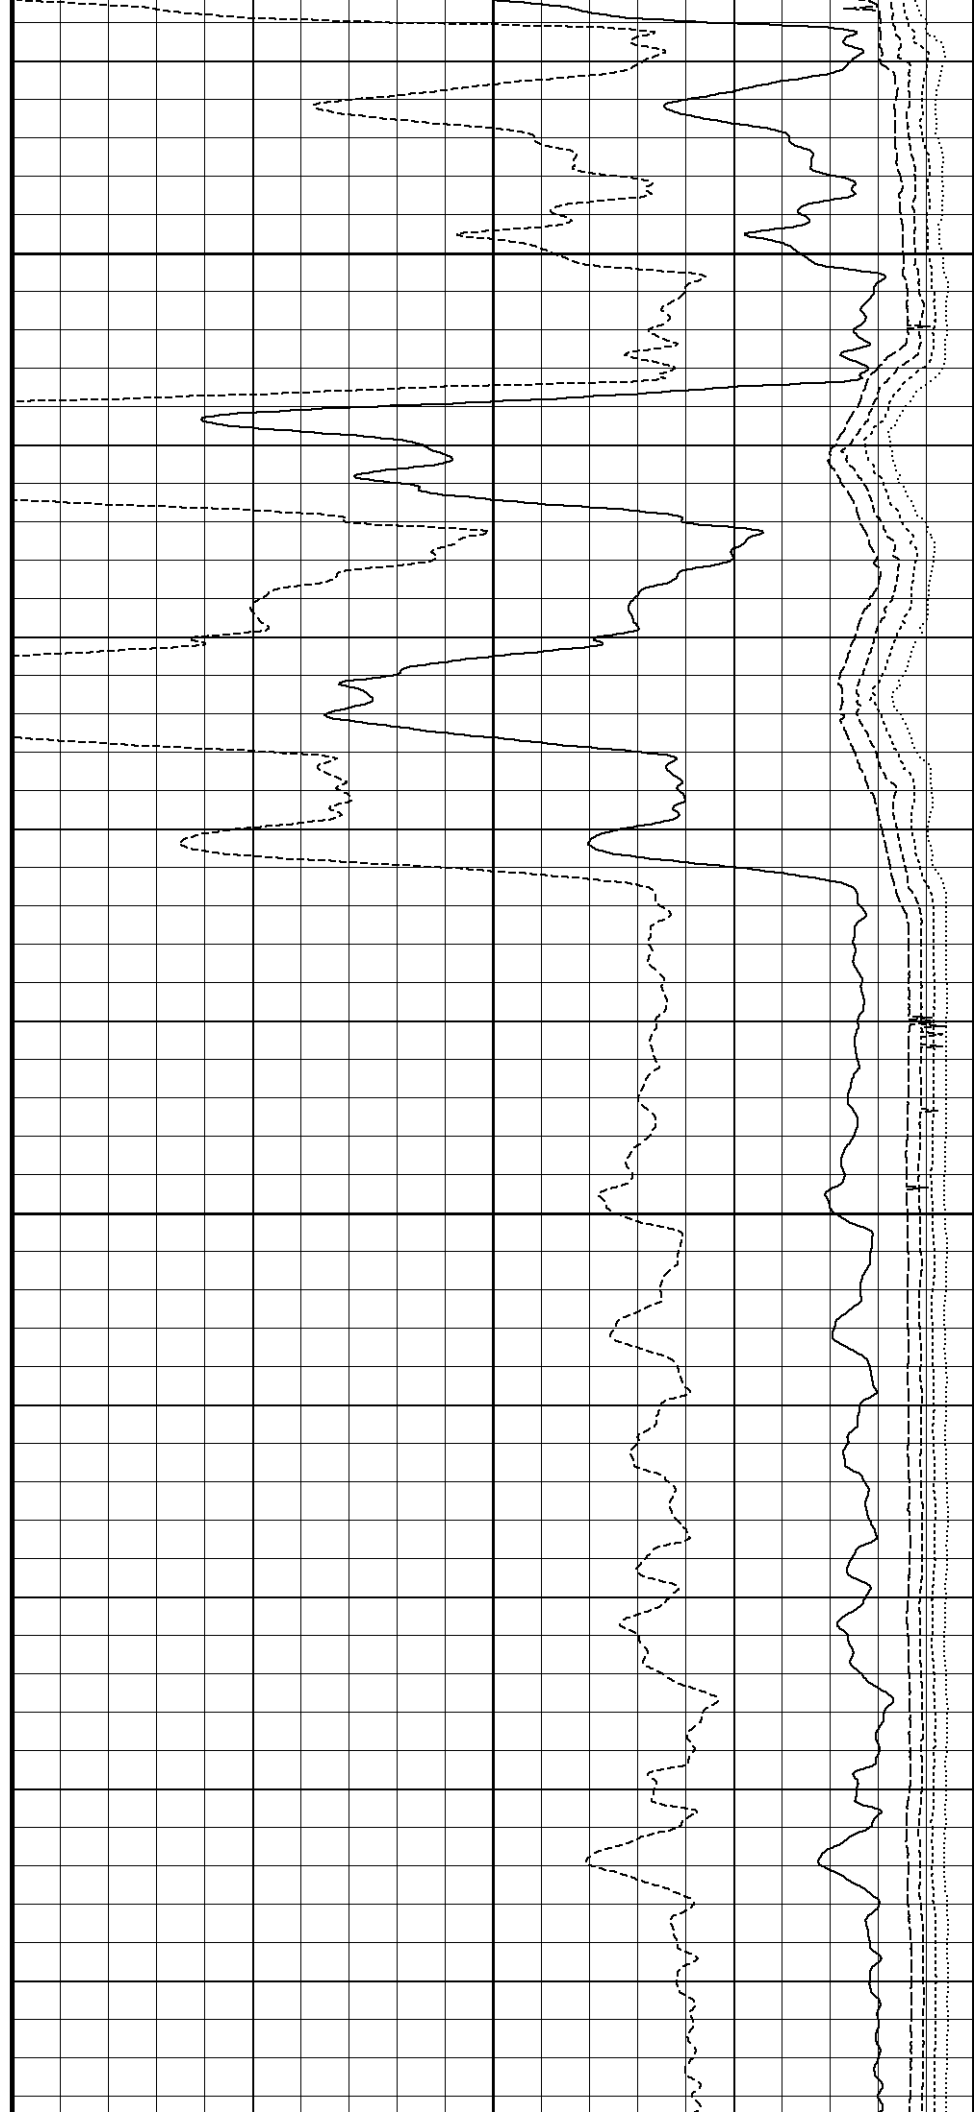

4600

← FR Density Caliper

← Bit Size

FR DST Uphole Tension →
DST Uphole Tension →

4650

4658
Depth
in
Feet

← Timing Marks
every 60.0 sec

Gamma Ray
API
0 75 150

Density Caliper
inches
6 11 16

Bit Size
inches
6 11 16

Borehole
Temp in
deg F

FR 5' Transit Time →
FR 3-5' Compensated Sonic →
FR 6' Transit Time →
FR 5' Transit Time →
FR 4' Transit Time →

3-5' Compensated Sonic
microsec/foot

140 115 90 65 40

Wyllie Lime. Sonic Por.
percent

30 20 10 0 -10

3' Transit Time
microseconds


1100 100

4' Transit Time
microseconds


1100 100

5' Transit Time
microseconds

1100 100

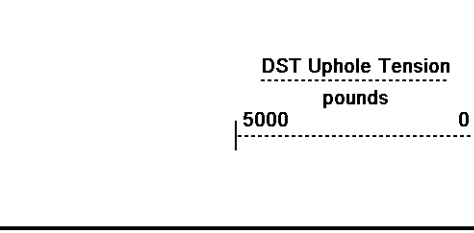

Replay
Scale
1:120




Depth Based Data - Maximum Sampling Increment 2.5cm
 Plotted on 04-JUN-2012 02:35
 Filename: C:\Minimus 11.03.4044\Data\Gran...\Grand Mesa Operating Company Phillip # 1-26_006.dta
 Recorded on 03-JUN-2012 23:05
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044



10 INCH HI RESOLUTION

5 INCH REPEAT PASS



Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 04-JUN-2012 02:35
 Filename: C:\Minimus 11.03.4044\Data\Gran...\Grand Mesa Operating Company Phillip # 1-26_003.dta
 Recorded on 03-JUN-2012 21:40
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

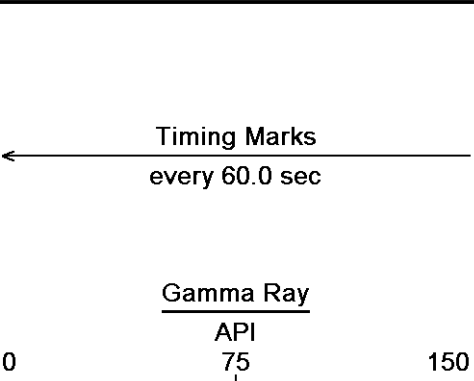


Depth
in
Feet

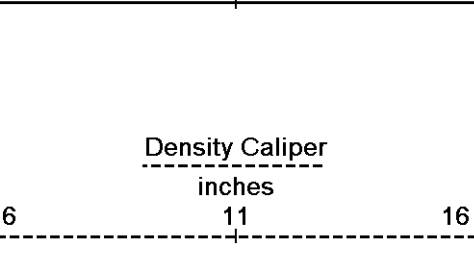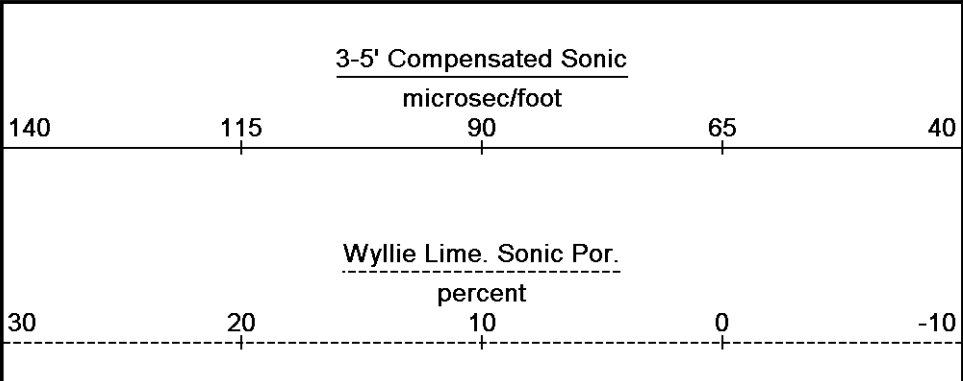


Borehole
Temp in
deg F

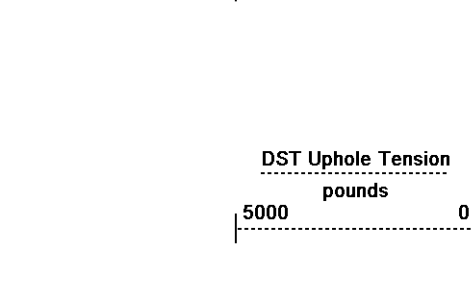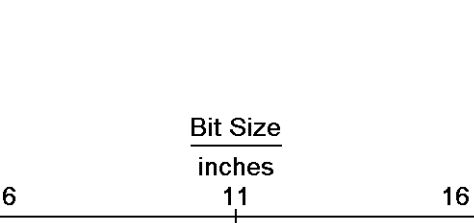


Replay
Scale
1:240

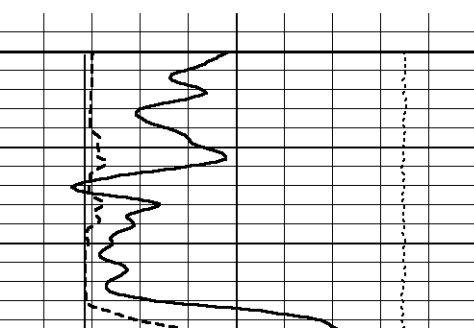

4300

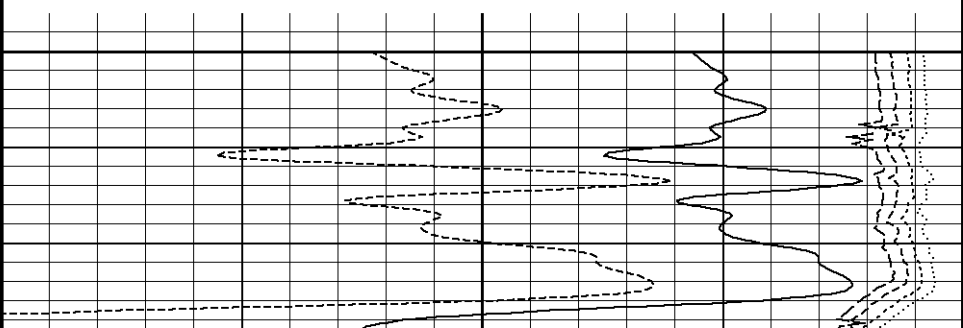

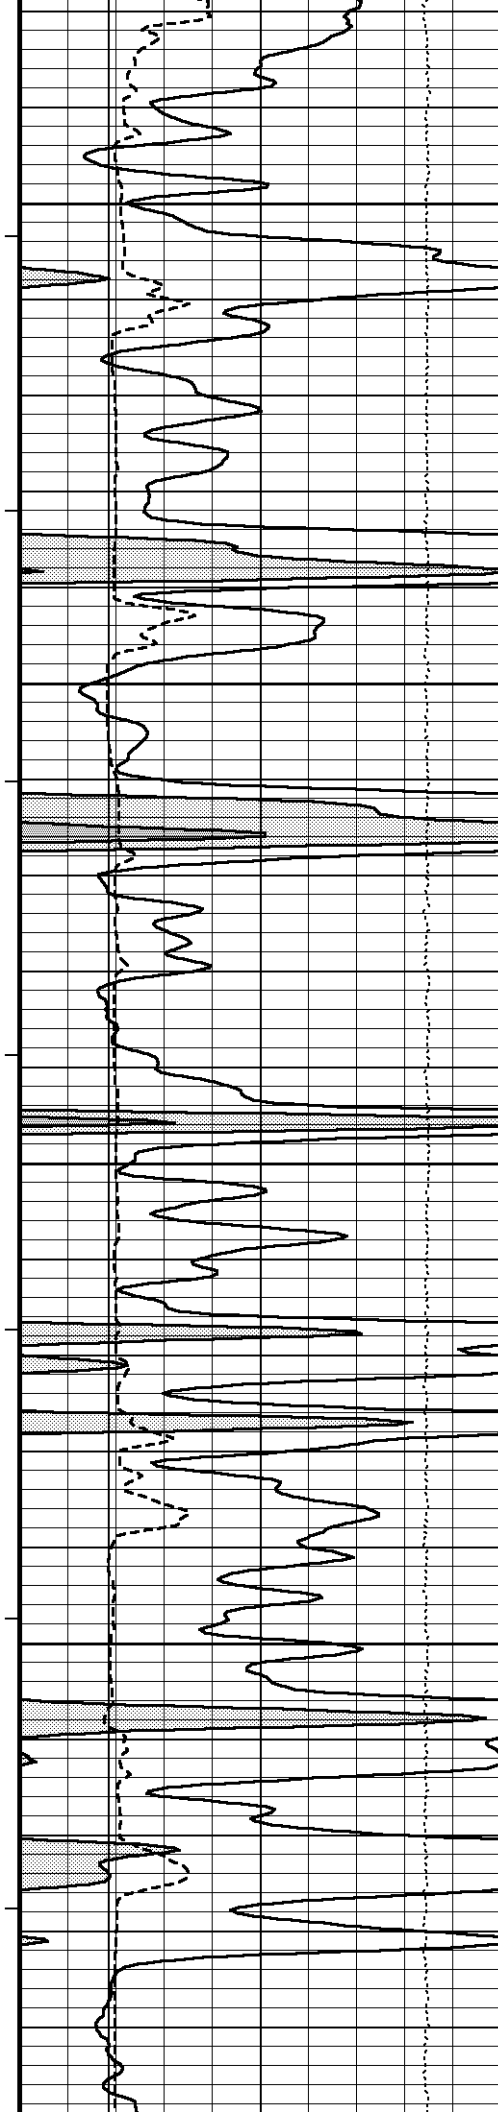

121°

4350

122°

4400


123°


4450

124°

4500

124°

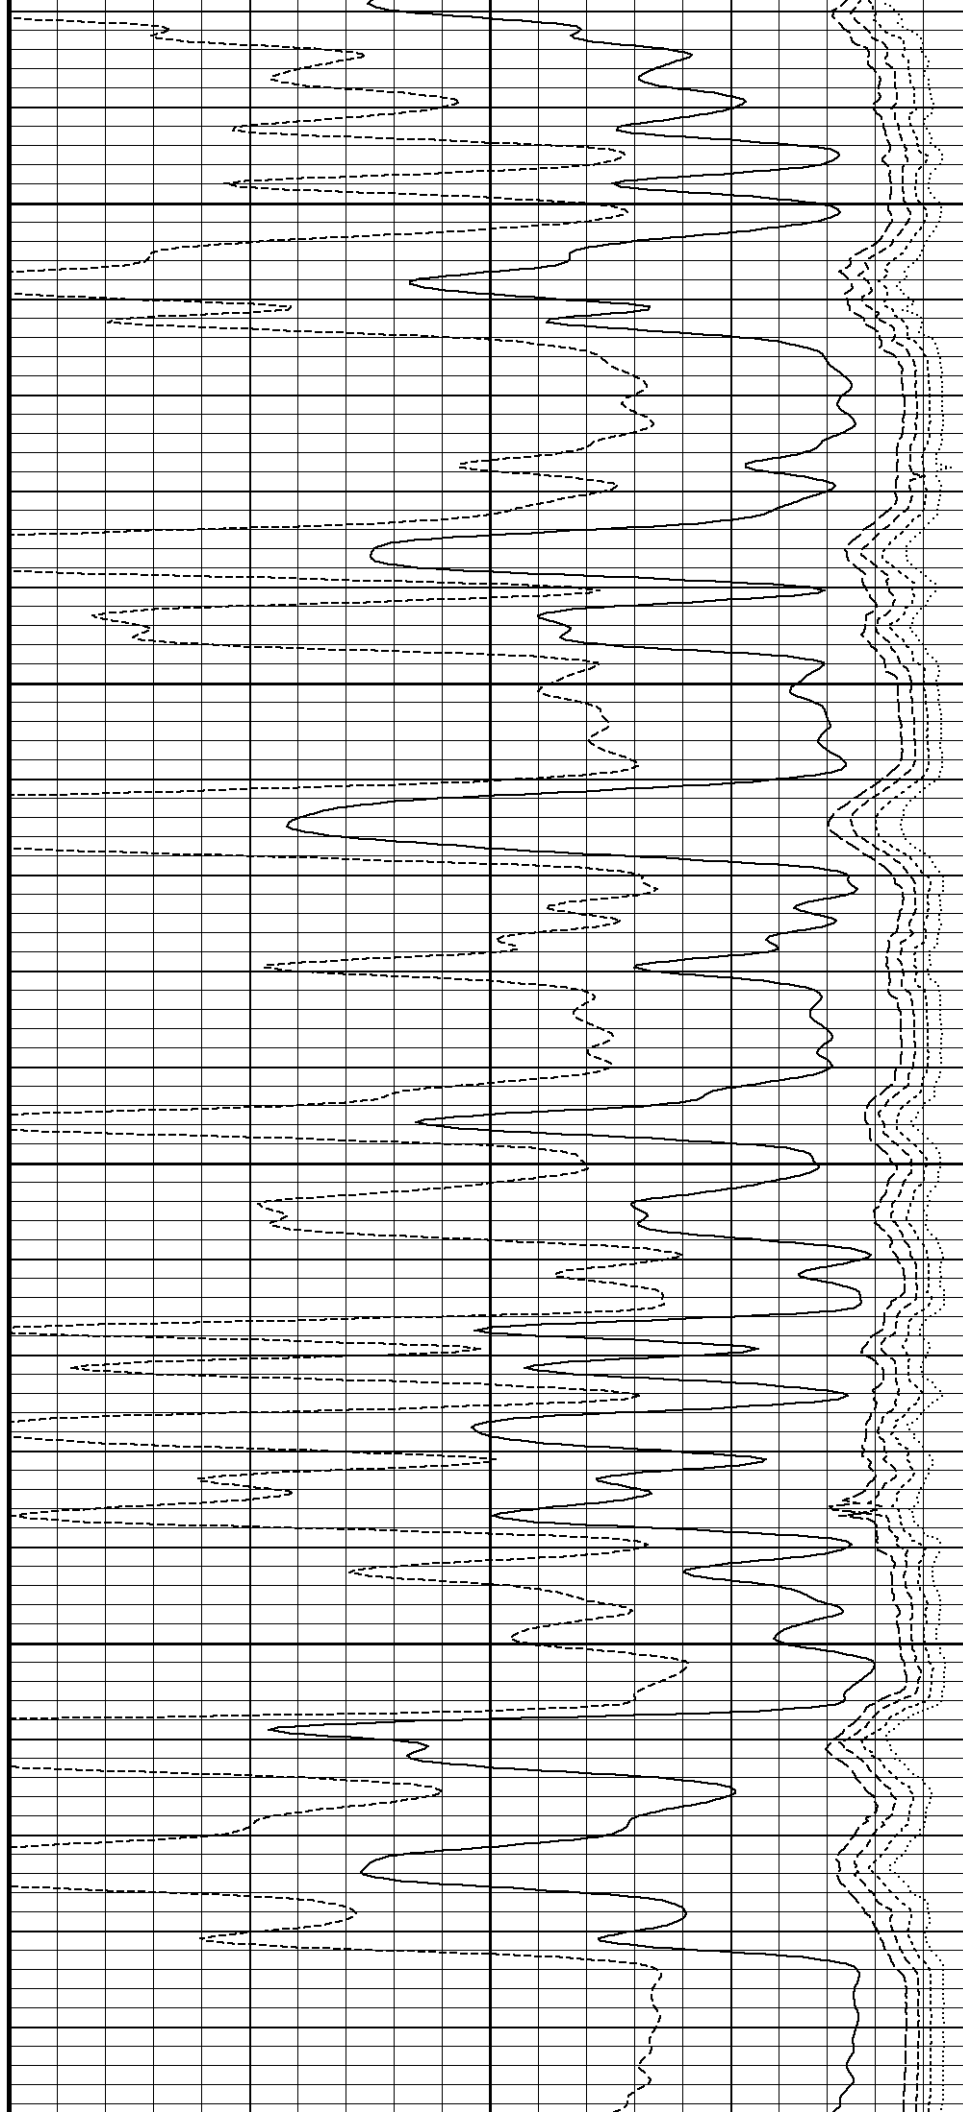

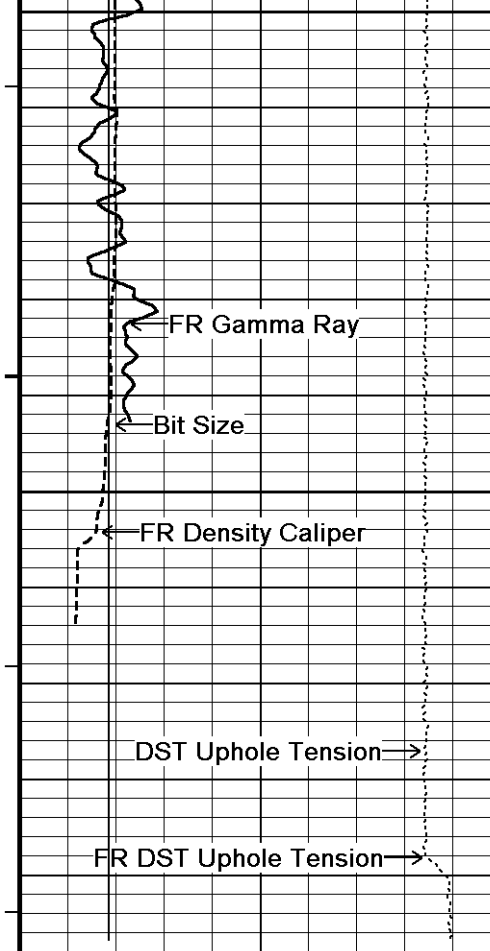

4550


124°

4600

4650

4658

Depth in Feet

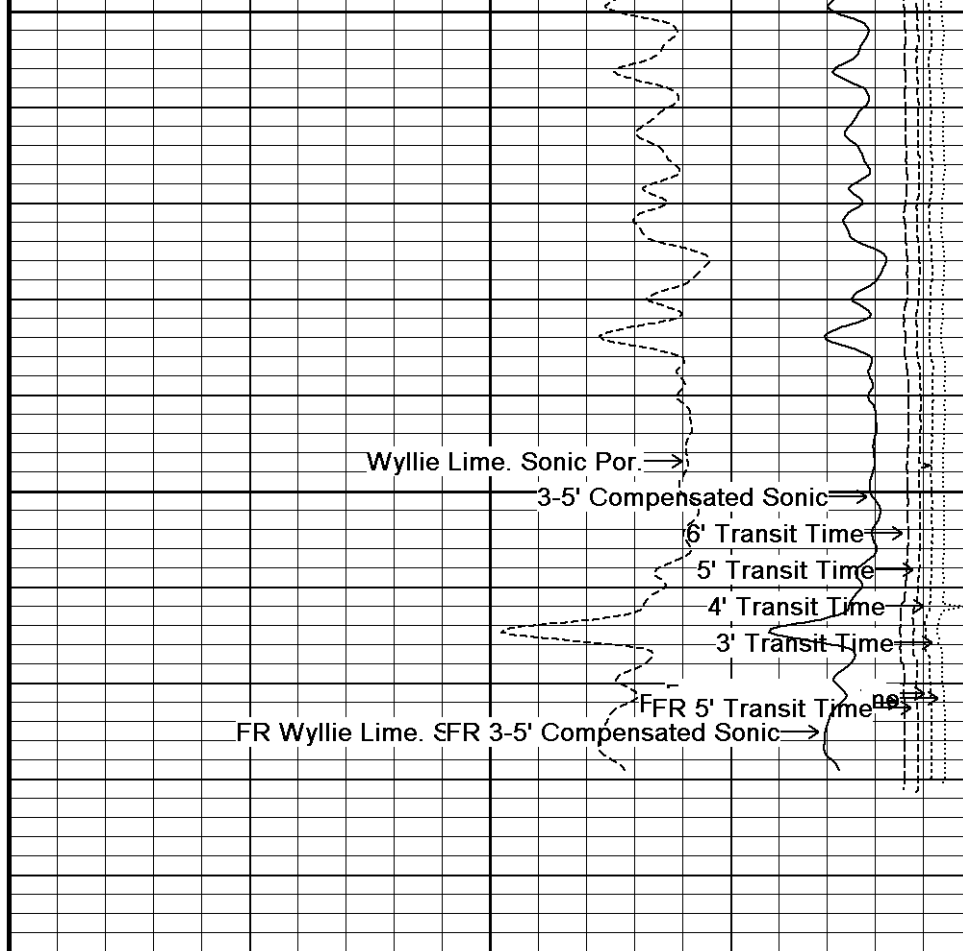

Timing Marks every 60.0 sec

Gamma Ray API

0 75 150

Density Caliper inches

6 11 16

Bit Size inches

6 11 16

DST Uphole Tension

3-5' Compensated Sonic microsec/foot

140 115 90 65 40

Wyllie Lime. Sonic Por. percent

30 20 10 0 -10

3' Transit Time microseconds

1100 100

4' Transit Time microseconds

1100 100

5' Transit Time microseconds

1100 100

Borehole Temp in deg F

5000 pounds 0

Replay Scale 1:240

6' Transit Time microseconds 1100 100

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 04-JUN-2012 02:35
Filename: C:\Minimus 11.03.4044\Data\Gran...\Grand Mesa Operating Company Phillip # 1-26_003.dta Recorded on 03-JUN-2012 21:40
System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

↑ 5 INCH REPEAT PASS ↑

BEFORE SURVEY CALIBRATION

C:\Minimus 11.03.4044\Data\Grand Mesa Operating Company Phillip # 1-26\Grand Mesa Operating Company Phillip # 1-26_003.dta

General Constants All 000 Last Edited on 03-JUN-2012,20:21

General Parameters		
Mud Resistivity	0.920	ohm-metres
Mud Resistivity Temperature	81.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	Density Caliper	

Rwa Parameters		
Porosity used	Base Density Porosity	
Resistivity used	Array Ind. Four Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	

Gamma Calibration MCG-C 84 Field Calibration on 31-MAY-2012 09:46

	Measured	Calibrated (API)
Background	66	44
Calibrator (Gross)	1148	769
Calibrator (Net)	1082	725

Gamma Constants MCG-C 84 Last Edited on 03-JUN-2012,20:21

Gamma Calibrator Number	GR38	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

SP Calibration MCG-C 84 Field Calibration on 28-MAY-2012,07:31

	Measured	Calibrated (mV)
Reference 1	103.5	100.0
Reference 2	-96.9	-100.0

High Resolution Temperature Calibration MCG-C 84 Field Calibration on 28-MAY-2012,07:32

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-C 84 Last Edited on

Pre-filter Length 11

Caliper Calibration MML-A 16 Base Calibration on 23-MAY-2012 11:59
Field Calibration on 31-MAY-2012 09:39

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	14501	5.98
2	17771	7.97

3	21107	9.86
4	24905	11.92
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
6.01	5.98

Micro Normal and Micro Inverse Calibration MML-A 16

Base Calibration on 23-MAY-2012 12:04
Field Check on 31-MAY-2012 09:40

Base Calibration

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.2	60.2	5.0	25.0
Micro Inverse	15.6	78.3	5.0	25.0

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	62.9	62.9
Micro Inverse	48.2	48.2

Micro Normal and Micro Inverse Constants MML-A 16

Last Edited on 03-JUN-2012,13:49

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	N/A	inches	

Neutron Calibration MDN-A.B 65

Base Calibration on 23-MAY-2012 14:31
Field Check on 31-MAY-2012 09:51

Base Calibration

Ratio	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	3164	98	3714	110
	32.187		33.764	

Field Calibrator at Base	Calibrated (cps)	
Ratio	1615	2315
	0.697	

Field Check	Calibrated (cps)	
Ratio	1630	2345
	0.695	

Neutron Constants MDN-A.B 65

Last Edited on 03-JUN-2012,20:22

Neutron Source Id	PN-521	
Neutron Jig Number	5824NE	
Epithermal Neutron	No	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-A.A 55

Base Calibration on 23-MAY-2012 09:37
Field Check on 31-MAY-2012 09:30

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	951.5	126.8
Base Check		281.5

FE Constants MFE-A.A 55

Last Edited on 03-JUN-2012,13:50

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Sonic Constants MSS-A.A 55

Last Edited on 06-JAN-2011,18:39

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A			
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A	
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A
Use 4' Waveform to derive TR	N/A
Use 5' Waveform to derive TR	N/A
Use 6' Waveform to derive TR	N/A
3' Waveform Discriminator Level	N/A mV
4' Waveform Discriminator Level	N/A mV
5' Waveform Discriminator Level	N/A mV
6' Waveform Discriminator Level	N/A mV
3' Waveform Filter	N/A
4' Waveform Filter	N/A
5' Waveform Filter	N/A
6' Waveform Filter	N/A
Semblance Level	N/A
Semblance Window Width	N/A micro-sec
Sonic 1 Despiker	N/A N/A
Sonic 2 Despiker	N/A N/A

Base Calibration

Test Loop Calibration

Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	14.4	472.6	9.3	966.2
2	5.7	374.0	7.6	821.4
3	3.4	261.2	5.2	566.0
4	2.5	133.9	2.6	279.2

Array Temperature 79.4 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	18.3	3851.3
2	0.0	0.0	31.6	3629.3
3	0.0	0.0	28.5	3049.3
4	0.0	0.0	18.2	2079.0
Deep	0.0	0.0	16.0	1911.0
Medium	0.0	0.0	42.4	4060.5
Shallow	0.0	0.0	49.4	5483.1

Array Temperature 0.0 70.7 Deg F

Induction Constants MAI-A.A 45

Last Edited on 03-JUN-2012,20:22

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

High Resolution Temperature Calibration MAI-A.A 45

Field Calibration on 12-JAN-2012,13:36

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MAI-A.A 45

Last Edited on 12-JAN-2012,11:13

Caliper Calibration MPD-B 59

Base Calibration on 16-MAY-2012 14:32
Field Calibration on 31-MAY-2012 09:33

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	19200	3.99
2	29152	5.98
3	39216	7.97
4	48949	9.86
5	60064	11.92
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
5.93	5.98

Photo Density Calibration MPD-B 59

Base Calibration on 16-MAY-2012 14:49
Field Check on 31-MAY-2012 09:38

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	49293	24802	59556	30836
Reference 2	20819	2436	24941	2541

Field Check at Base

1213.5 1290.5

Field Check

1206.1 1292.9

PE Calibration

Base Calibration	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	220	1092		
Reference 1	18022	49118	0.371	0.371
Reference 2	5449	20689	0.267	0.272

Field Check at Base

220.3 1091.9

Field Check

221.9 1084.8

Density Constants MPD-B 59

Last Edited on 03-JUN-2012,20:22

Density Source Id	254	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

DOWNHOLE EQUIPMENT

MCB-A.A 11B Tension Cablehead
 MCB-A.A 155 LG: 2.40 ft WT: 19.8 lb OD: 2.24 in

MCB-A.A 11B Tension Cablehead
 MCB-A.A 155 LG: 2.40 ft WT: 19.8 lb OD: 2.24 in

Compact Comms Gamma
 MCG-C 84 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Comms Gamma
 MCG-C 84 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-log
 MML-A 16 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Micro-log
 MML-A 16 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Neutron
 MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Neutron
 MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
 MPD-B 59 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Density/Caliper
 MPD-B 59 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focussed Electric
 MFE-A.A 55 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Focussed Electric
 MFE-A.A 55 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Sonic
 MSS-A.A 55 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in


Compact Sonic
 MSS-A.A 55 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in

Compact Induction
 MAI-A.A 45 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
 MAI-A.A 45 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 63.07 ft Weight: 476.2 lb

Total Length: 63.07 ft Weight: 476.2 lb

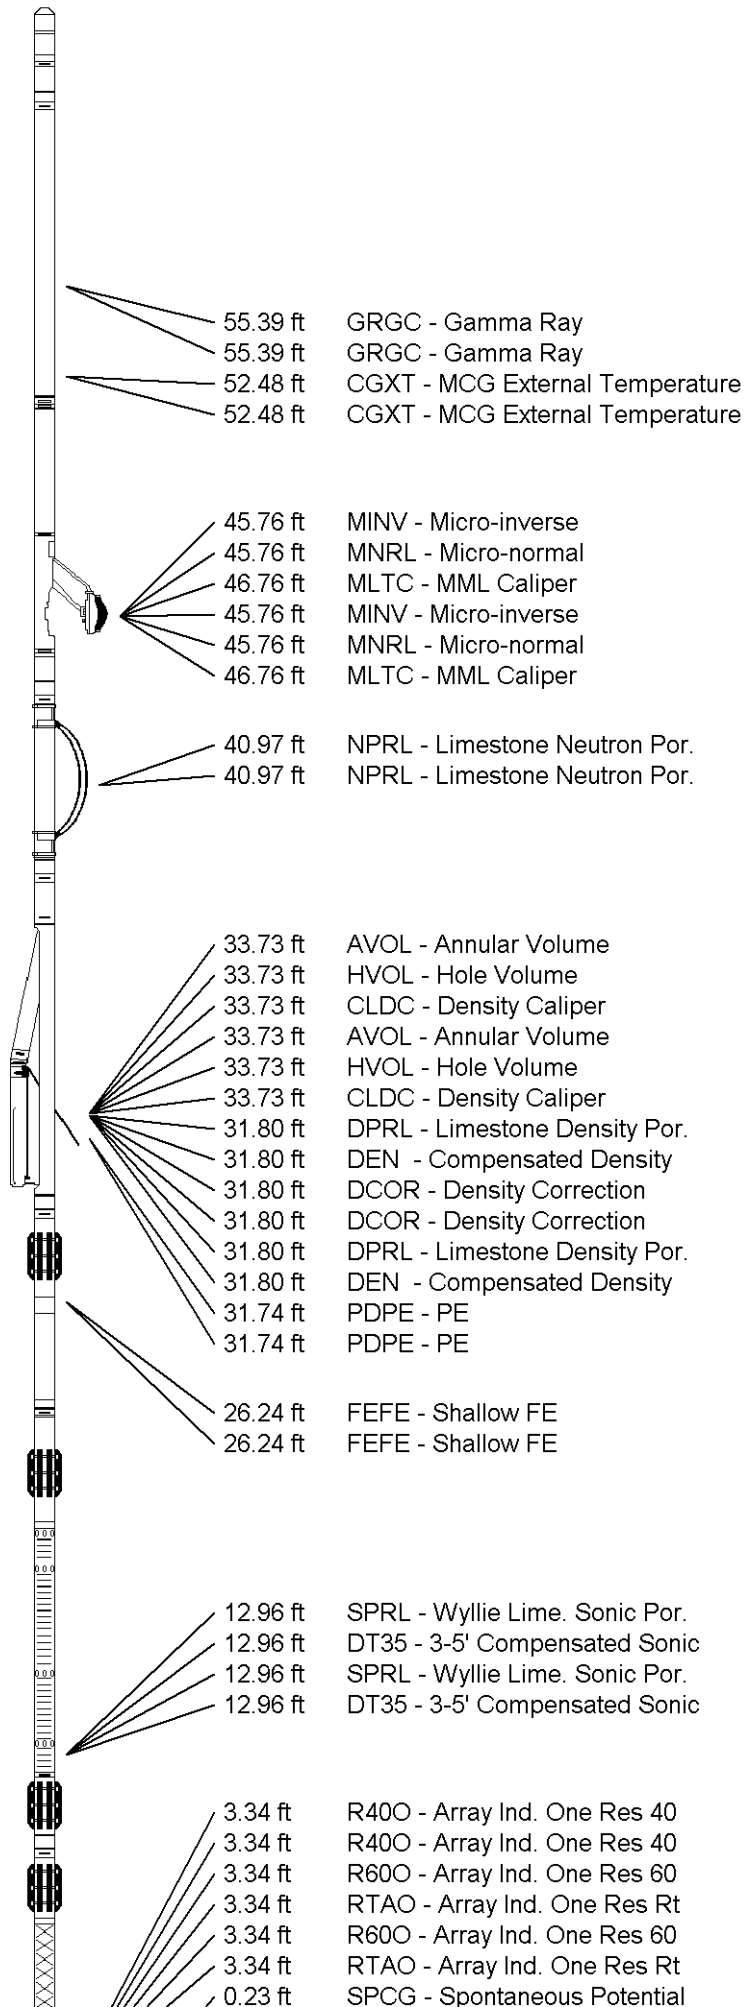

55.39 ft GRGC - Gamma Ray
 55.39 ft GRGC - Gamma Ray
 52.48 ft CGXT - MCG External Temperature
 52.48 ft CGXT - MCG External Temperature

45.76 ft MINV - Micro-inverse
 45.76 ft MNRL - Micro-normal
 46.76 ft MLTC - MML Caliper
 45.76 ft MINV - Micro-inverse
 45.76 ft MNRL - Micro-normal
 46.76 ft MLTC - MML Caliper


40.97 ft NPRL - Limestone Neutron Por.
 40.97 ft NPRL - Limestone Neutron Por.

33.73 ft AVOL - Annular Volume
 33.73 ft HVOL - Hole Volume
 33.73 ft CLDC - Density Caliper
 33.73 ft AVOL - Annular Volume
 33.73 ft HVOL - Hole Volume
 33.73 ft CLDC - Density Caliper
 31.80 ft DPRL - Limestone Density Por.
 31.80 ft DEN - Compensated Density
 31.80 ft DCOR - Density Correction
 31.80 ft DCOR - Density Correction
 31.80 ft DPRL - Limestone Density Por.
 31.80 ft DEN - Compensated Density
 31.74 ft PDPE - PE
 31.74 ft PDPE - PE

26.24 ft FEFE - Shallow FE
 26.24 ft FEFE - Shallow FE

12.96 ft SPRL - Wyllie Lime. Sonic Por.
 12.96 ft DT35 - 3-5' Compensated Sonic
 12.96 ft SPRL - Wyllie Lime. Sonic Por.
 12.96 ft DT35 - 3-5' Compensated Sonic

3.34 ft R400 - Array Ind. One Res 40
 3.34 ft R400 - Array Ind. One Res 40
 3.34 ft R600 - Array Ind. One Res 60
 3.34 ft RTAO - Array Ind. One Res Rt
 3.34 ft R600 - Array Ind. One Res 60
 3.34 ft RTAO - Array Ind. One Res Rt
 0.23 ft SPCG - Spontaneous Potential



0.23 ft SPCG - Spontaneous Potential
 Tool Zero (0.13ft from bottom)
 Tool Zero (0.13ft from bottom)
 -0.13 ft SMTU - DST Uphole Tension
 -0.13 ft SMTU - DST Uphole Tension
 All measurements relative to tool zero.
 All measurements relative to tool zero.

COMPANY	GRAND MESA OPERATING COMPANY
WELL	PHILLIP # 1-26
FIELD	WILDCAT
PROVINCE/COUNTY	GOVE
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	2856.00	feet	First Reading	4625.00	feet
Elevation Drill Floor	2854.00	feet	Depth Driller	4631.00	feet
Elevation Ground Level	2851.00	feet	Depth Logger	4638.00	feet



Weatherford®

COMPENSATED SONIC
 WITH INTEGRATED TRANSIT TIME

