



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-051-26,290-00-00

Company TDI, Inc.

Well Augustine No.1

Field Catherine South

County Ellis State

Kansas

Location

1200' FSL & 1400' FWL

Other Services
CNL/CDL
DIL

Sec: 15

Twp: 13S

Rge: 17W

Elevation

2008

Permanent Datum Ground Level
Log Measured From Kelly Bushing
Drilling Measured From Kelly Bushing

K.B. 2018
D.F.
G.L. 2008

Date

5/23/2012

Run Number

Two

Depth Driller

3735

Depth Logger

3732

Bottom Logged Interval

3731

Top Log Interval

2900

Casing Driller

8.625 @ 215

Casing Logger

213

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

6,300

Density / Viscosity

9.0 59

pH / Fluid Loss

11.0 7.2

Source of Sample

Flowline

Rm @ Meas. Temp

.5 @ 69

Rmf @ Meas. Temp

.38 @ 69

Rmc @ Meas. Temp

.68 @ 69

Source of Rmf / Rmc

Charts

Rm @ BHT

.3 @ 113

Operating Rig Time

3 1/2 Hours

Max Rec. Temp. F

113

Equipment Number

17

Location

Hays

Recorded By

C. Desaire

Witnessed By

Tom Denning

Herb Deines

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Catherine KS, 1/2 E,
1 S, 1/2 E, N Into

Database File: c:\warrior\data\tdi_augustine no.1\tdihd.db
Dataset Pathname: dil\tdistk
Presentation Format: micro
Dataset Creation: Wed May 23 04:47:09 2012
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

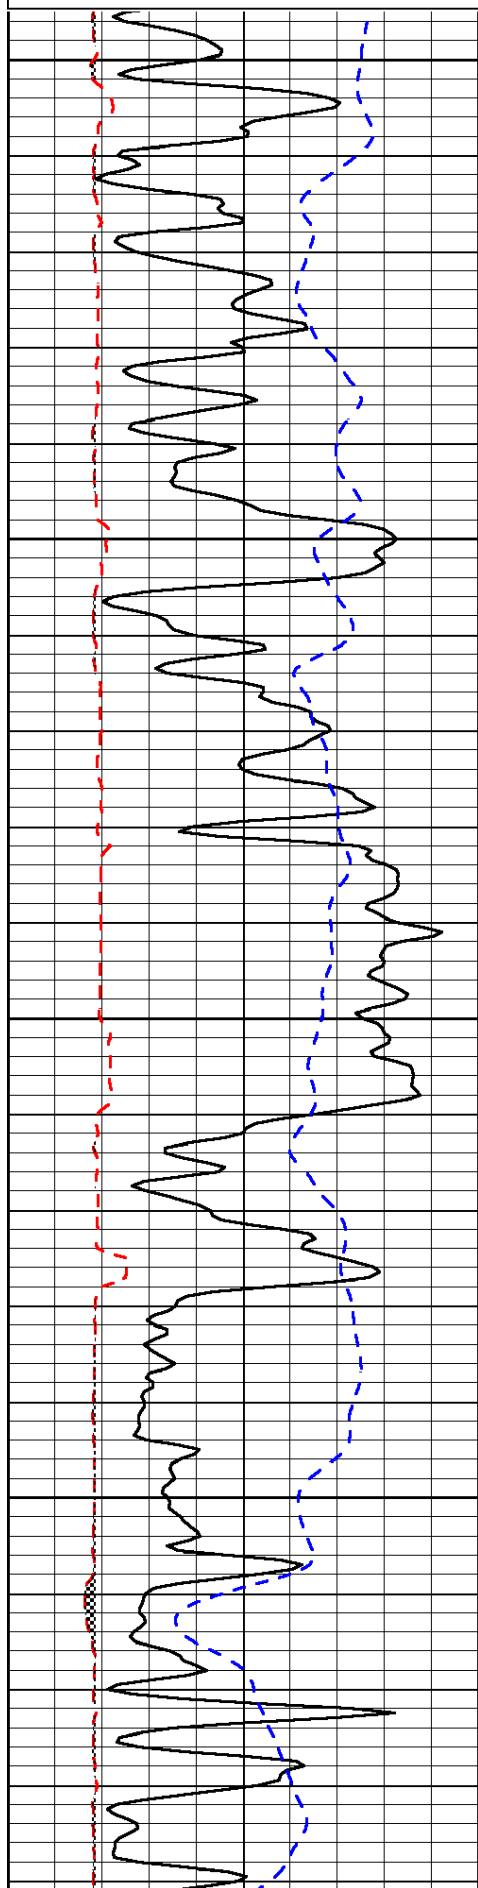


2900

2950

3000

3050

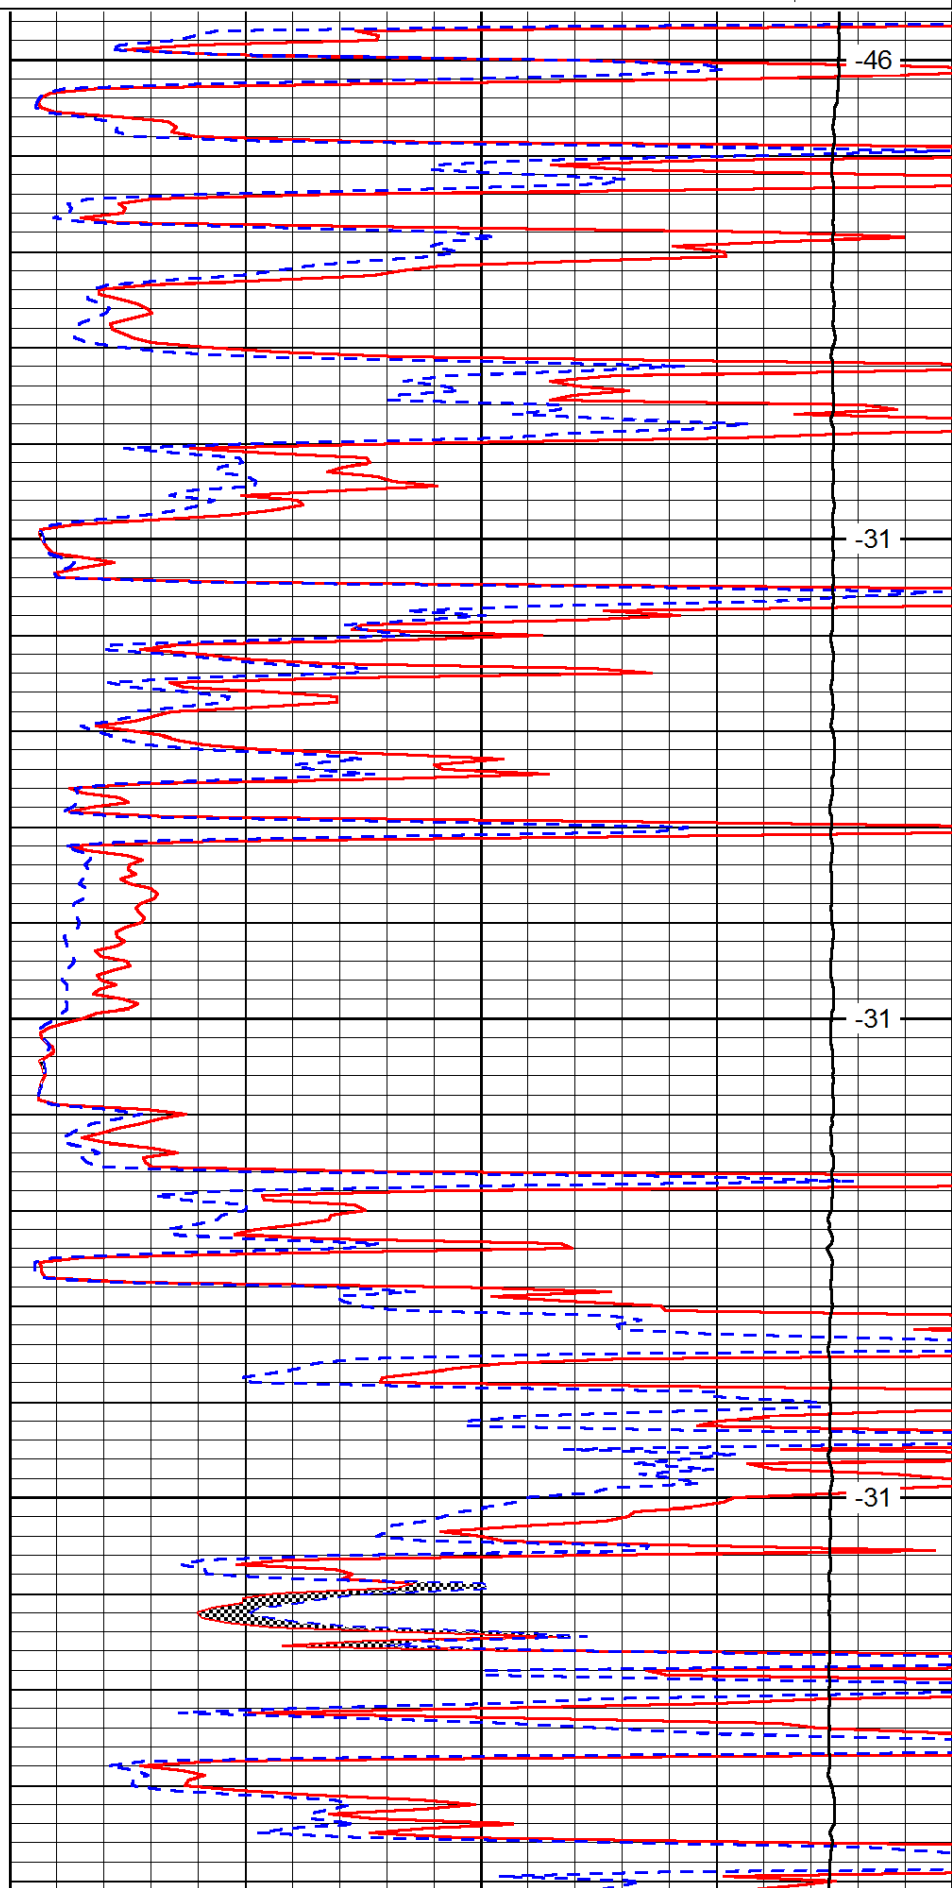


-46

-31

-31

-31

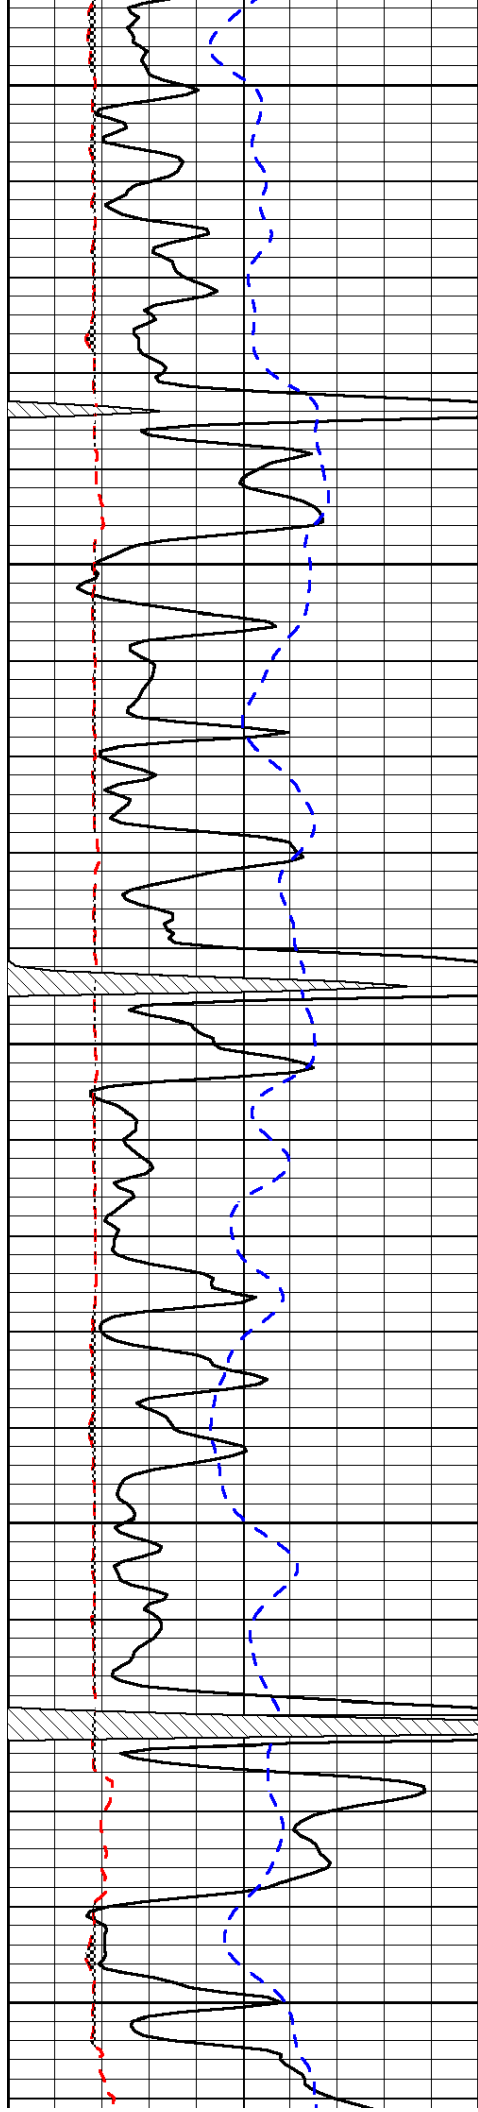


3100


3150

3200

3250

3300

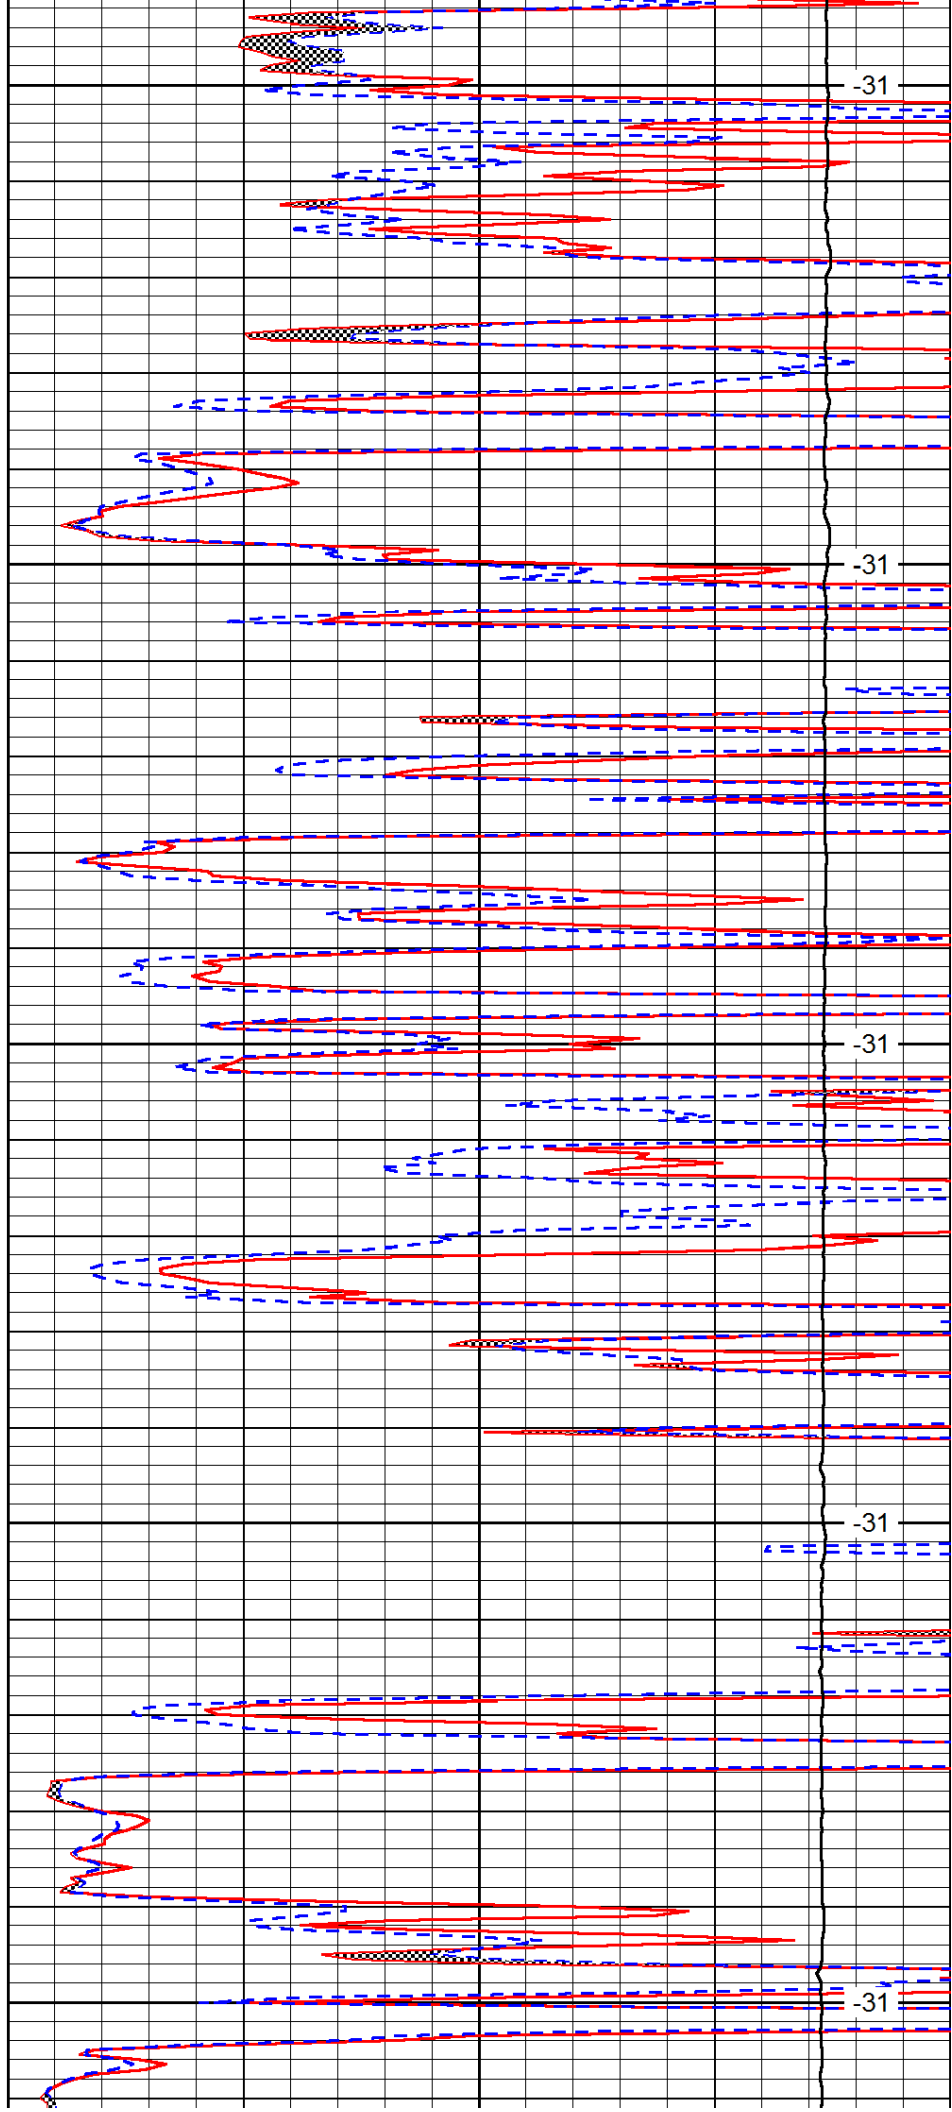

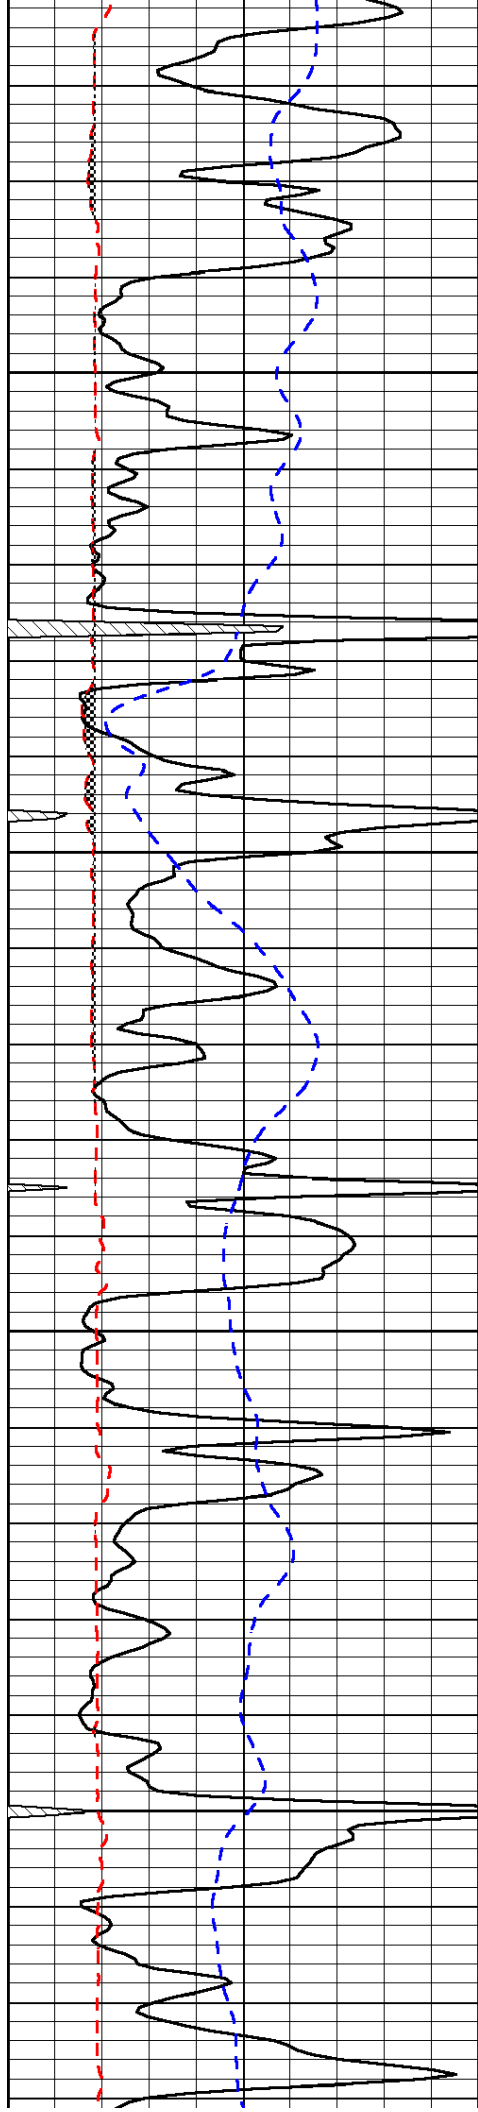


3350

3400

3450

3500

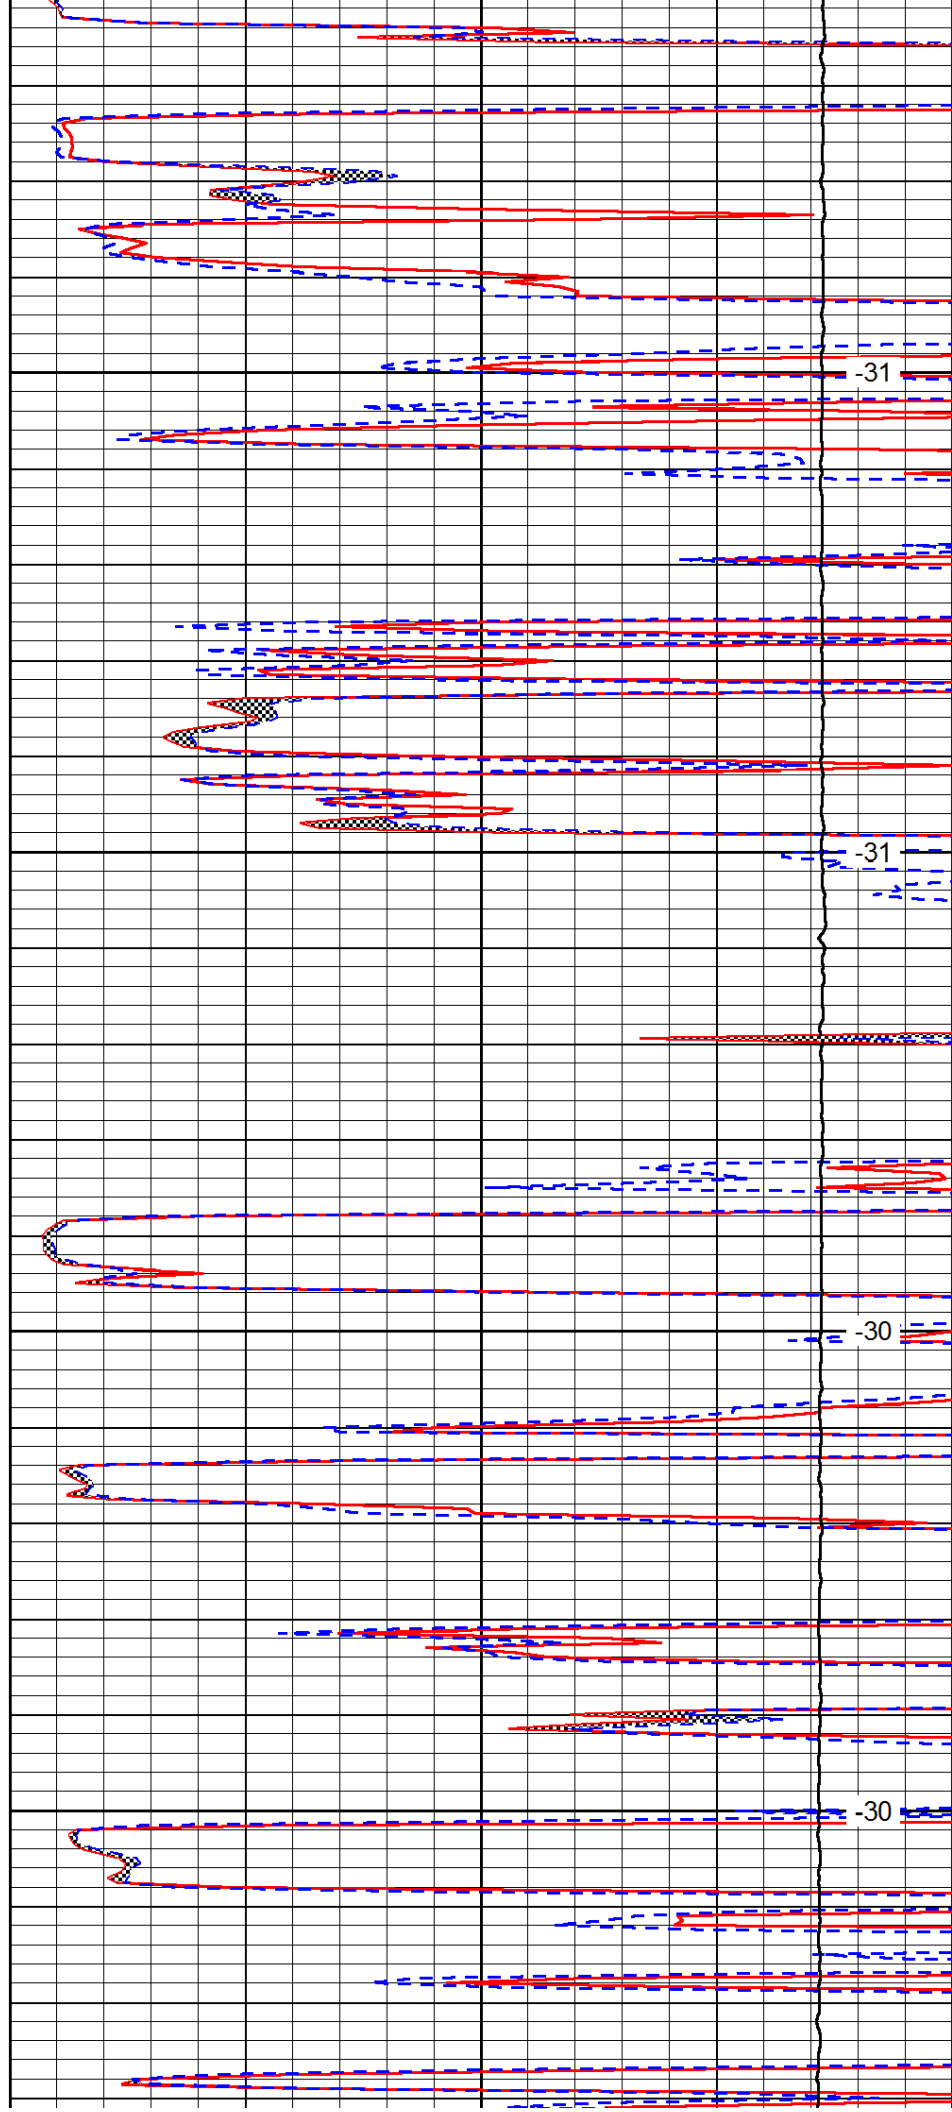

-31

-31

-30

-30

