



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCLVDL

Company		EXCEL OIL & GAS	
Well		CARTER # 16-5	
Field		PERU-SEDAN	
County		CHAUTAUQUA	
State		KANSAS	
Location:		API #: 15-019-27184	
Permanent Datum		NW NE SE NE	
Log Measured From		3790' FSL & 500' FEL	
Drilling Measured From		SEC 16 TWP 34S RGE 12E	
Elevation		780'	
Other Services			
Date		9-4-12	
Run Number		1	
Depth Driller		1042'	
Depth Logger		1009'	
Bottom Logged Interval		1008'	
Top Log Interval		SURFACE	
Open Hole Size		WATER	
Type Fluid		---	
Density / Viscosity		---	
Max. Recorded Temp.		---	
Estimated Cement Top		SURFACE	
Time Well Ready		---	
Time Logger on Bottom		---	
Equipment Number		3	
Location		DEWEY	
Recorded By		HERREN	
Witnessed By		MR JONES	
Run Number		Borehole Record	
Bit		From	
To		Size	
Weight		Tubing Record	
From		To	
Casing Record		Size	
Surface String		8.625"	
Prot. String		Wgt/Ft	
Production String		4.5"	
Liner		Top	
		Bottom	
		60'	
		SURFACE	
		TD	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline

GAMMA RAY CEMENT BOND

Database File: carter165.db
Dataset Pathname: carter165/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Tue Sep 04 10:15:46 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240




Collar Locator	-1	-2	Amplitude (mV)	100	200	Variable Density	1200
Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			




Collar Locator	-1
Gamma Ray (GAPI) (GAPI)	60

-2	Amplitude (mV)	100
1000	Travel Time (usec)	250

200	Variable Density	1200
-----	------------------	------

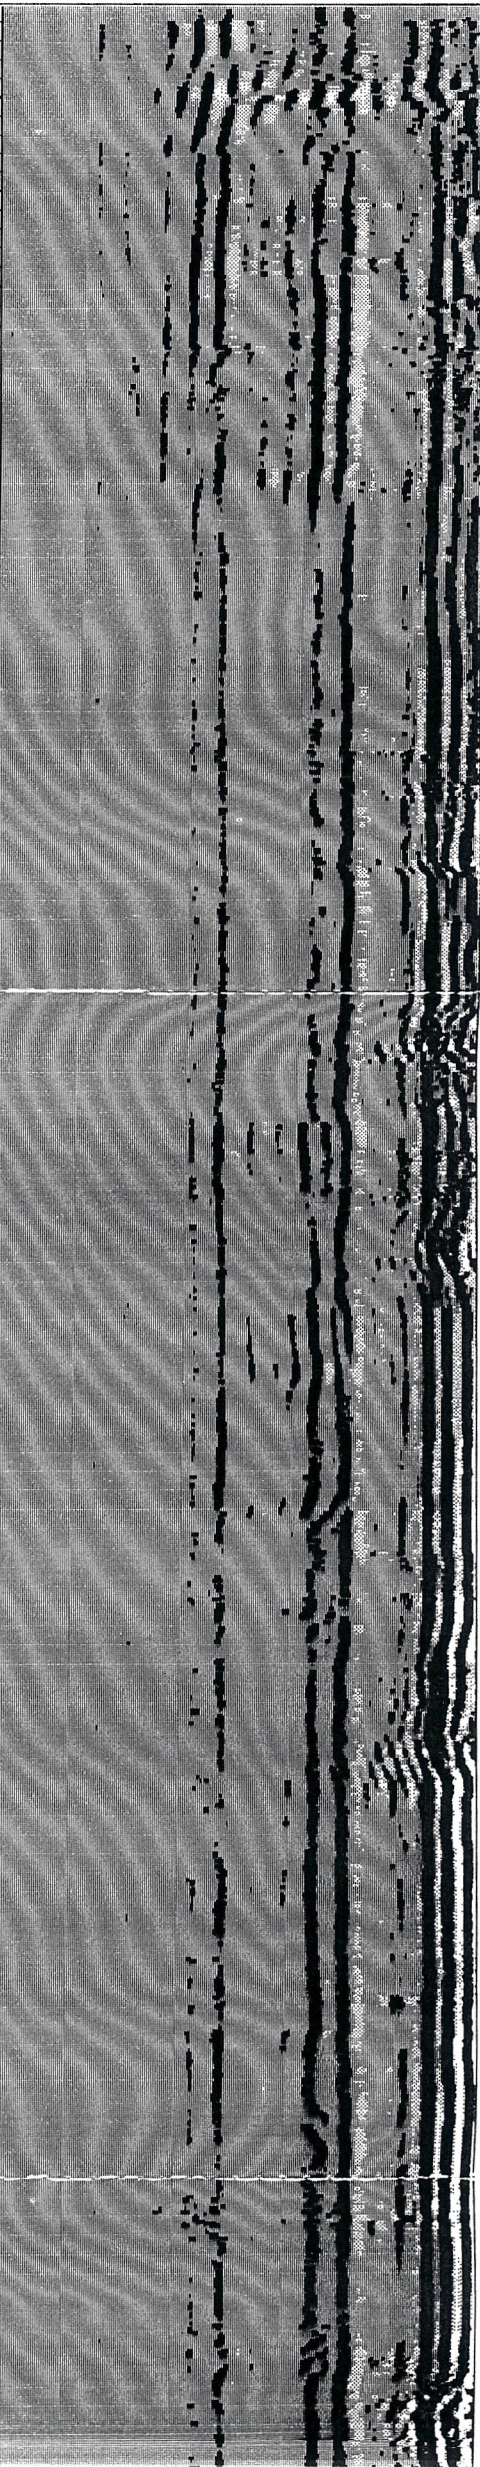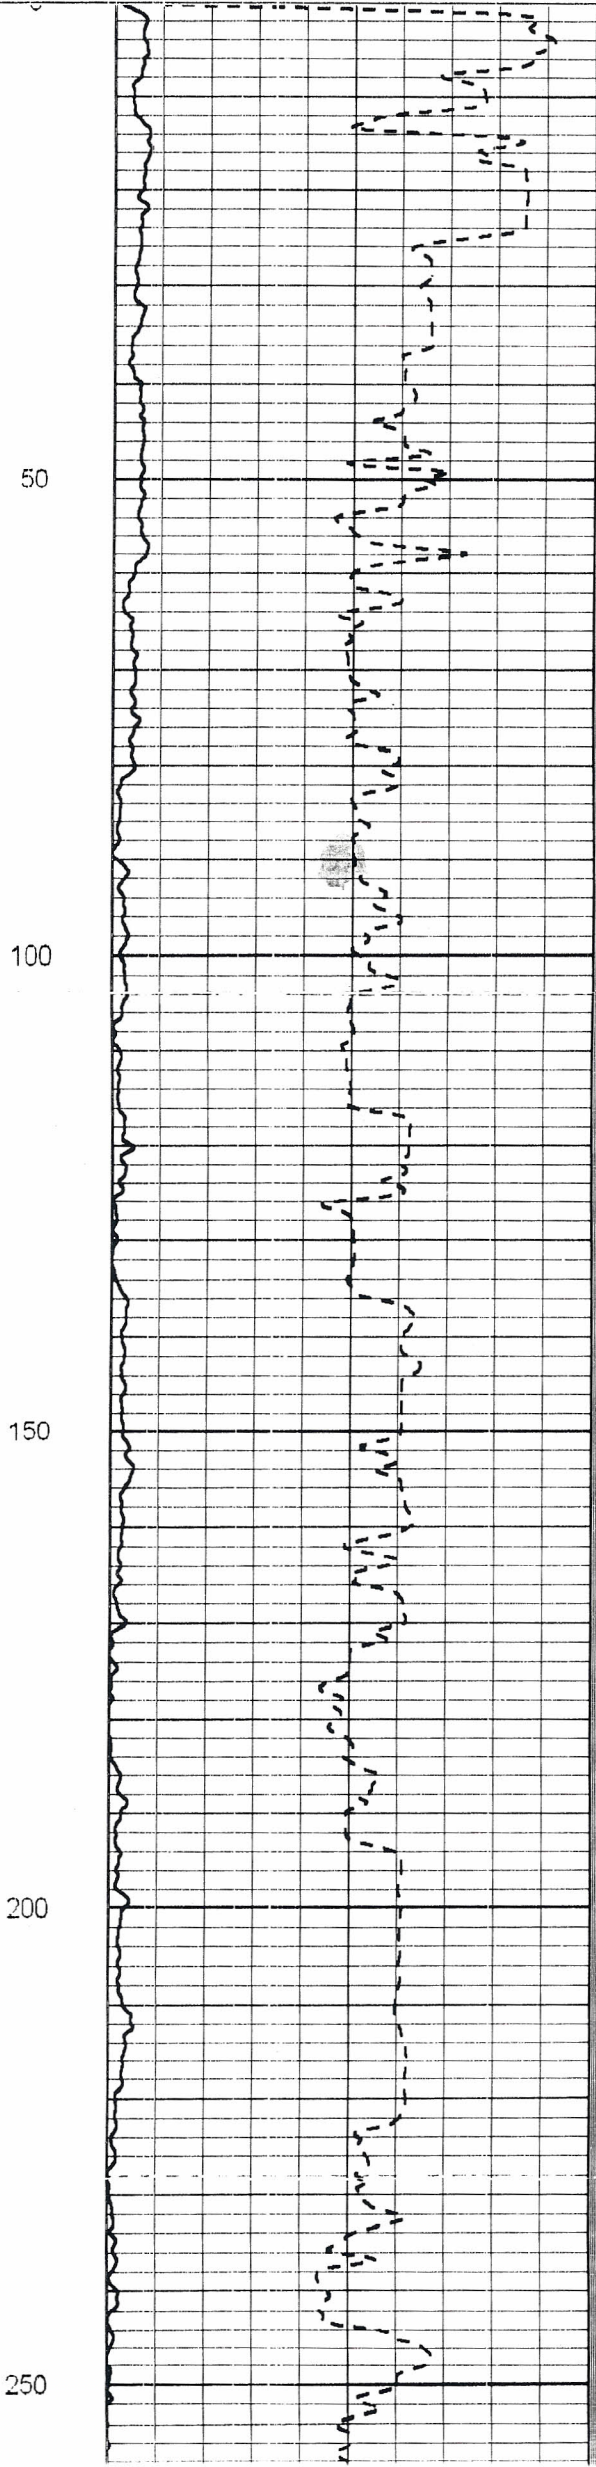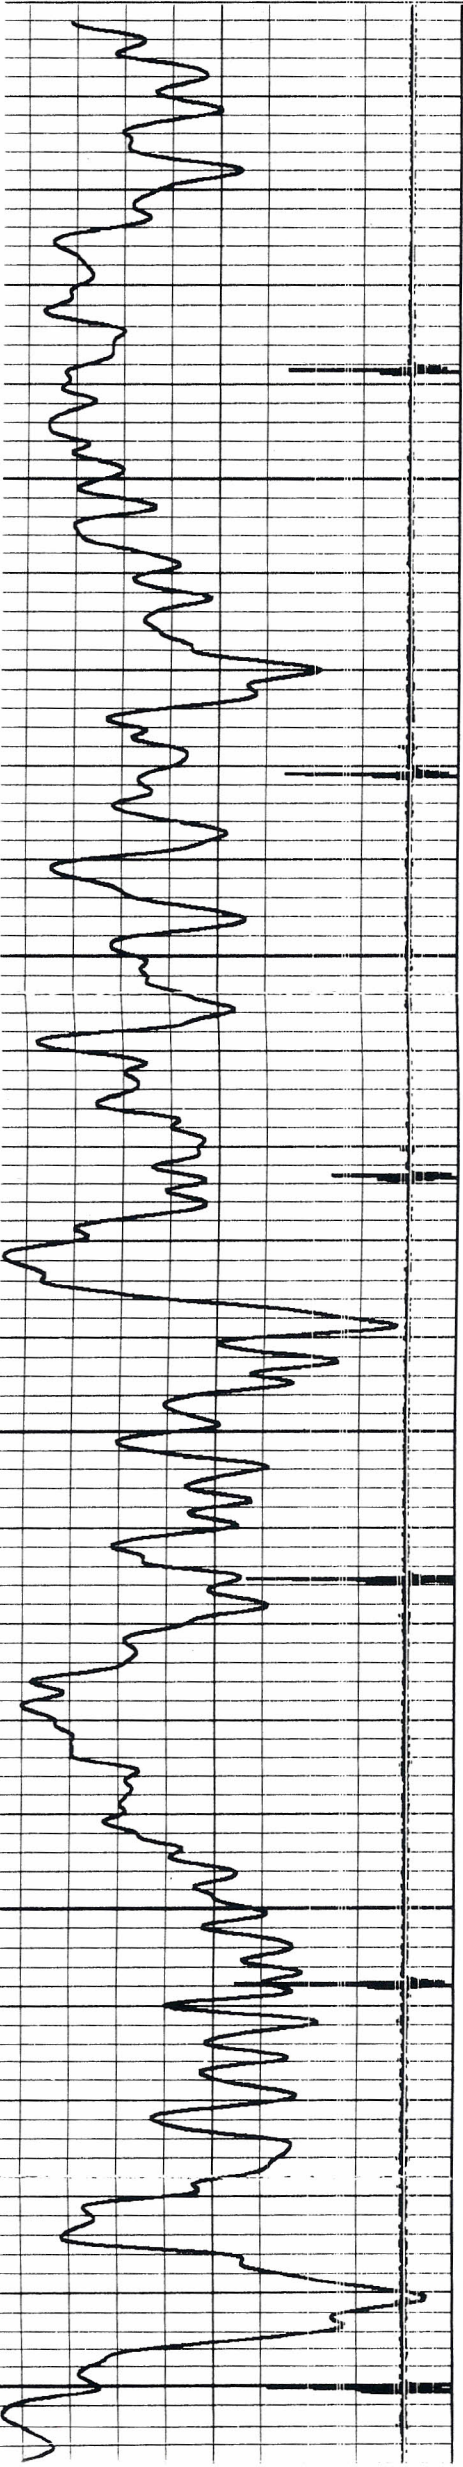

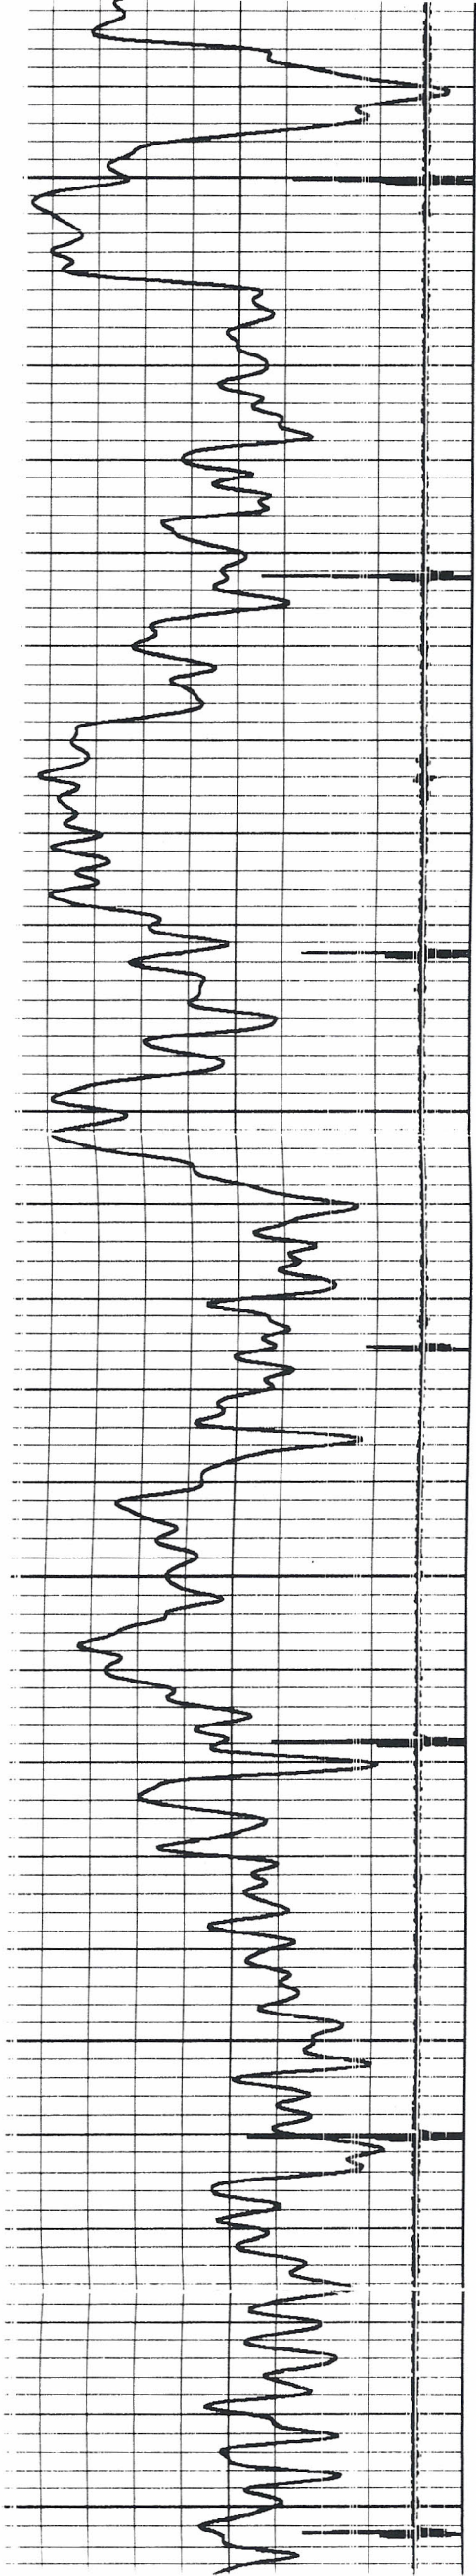

250



300


350

400

450

500

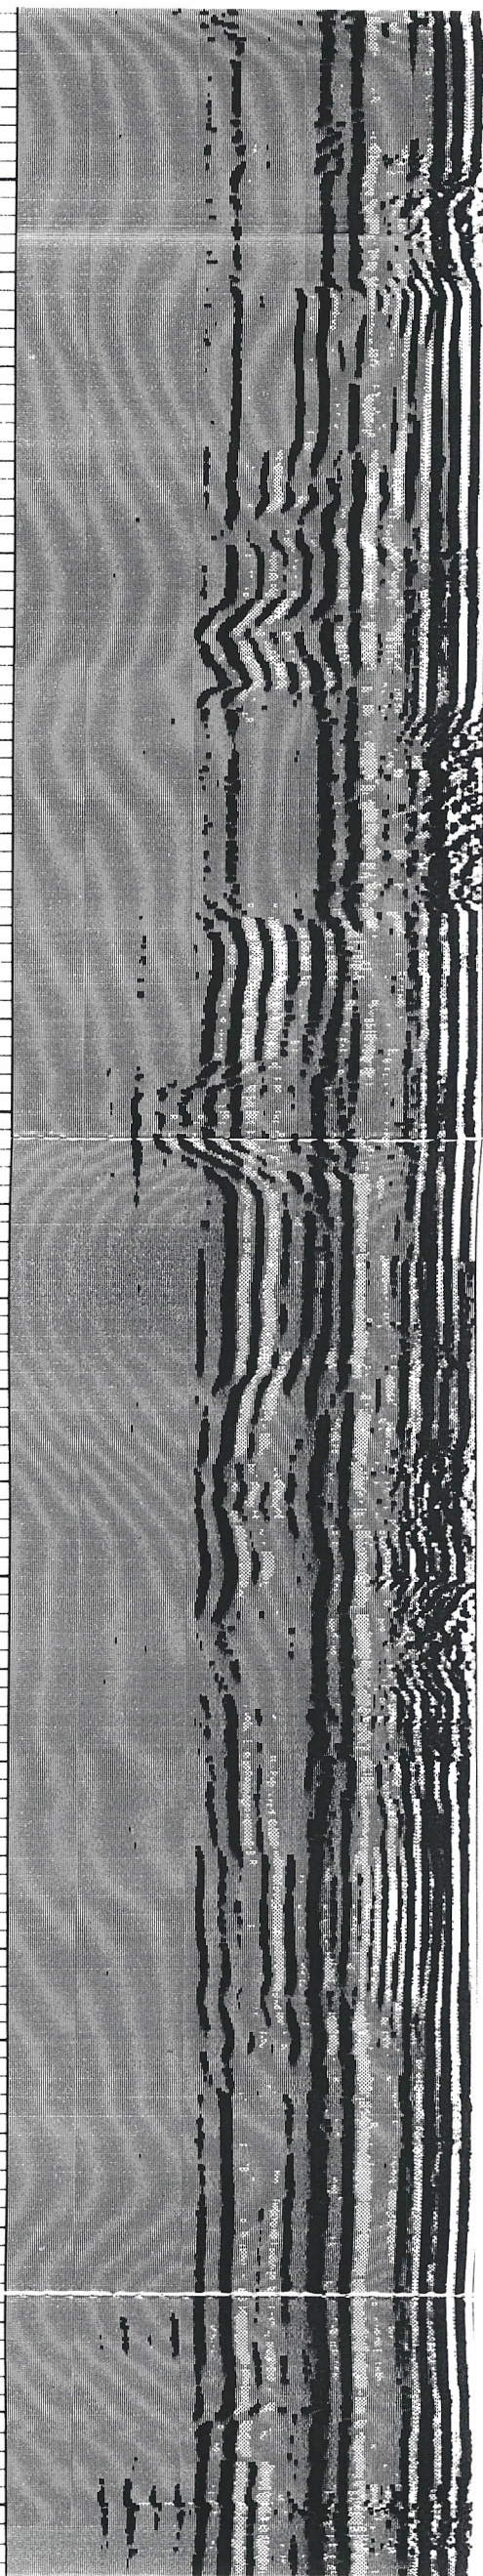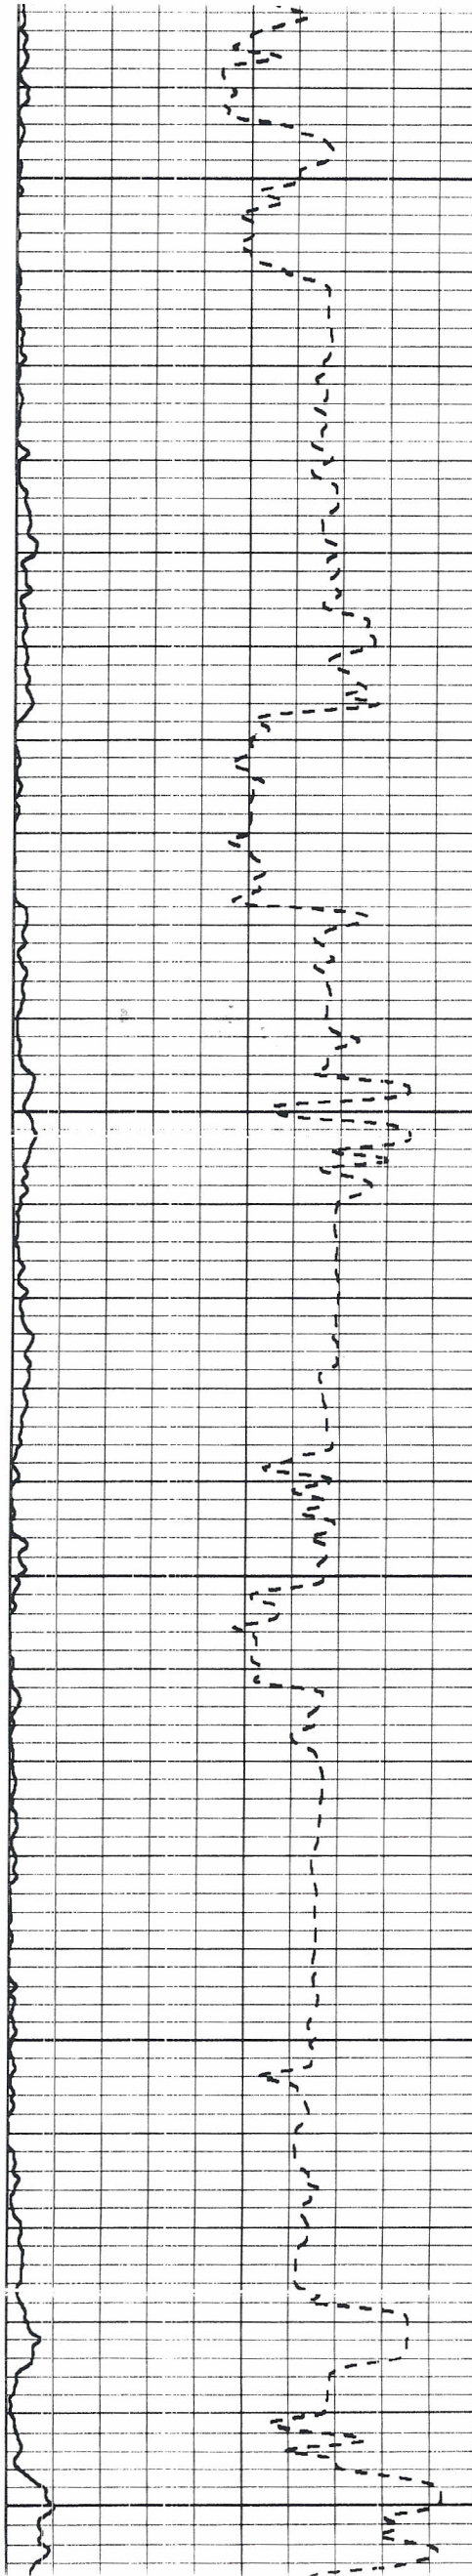

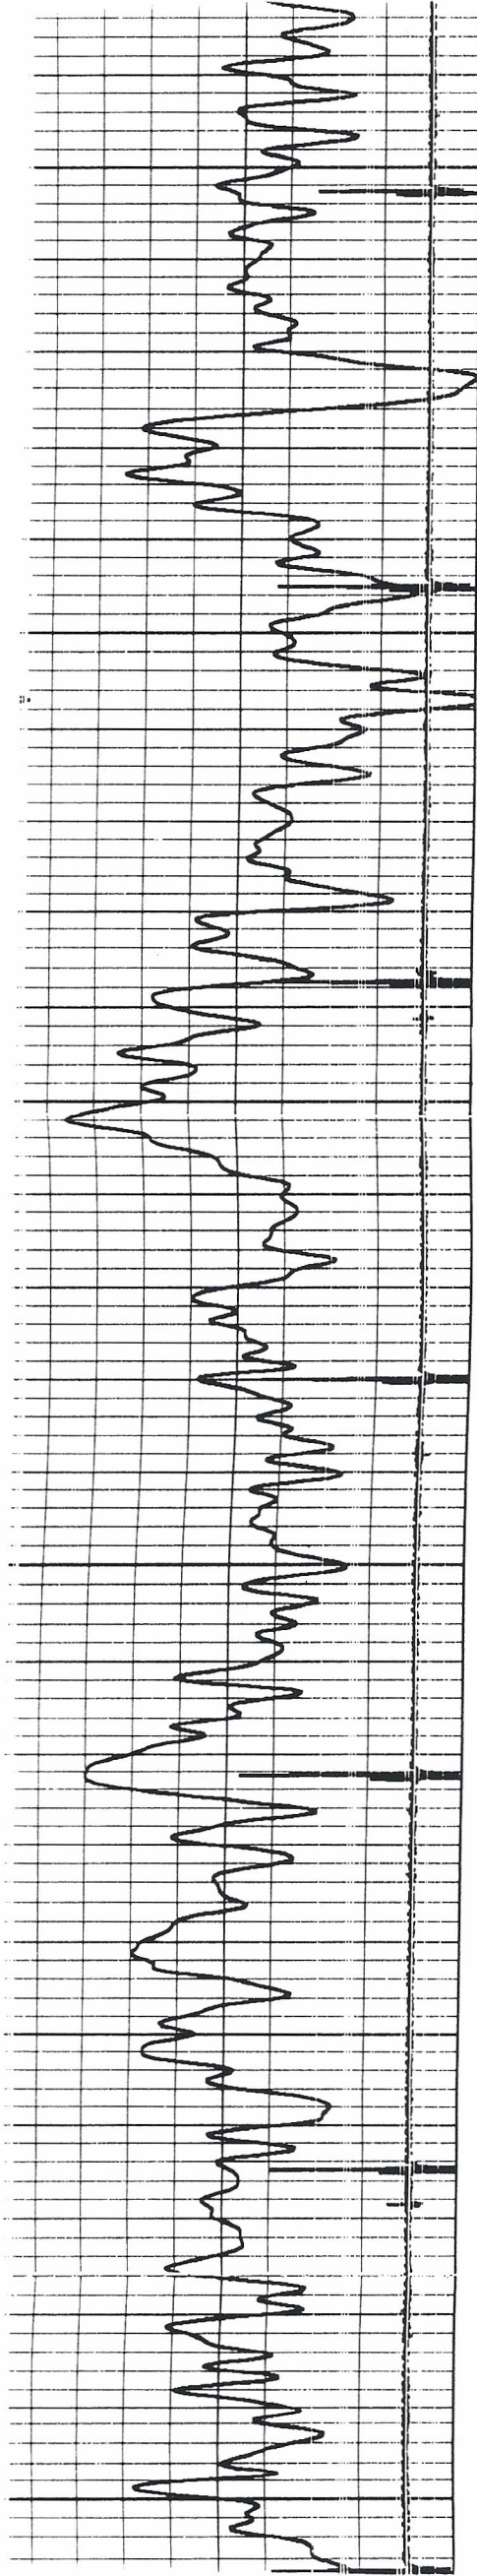

500



550


600

650

700

750

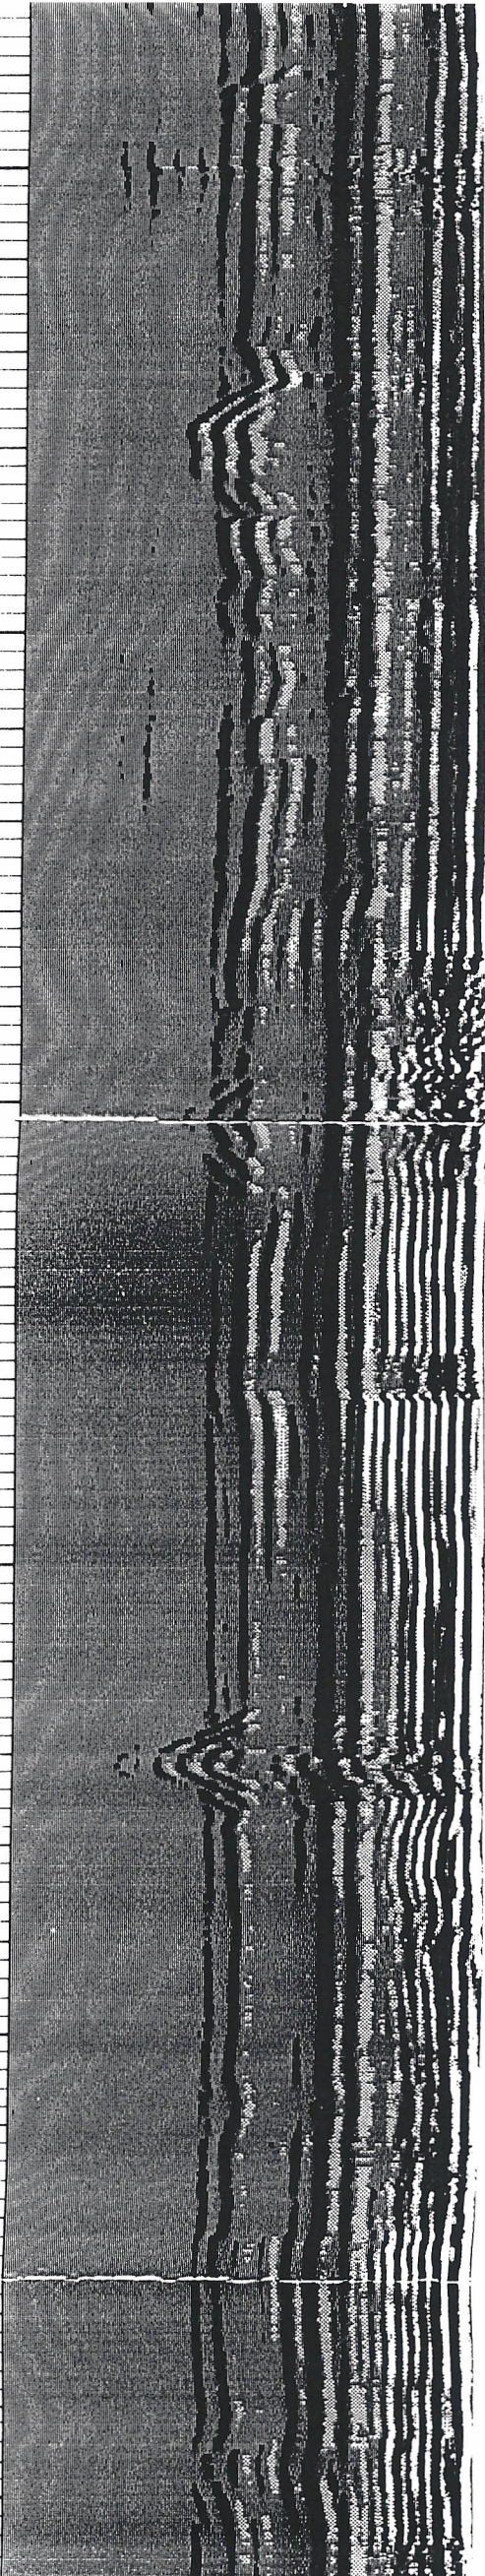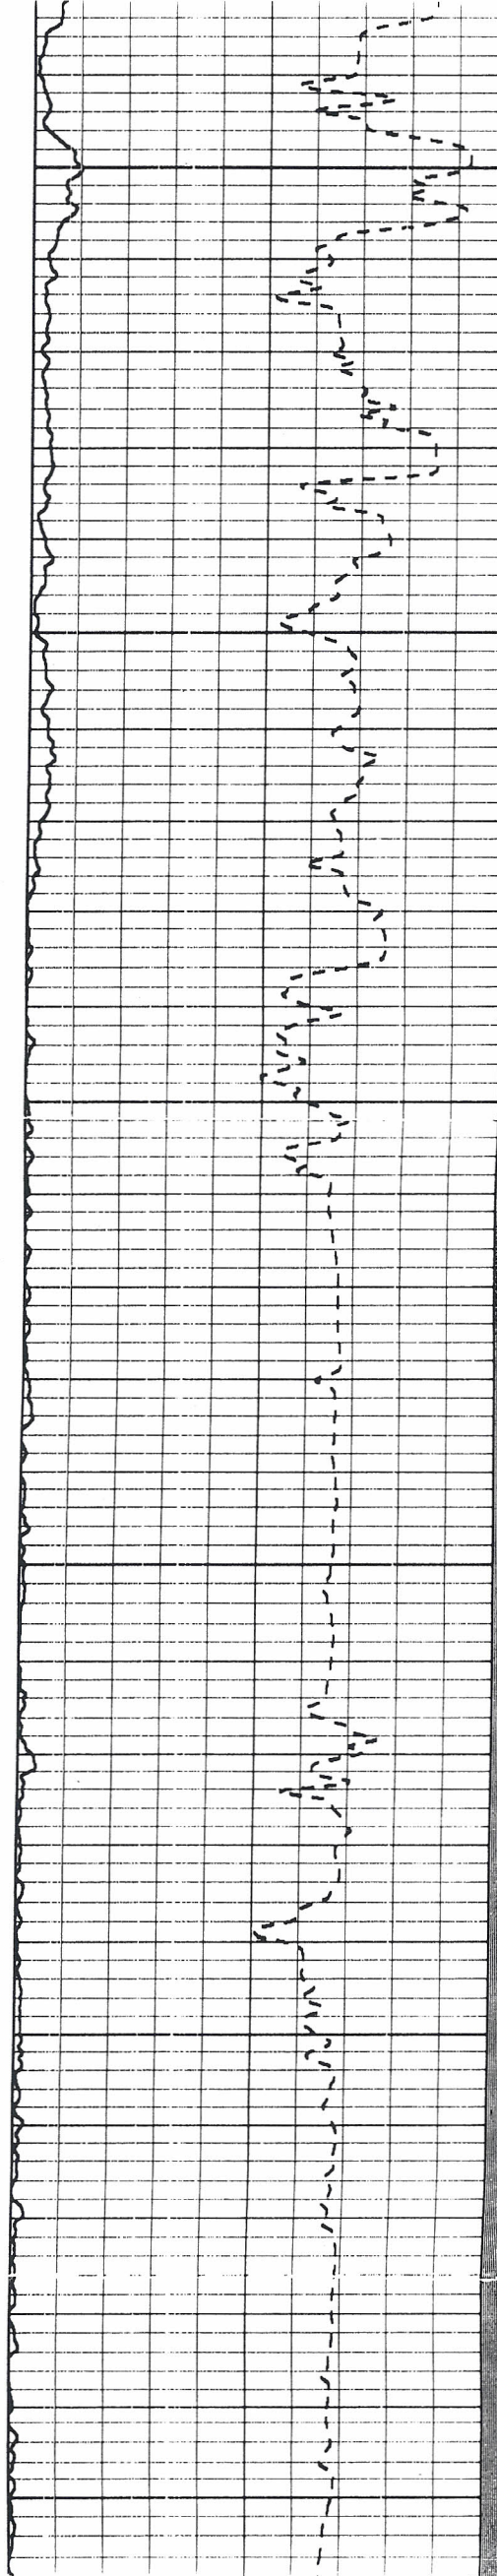

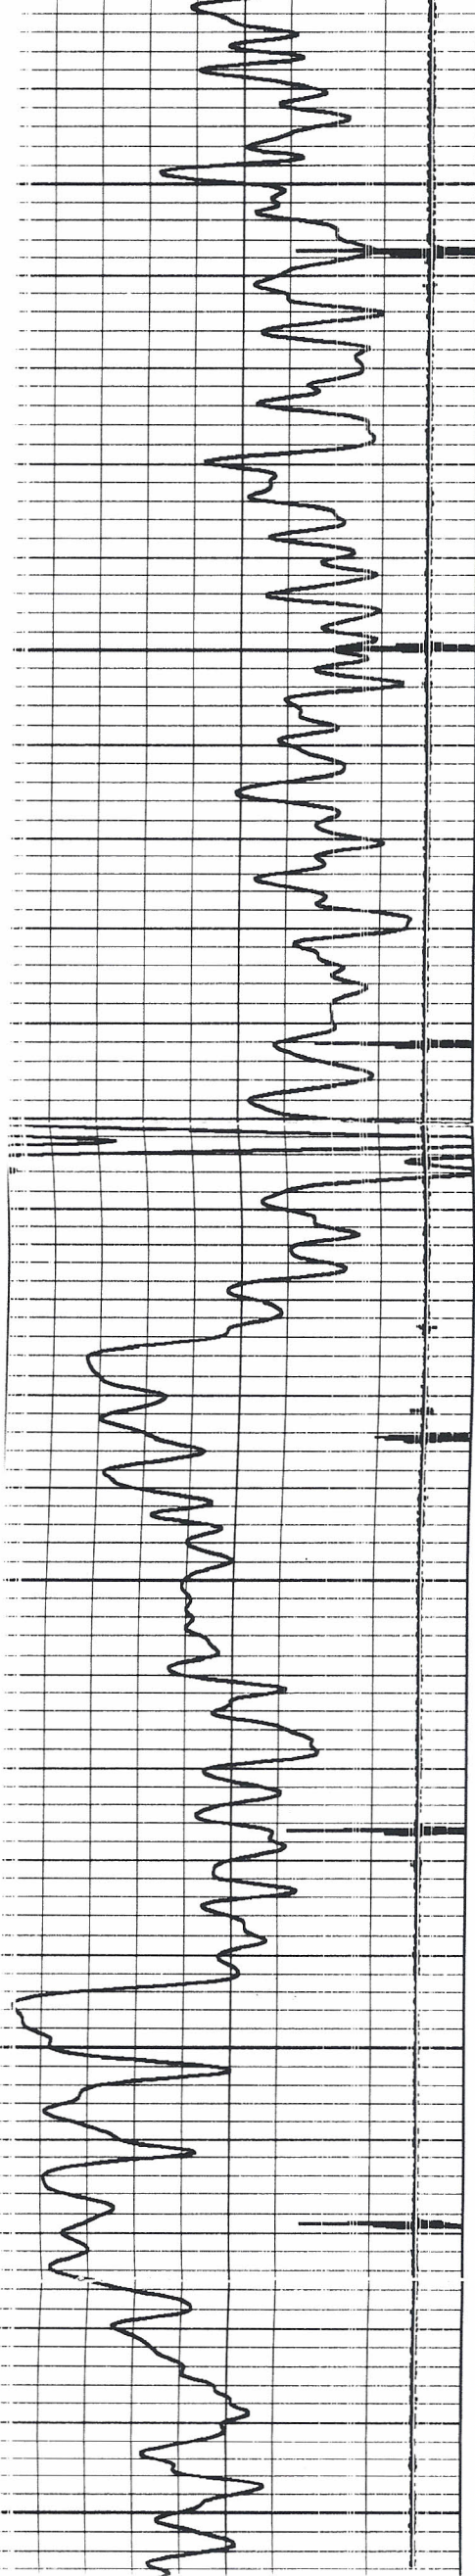

750



800

850

900

950

1000

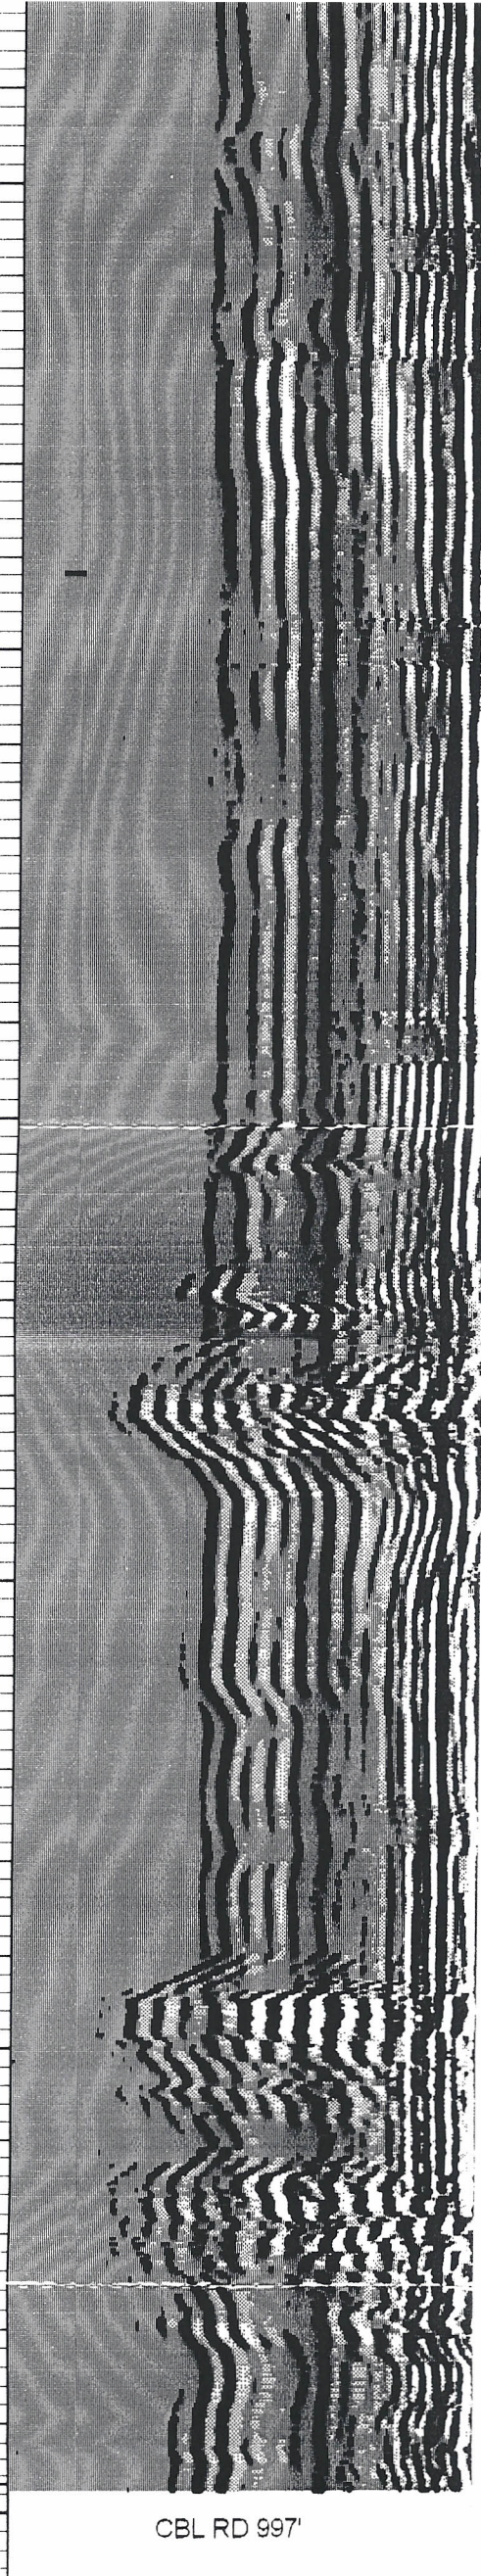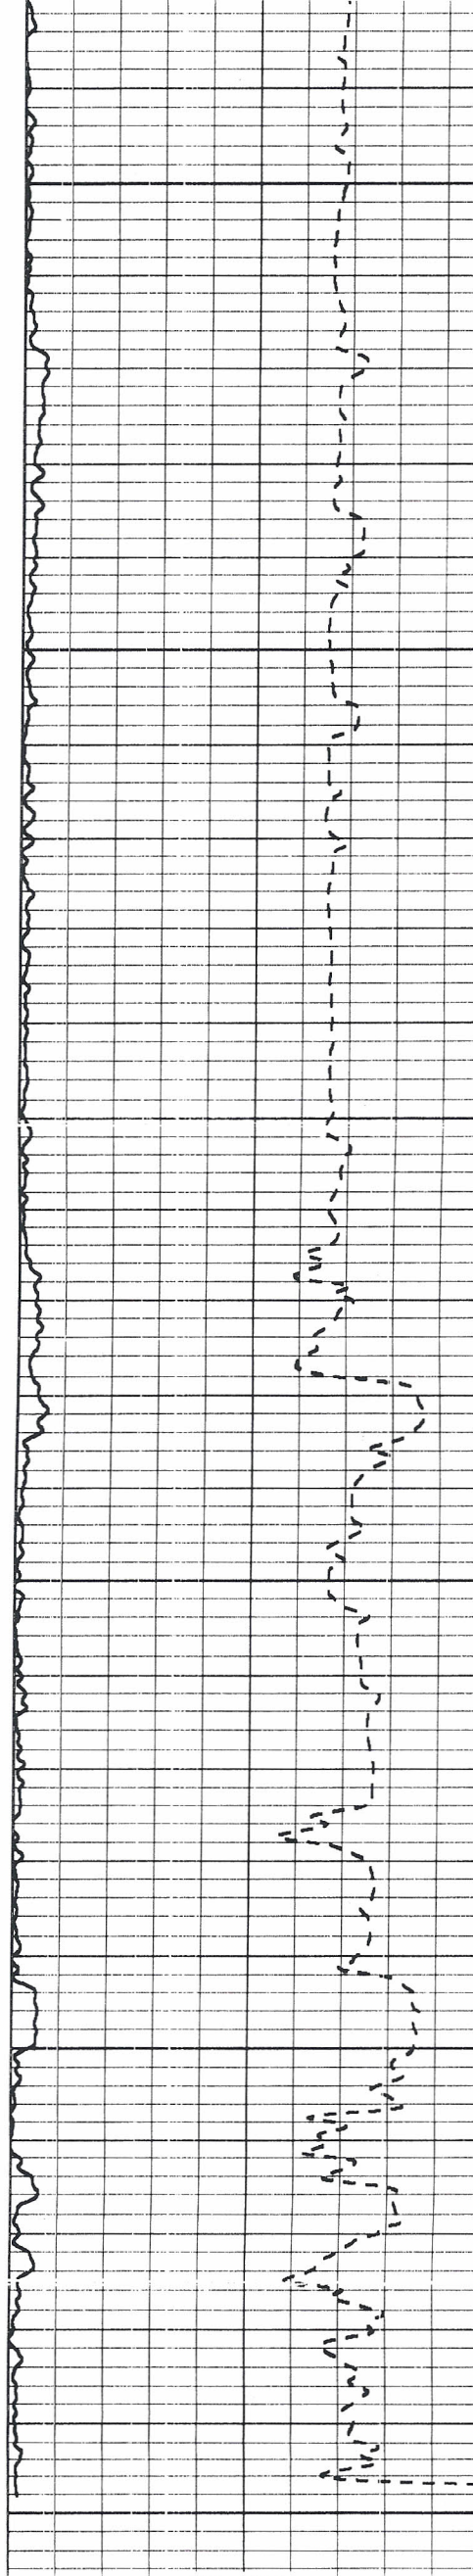

CBL RD 997'