




Weatherford[®]

**COMPACT PHOTO DENSITY
COMPENSATED NEUTRON
LOG**

COMPANY **O'BRIEN ENERGY RESOURCES CORP.**
WELL **ARDREY #1-2**
FIELD **ARDREY**
PROVINCE/COUNTY **CLARK**
COUNTRY/STATE **U.S.A. / KANSAS**
LOCATION **660' FNL & 2066' FWL
W/2 E2 NE NW**



SEC	TWP	RGE	Other Services	MML
2	31S	24W	MA/MFE	
API Number		15-025-21541		
Permit Number				
Permanent Datum G.L., Elevation 2529 feet				
Log Measured From KB				
Drilling Measured From K.B.				
Date	12-JUN-2012			
Run Number	ONE			

Elevations:	feet
KB	2541.00
DF	2539.00
GL	2529.00

Hole Fluid Type	CHEMICAL	
Density / Viscosity	9.30 lb/USg	48.00 CP
PH / Fluid Loss	11.00	11.60 ml/30Min
Sample Source	FLOWLINE	
Rm @ Measured Temp	0.52 @ 86.0	ohm-m
Rmf @ Measured Temp	0.42 @ 86.0	ohm-m
Rmc @ Measured Temp	0.62 @ 86.0	ohm-m
Source Rmf / Rmc	CALC	CALC
Rm @ BHT	0.37 @120.0	ohm-m
Time Since Circulation	4 HOURS	
Max Recorded Temp	120.00	deg F
Equipment Name	COMPACT	
Equipment / Base	13096	LIB
Recorded By	L. SCOTT	
Witnessed By	ROGER PEARSON	
S.O.# / JOB#	3534544	PETER DEBENHAM

BOREHOLE RECORD			Last Edited: 12-JUN-2012 05:44
Bit Size inches	Depth From feet	Depth To feet	
7.875	731.00	5696.00	
CASING RECORD			
Type	Size inches	Depth From feet	Shoe Depth feet
SURFACE	8.625	0.00	731.00
			Weight pounds/ft
			24.00

REMARKS

Tools Run: MAI, MPD, MCG, MDN, MML, MFE
Hardware: MPD: 8 inch profile plate used. MAI and MFE: 0.5 Inch standoffs used. MDN: Dual Eccentraliser used.
2.71 G/CC Limestone density matrix used to calculate porosity.
Borhole rugosity, tight pulls, and washouts will affect data quality.
All intervals logged and scaled per customer's request.
Annular volume with 4.5 inch production casing= 362 cu. ft.
Total hole volume from TD to Surface Casing= 2427cu. ft.
Service order #3534544
Rig: Duke Rig # 1
Engineer: L. Scott
Operator(s): K. Rinehart, J. LaPoint

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

5 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm

Plotted on 12-JUN-2012 07:52

Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_003.dta

Recorded on 12-JUN-2012 05:13

System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

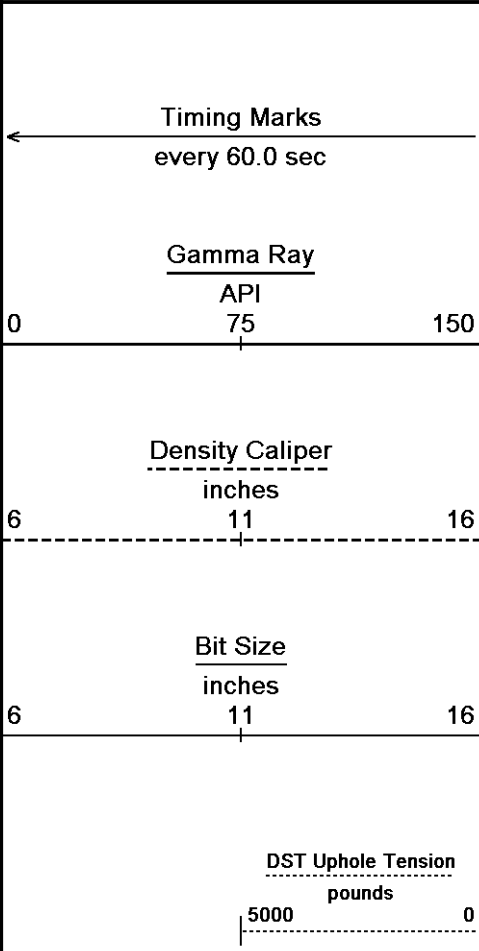




Depth in Feet


Borehole Temp in deg F


HVI every 10 cu ft


Annular Integral every 10 cu ft

Replay Scale 1:240

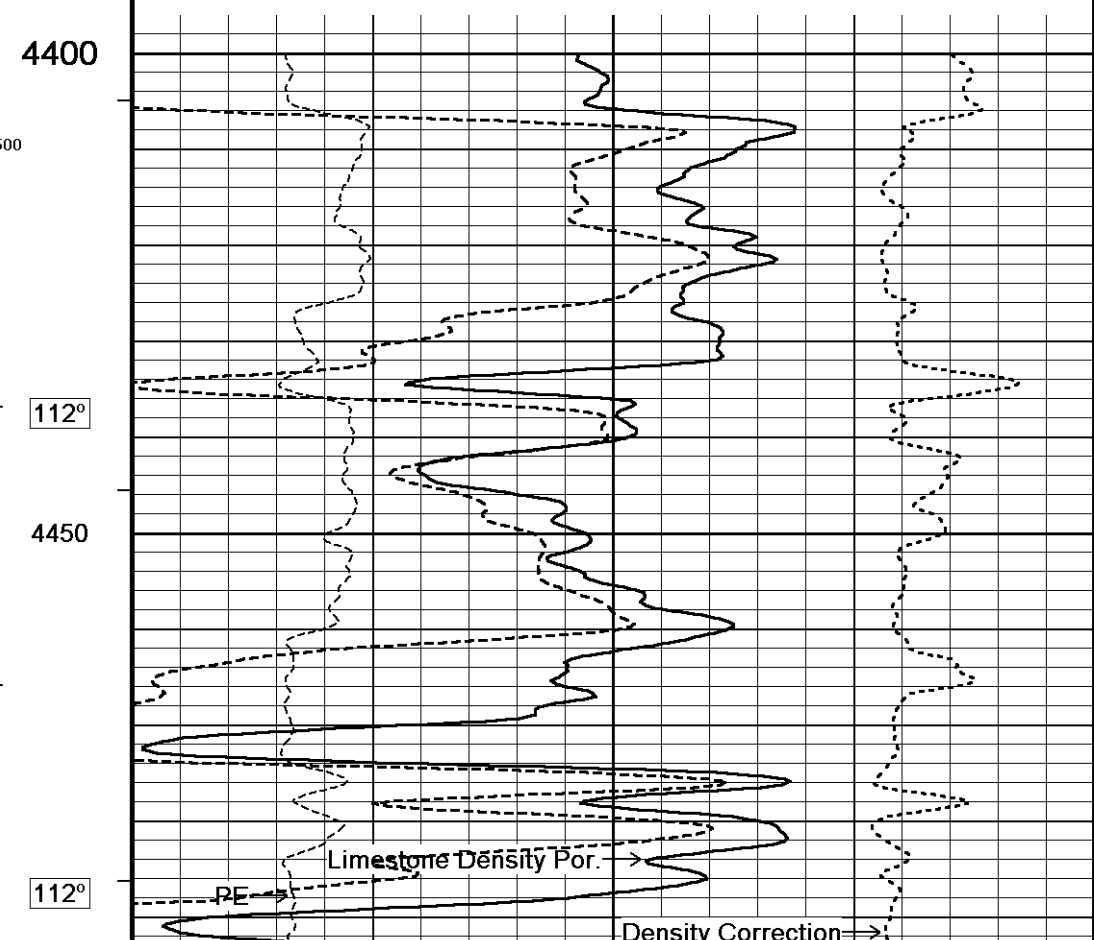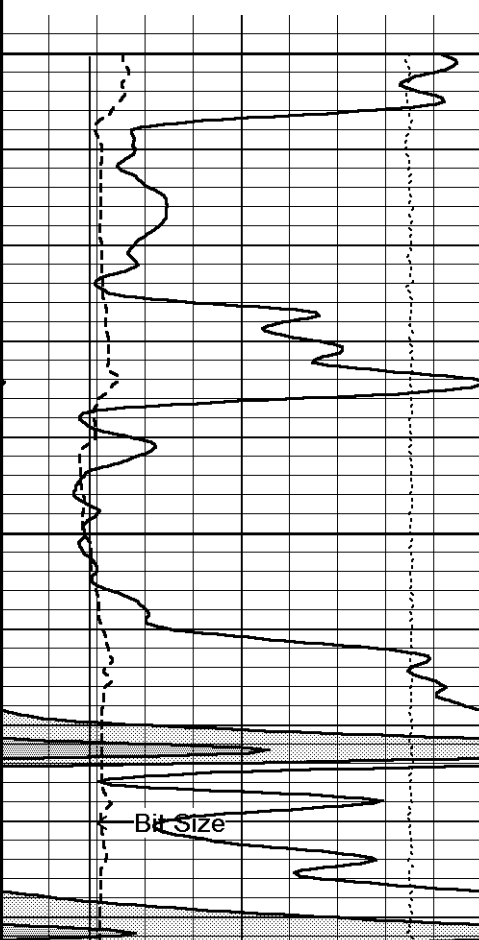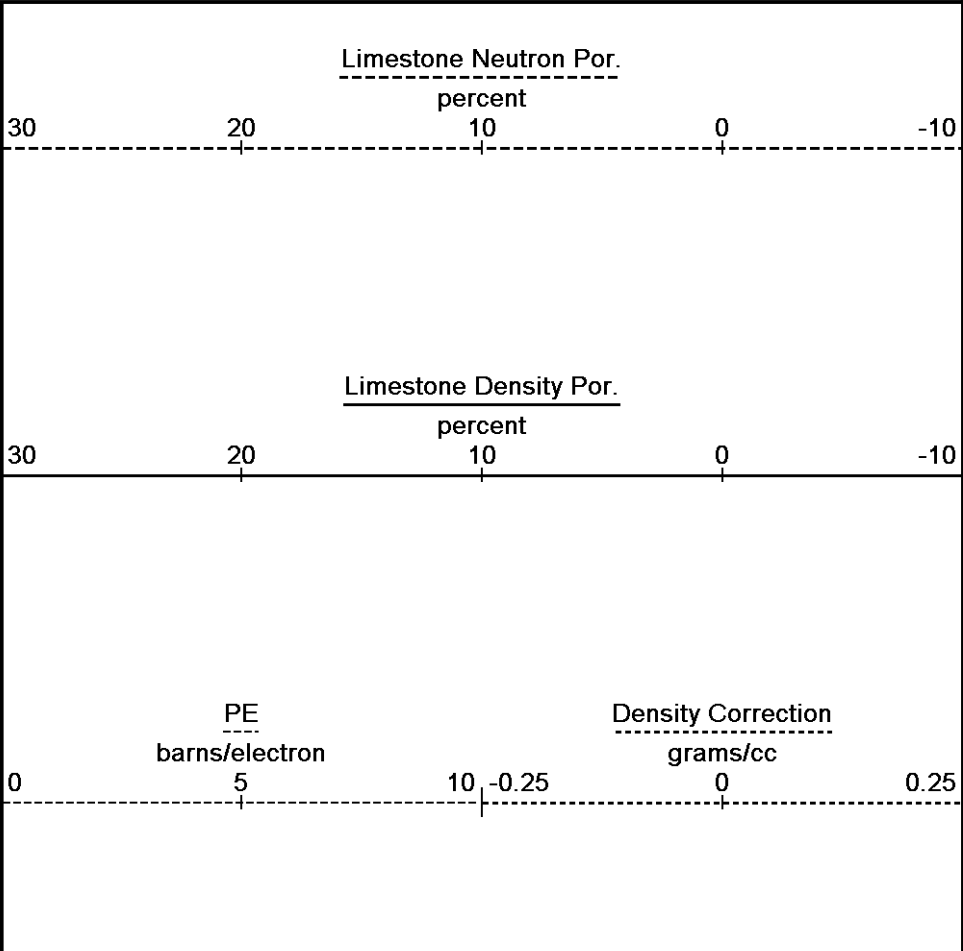


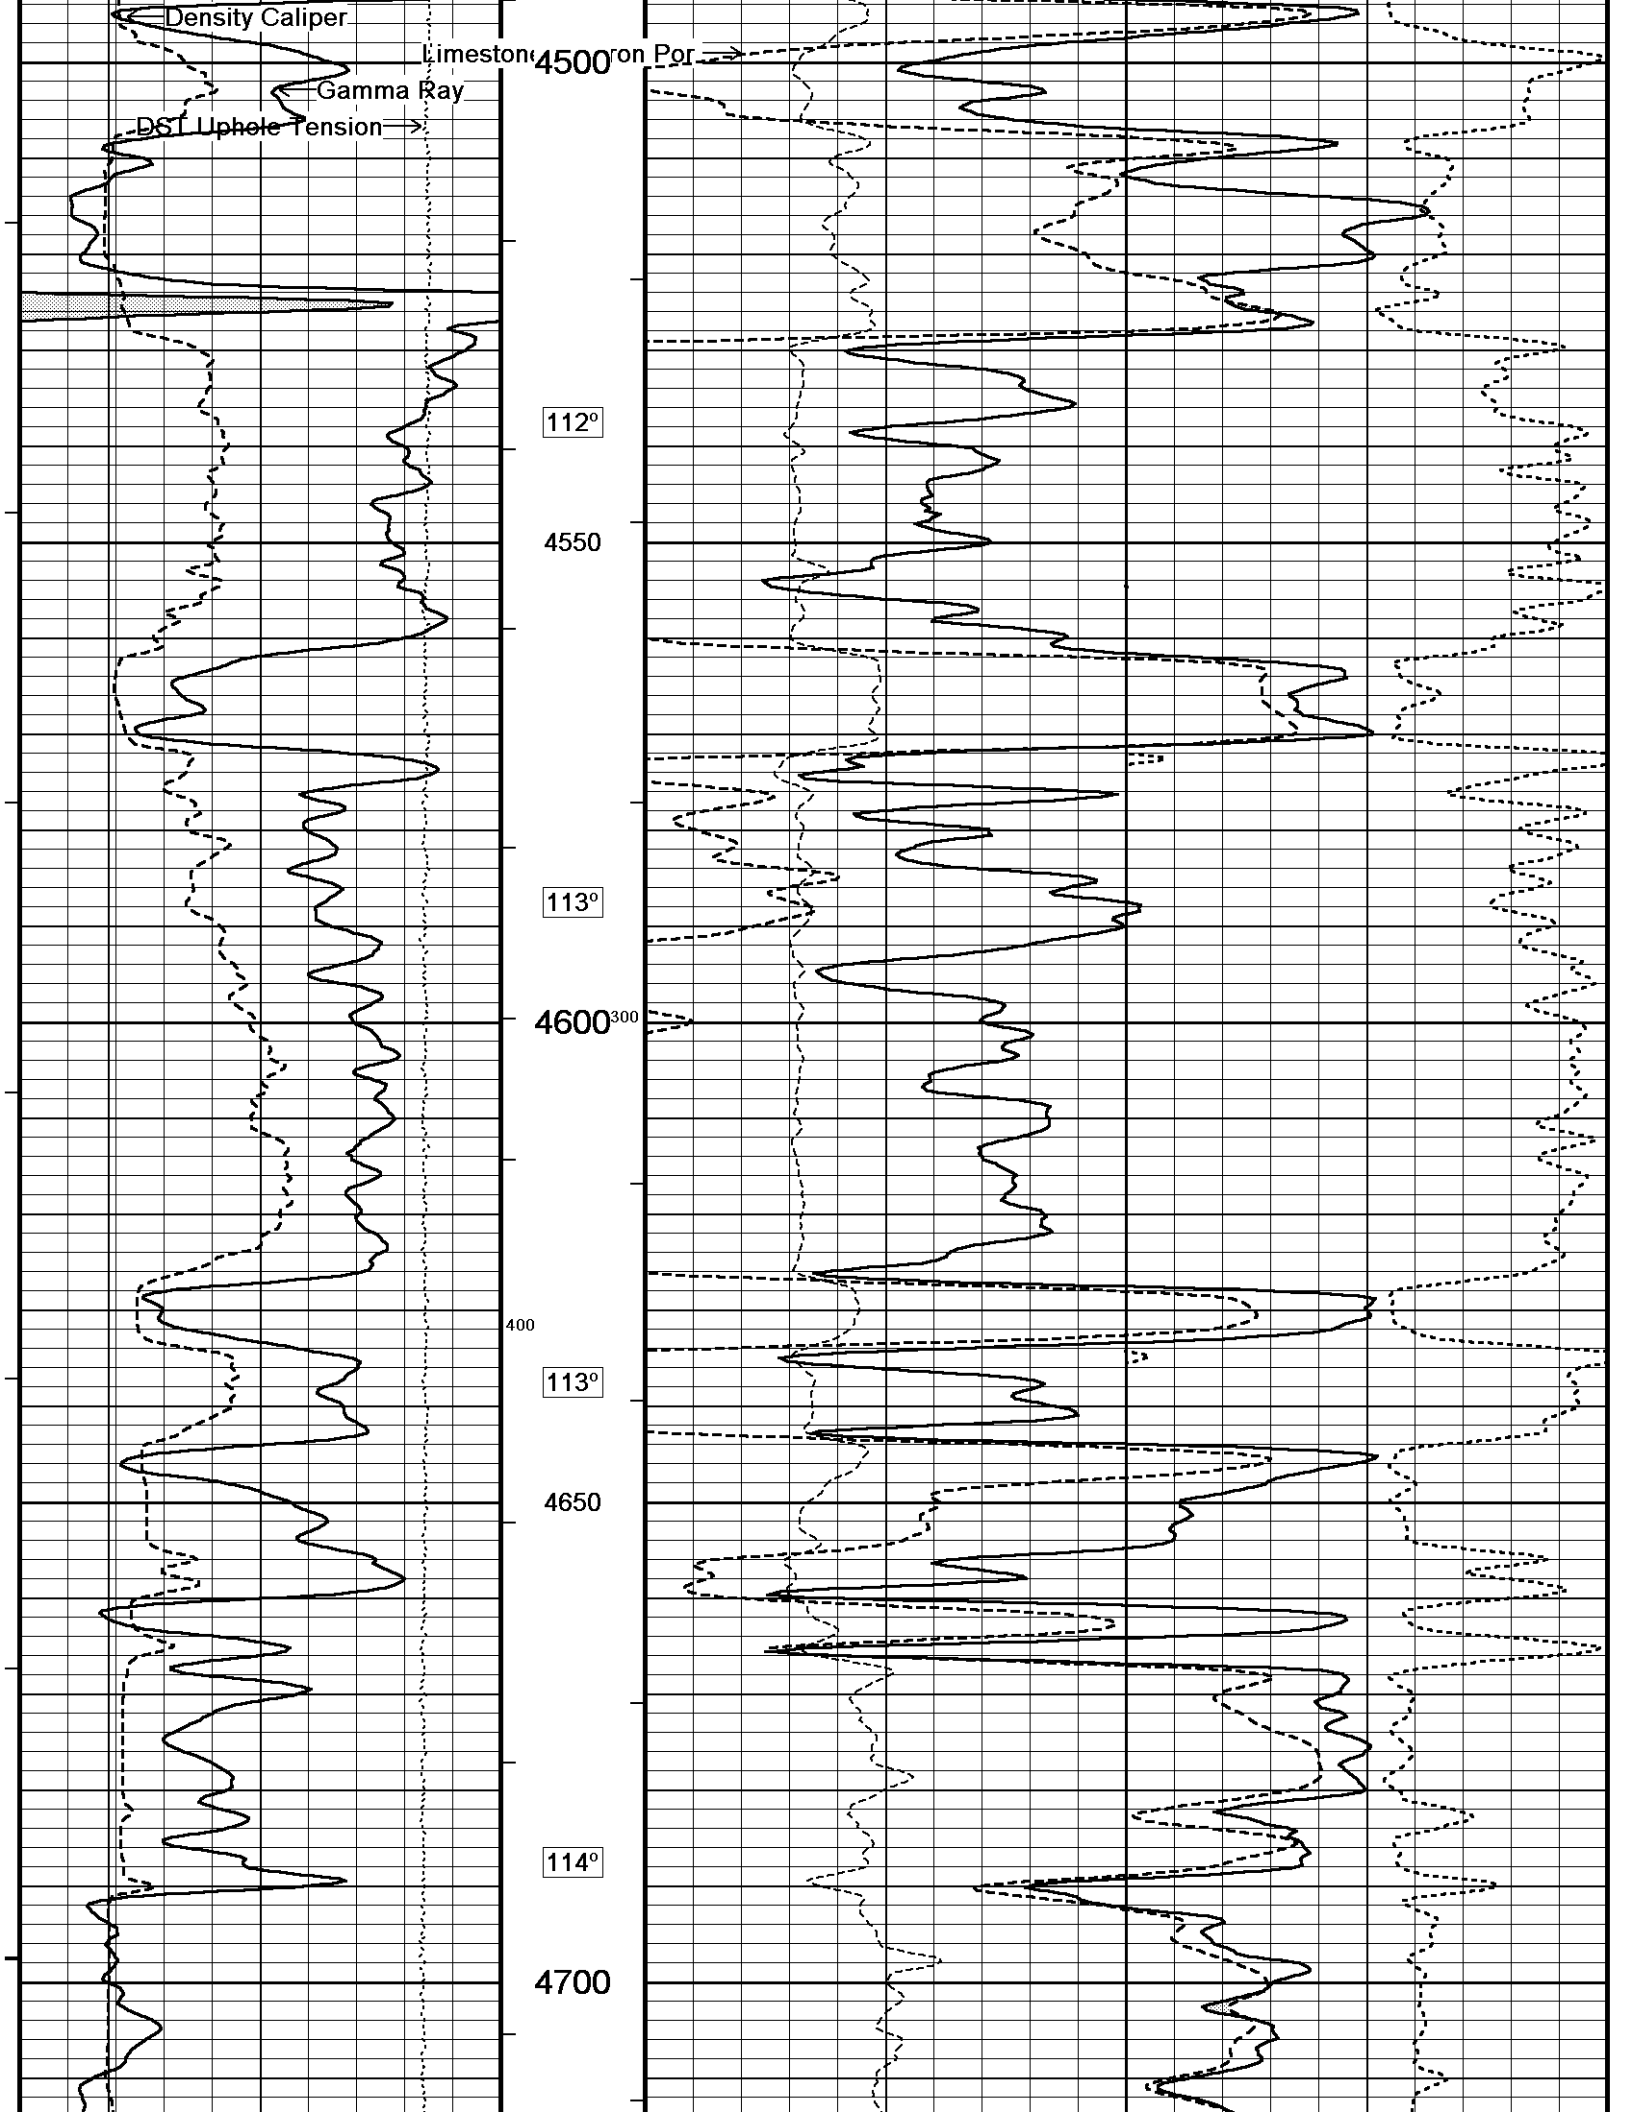



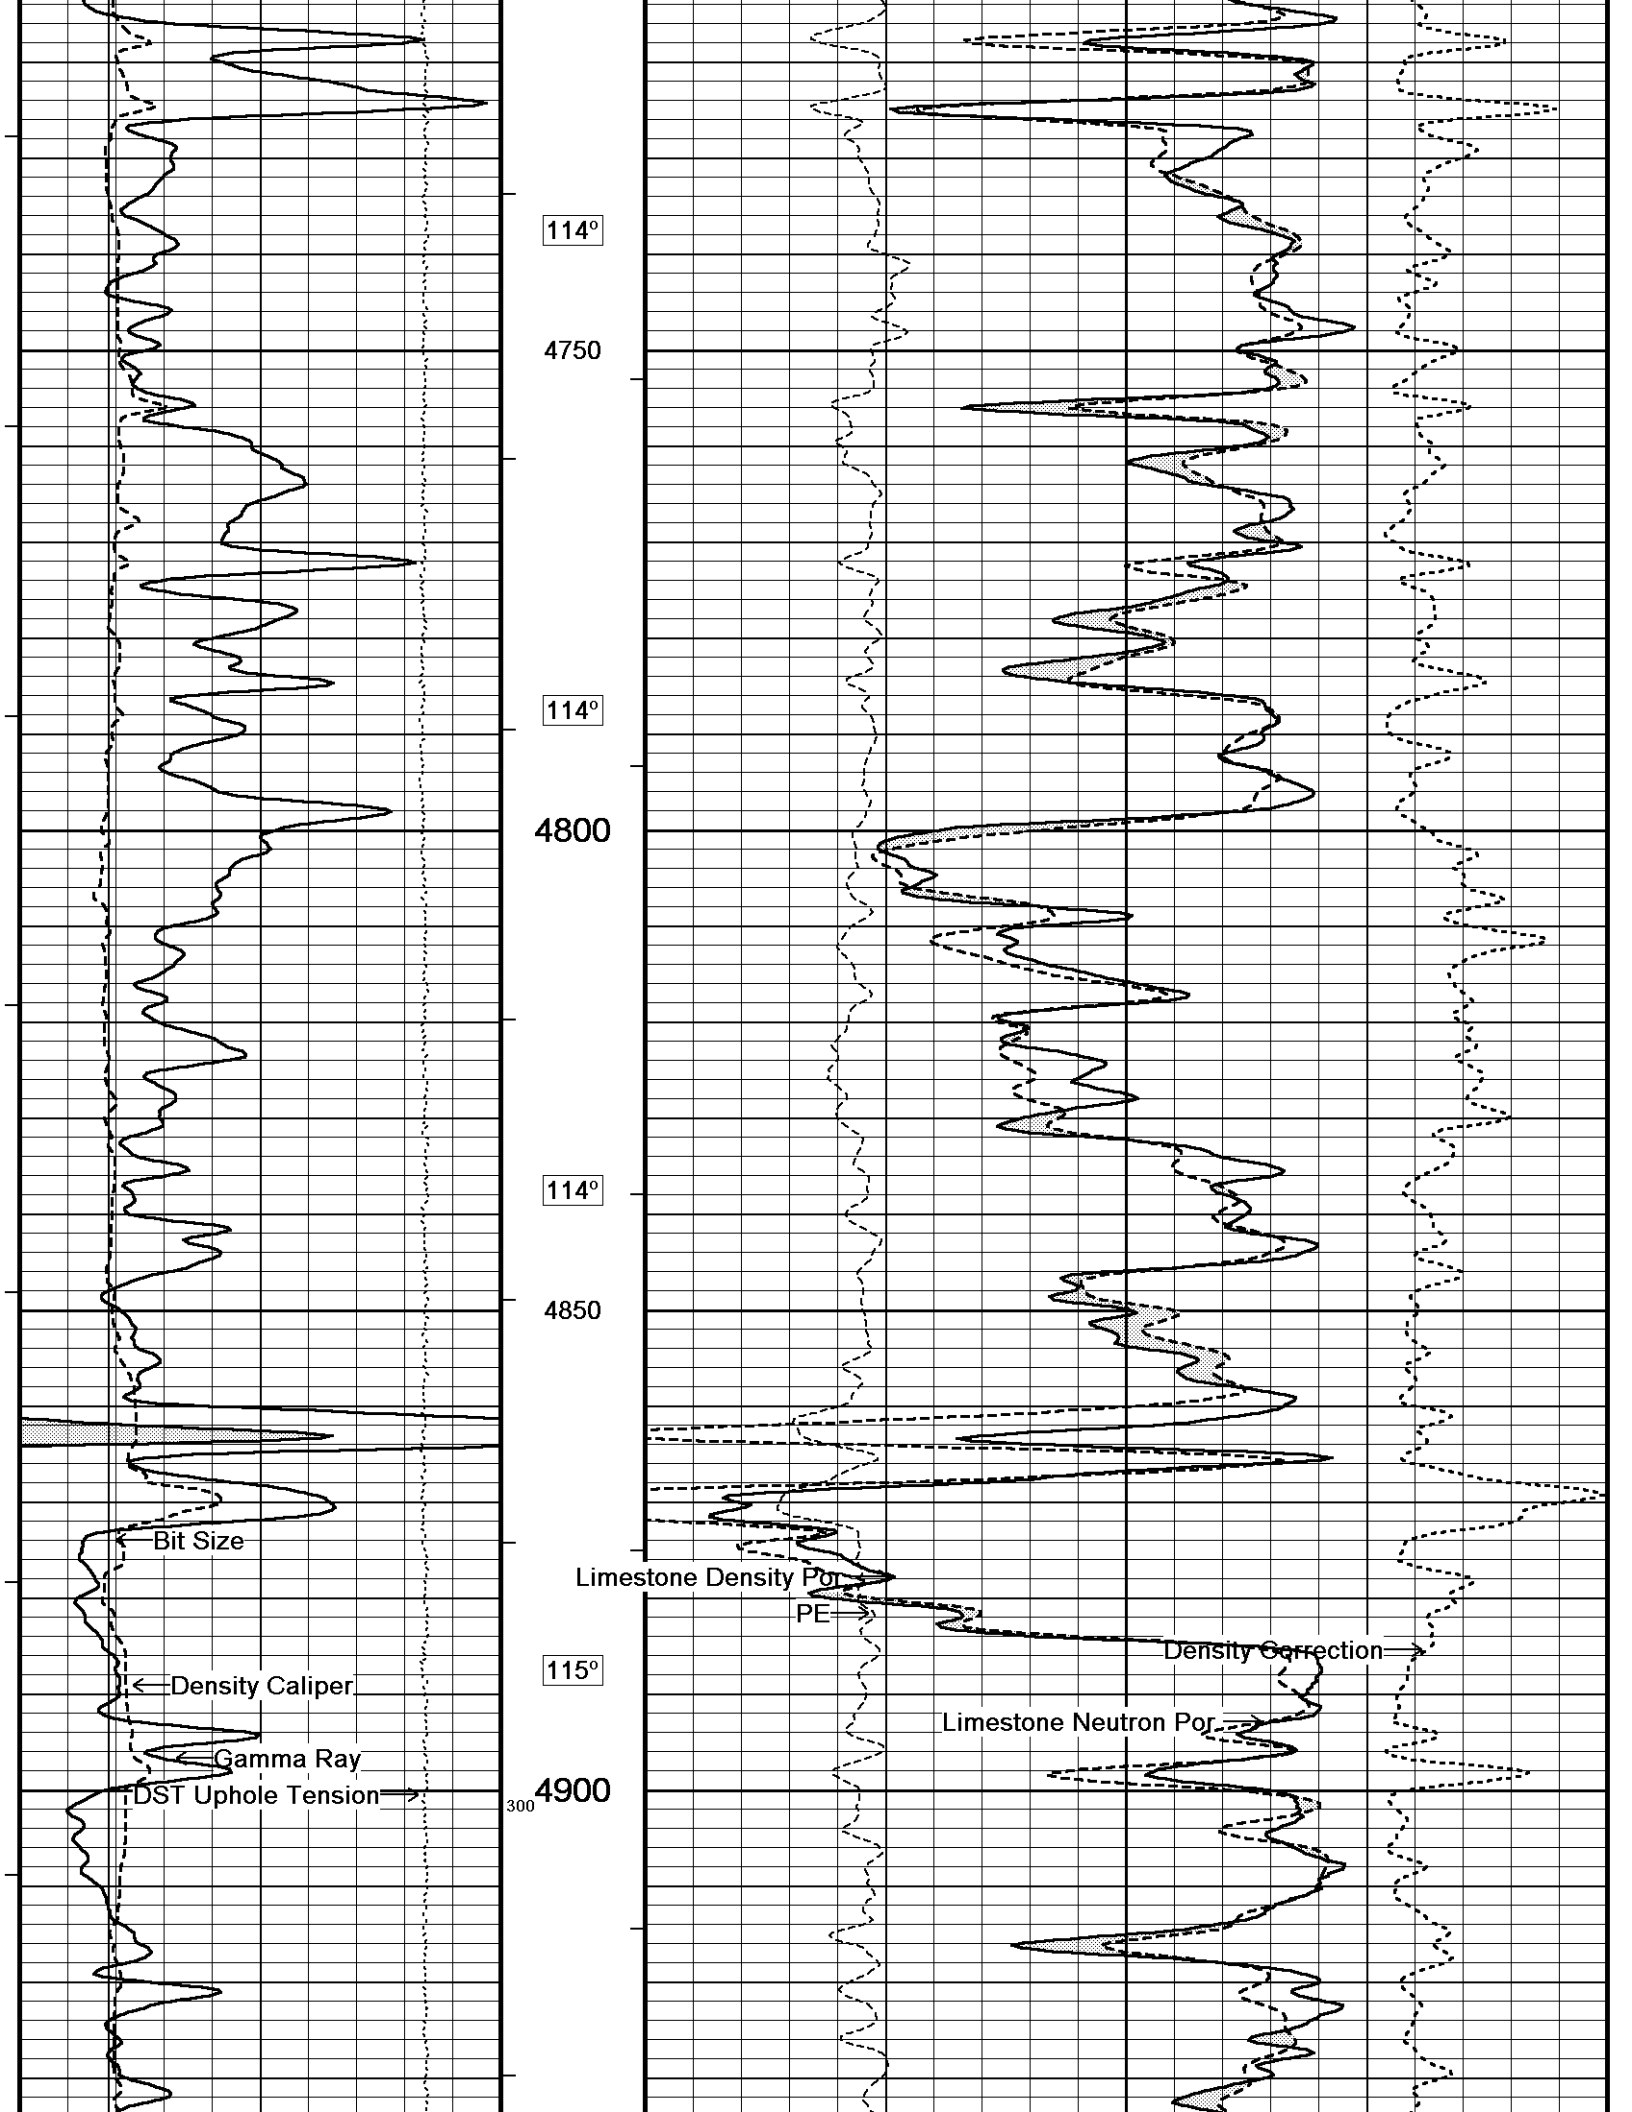





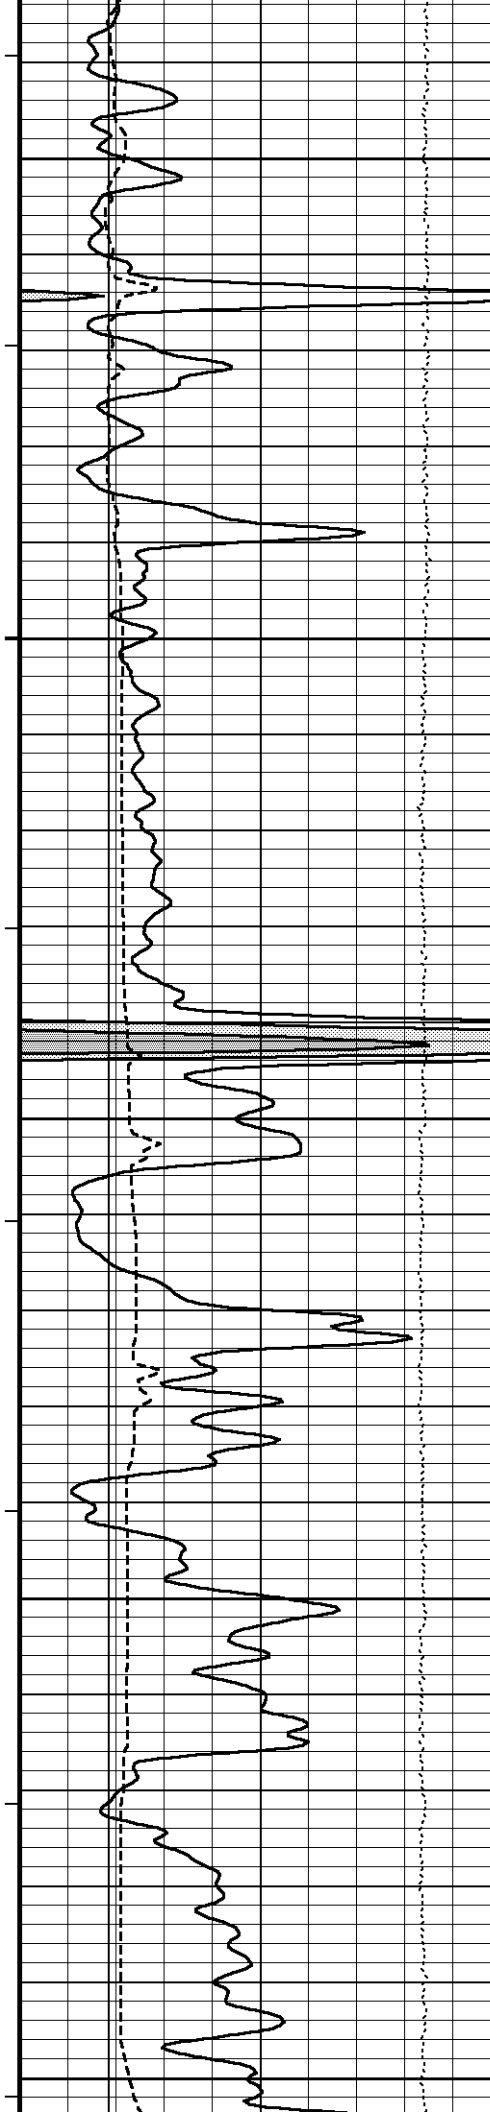


115°
4950
200
115°
5000
116°
5050
116°
5100
115°
5150

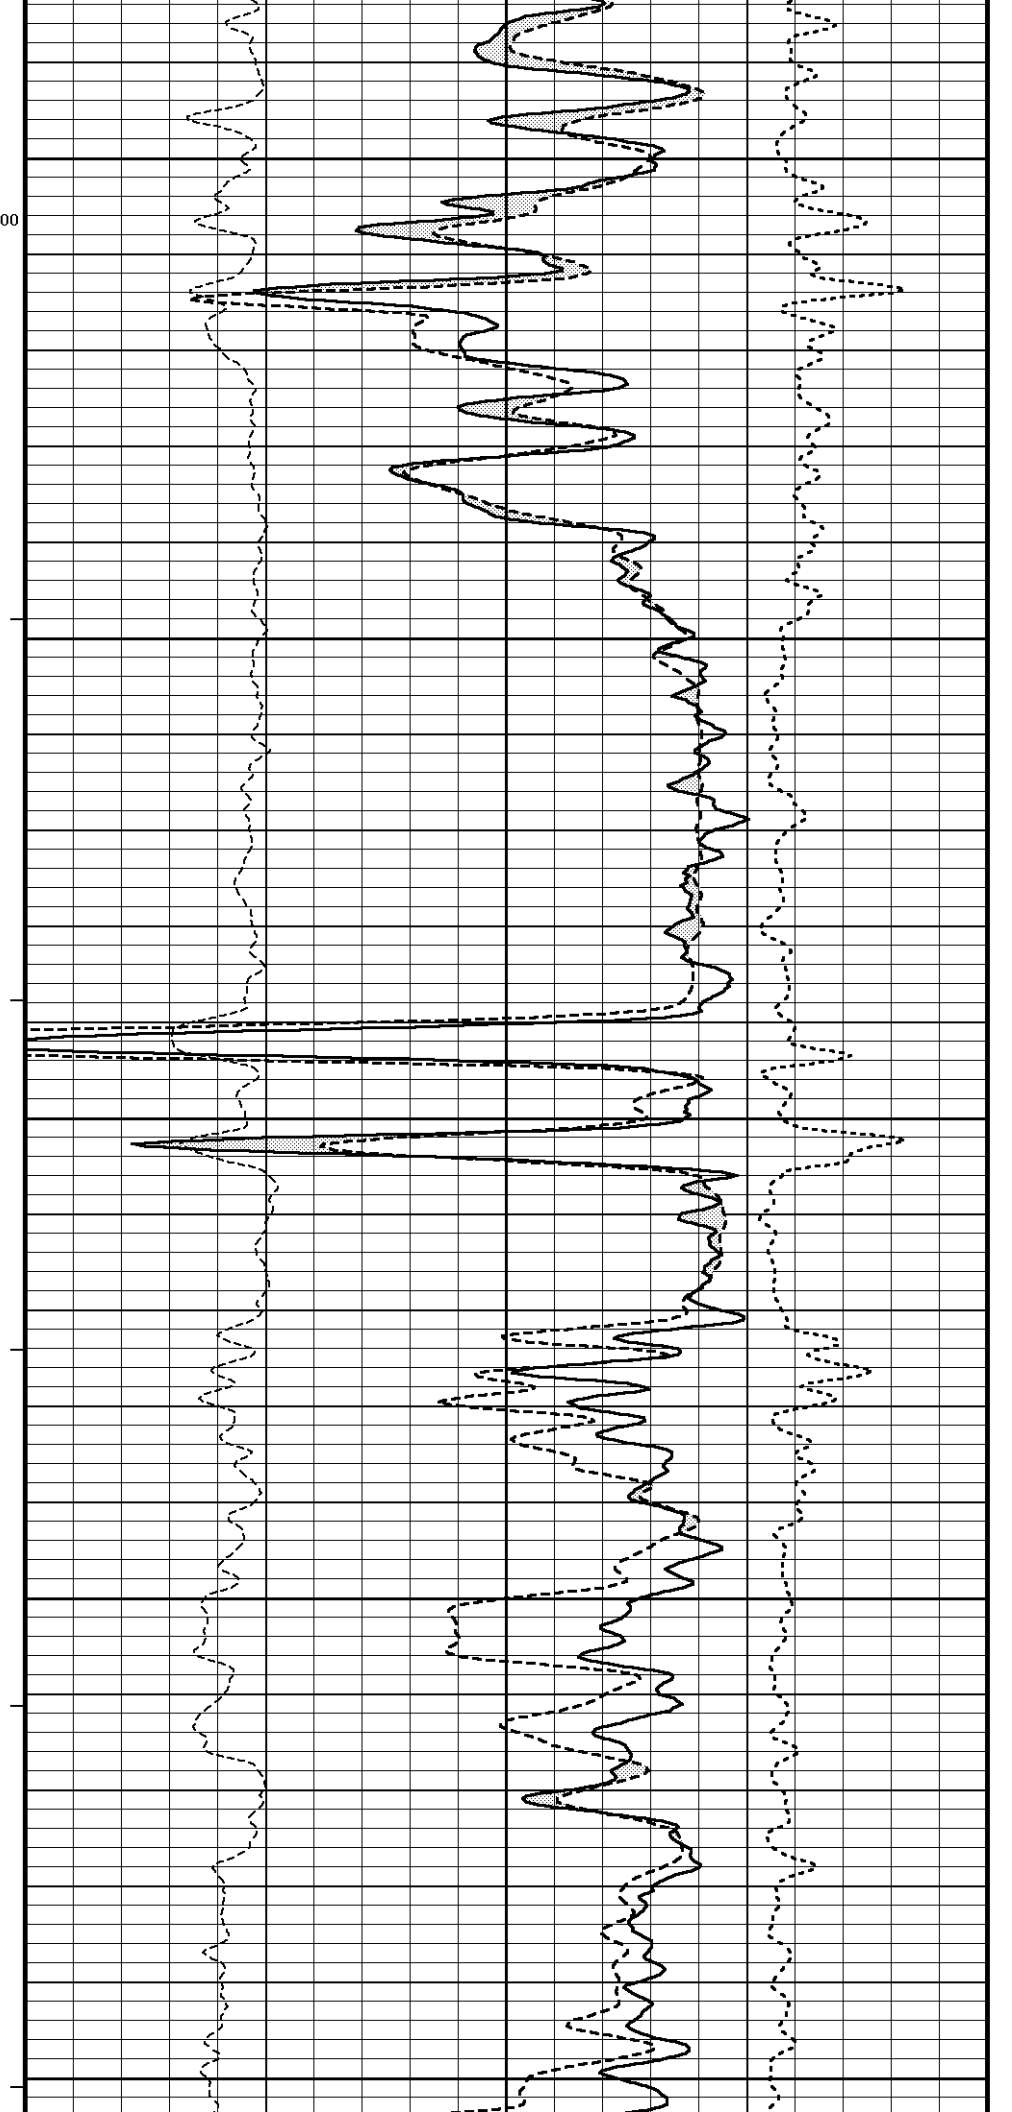

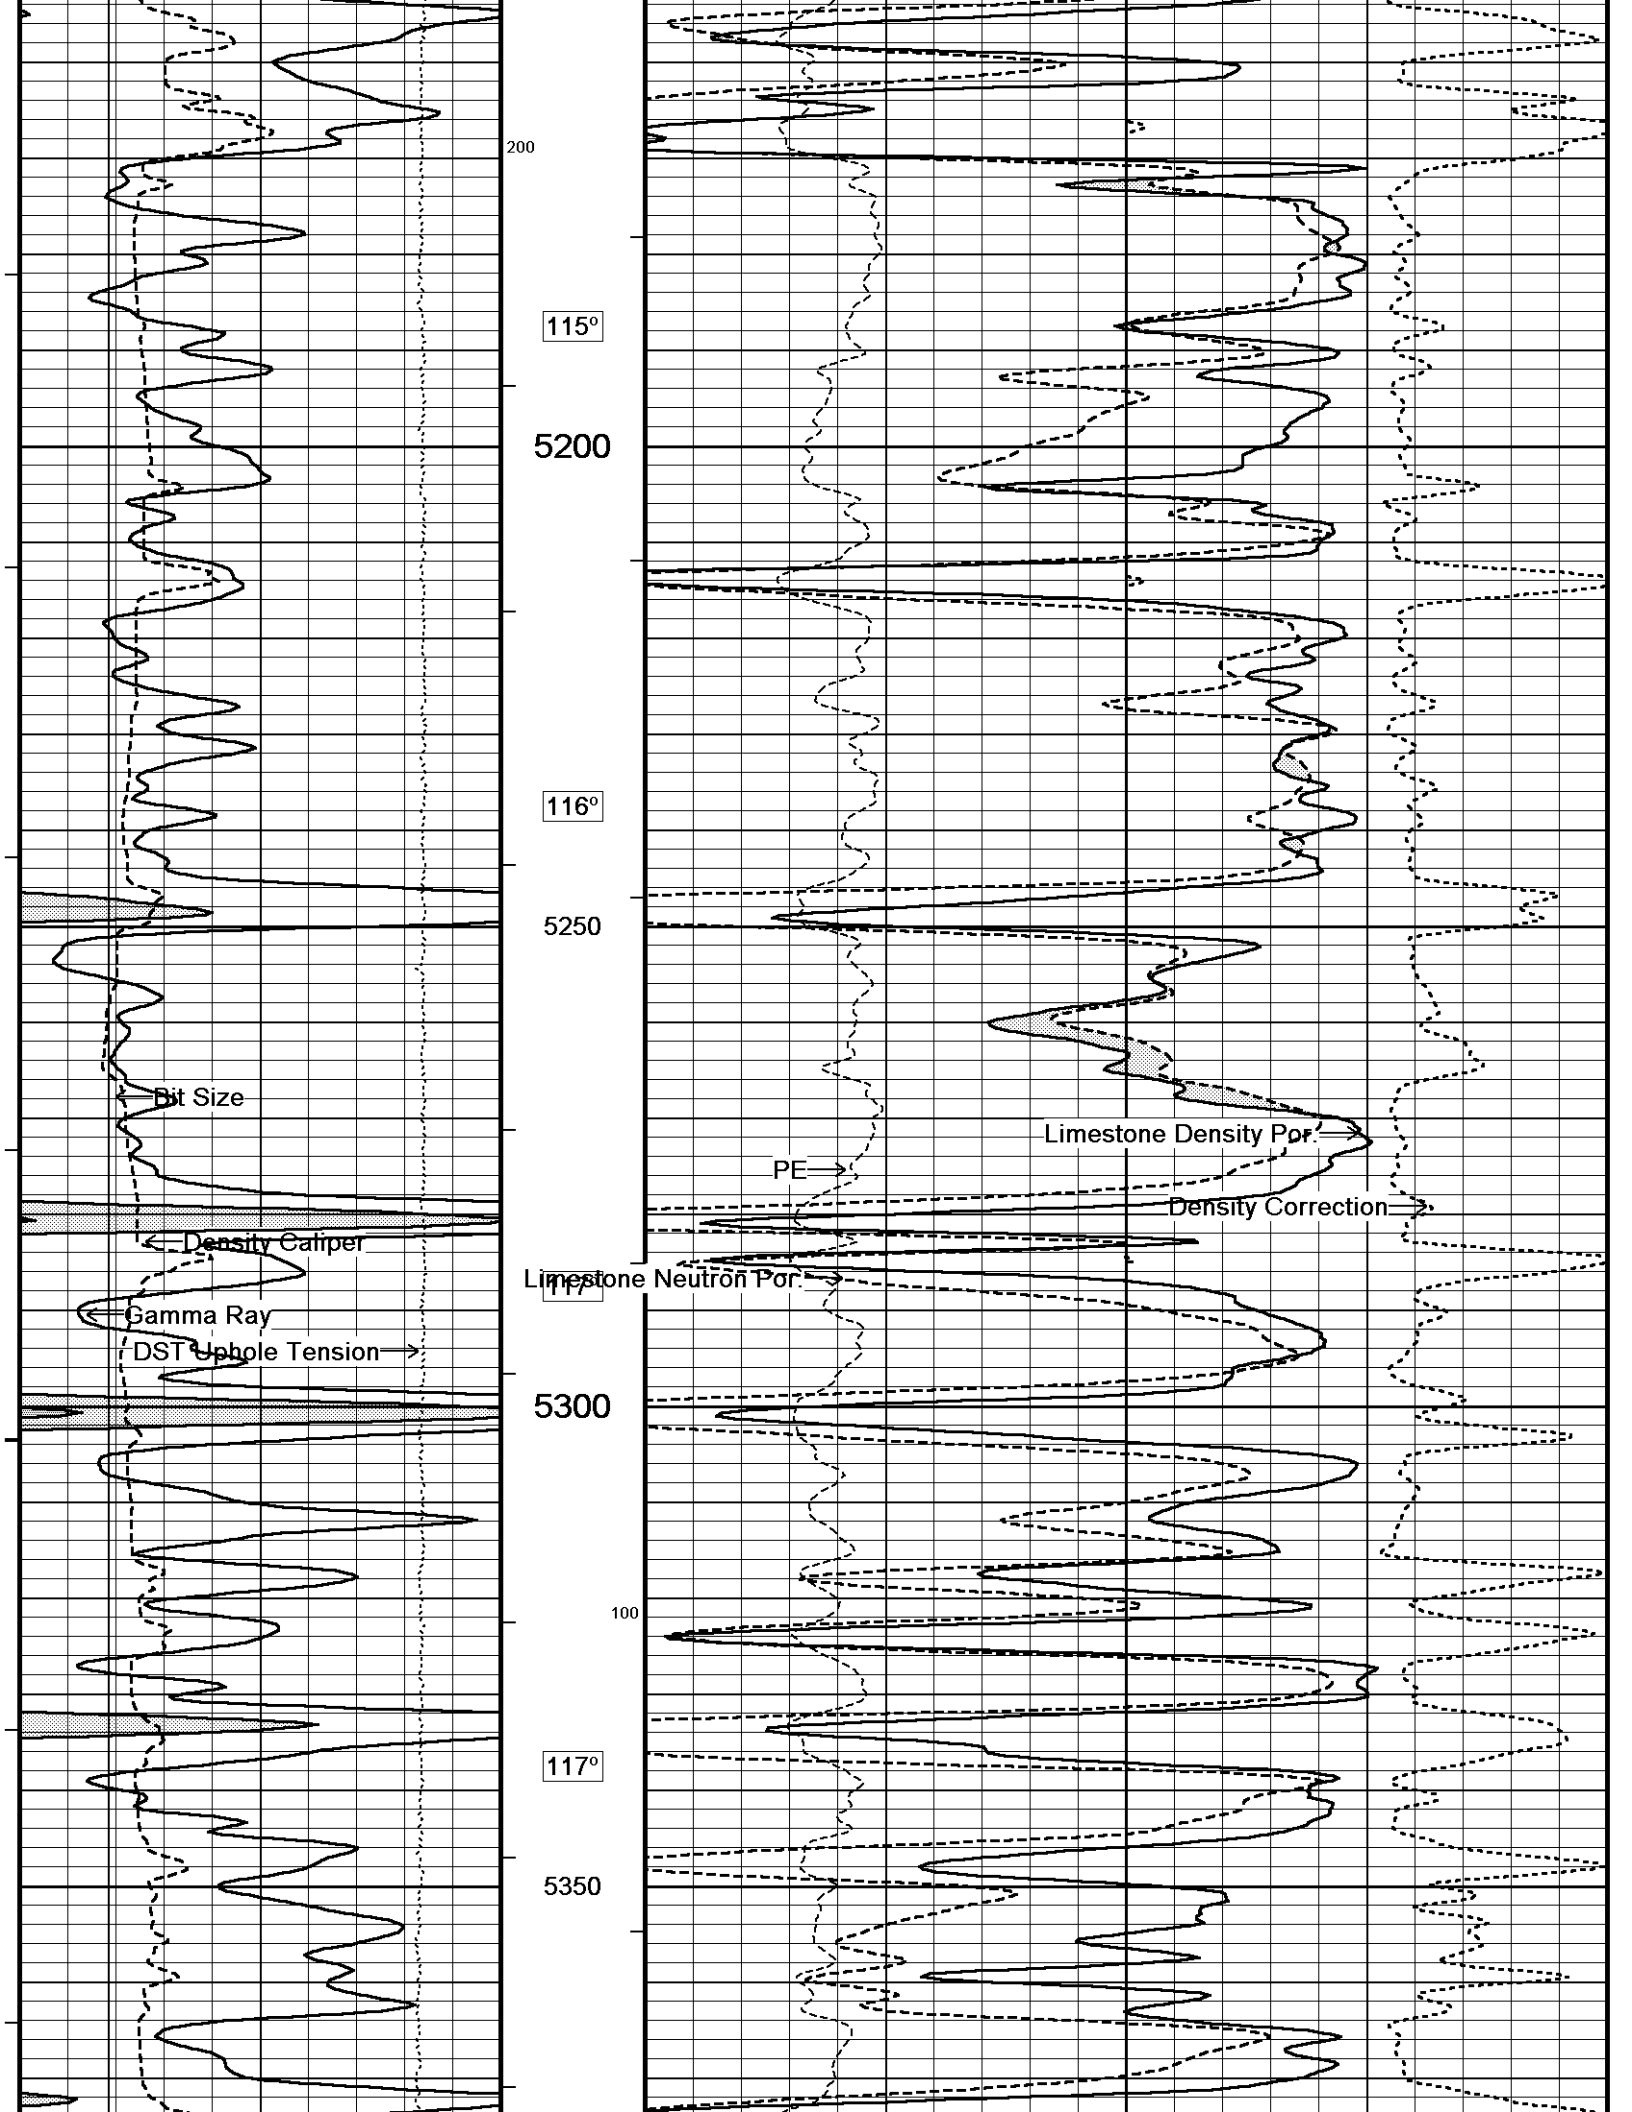

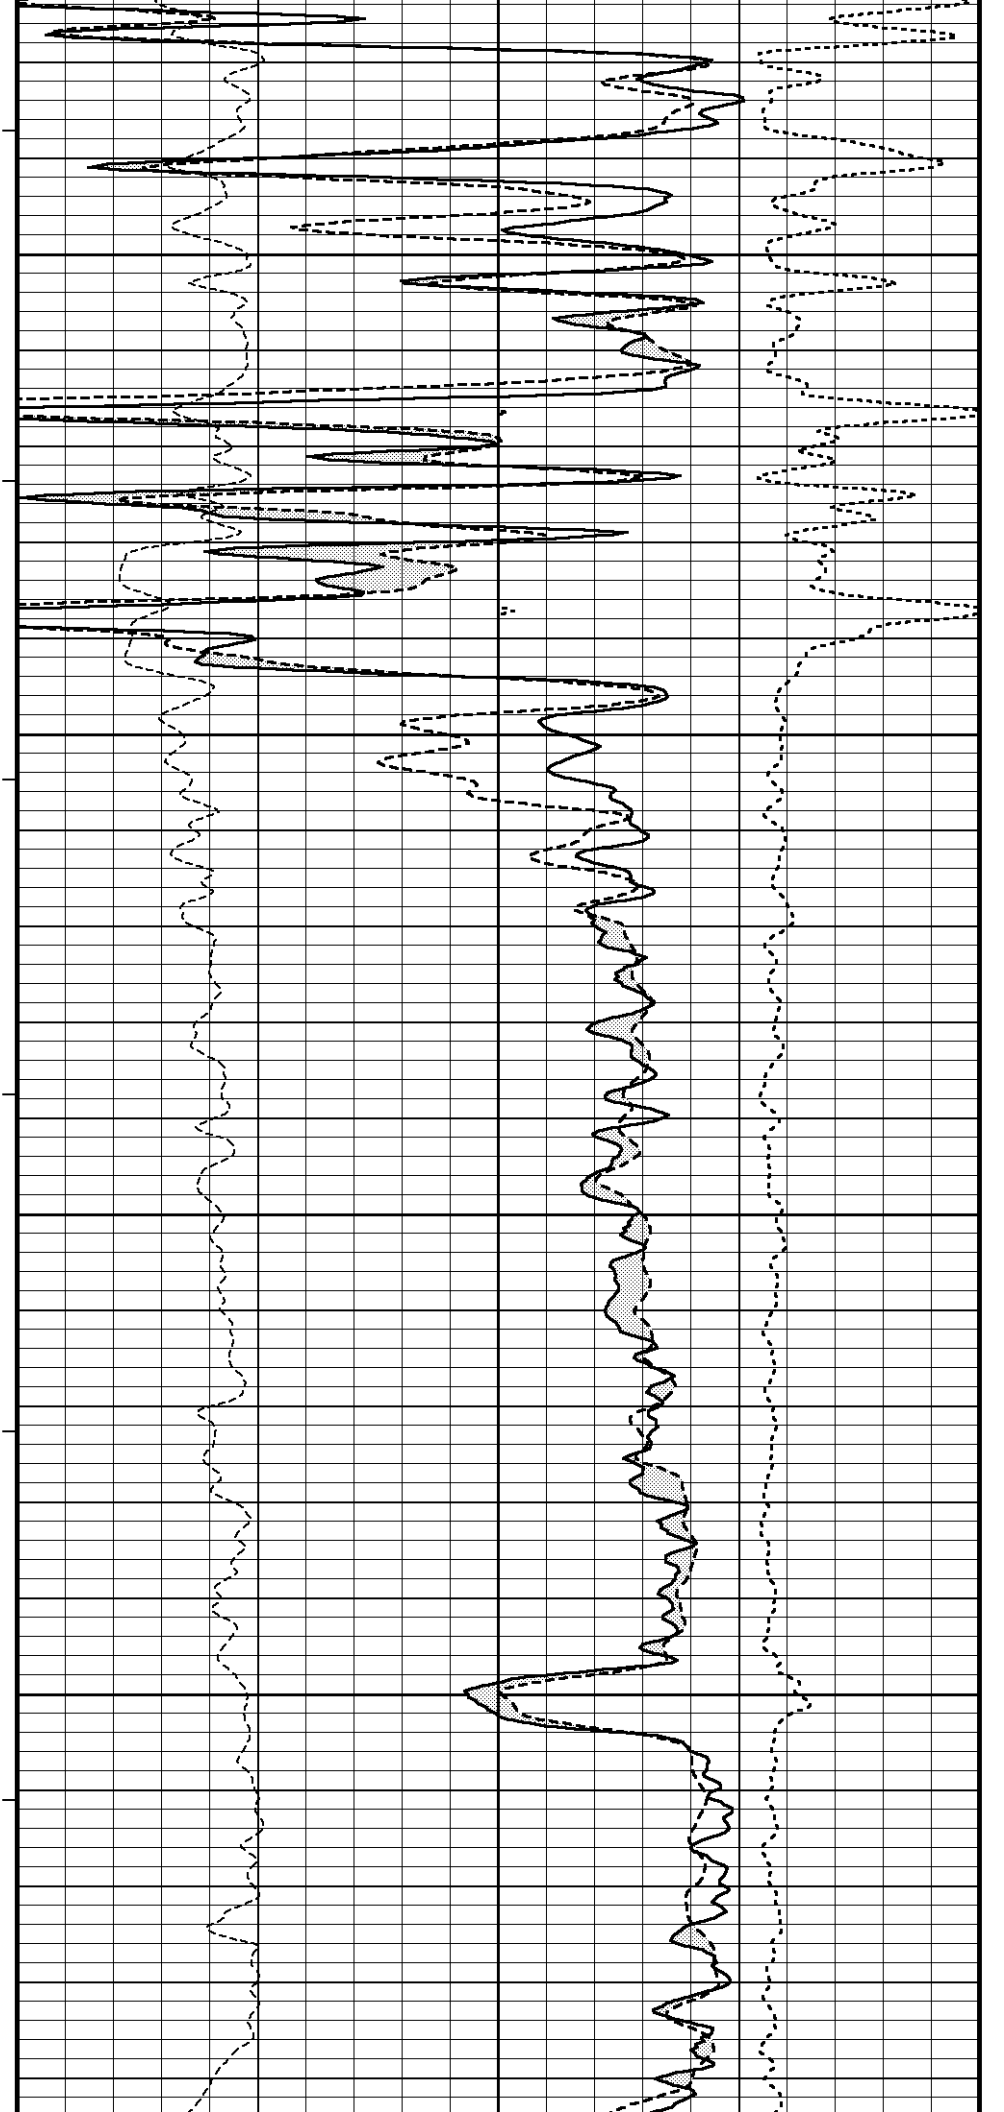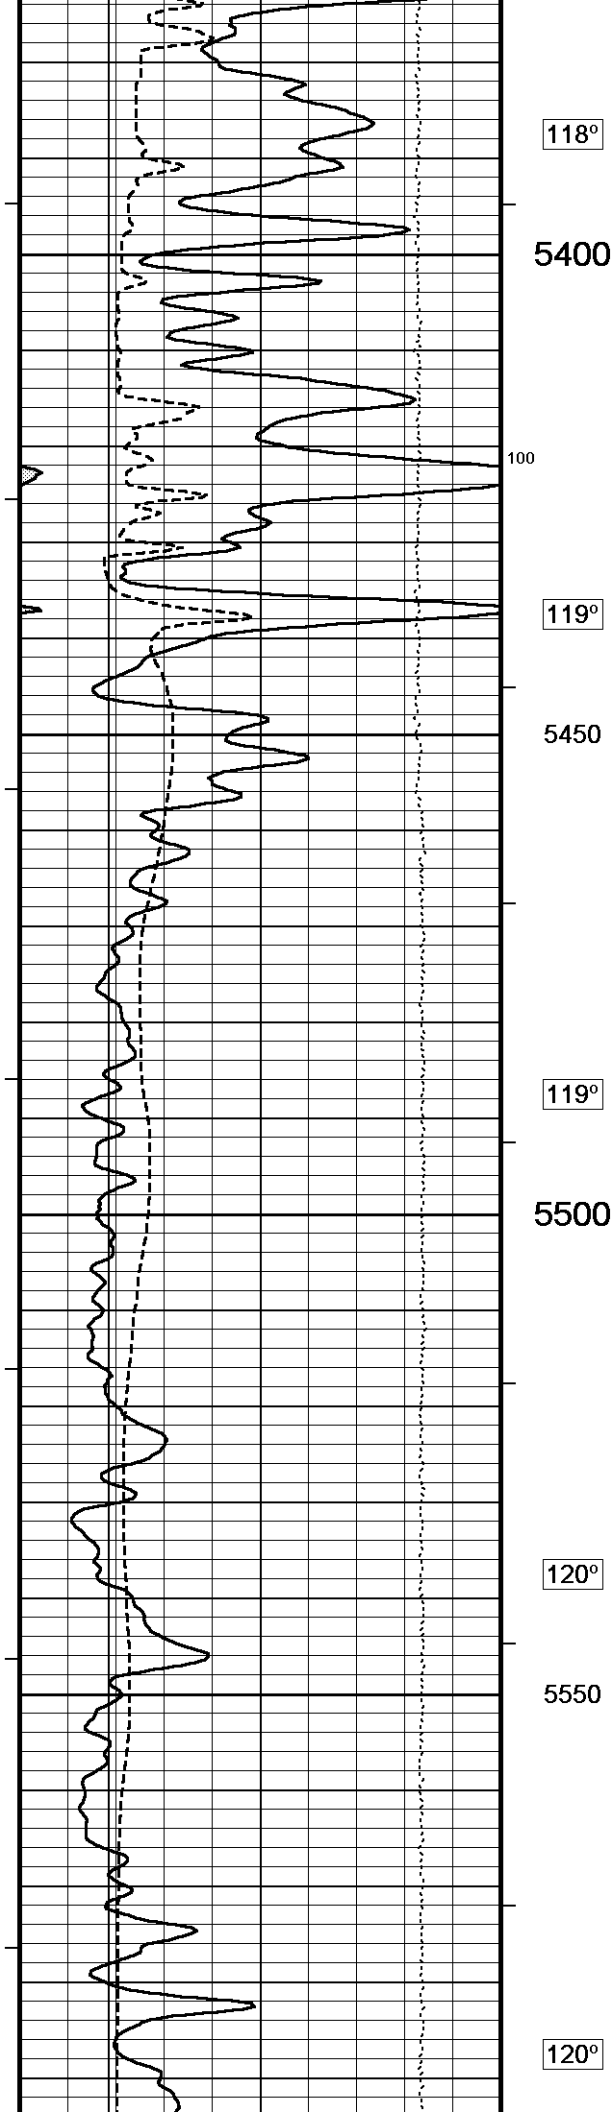

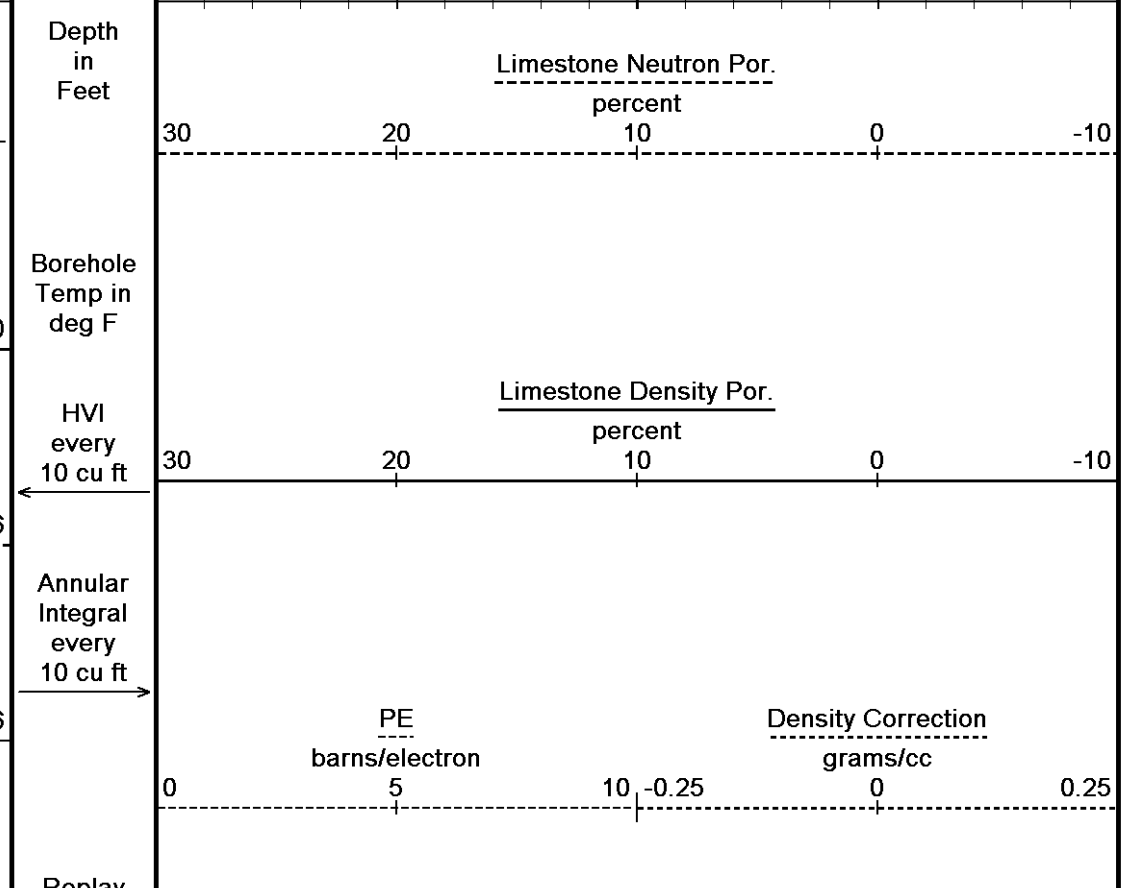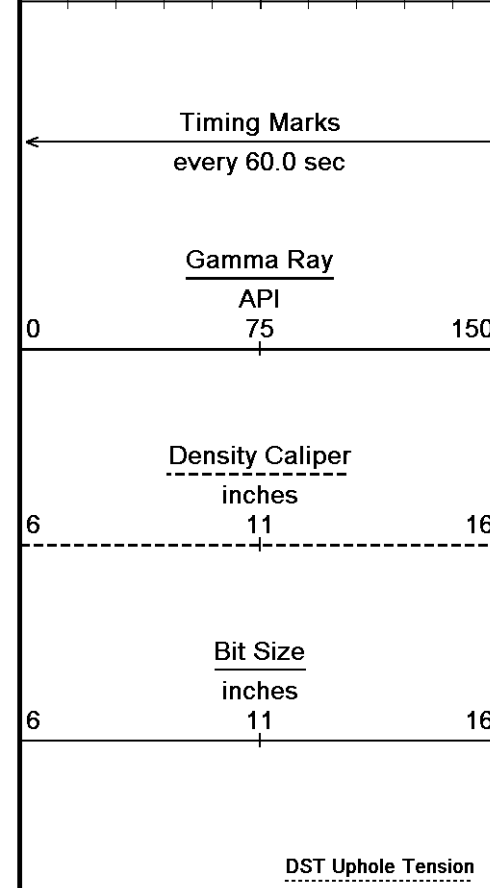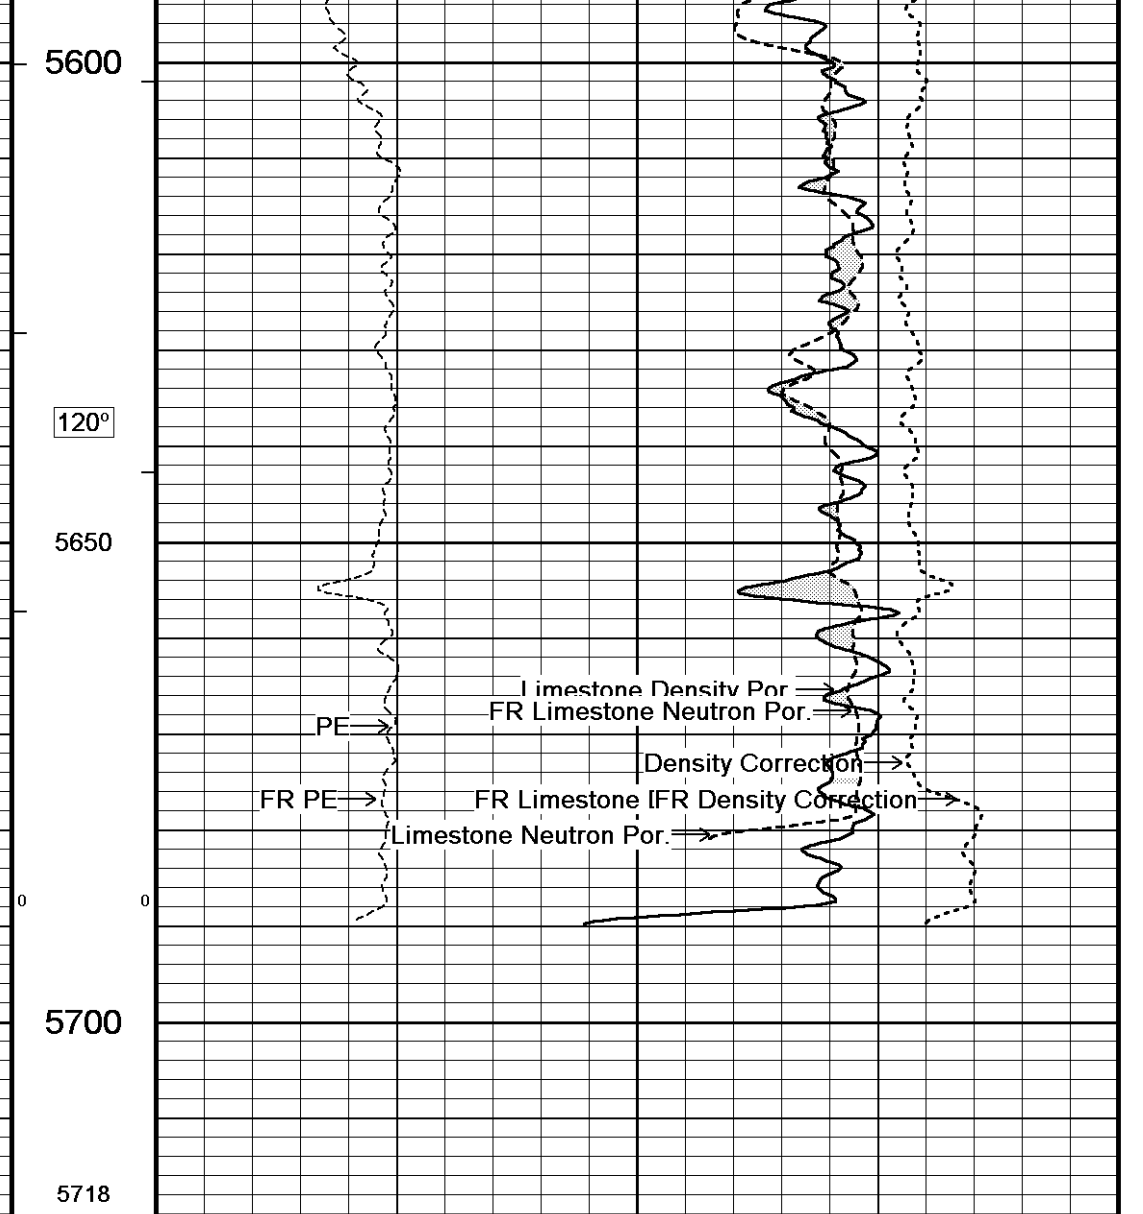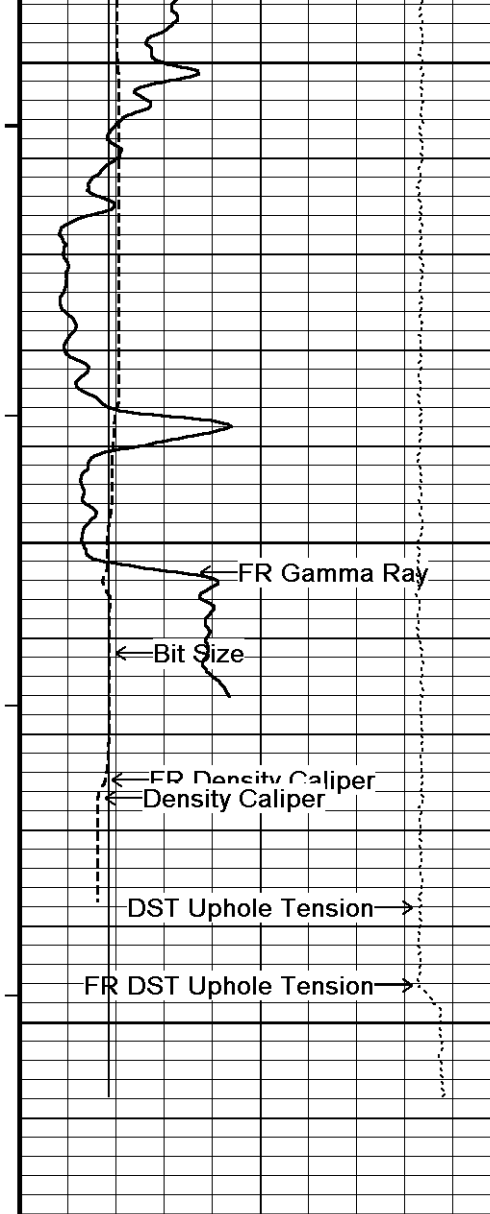

5000 pounds 0

Scale 1:240

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 12-JUN-2012 07:52

Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_003.dta

Recorded on 12-JUN-2012 05:13

System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044



5 INCH MAIN



10 INCH HI-RES





Depth Based Data - Maximum Sampling Increment 2.5cm Plotted on 12-JUN-2012 07:52

Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_001.dta

Recorded on 12-JUN-2012 04:40

System Versions: Logged with 11.03.4044 Plotted with 11.03.4044

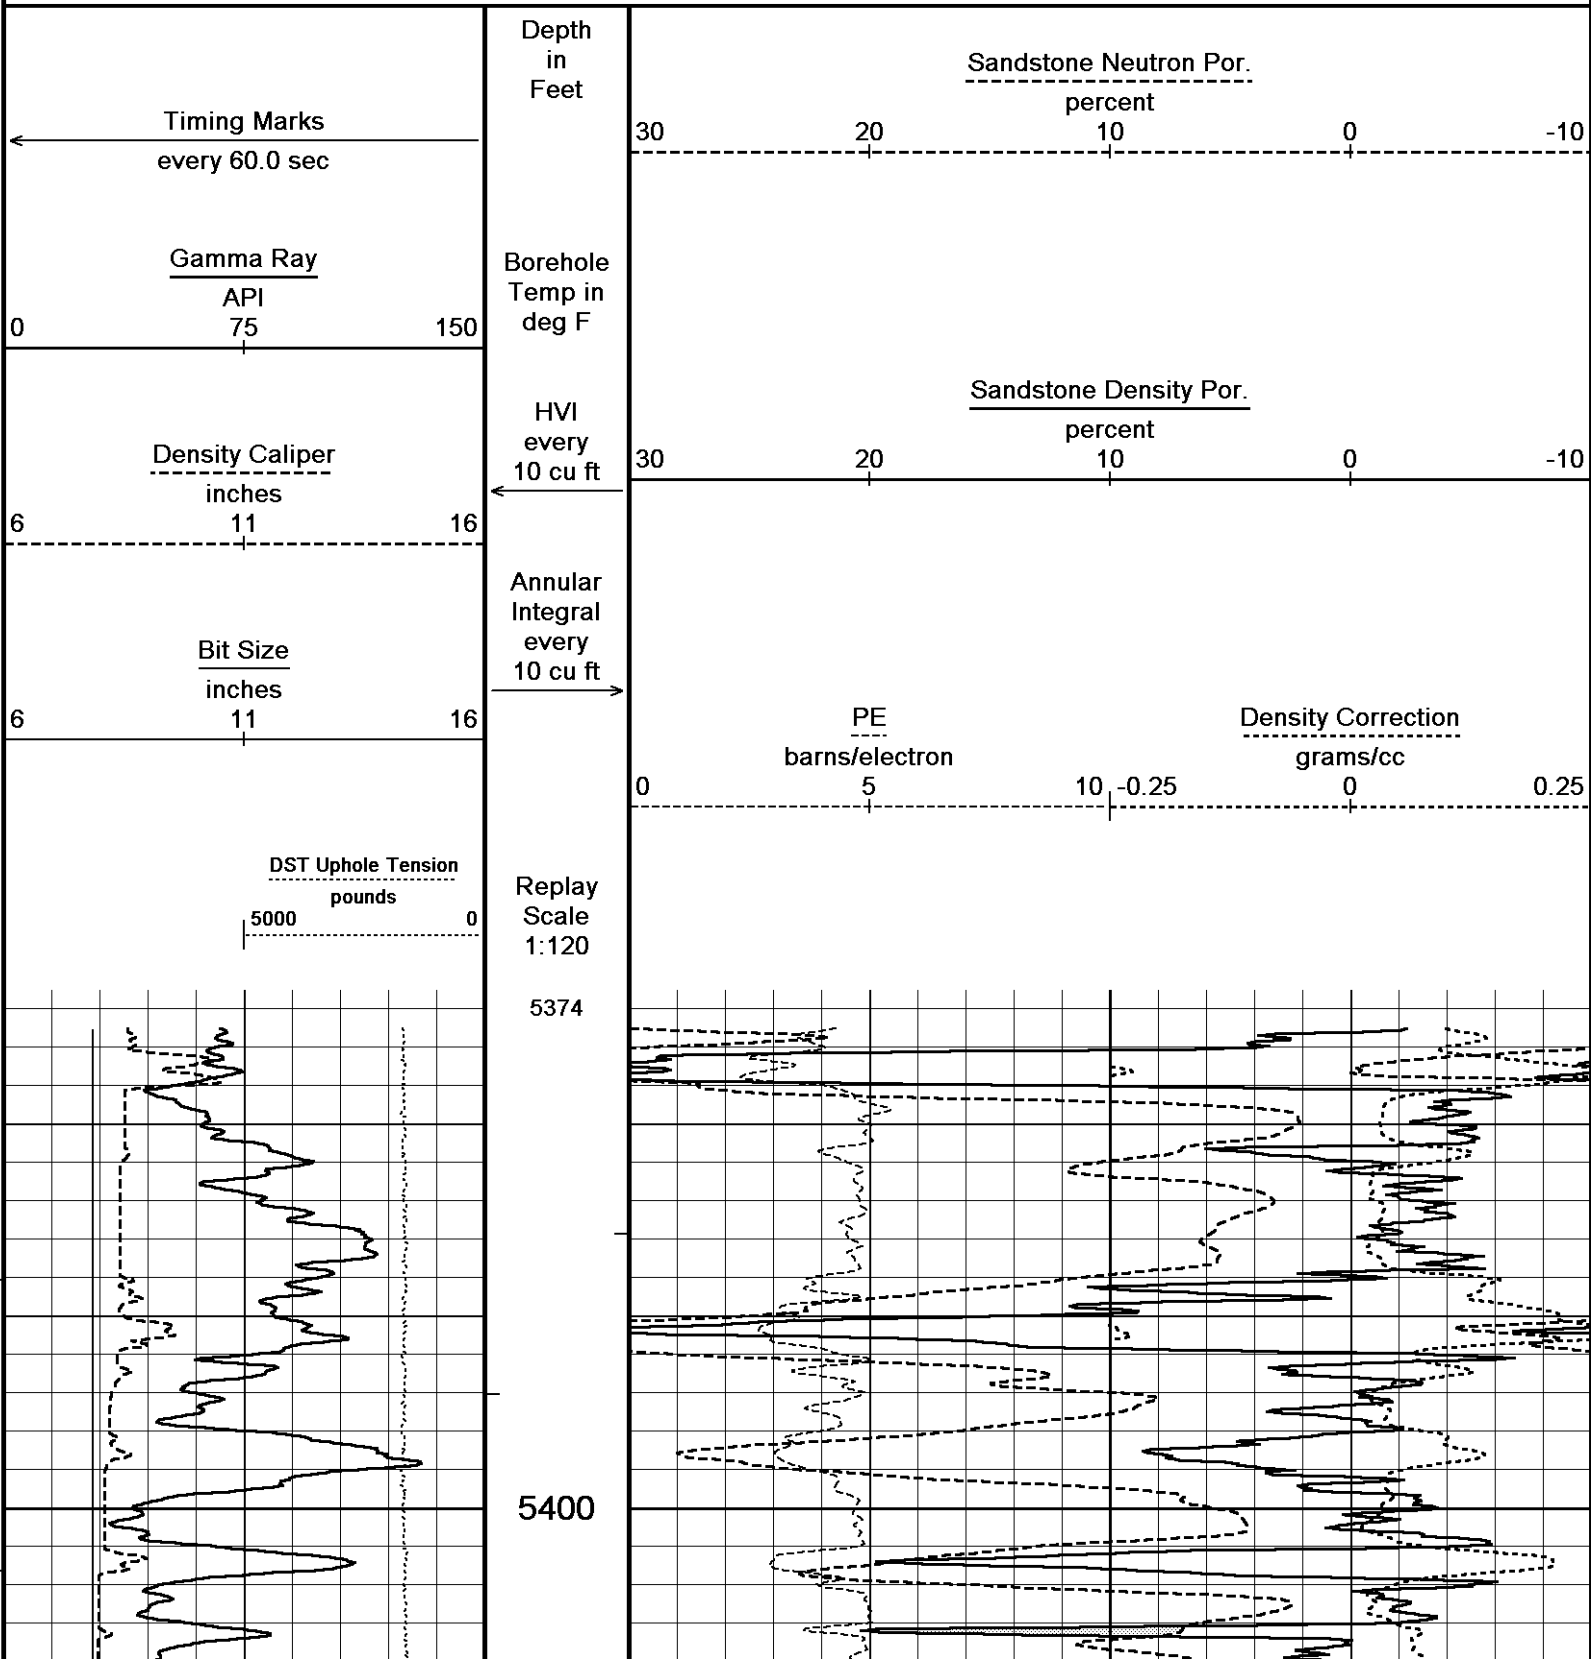

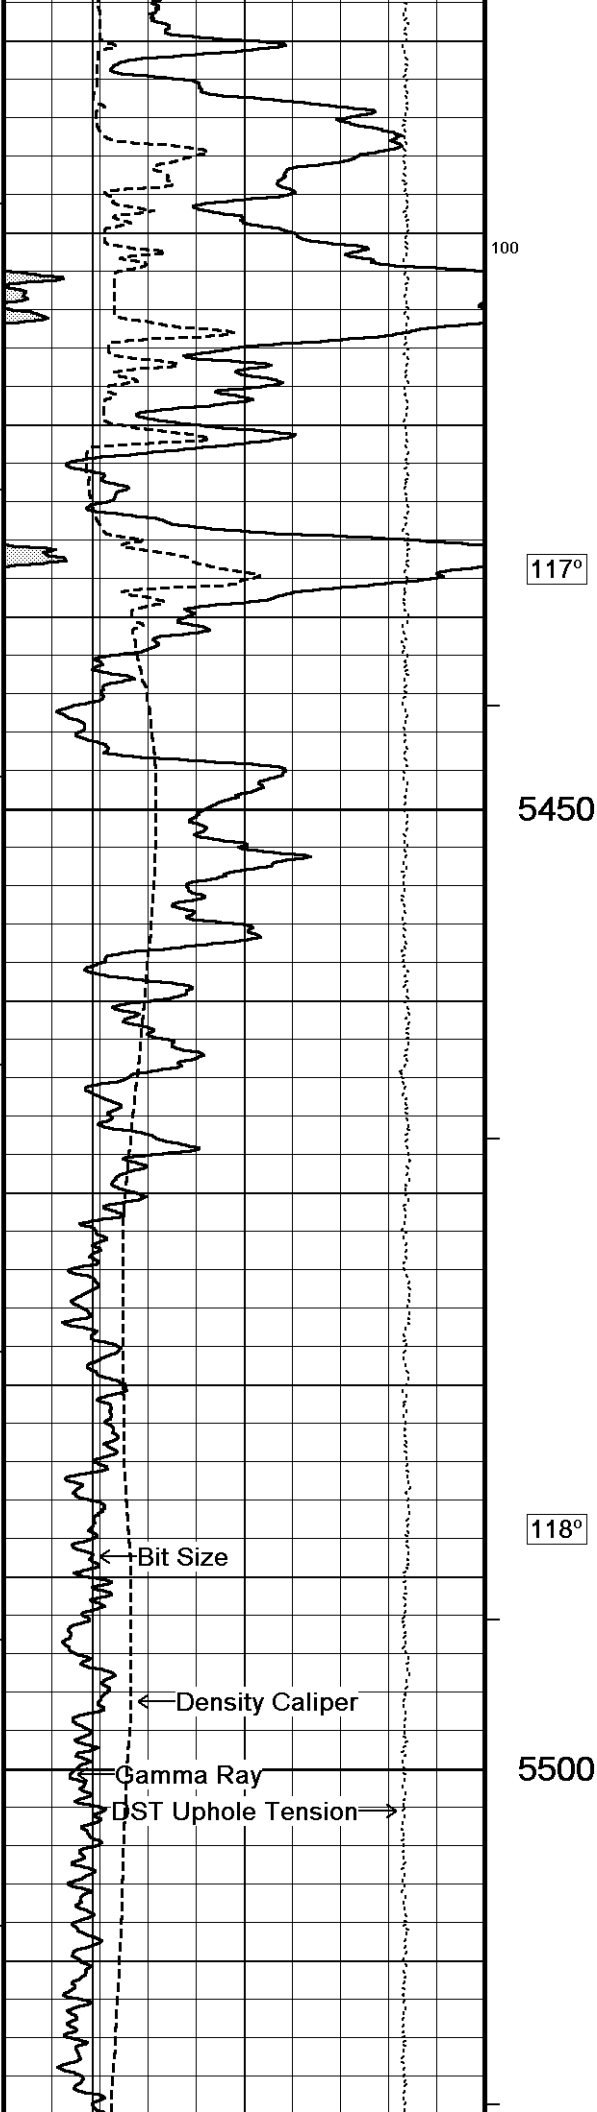


100

117°

5450

118°

5500


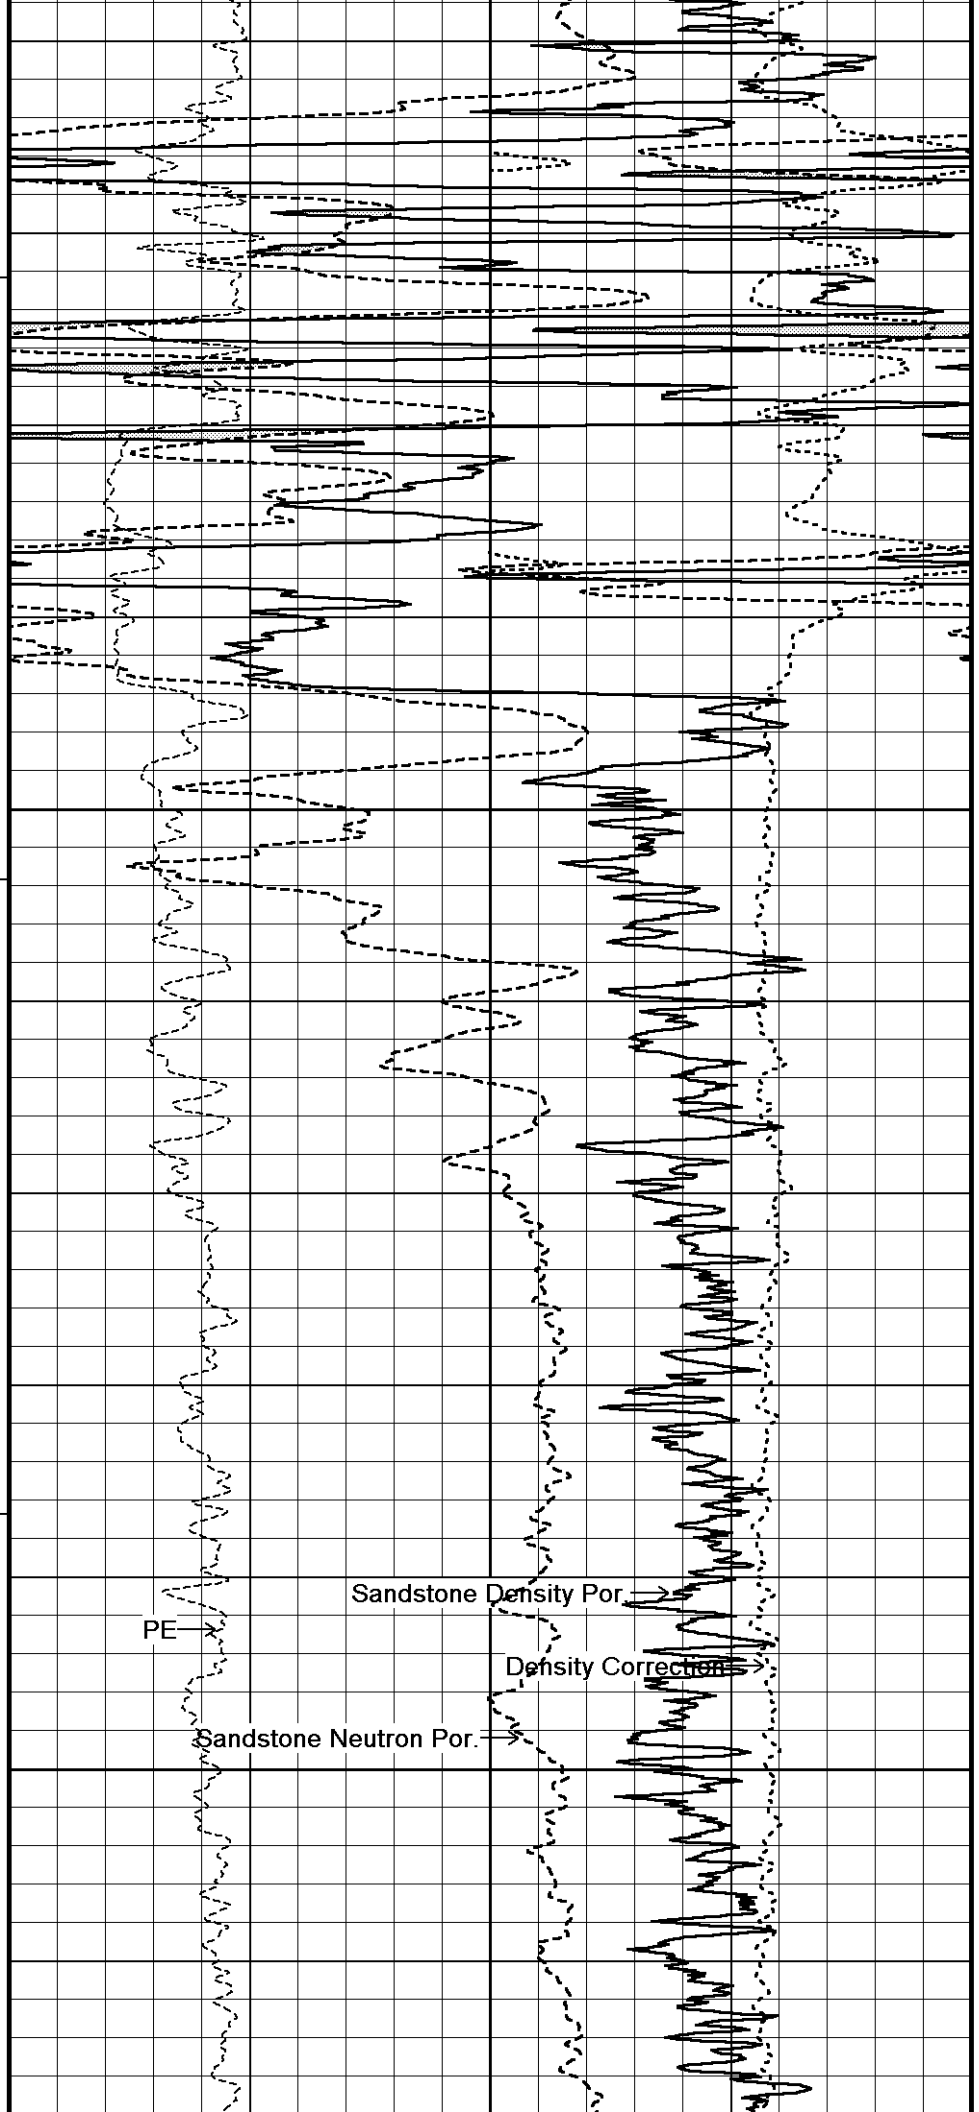



PE

Sandstone Density Por.

Density Correction

Sandstone Neutron Por.

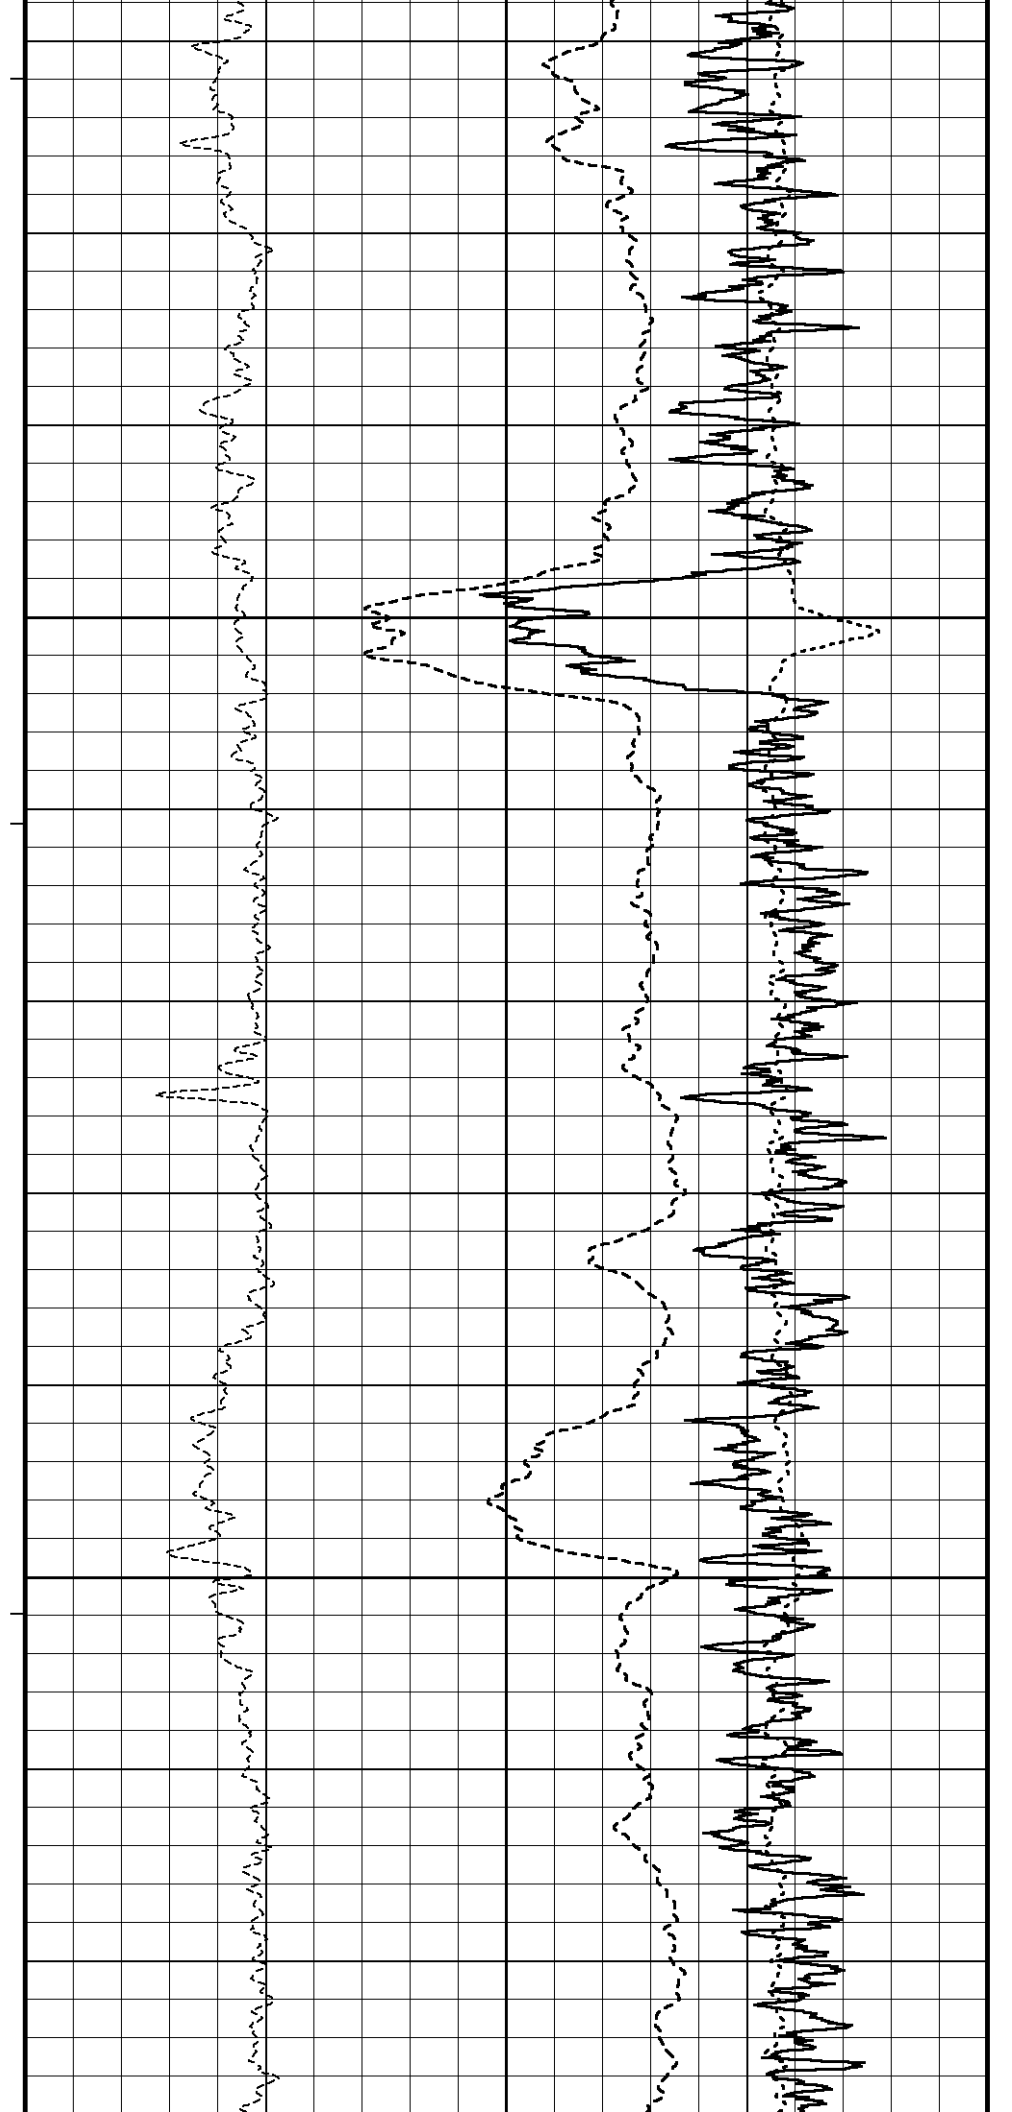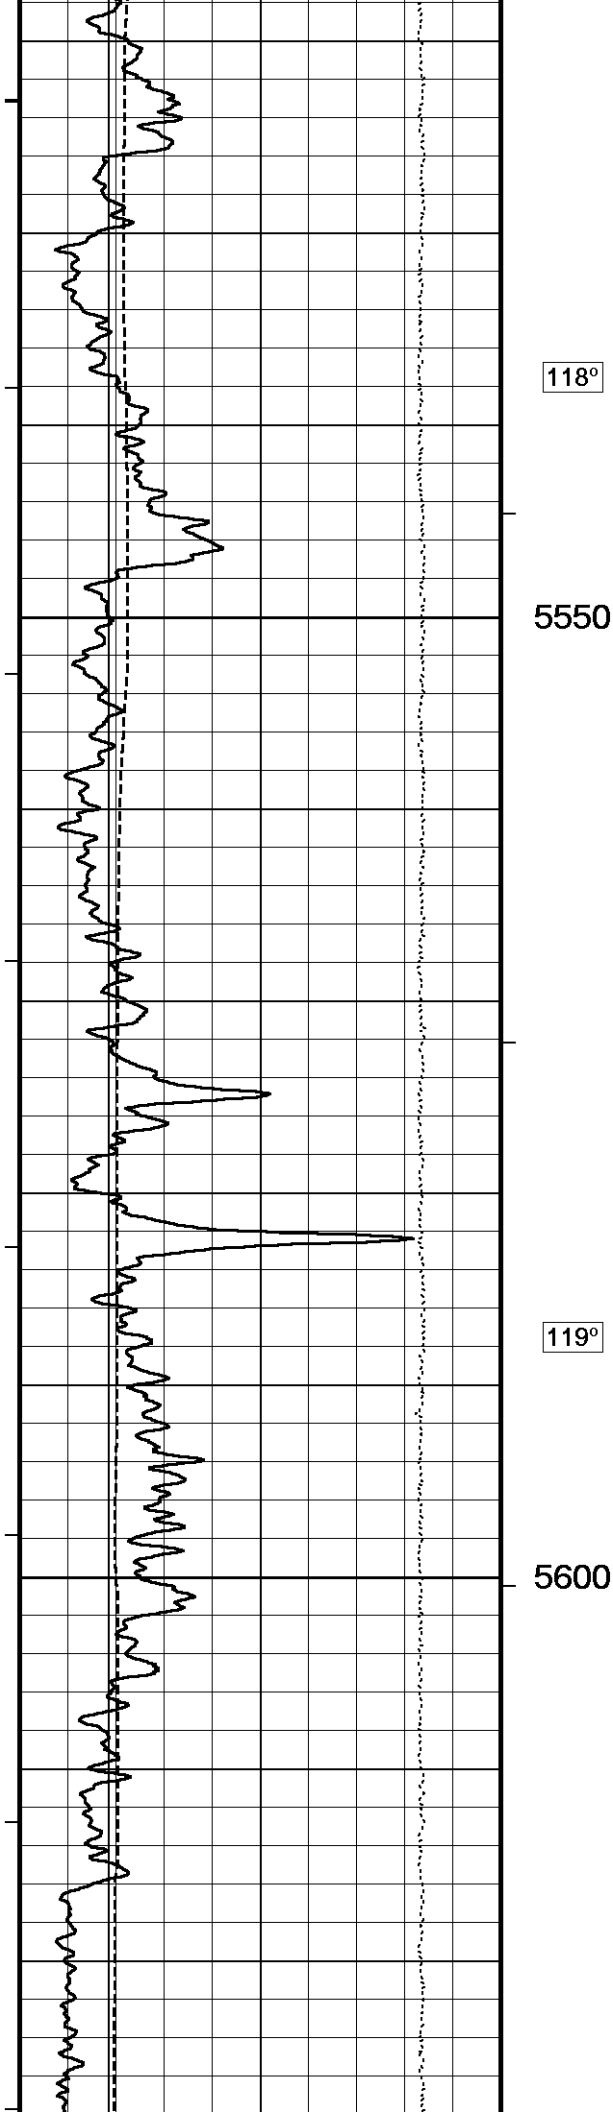

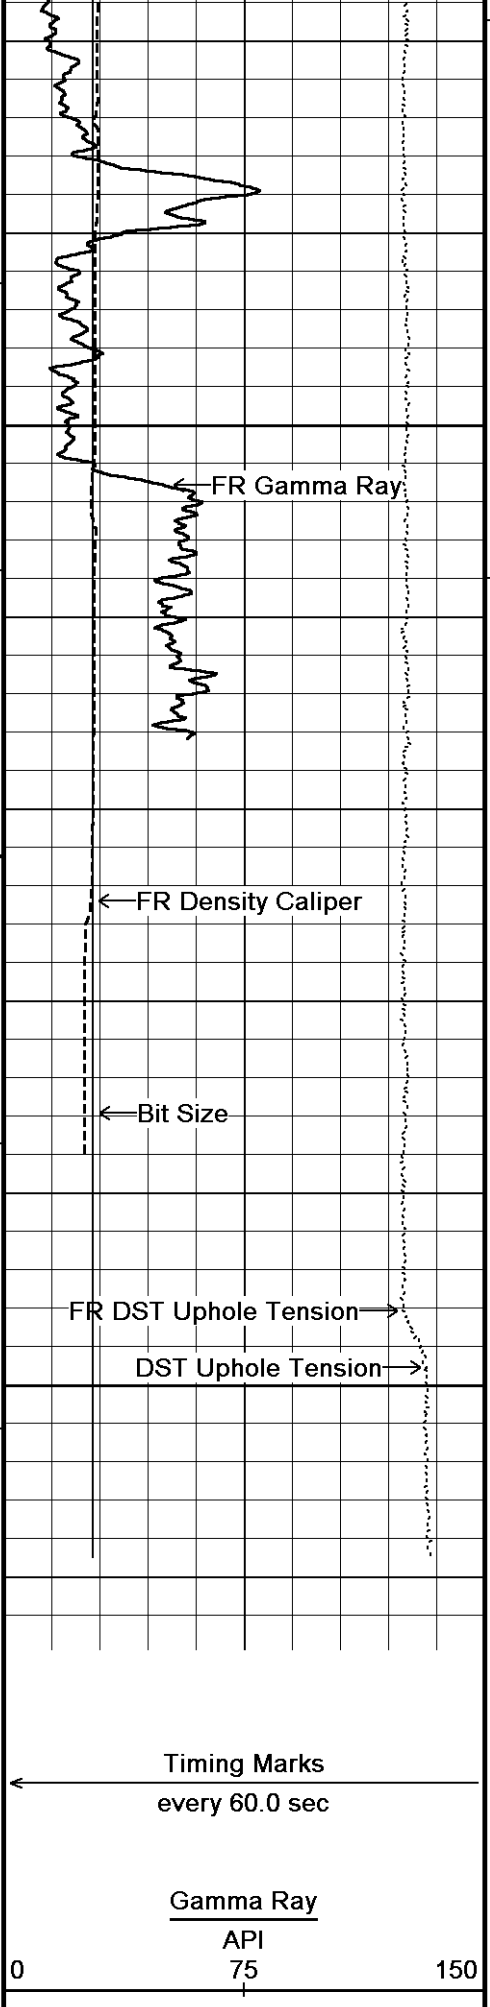

119°


5650


5700

5712

Depth in Feet

Borehole Temp in deg F

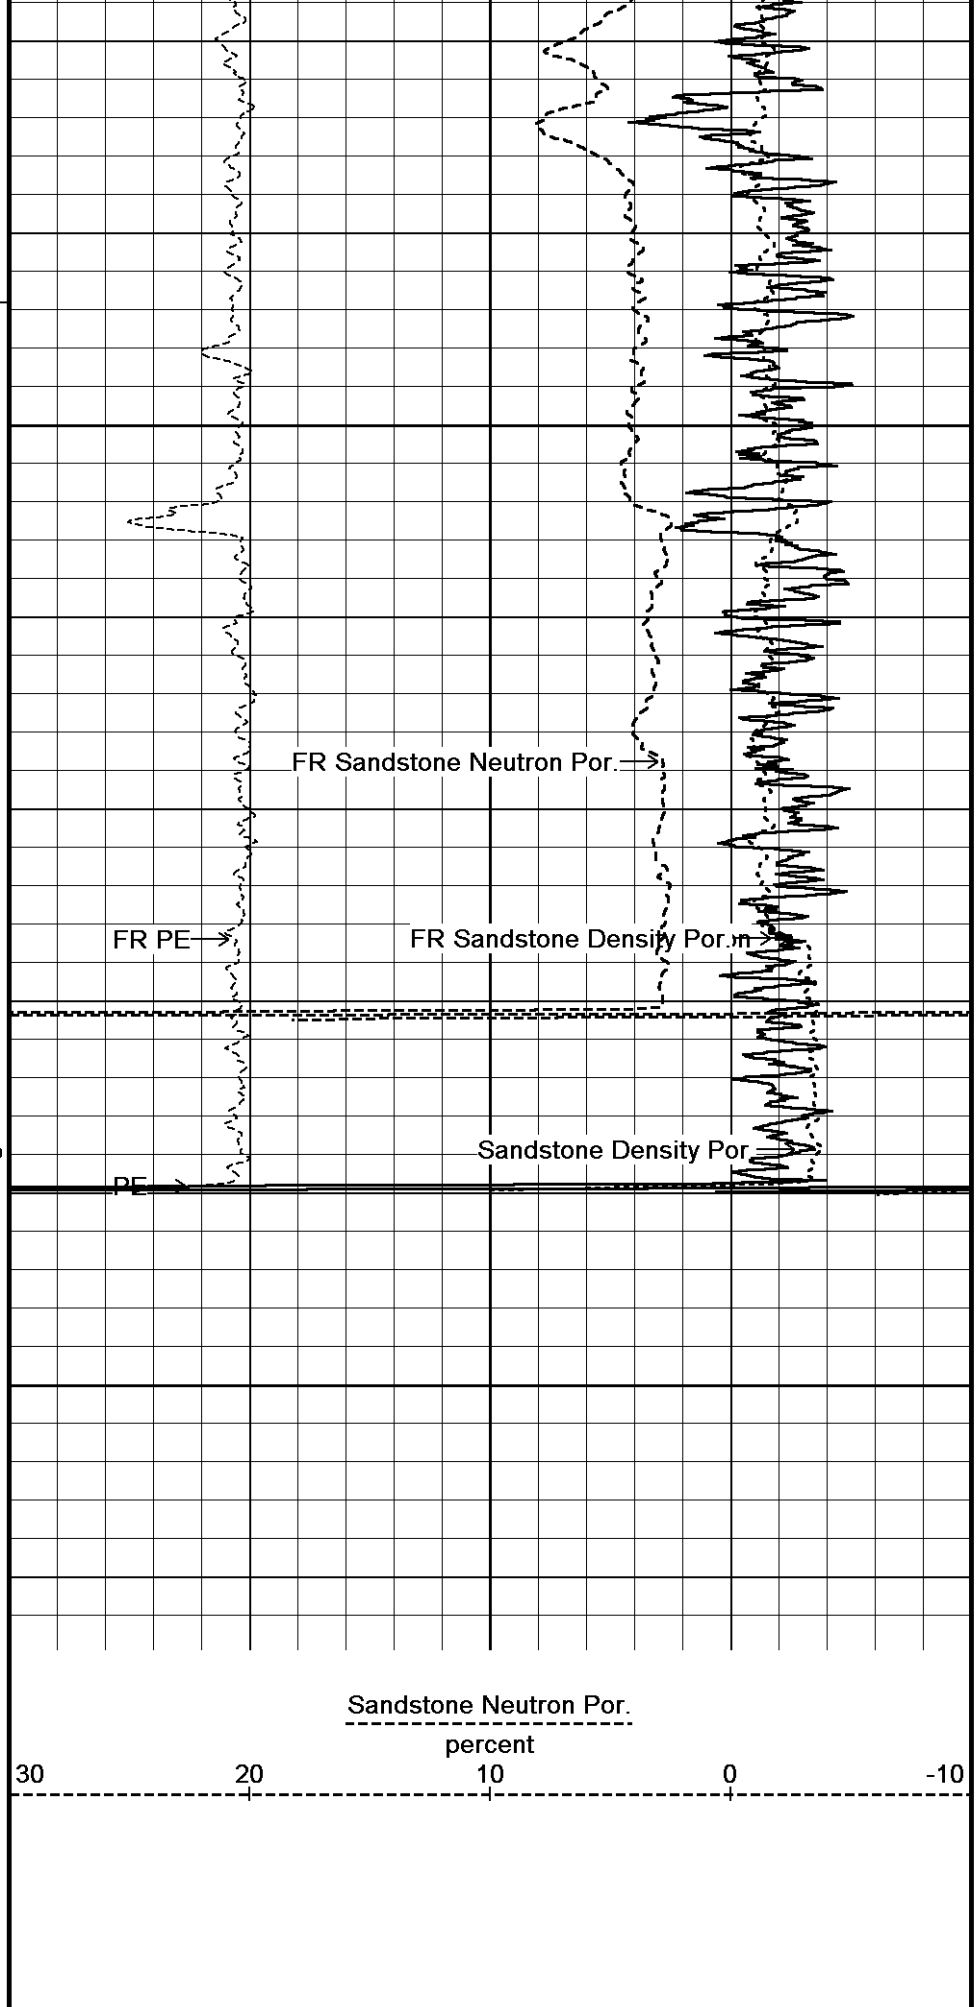

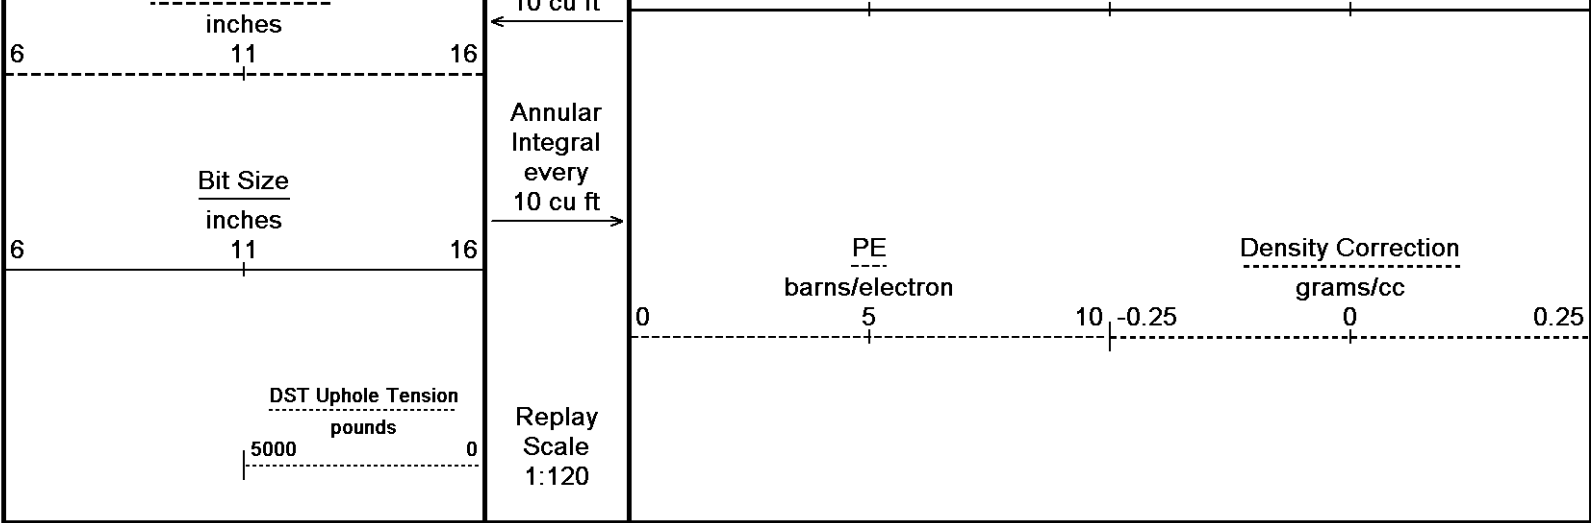




Depth Based Data - Maximum Sampling Increment 2.5cm Plotted on 12-JUN-2012 07:52
 Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_001.dta Recorded on 12-JUN-2012 04:40
 System Versions: Logged with 11.03.4044 Plotted with 11.03.4044


↑ 10 INCH HI-RES ↑

↓ REPEAT SECTION ↓

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 12-JUN-2012 07:52
 Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_002.dta Recorded on 12-JUN-2012 04:40
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

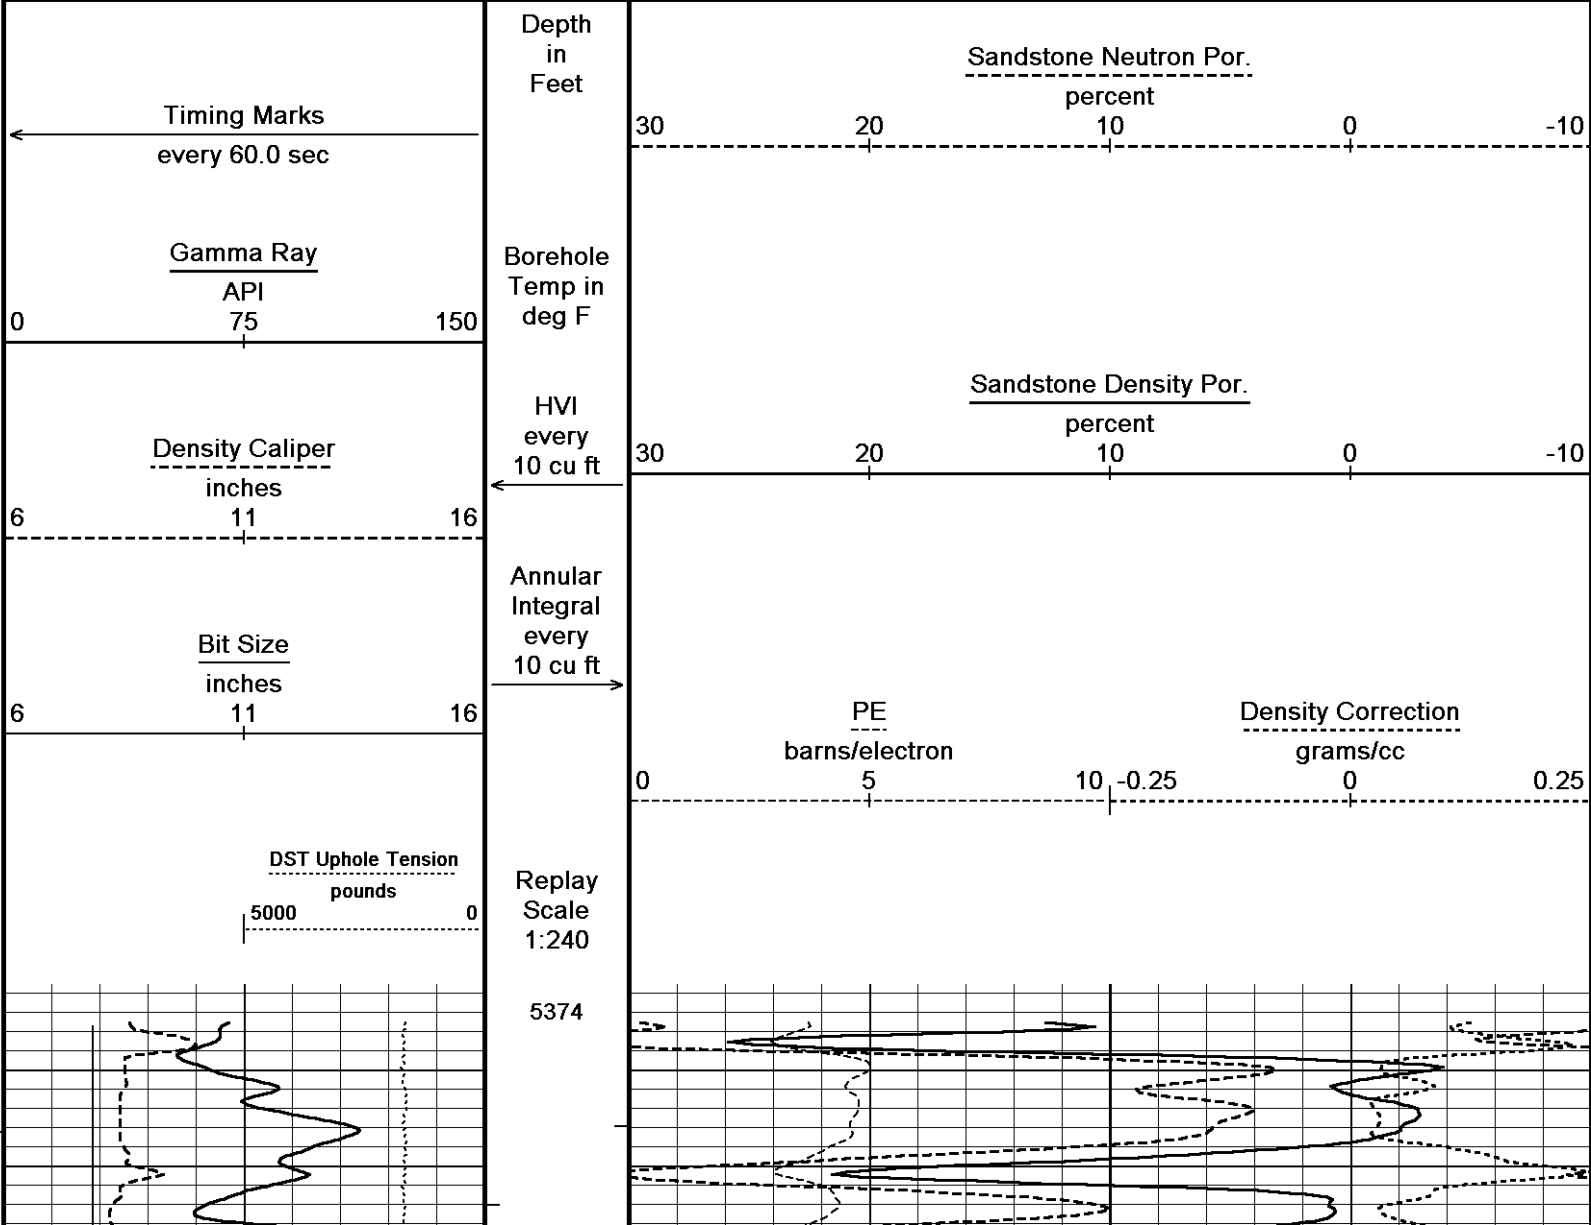

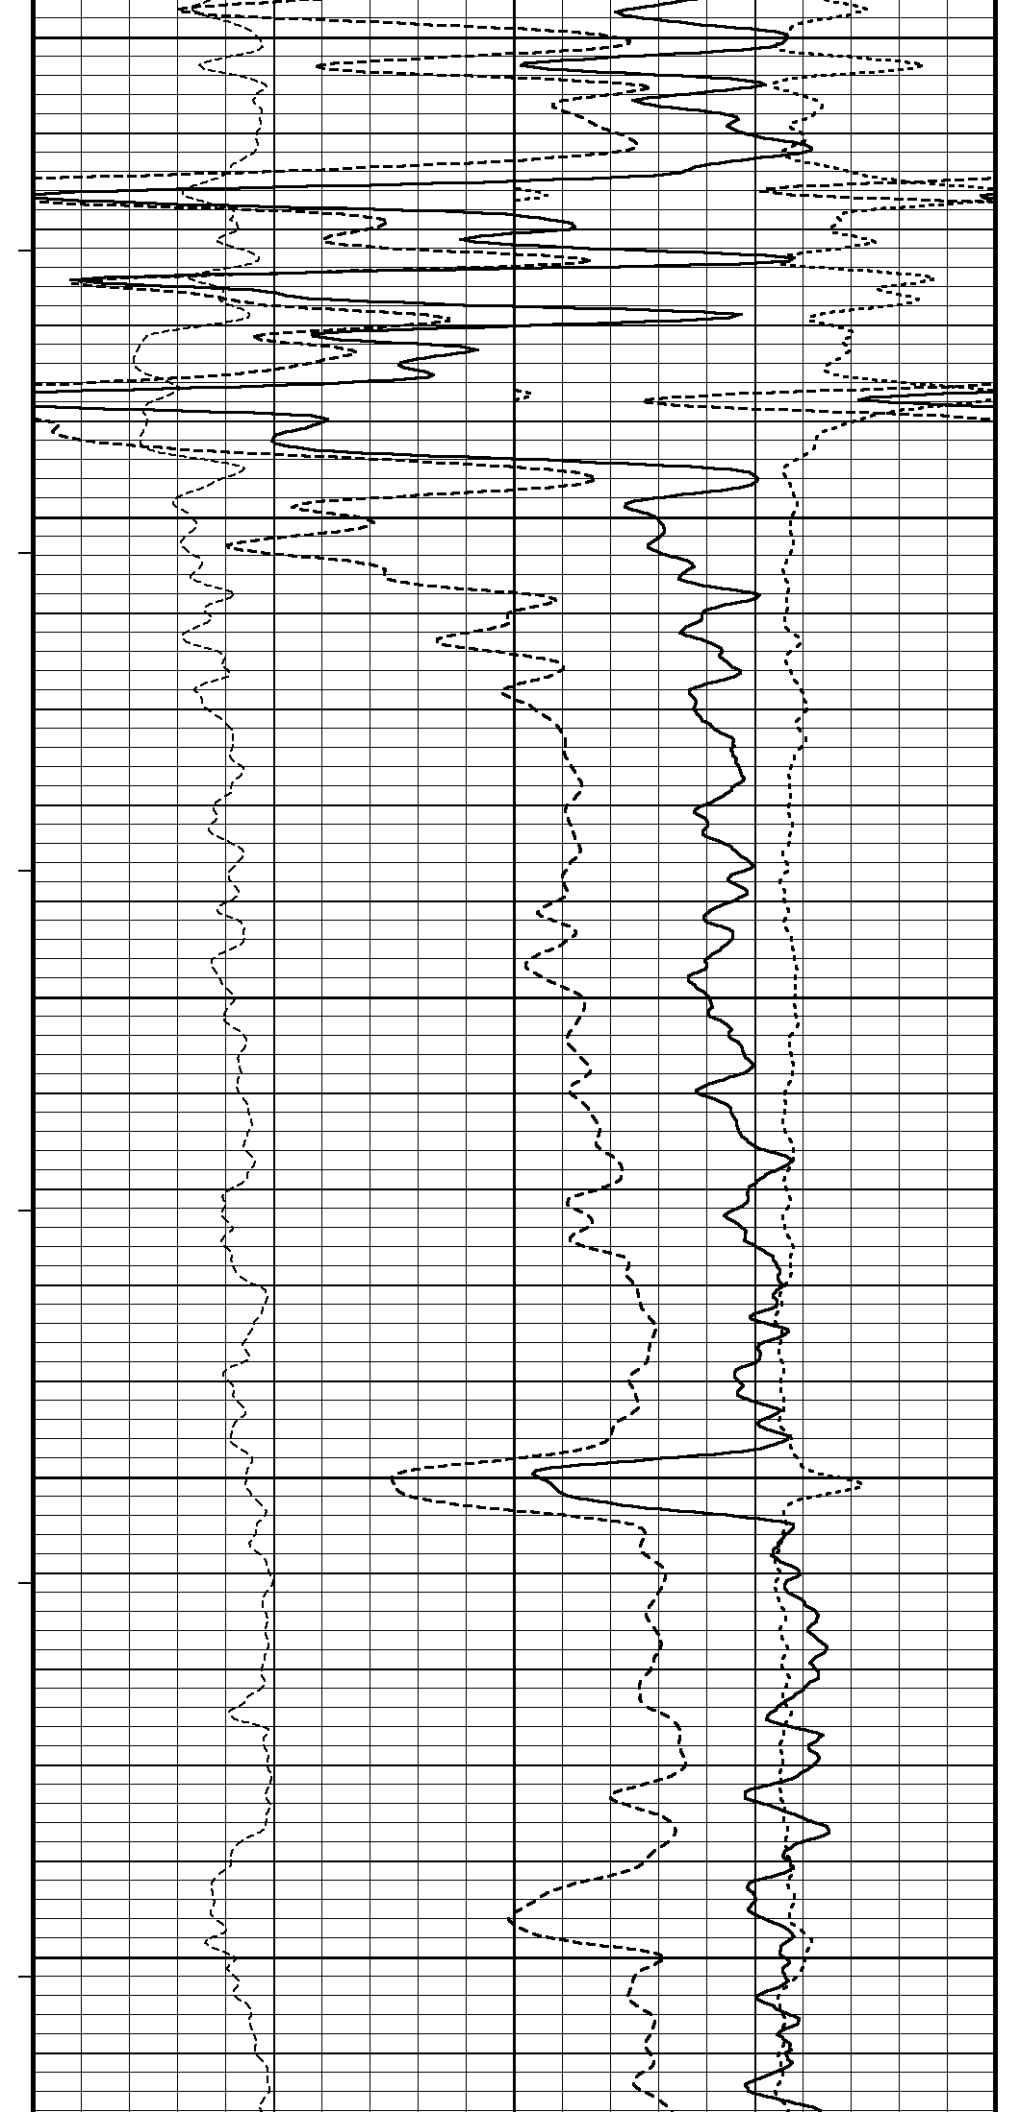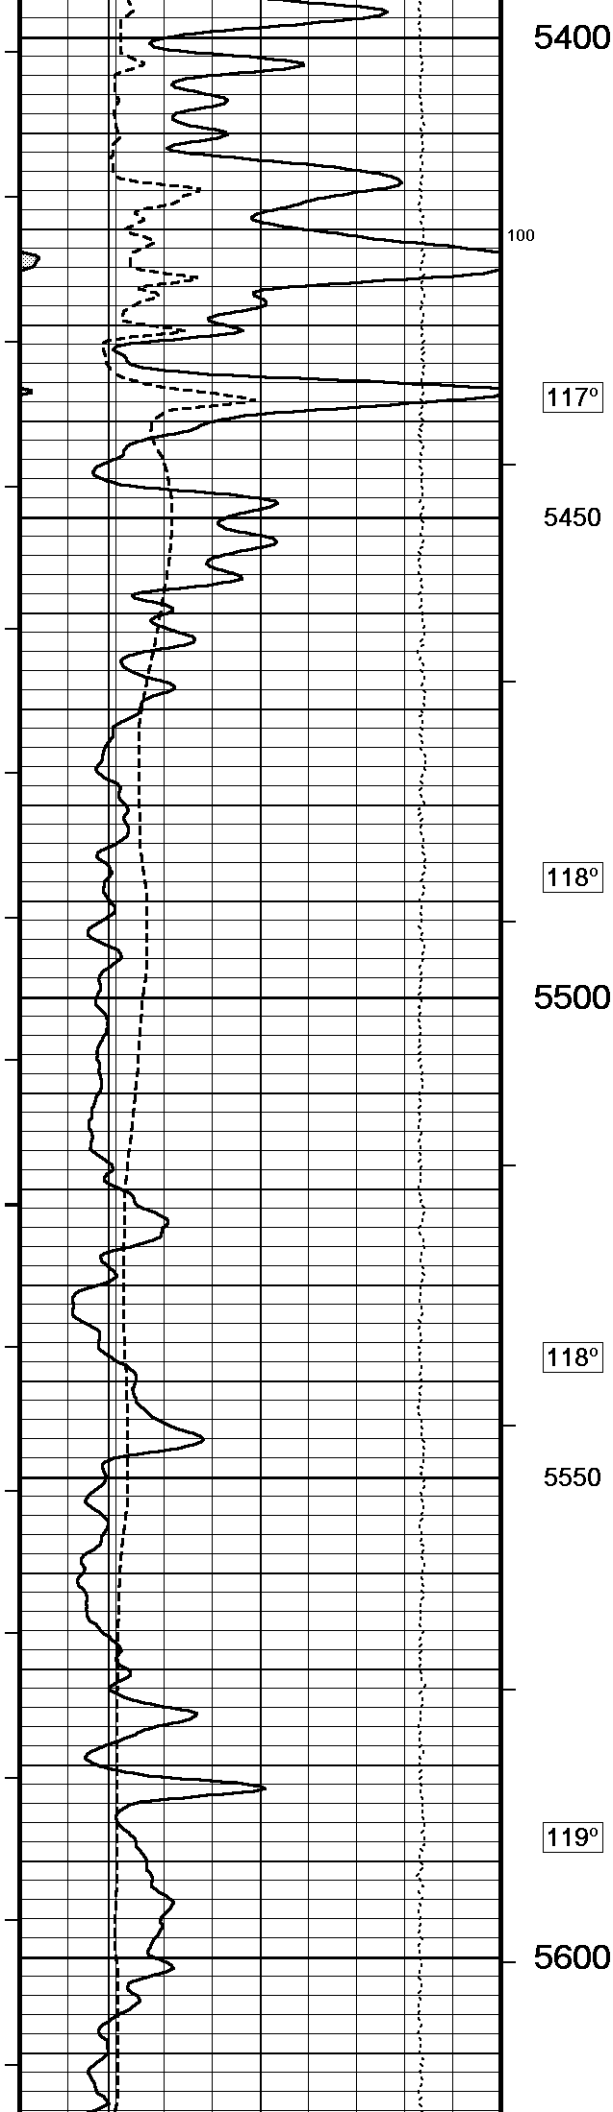


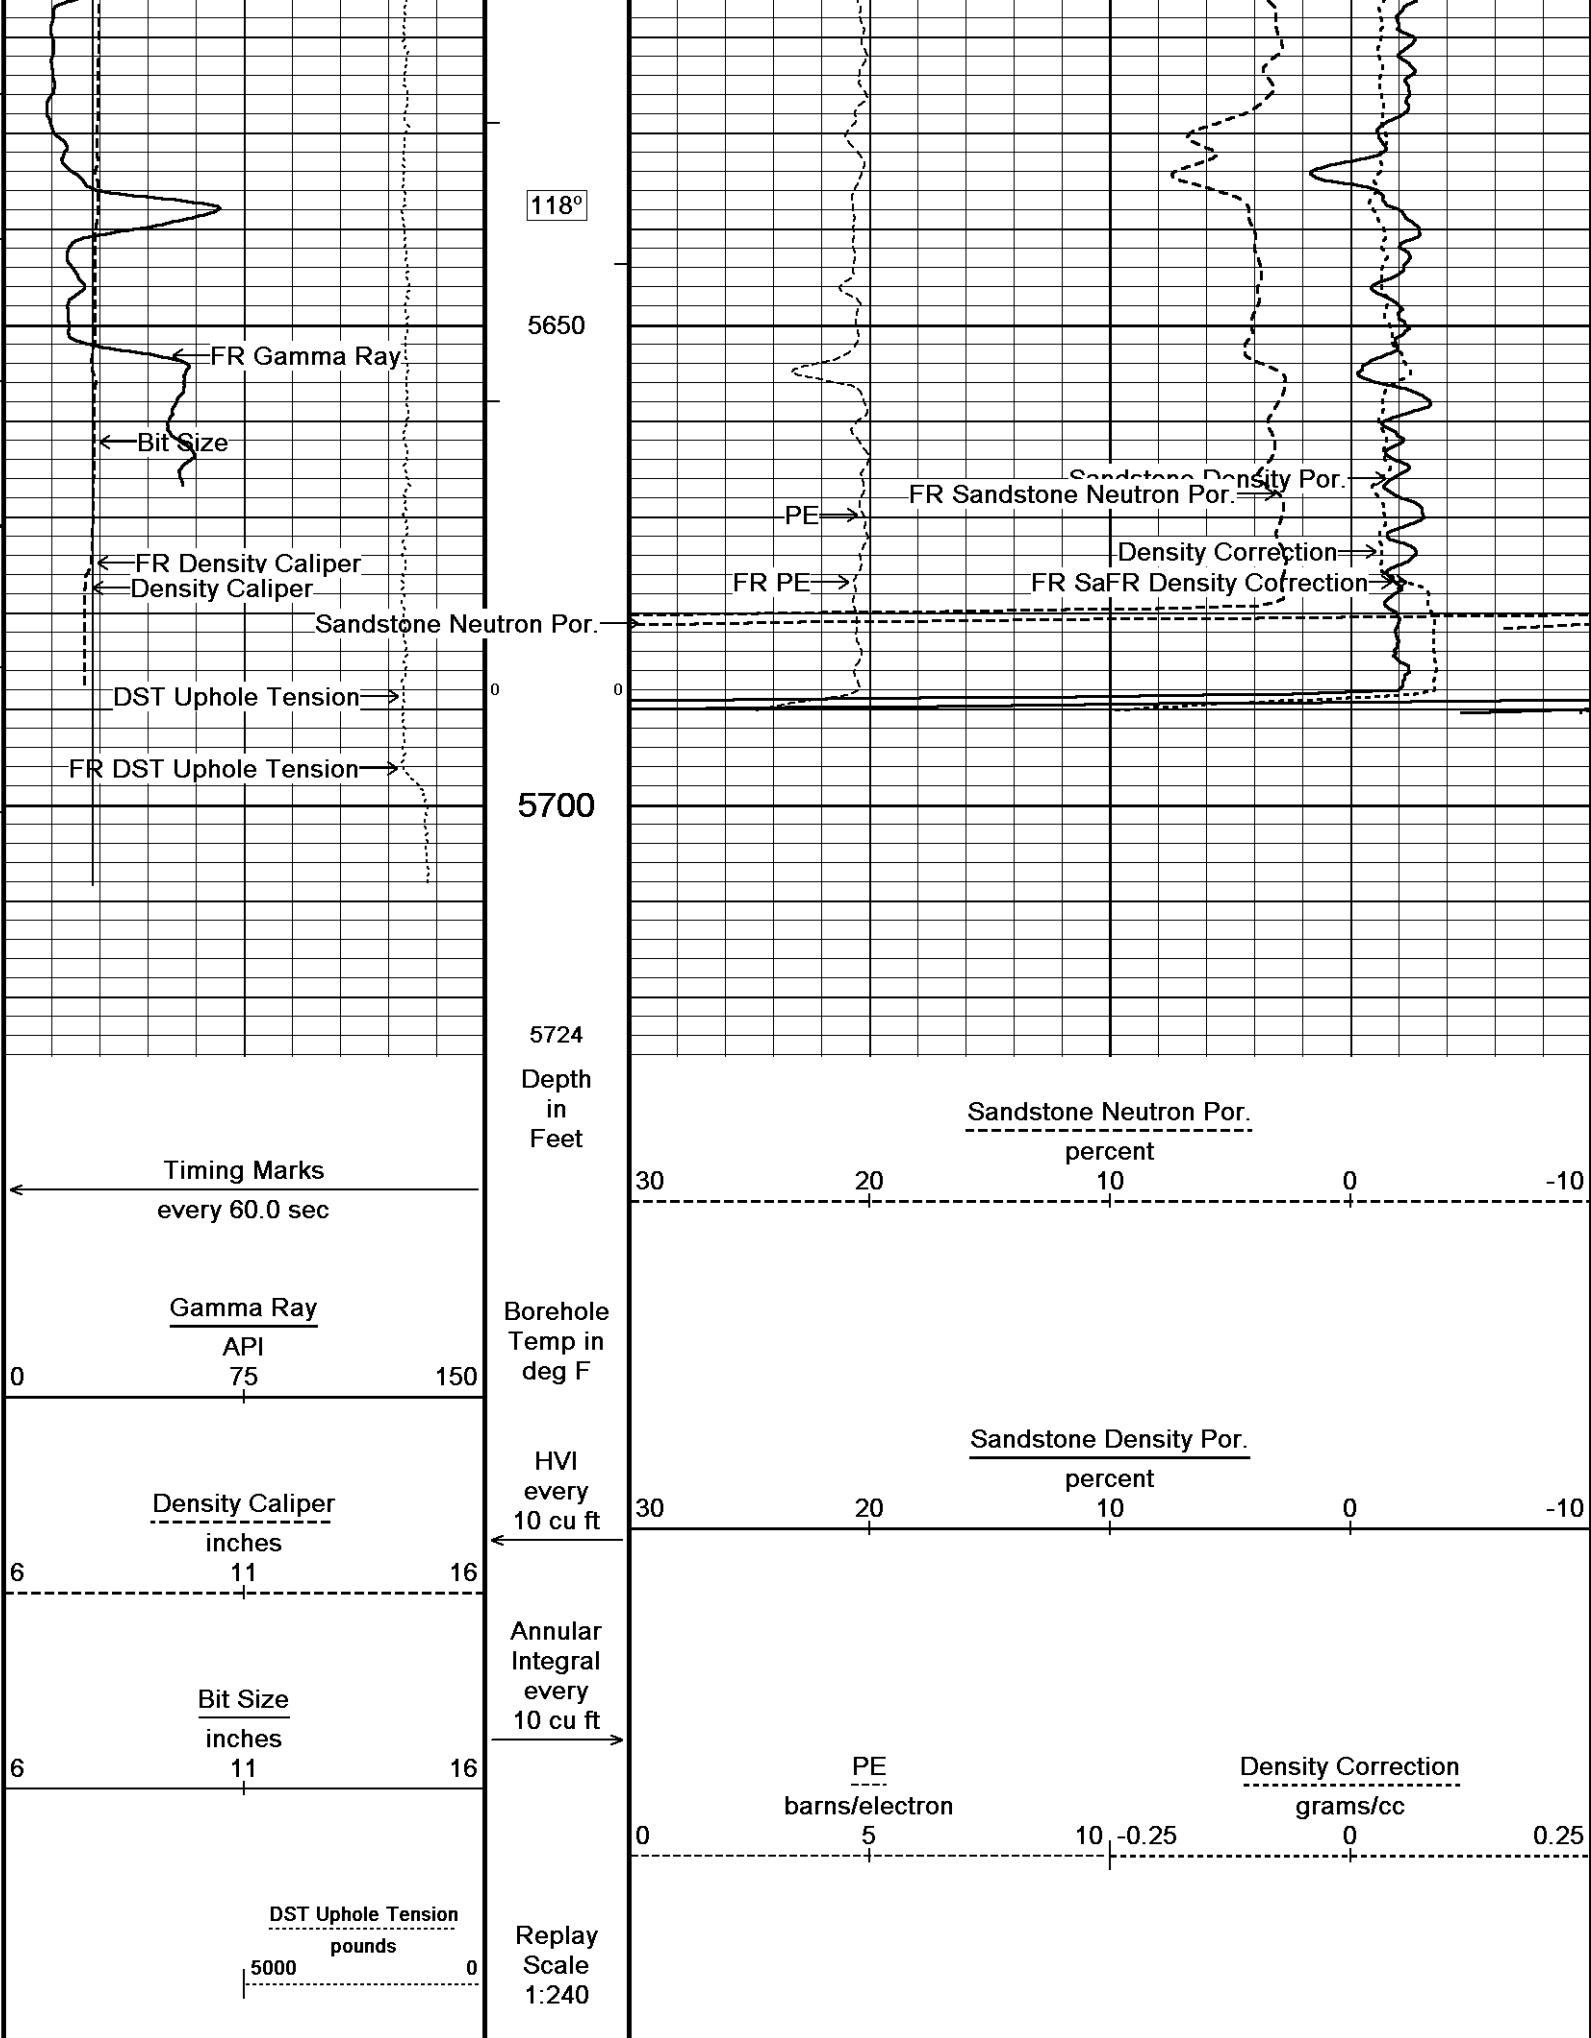



↑ REPEAT SECTION ↑


↓ 5 INCH MAIN ↓


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 12-JUN-2012 07:52
 Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_003.dta Recorded on 12-JUN-2012 05:13
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

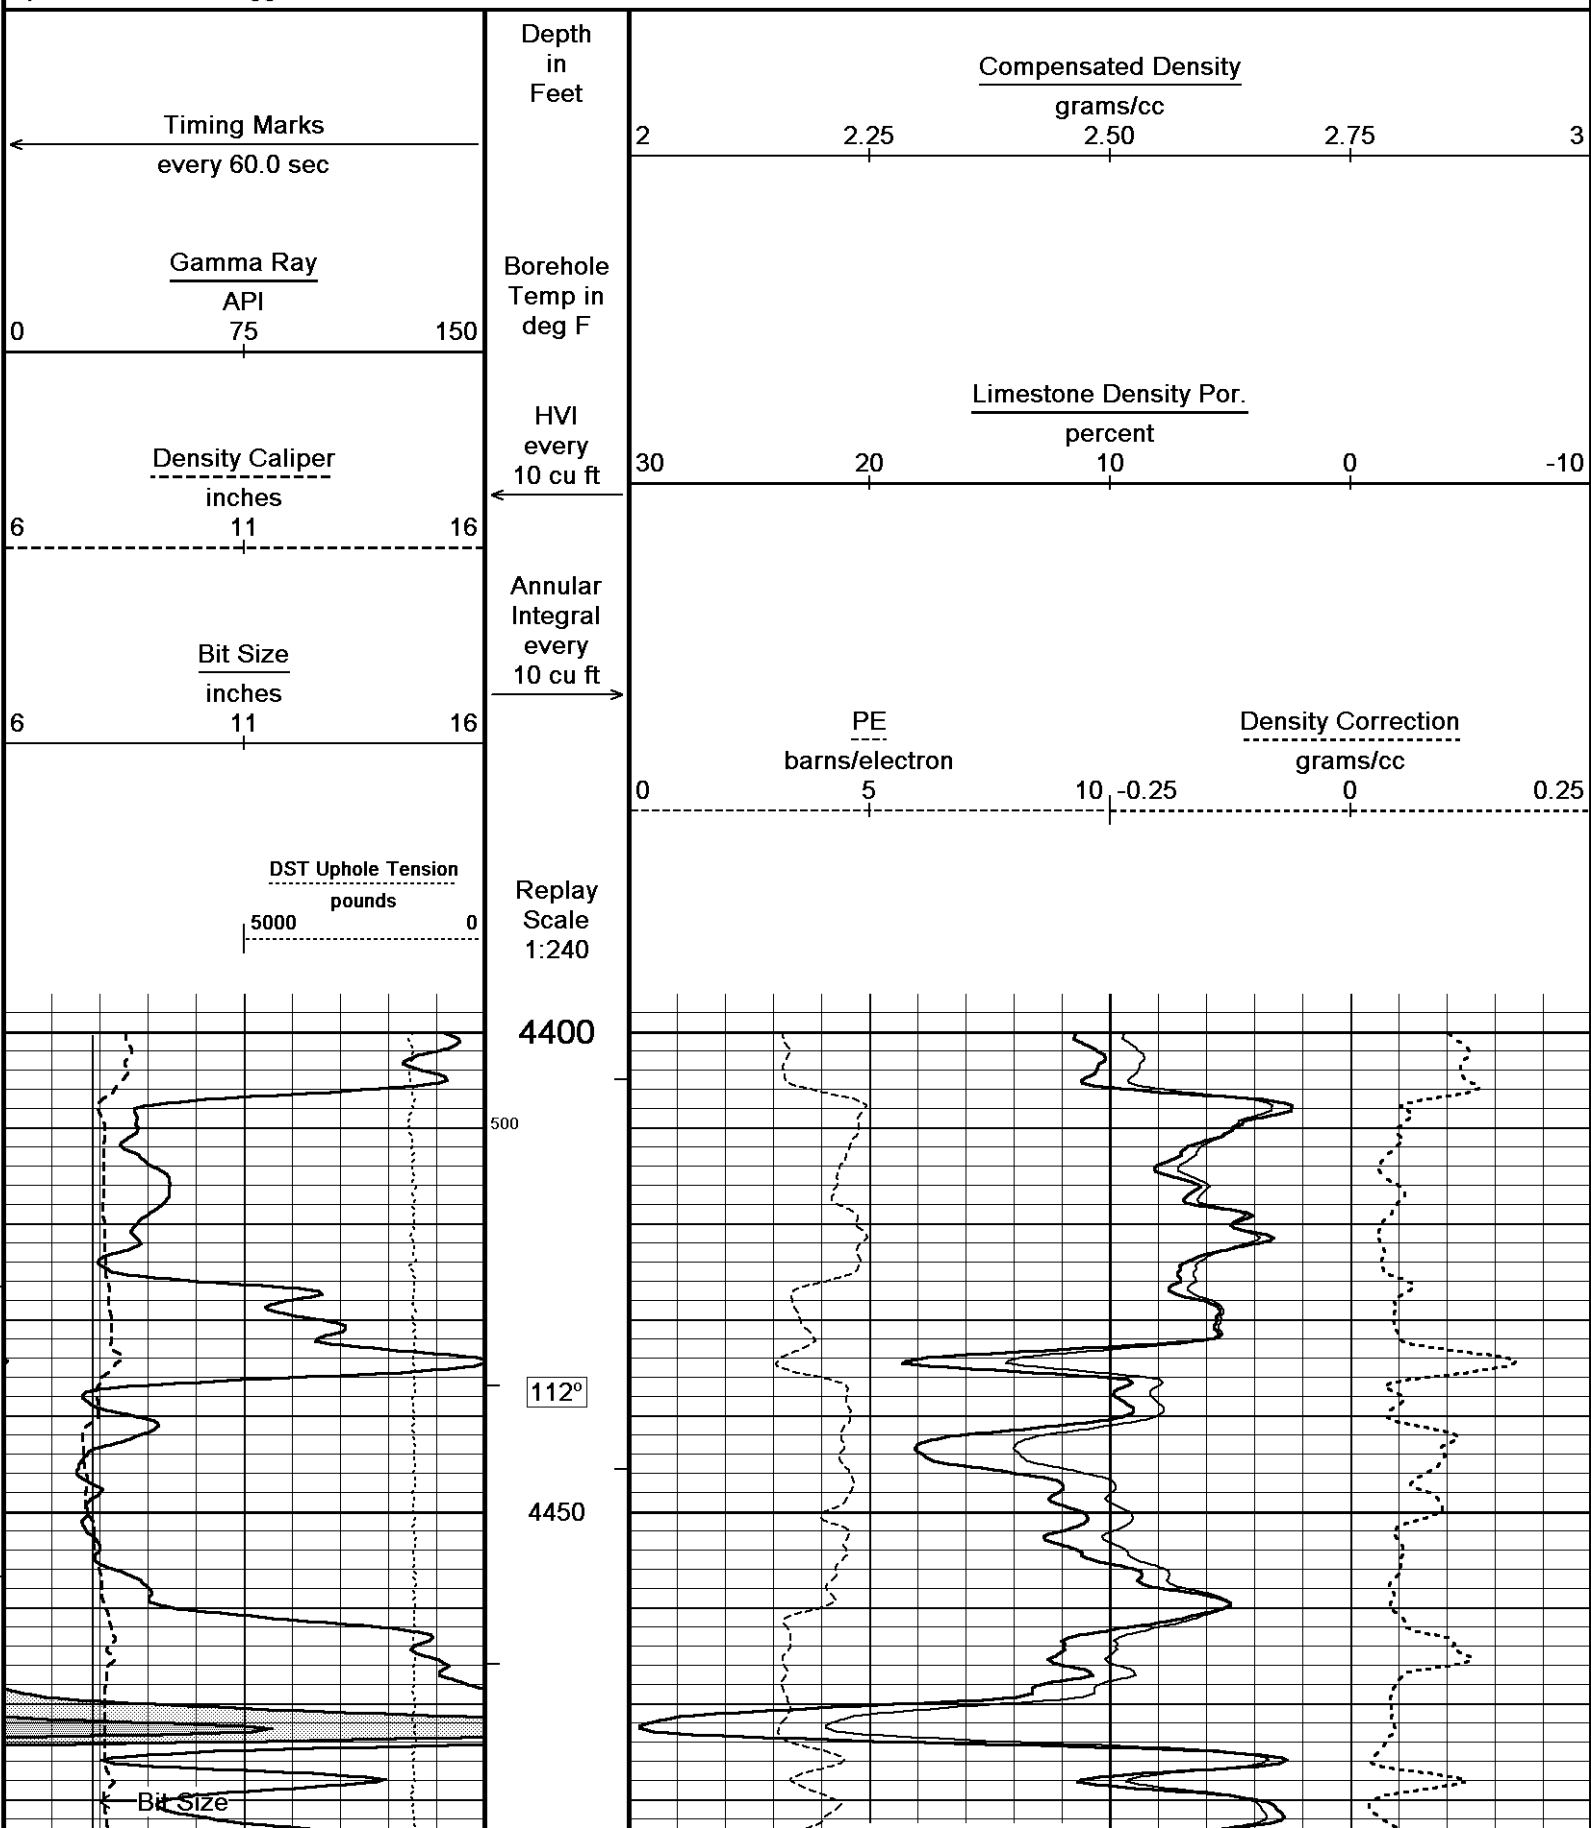


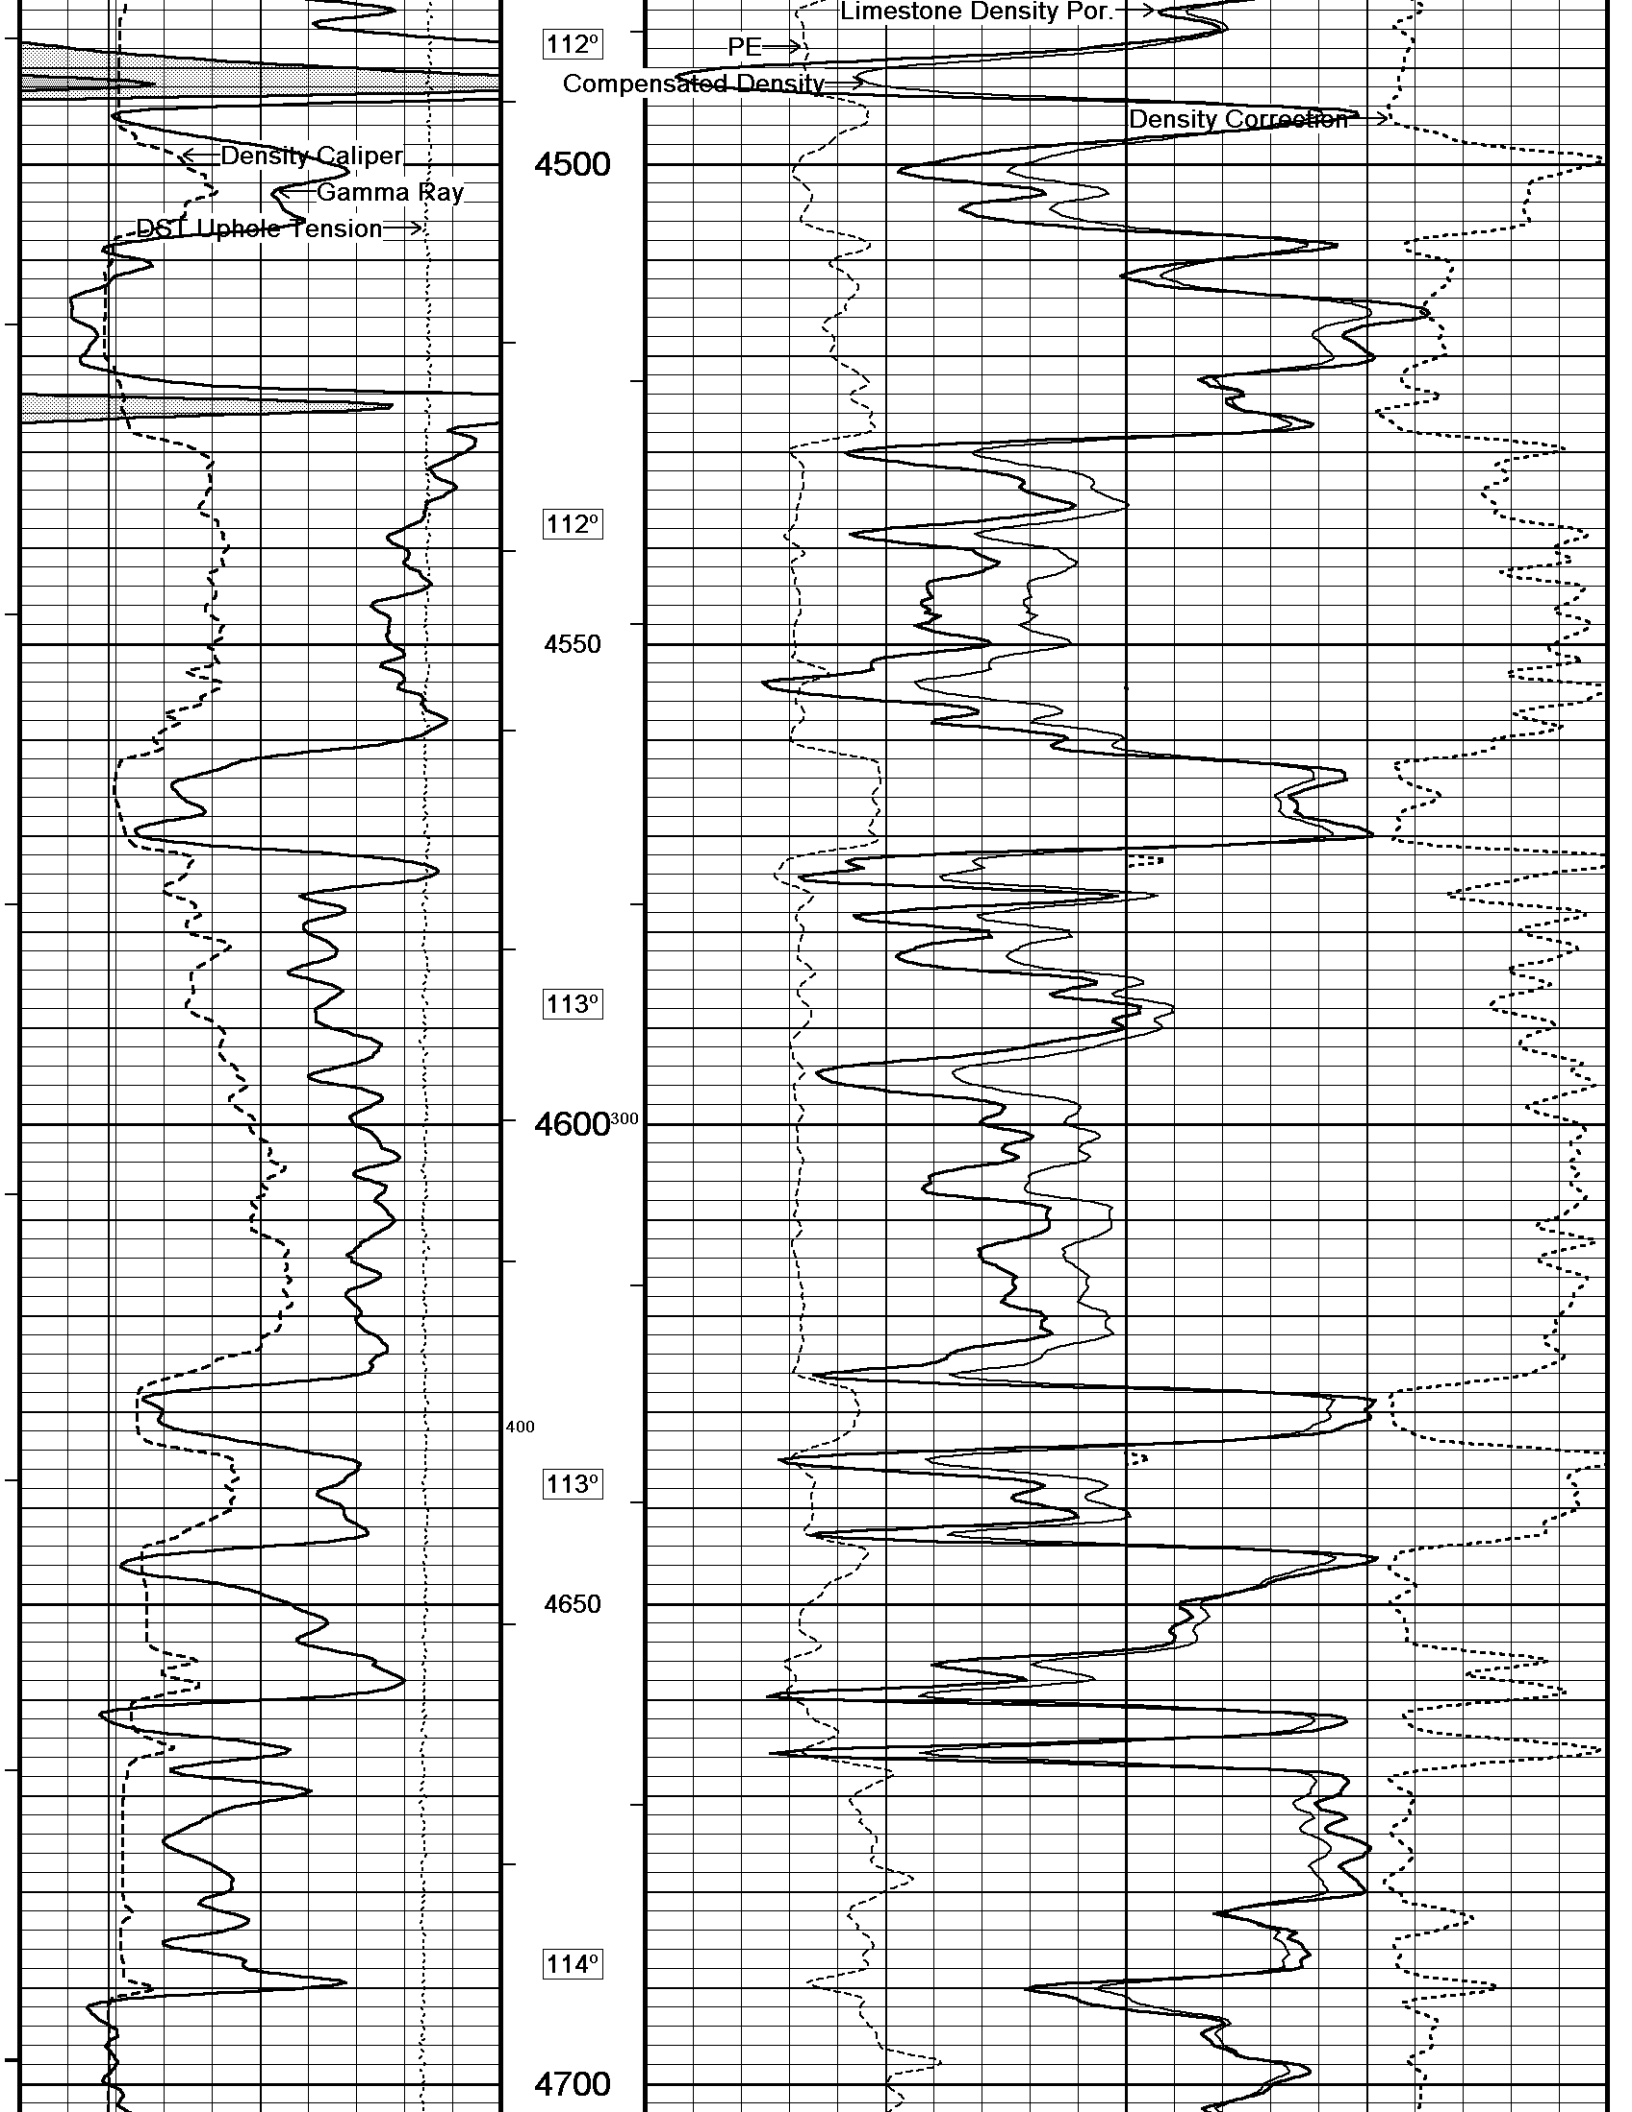


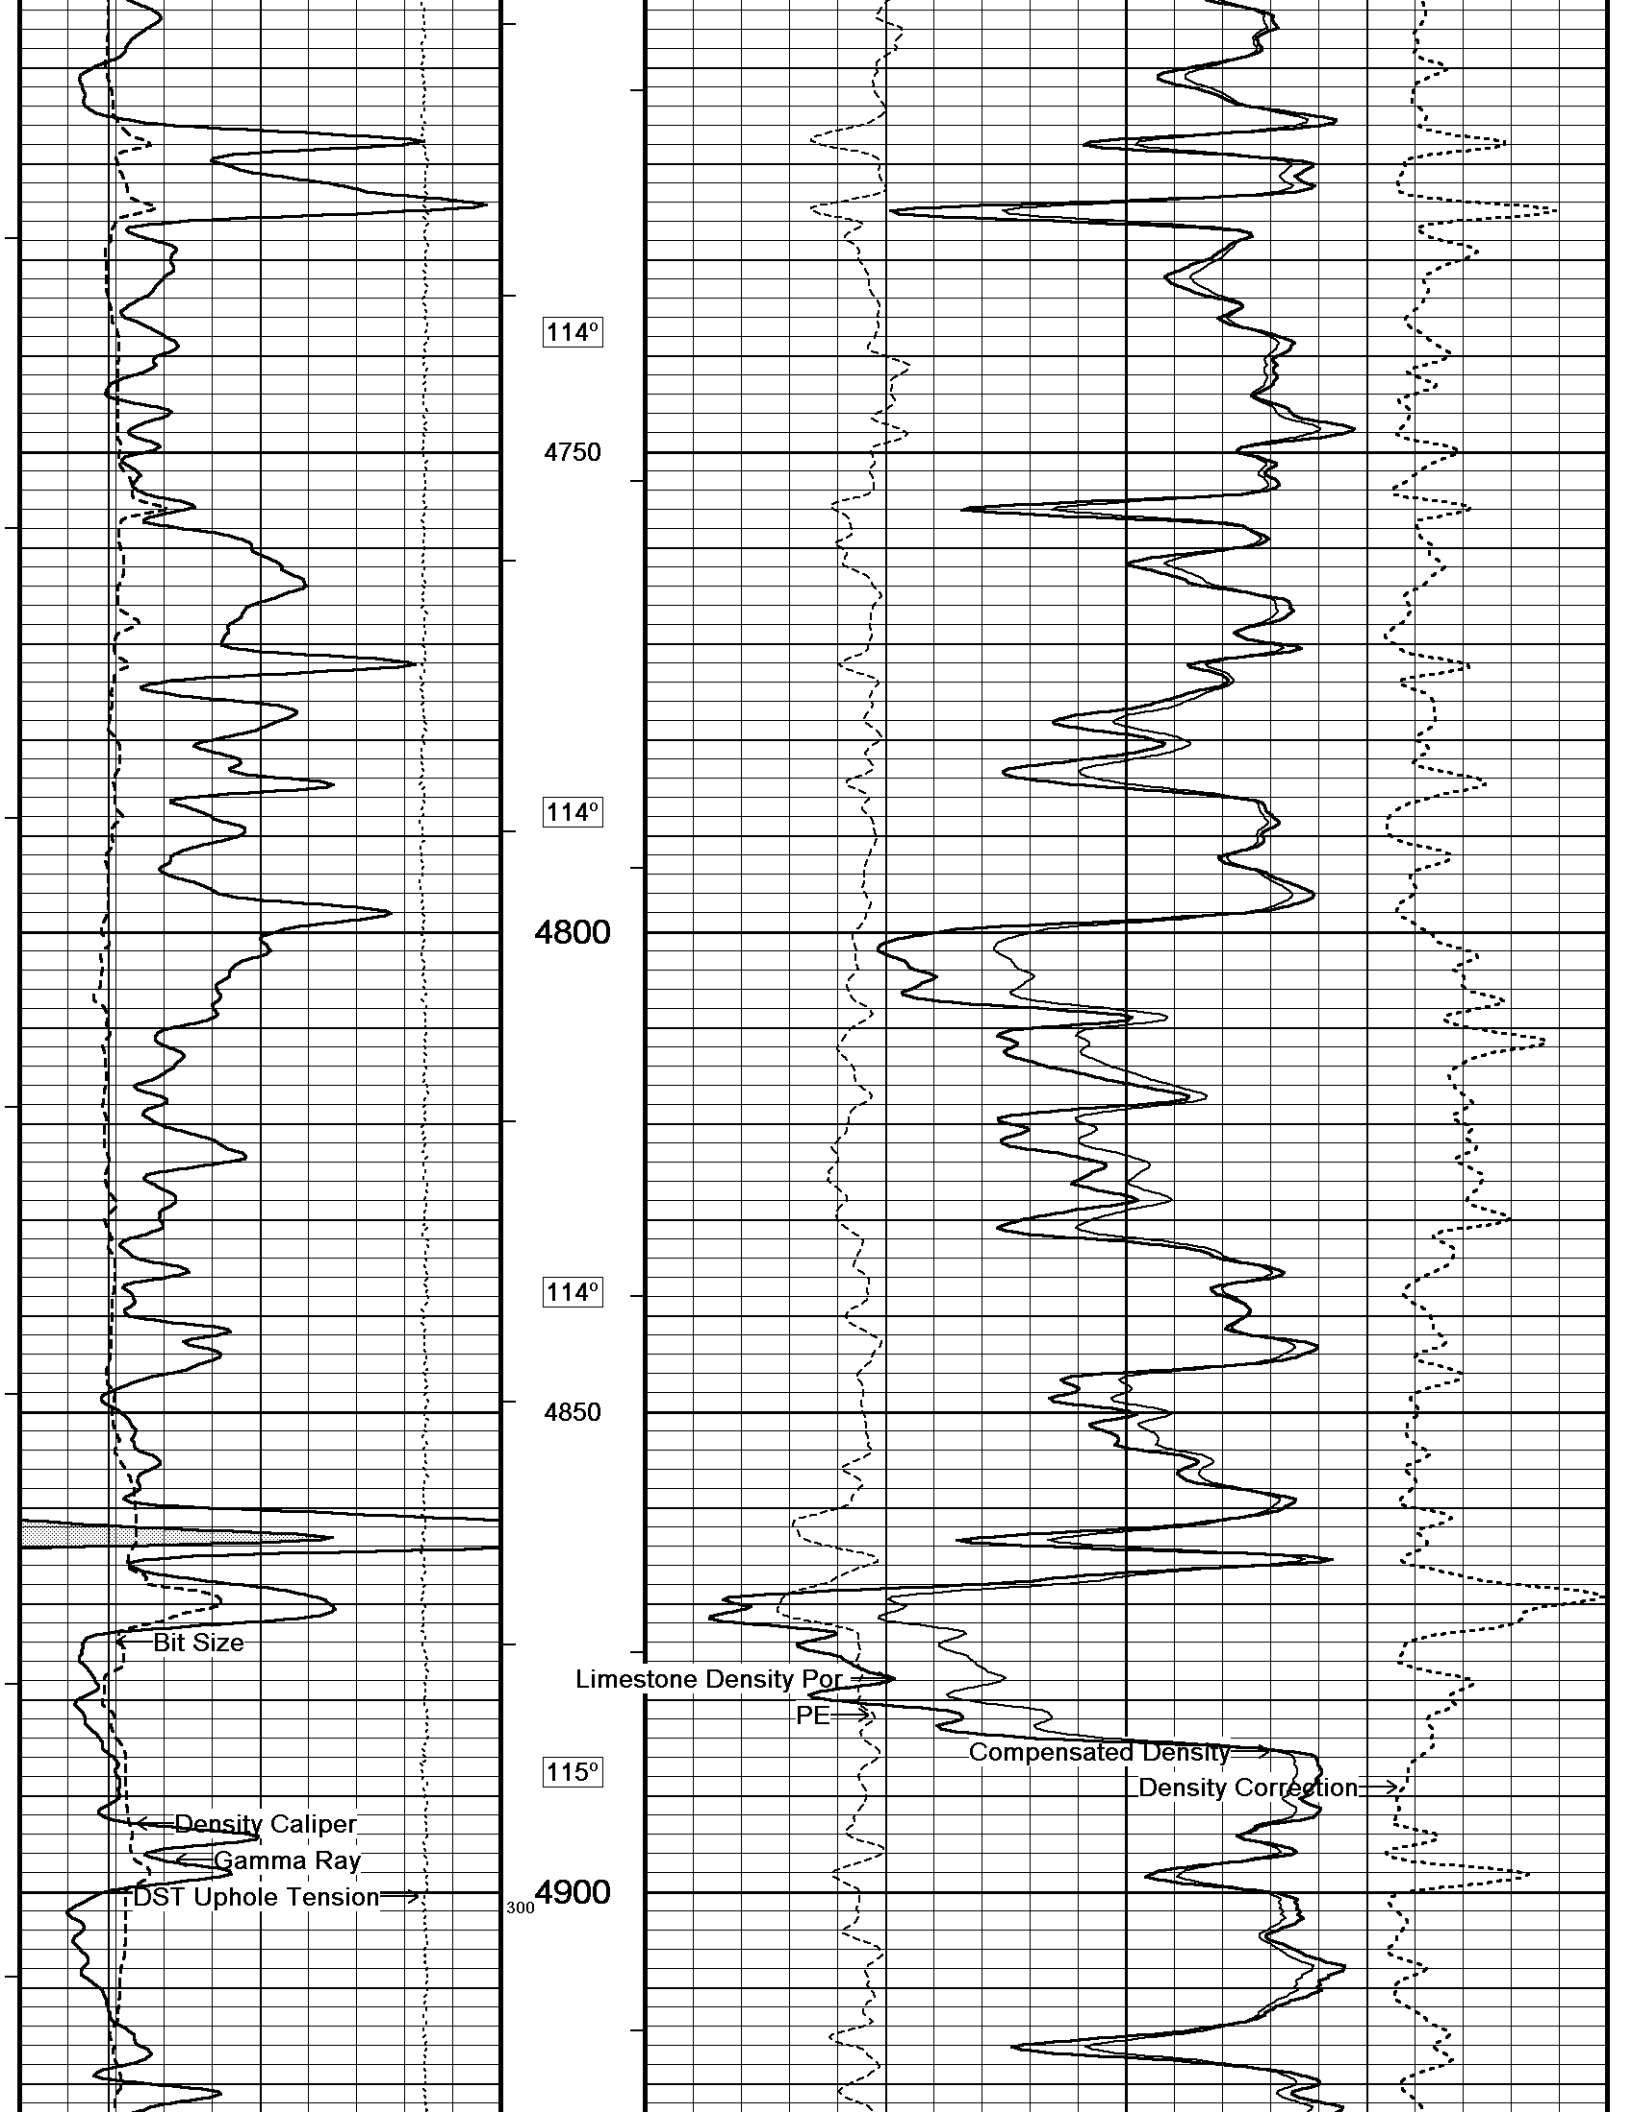

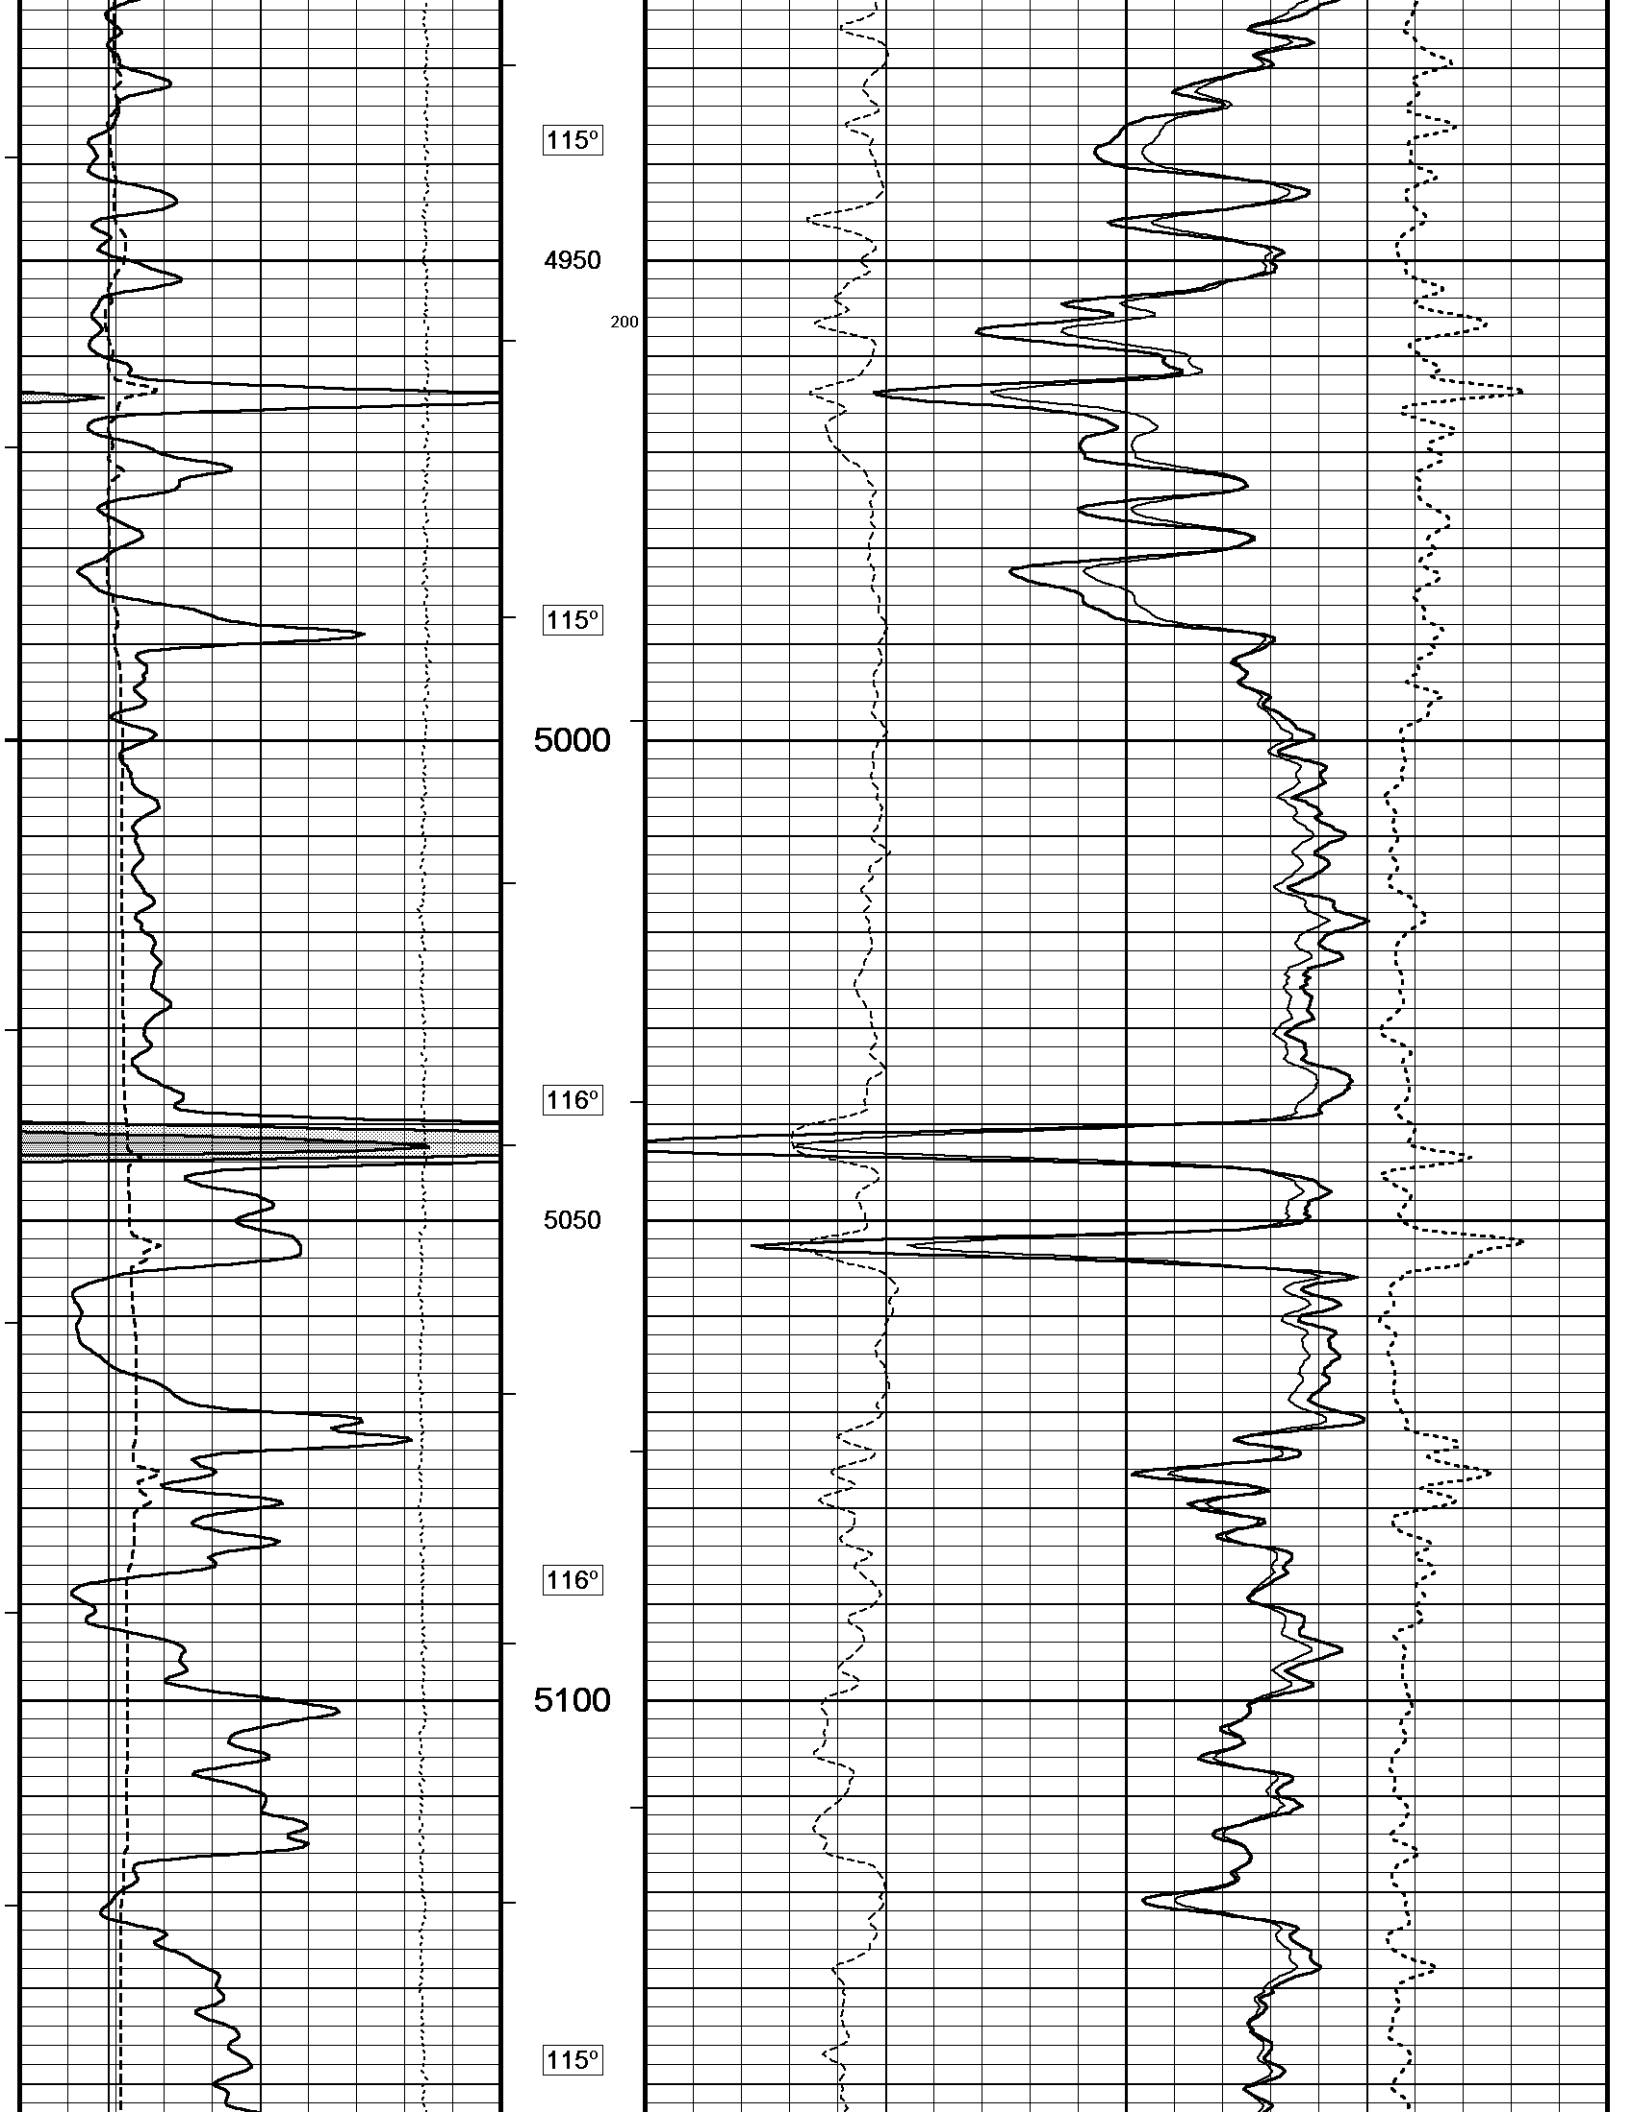

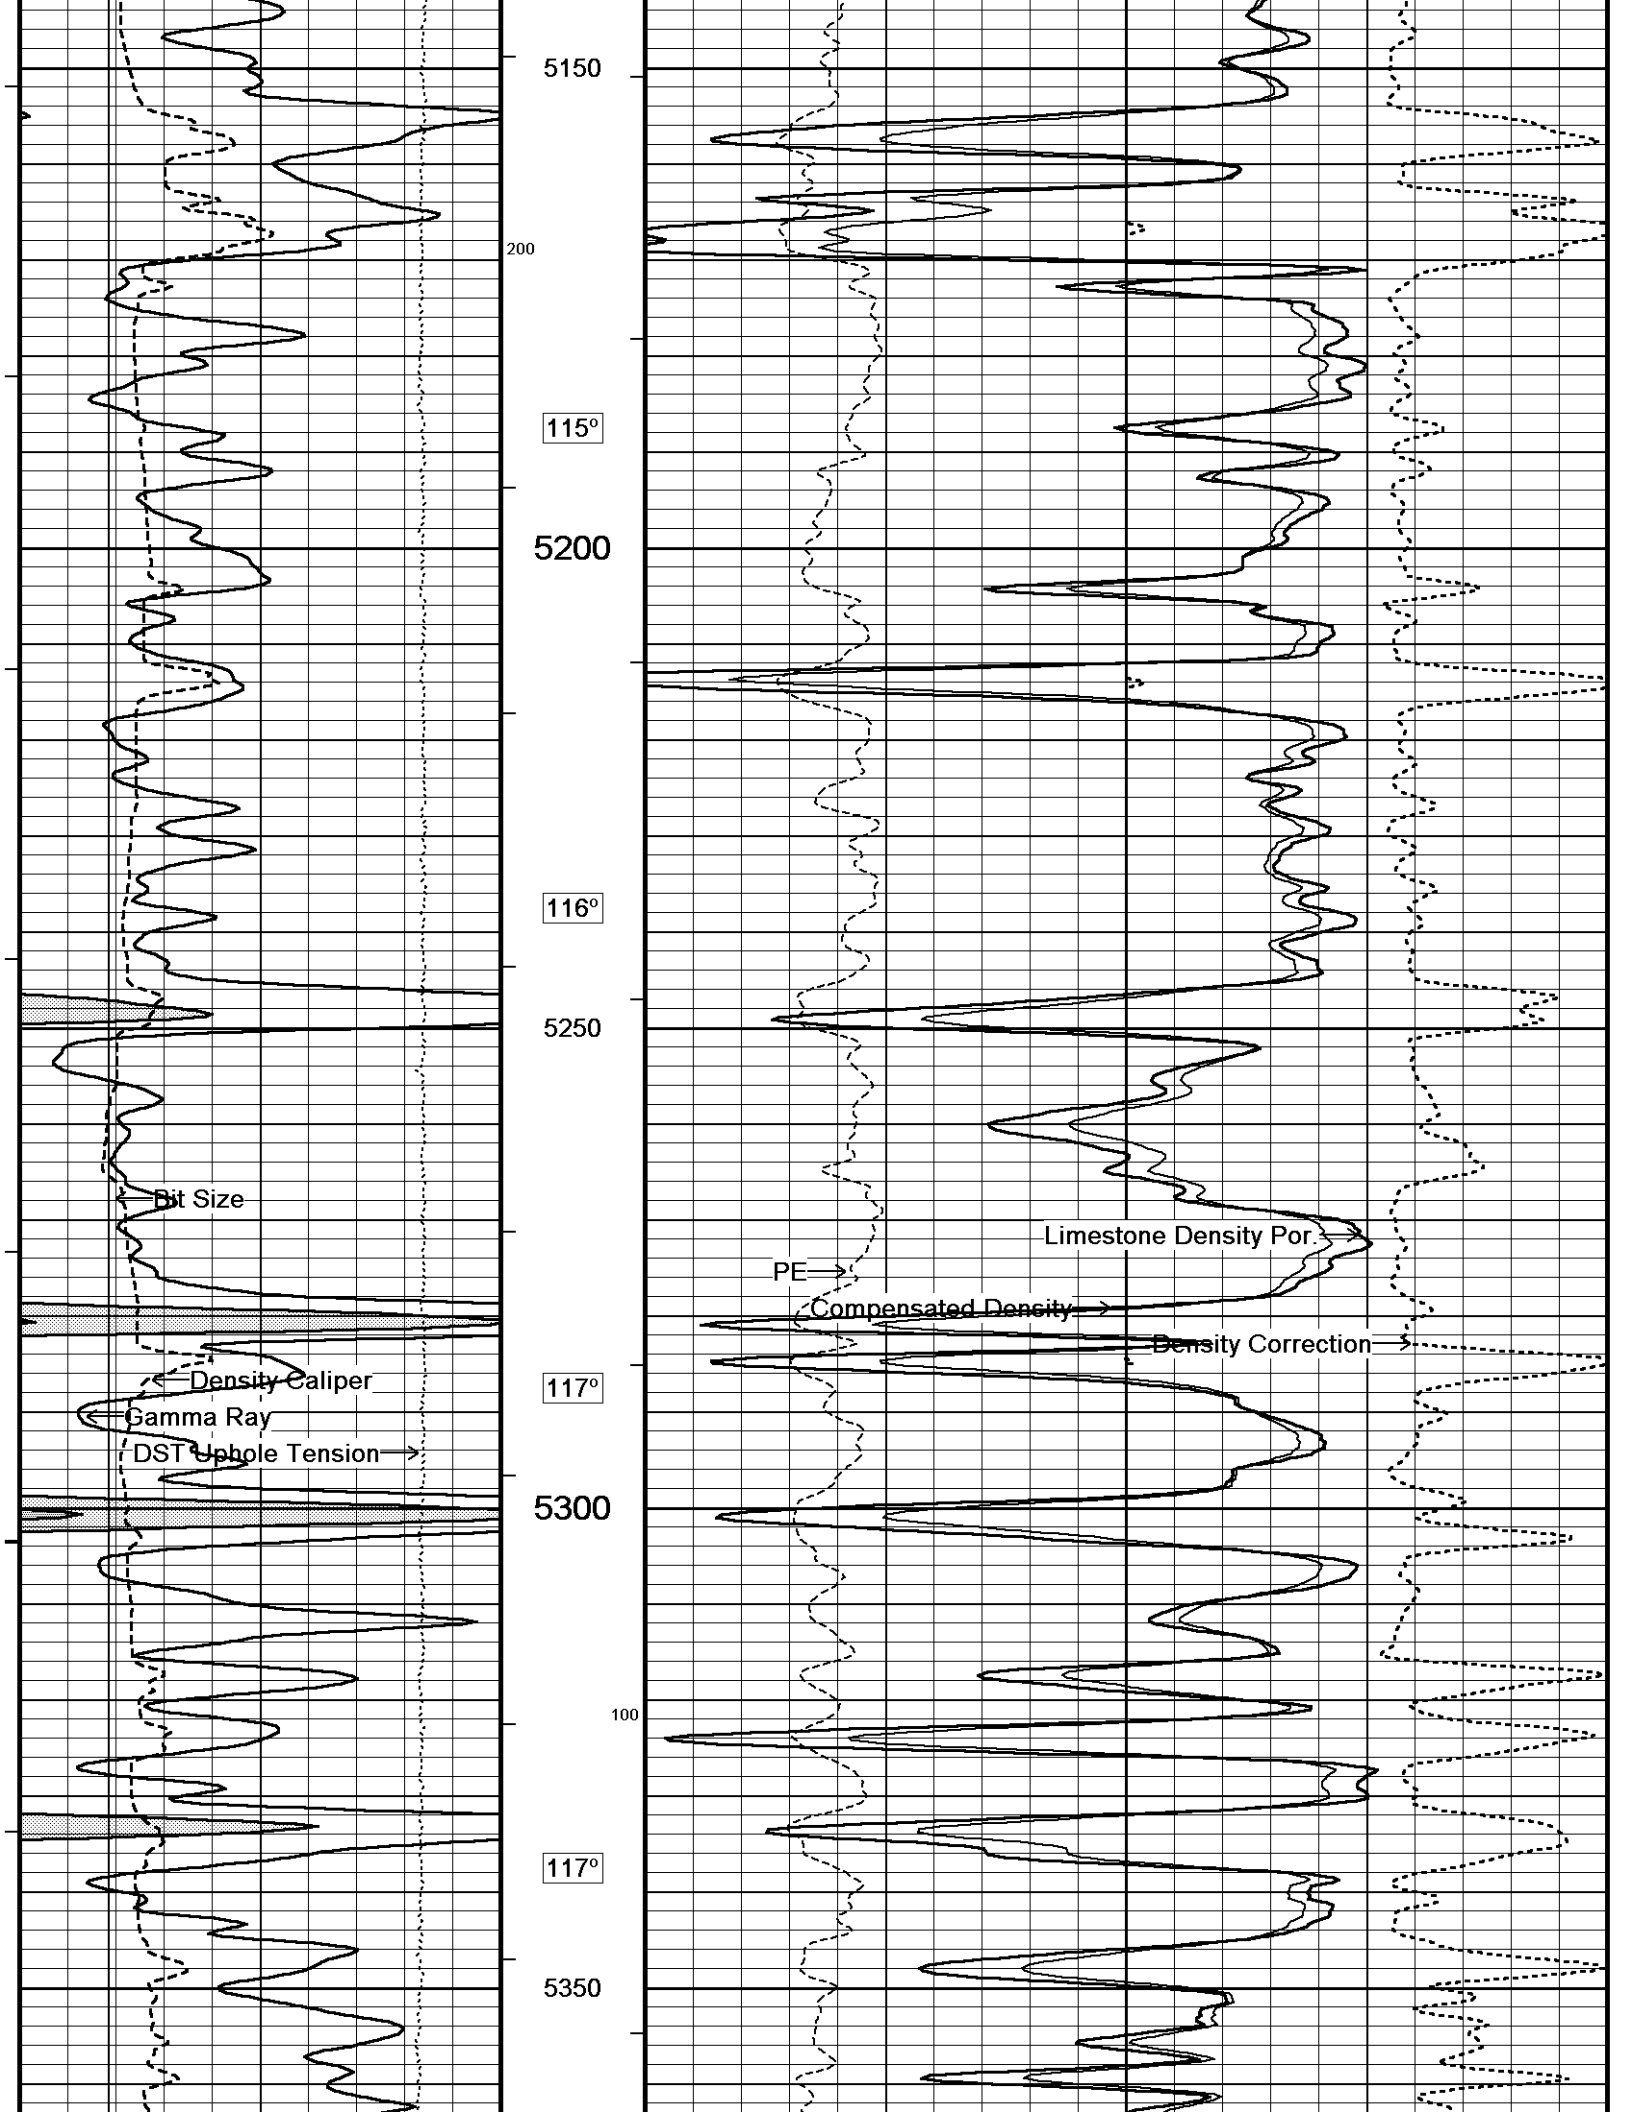

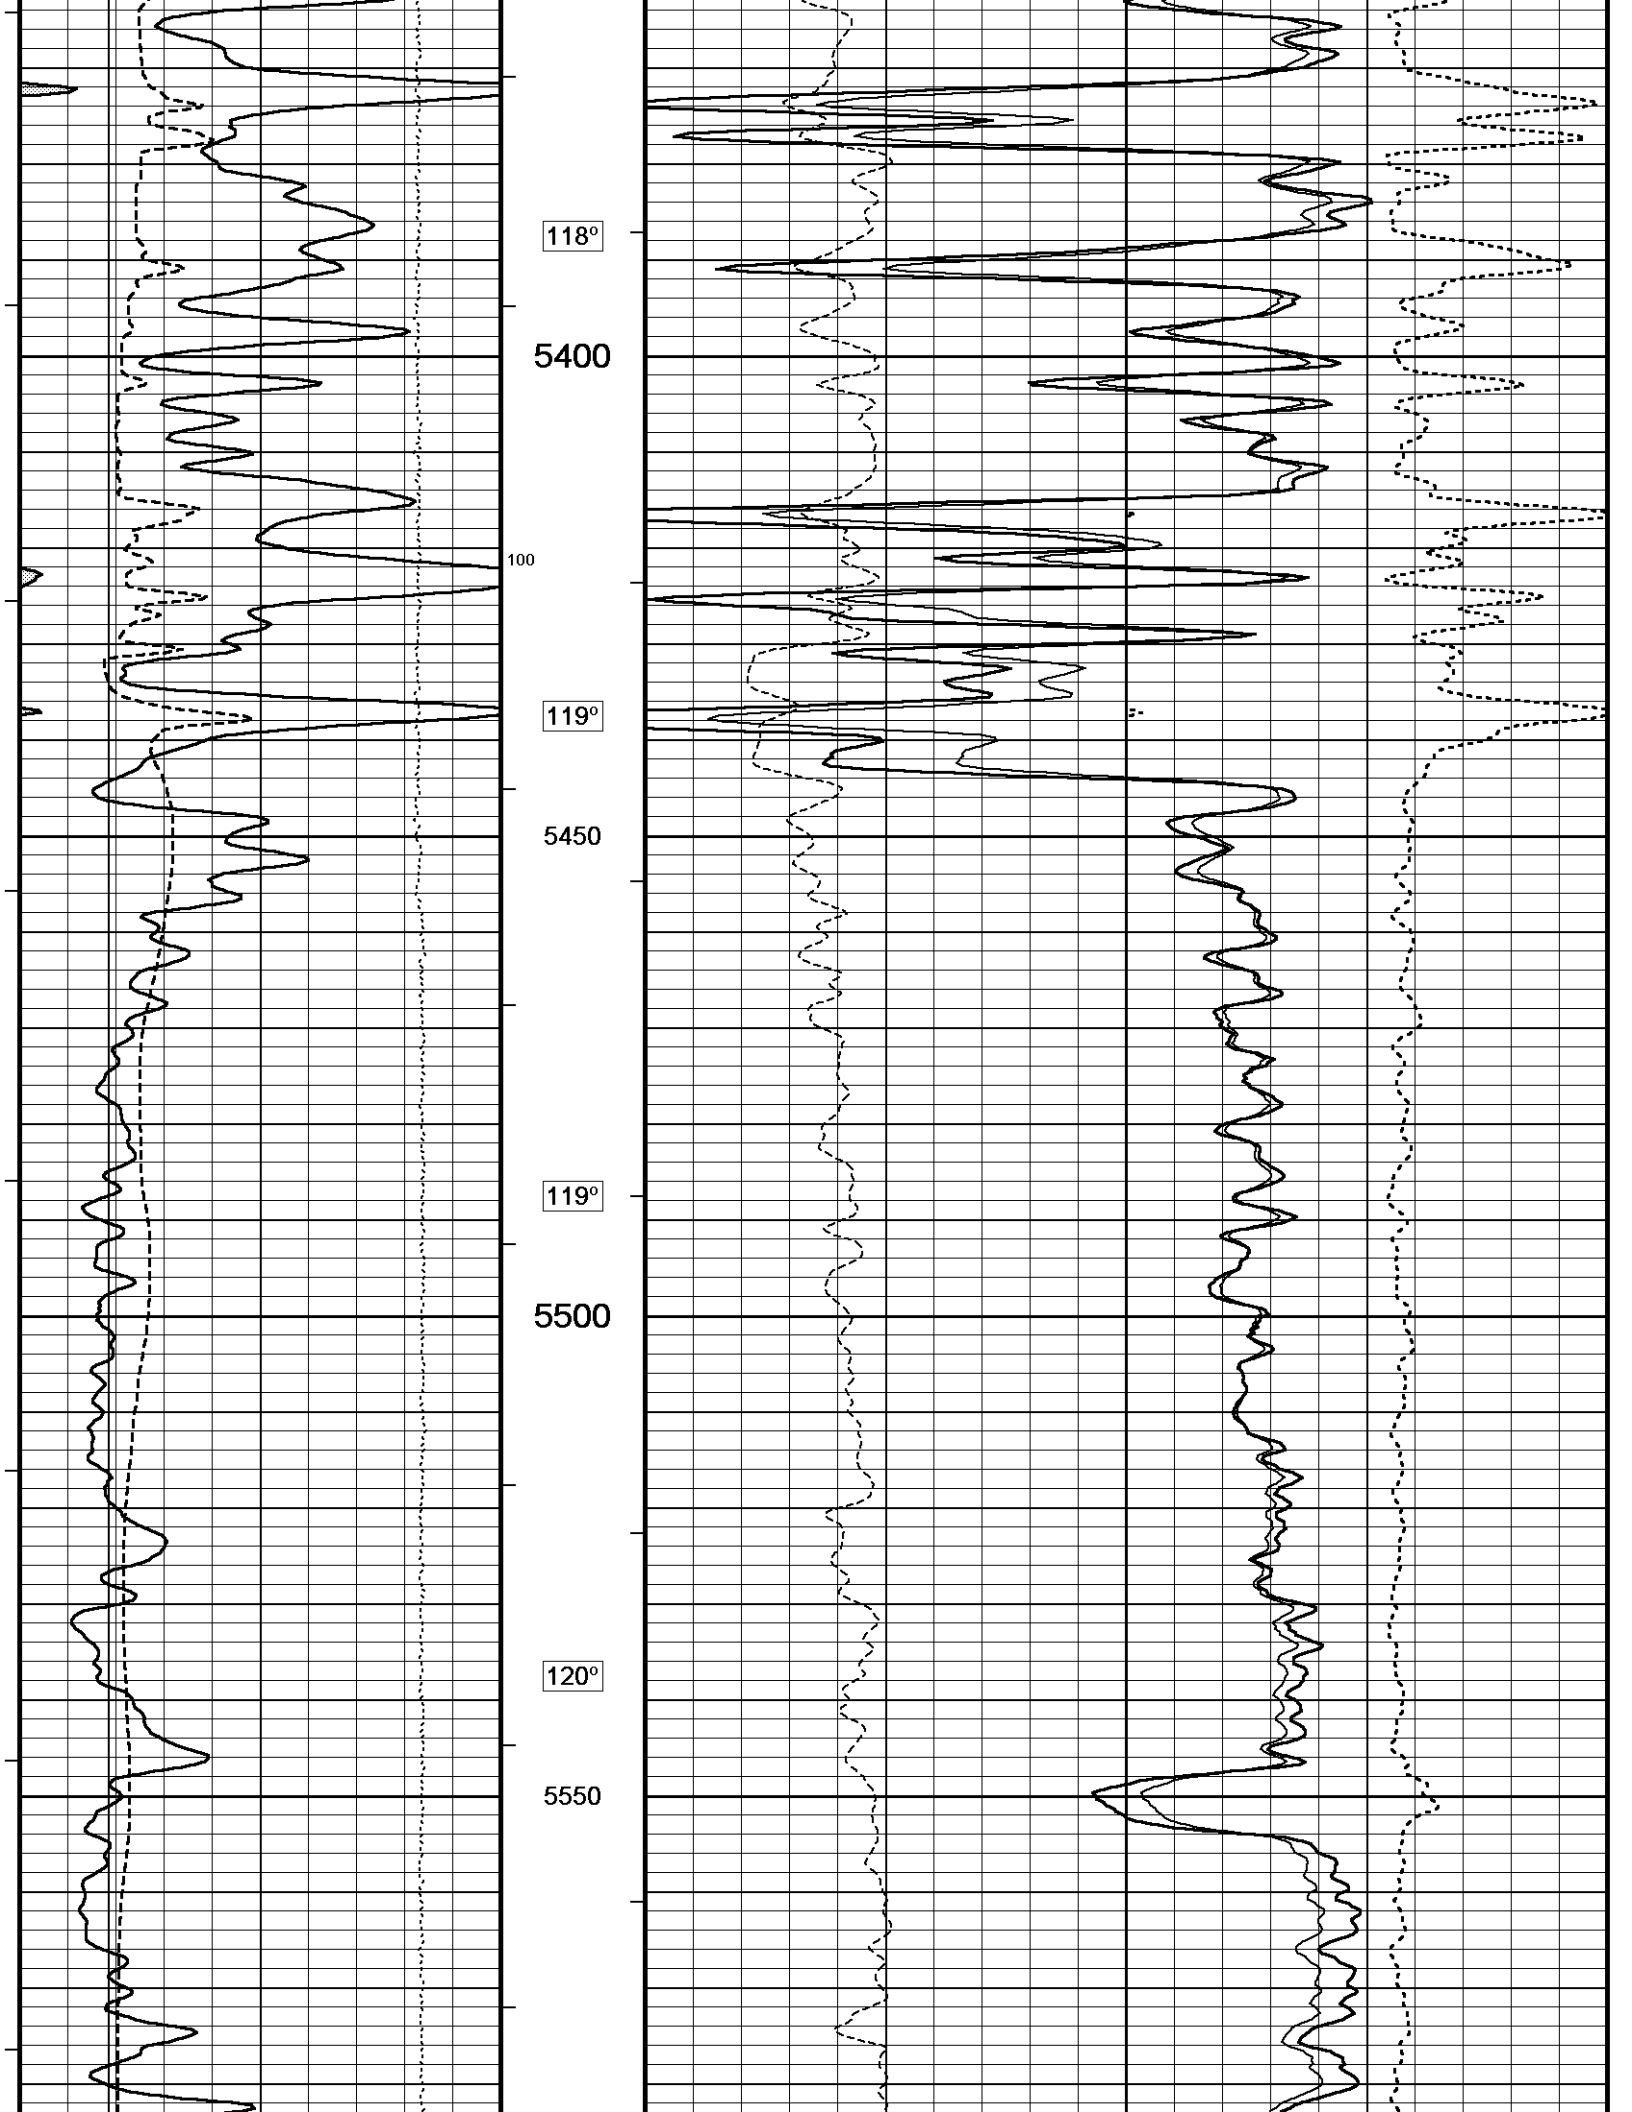

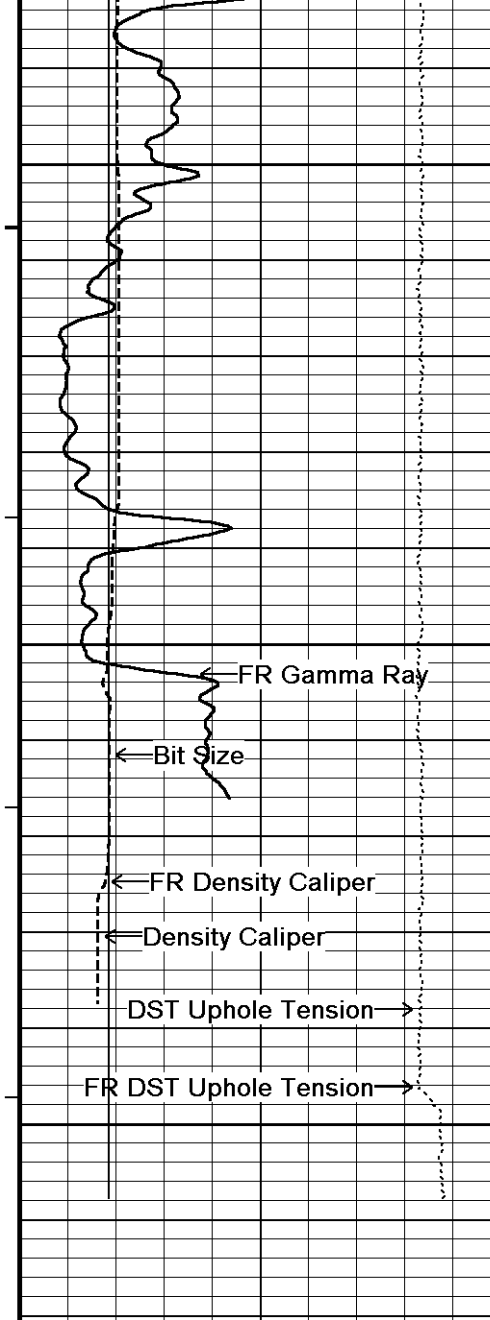

120°

5600

120°



5650

0

5700

5718


Depth in Feet

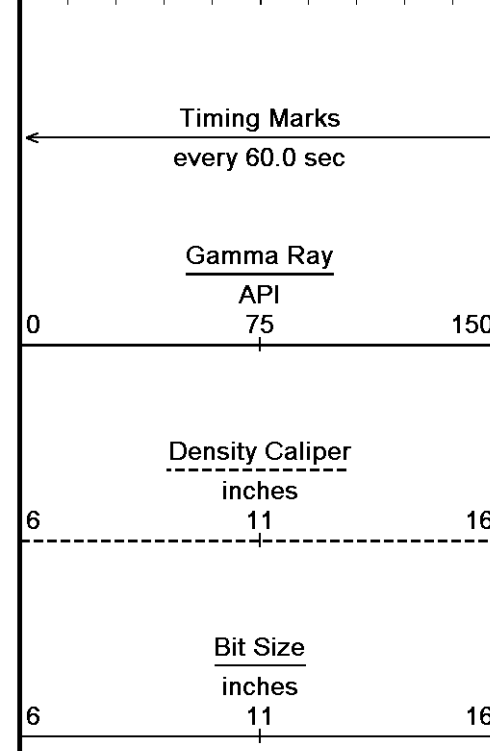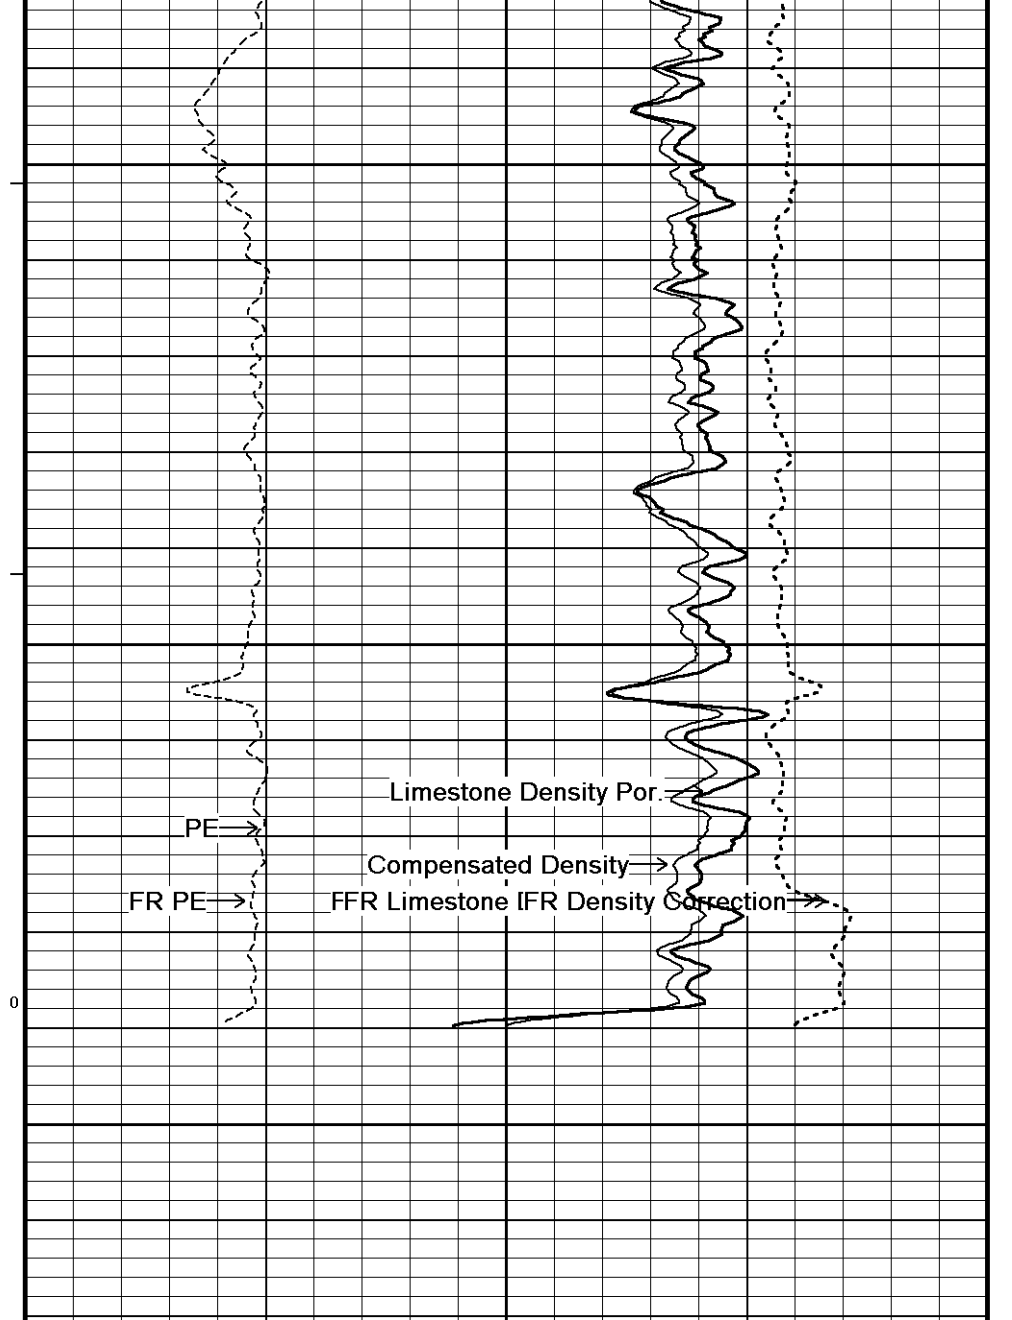


Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

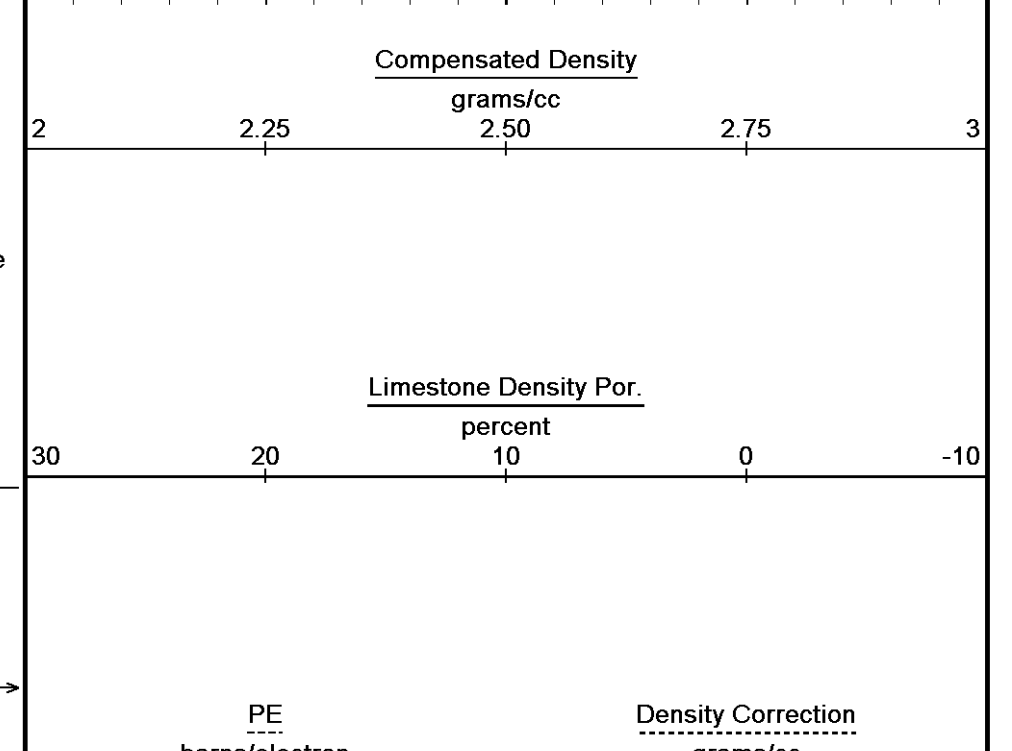

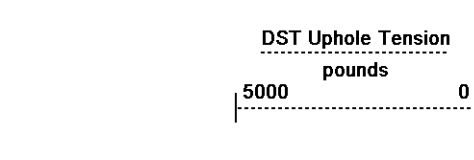


Replay
Scale
1:240



Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 12-JUN-2012 07:52
 Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_003.dta
 Recorded on 12-JUN-2012 05:13
 System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044



5 INCH MAIN


10 INCH HI-RES

Depth Based Data - Maximum Sampling Increment 2.5cm
 Plotted on 12-JUN-2012 07:52
 Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_001.dta
 Recorded on 12-JUN-2012 04:40
 System Versions: Logged with 11.03.4044 Plotted with 11.03.4044

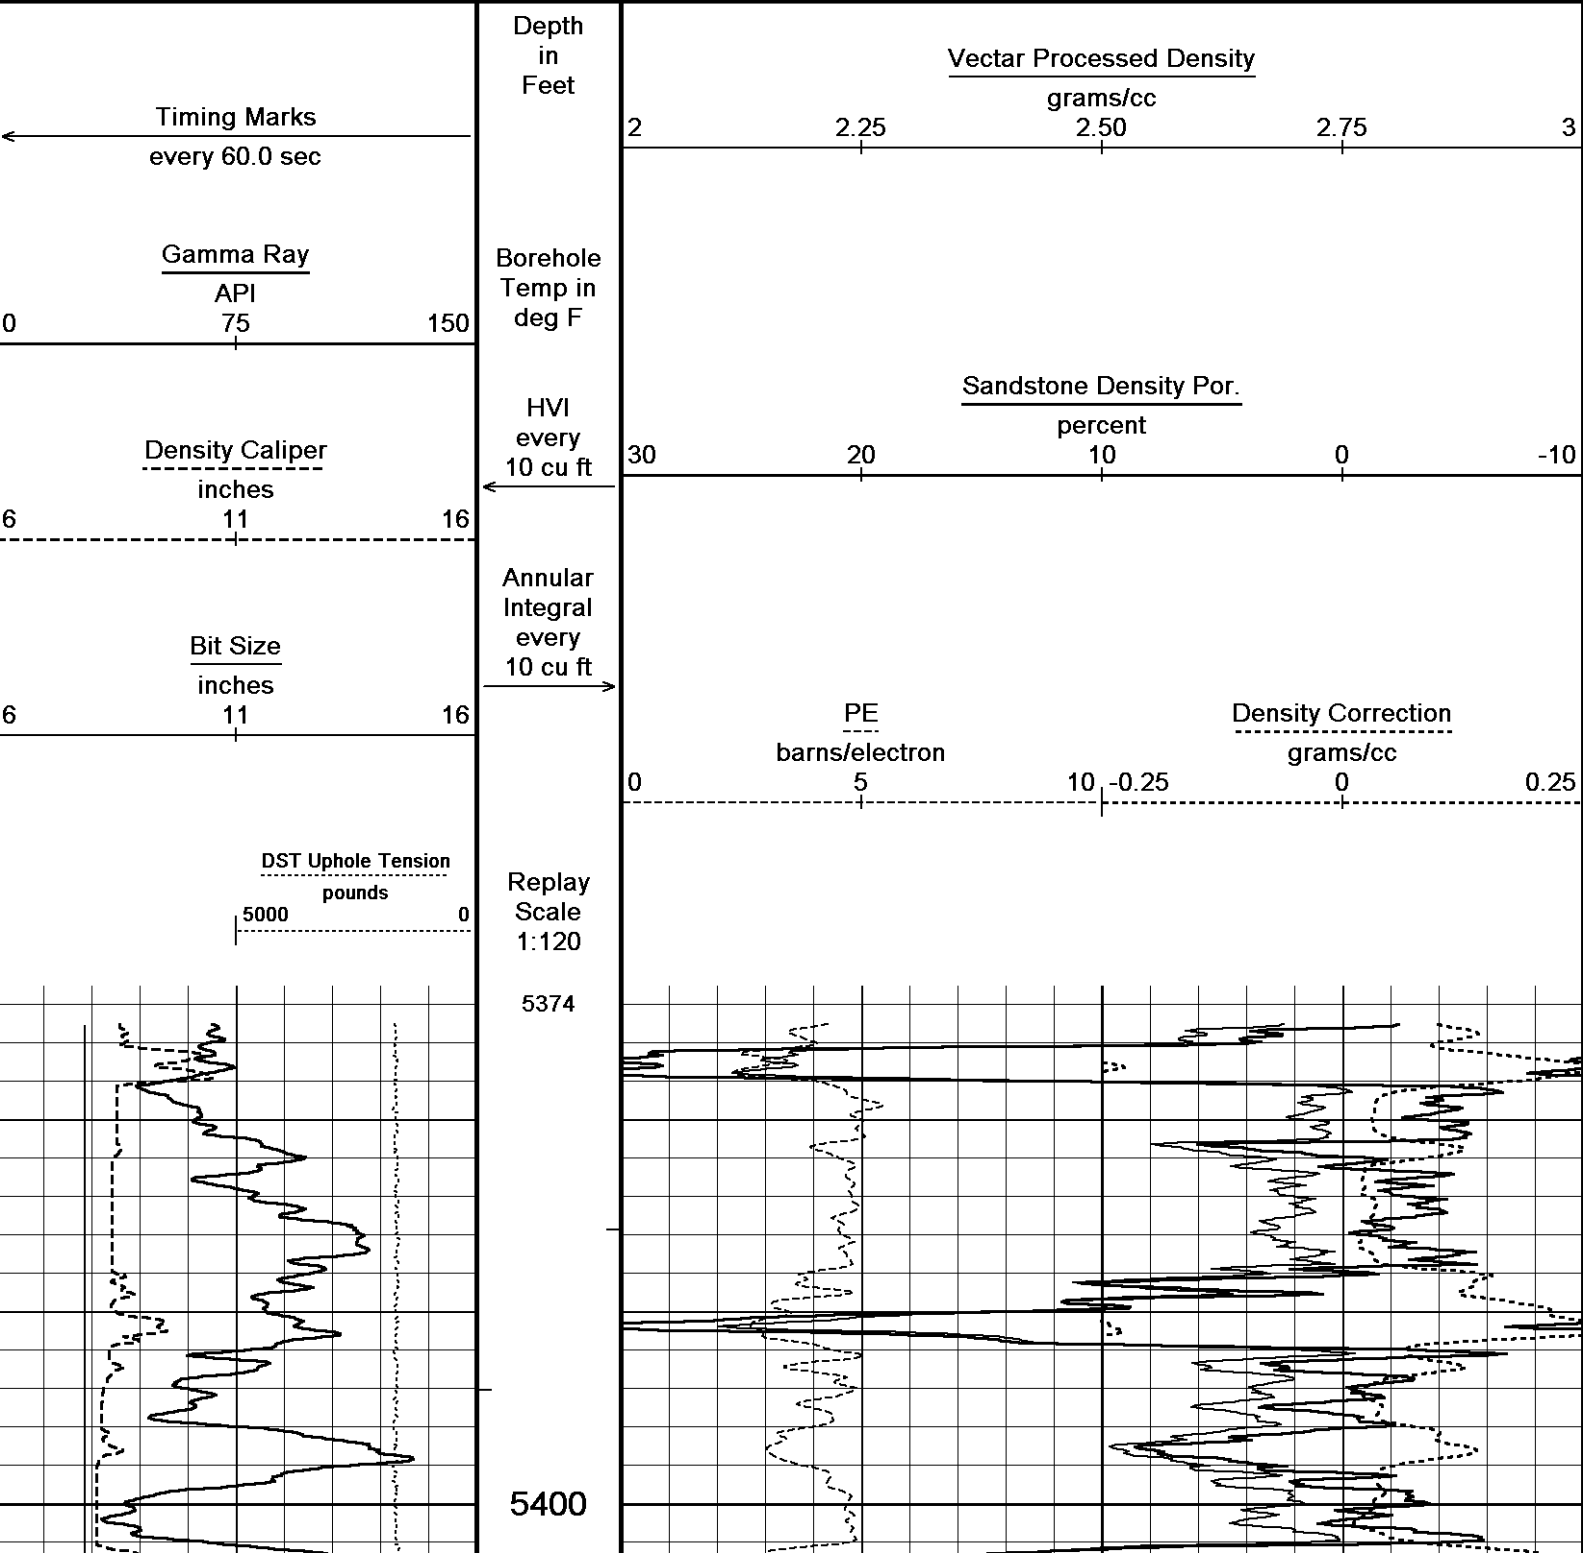

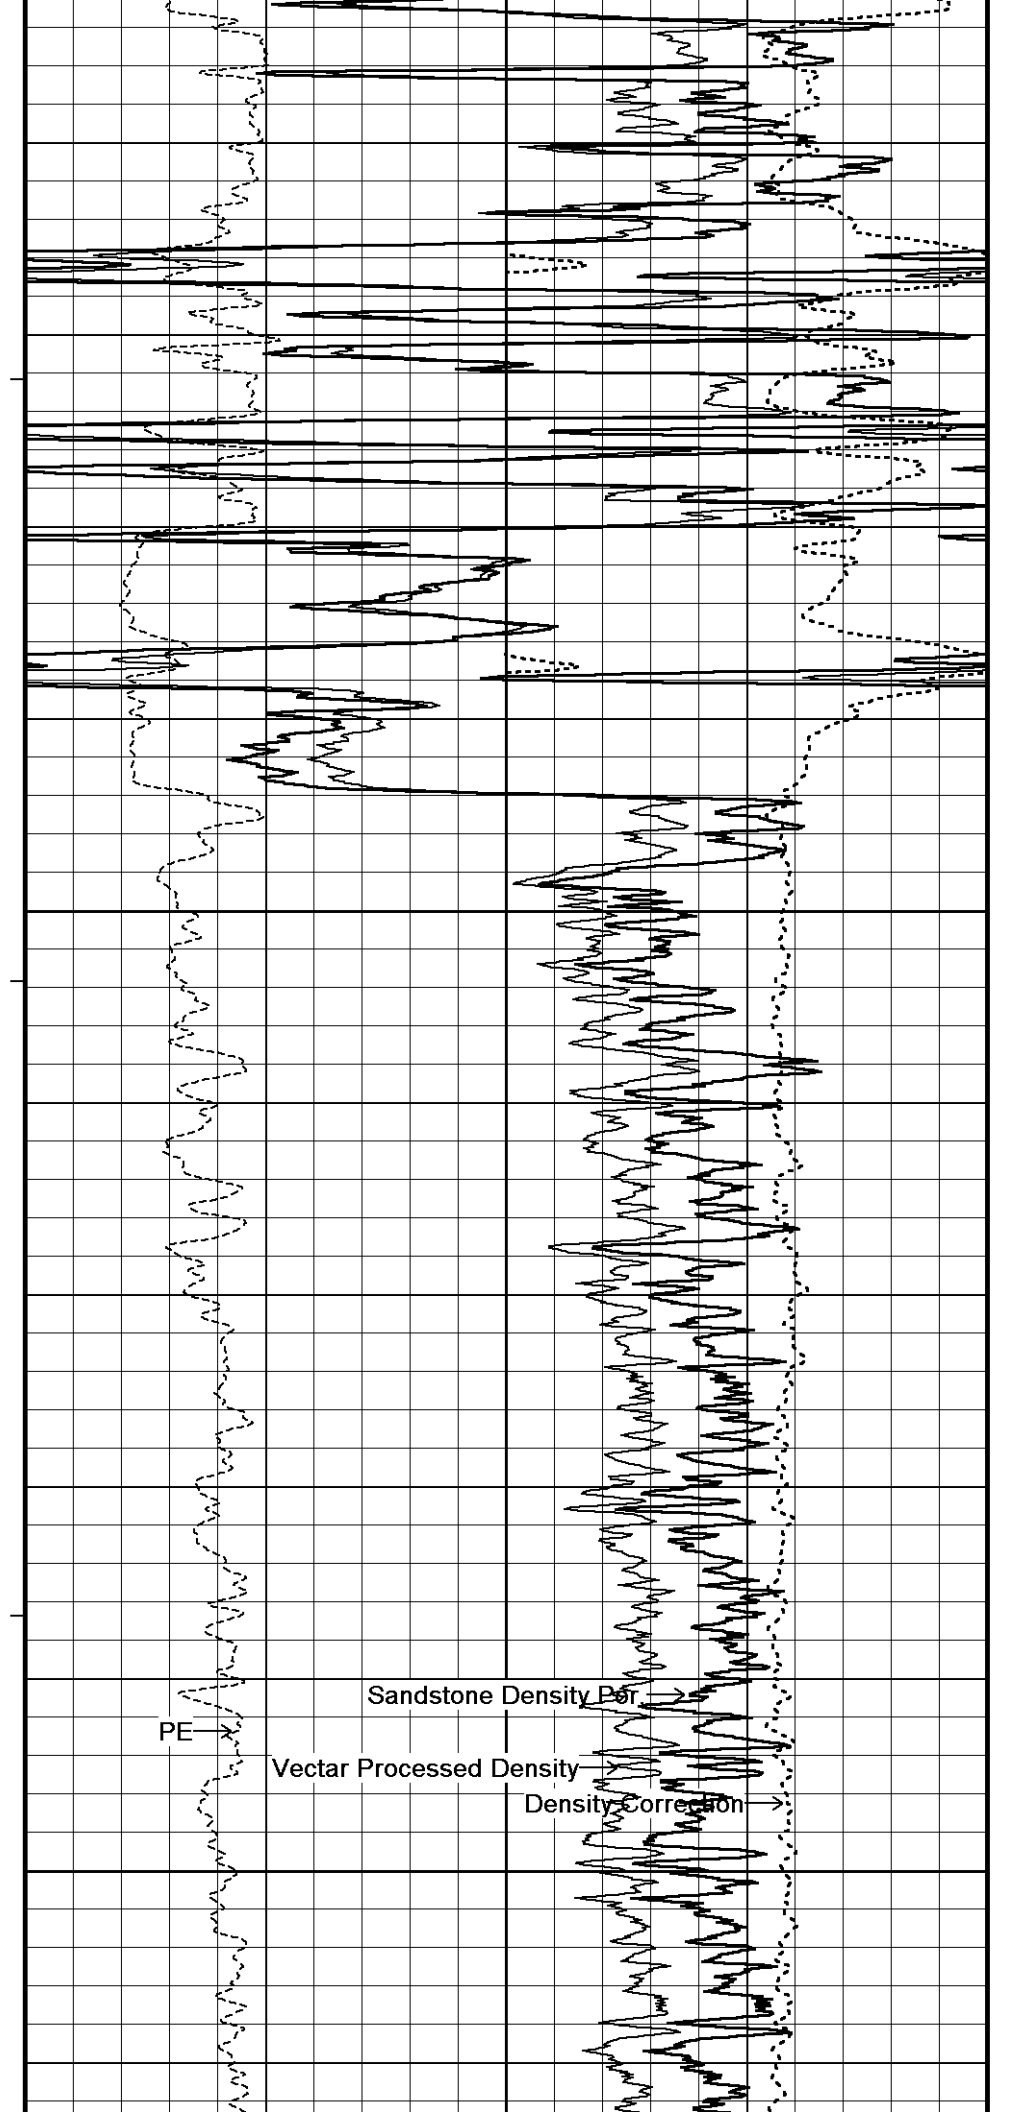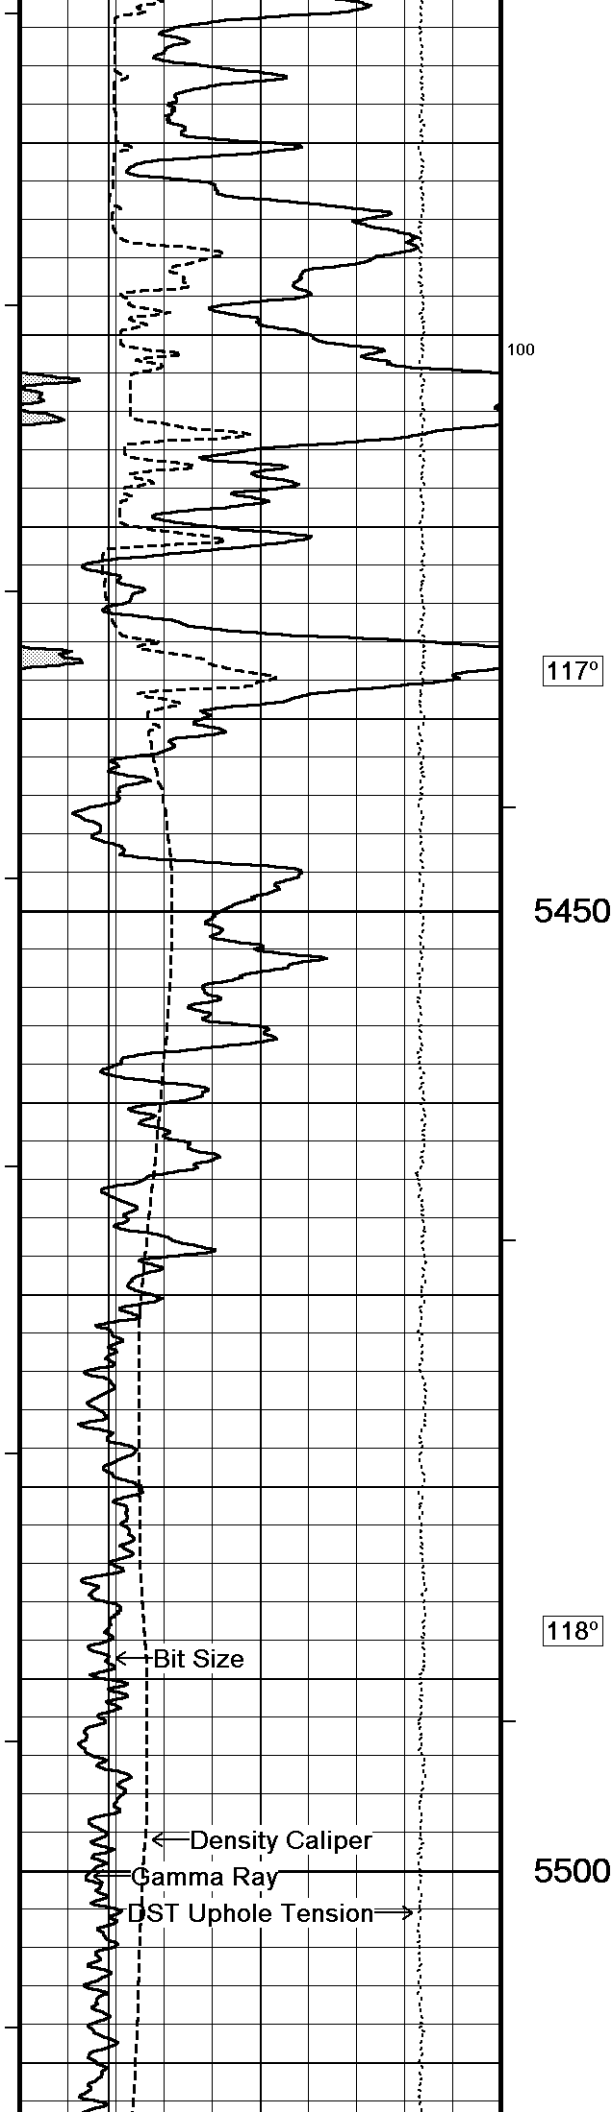

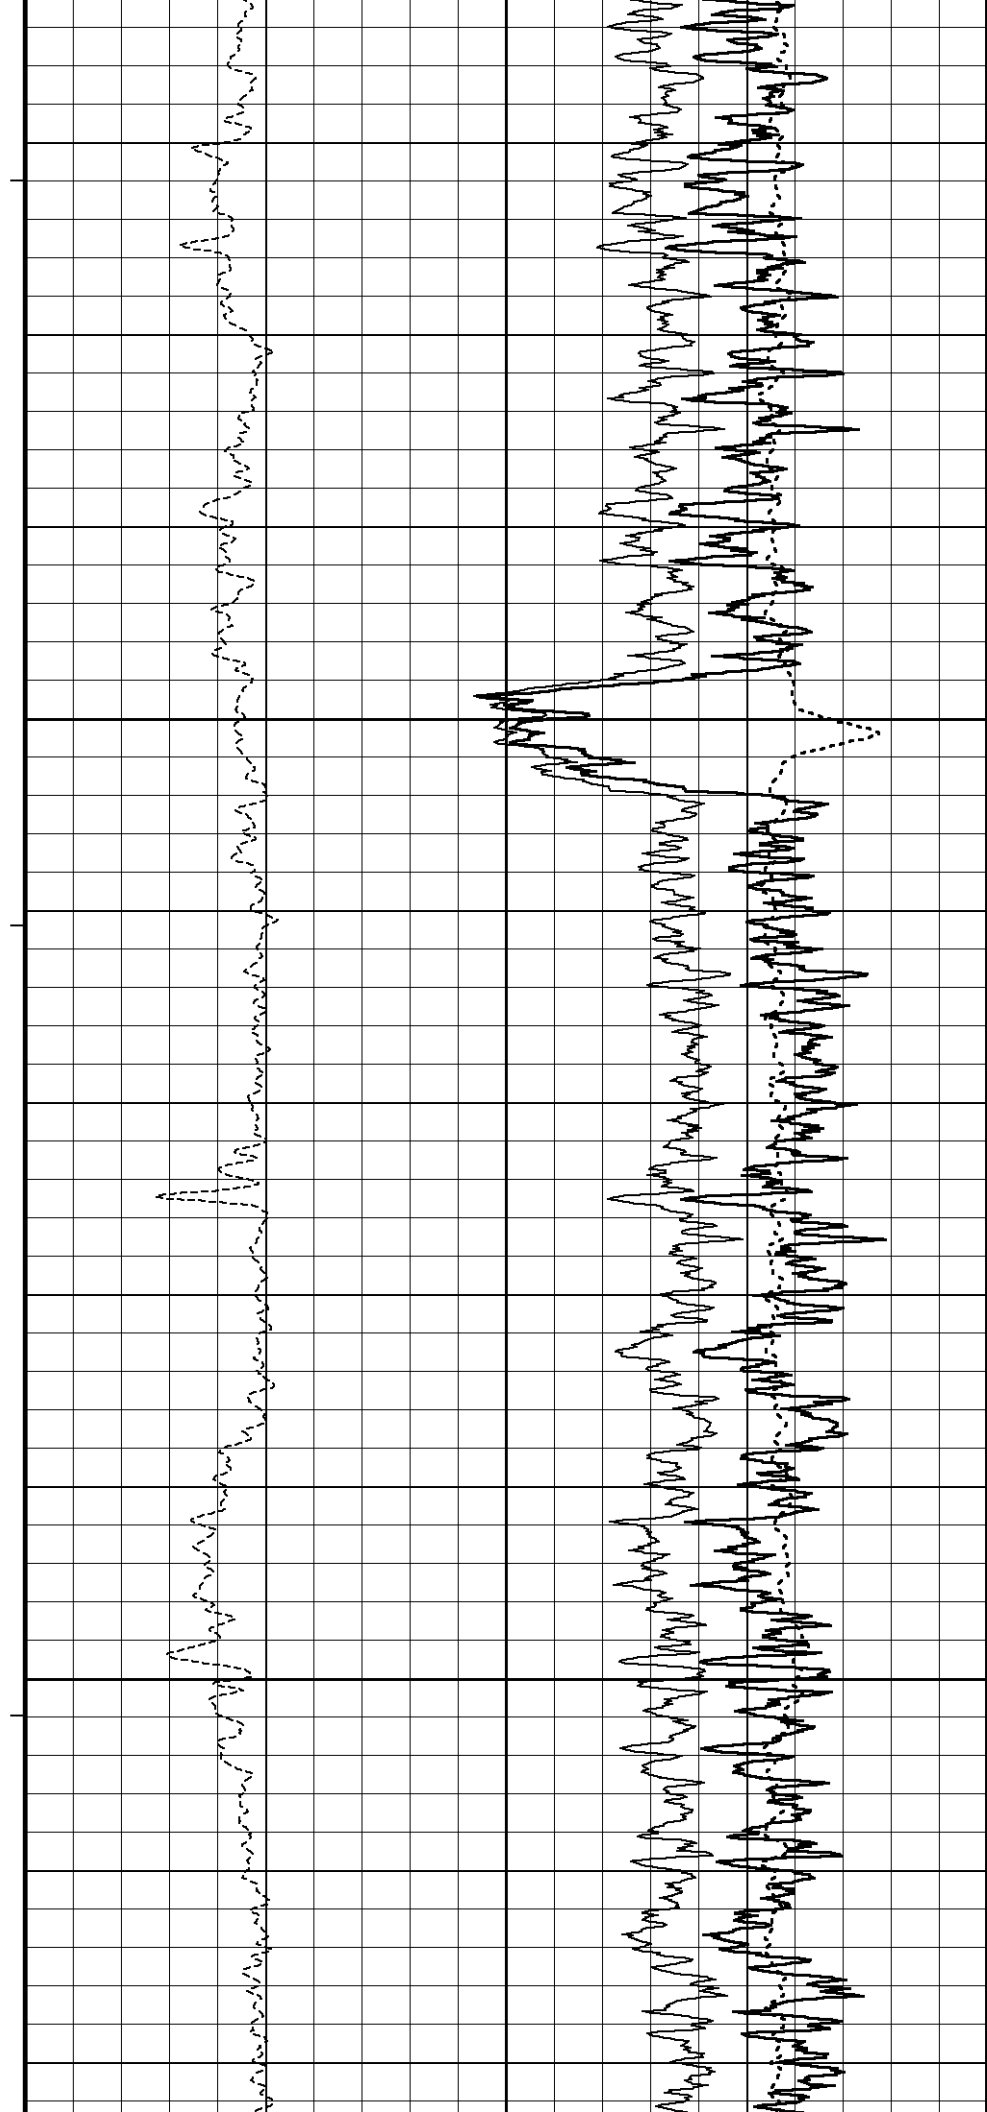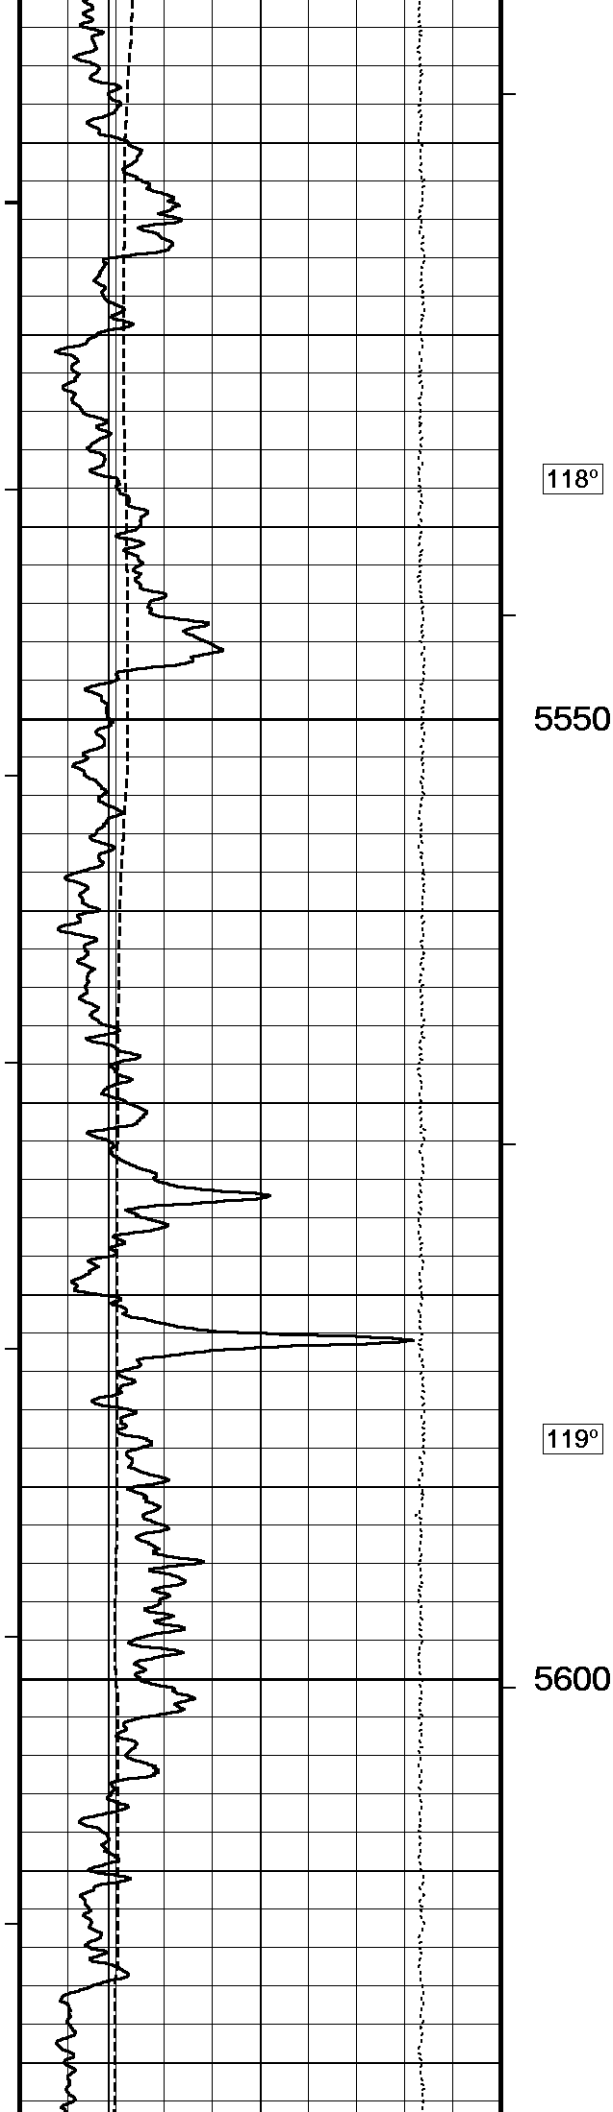

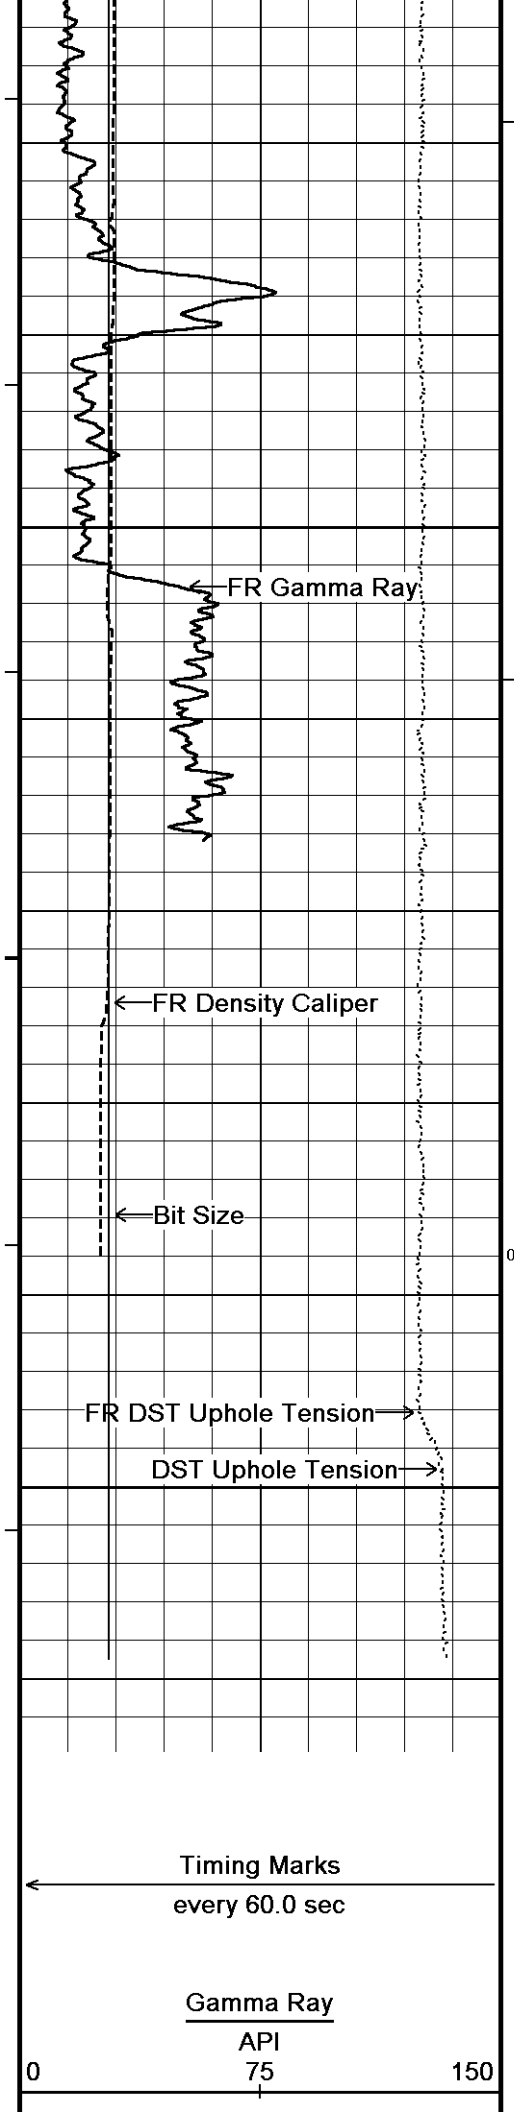

119°

5650


0


5700

5712

Depth in Feet

Borehole Temp in deg F

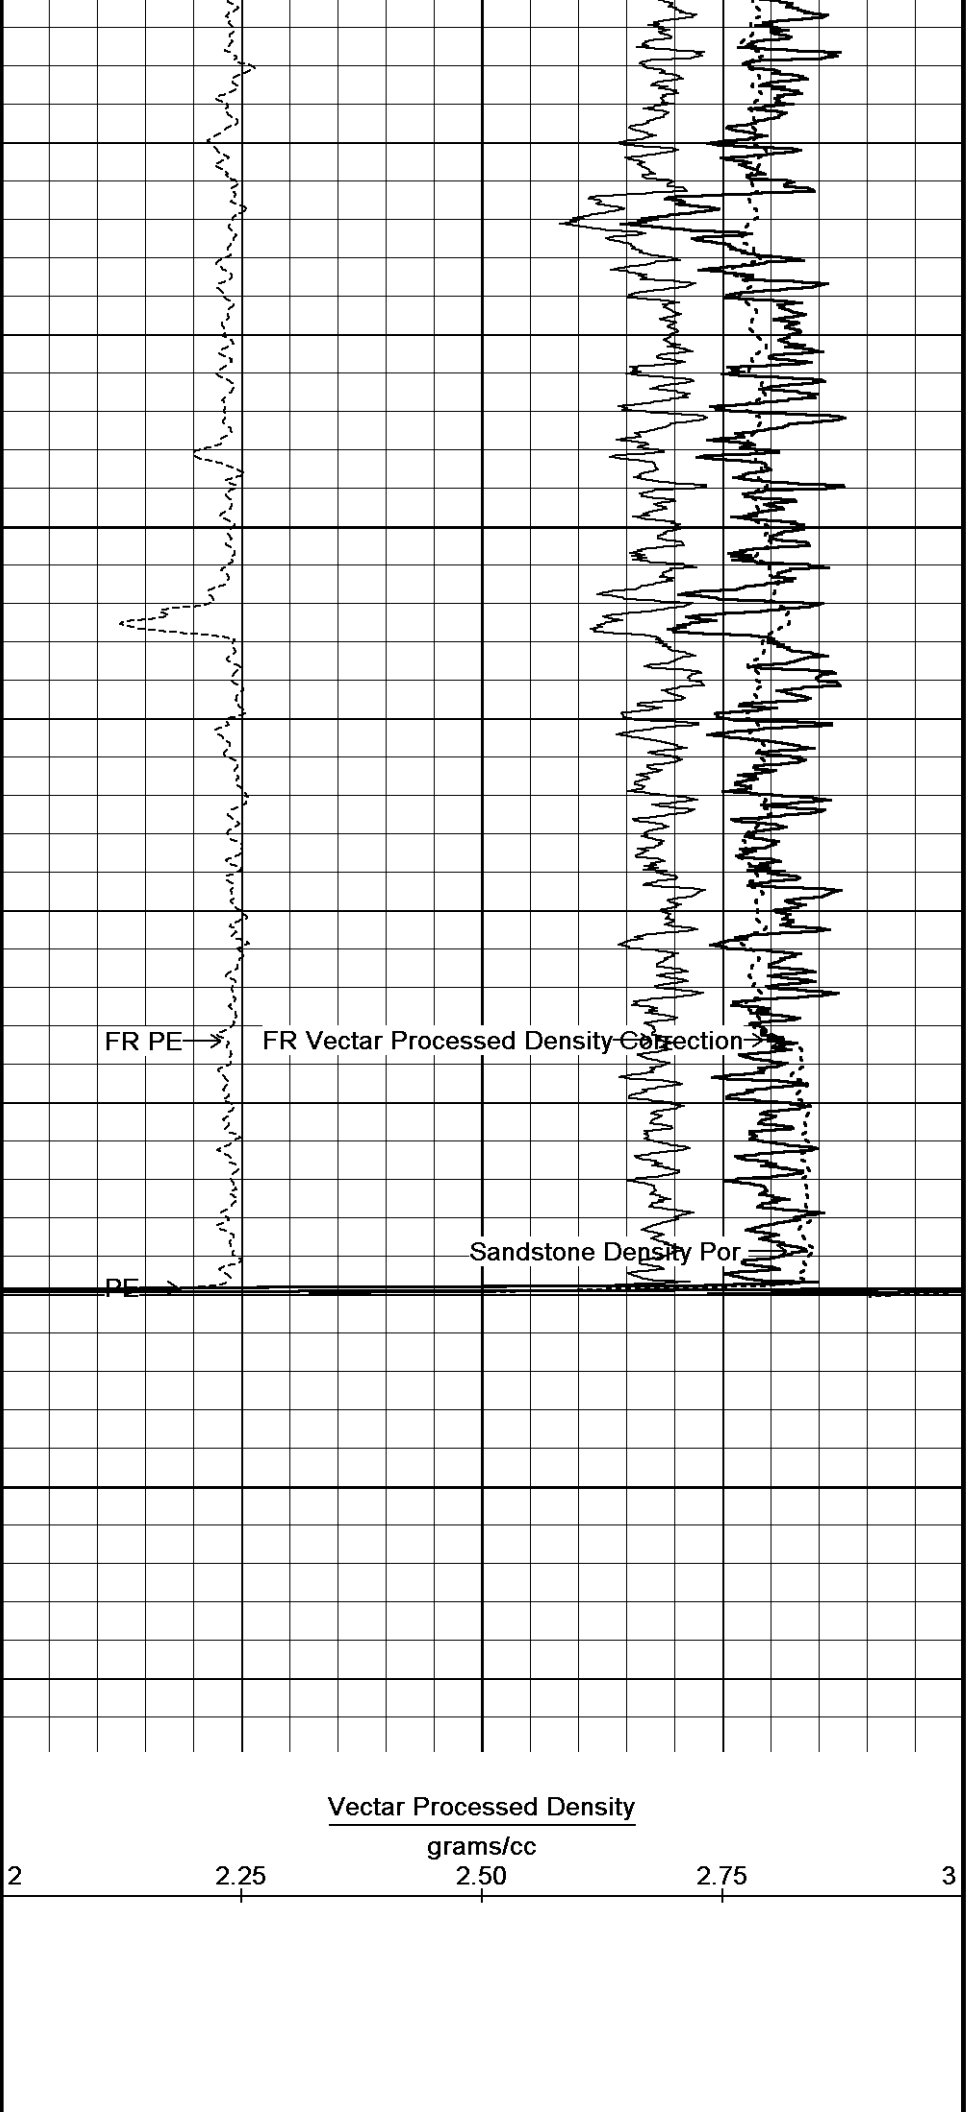


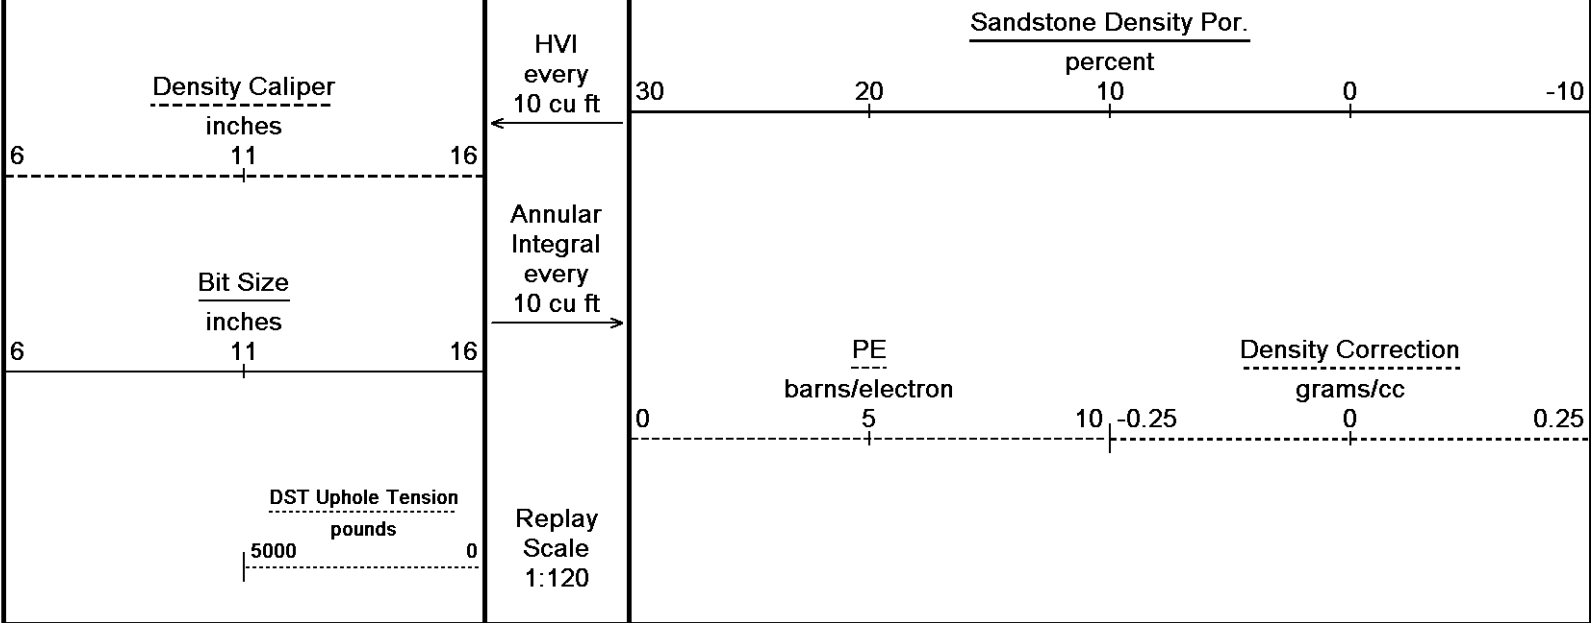



↑ 10 INCH HI-RES ↑

↓ REPEAT SECTION ↓

Depth Based Data - Maximum Sampling Increment 10.0cm
Plotted on 12-JUN-2012 07:52
Filename: C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2_002.dta
Recorded on 12-JUN-2012 04:40
System Versions: Logged with 11.03.4044 Processed with 11.03.4044 Plotted with 11.03.4044

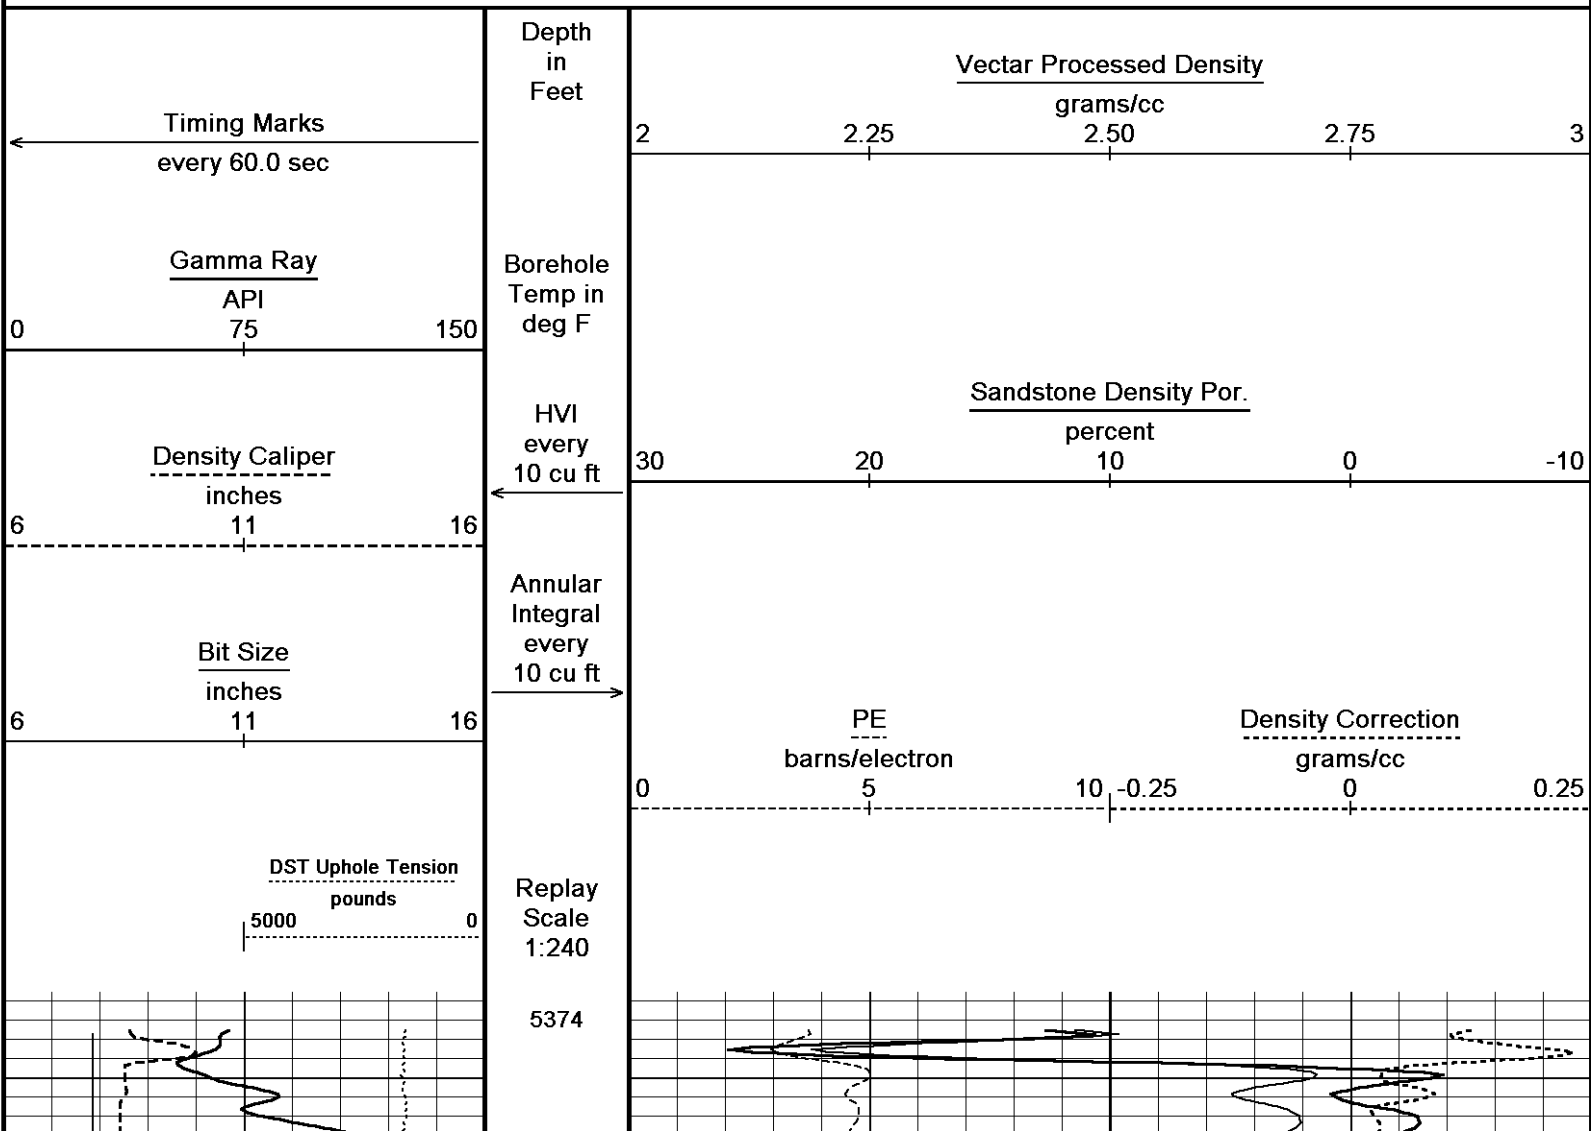

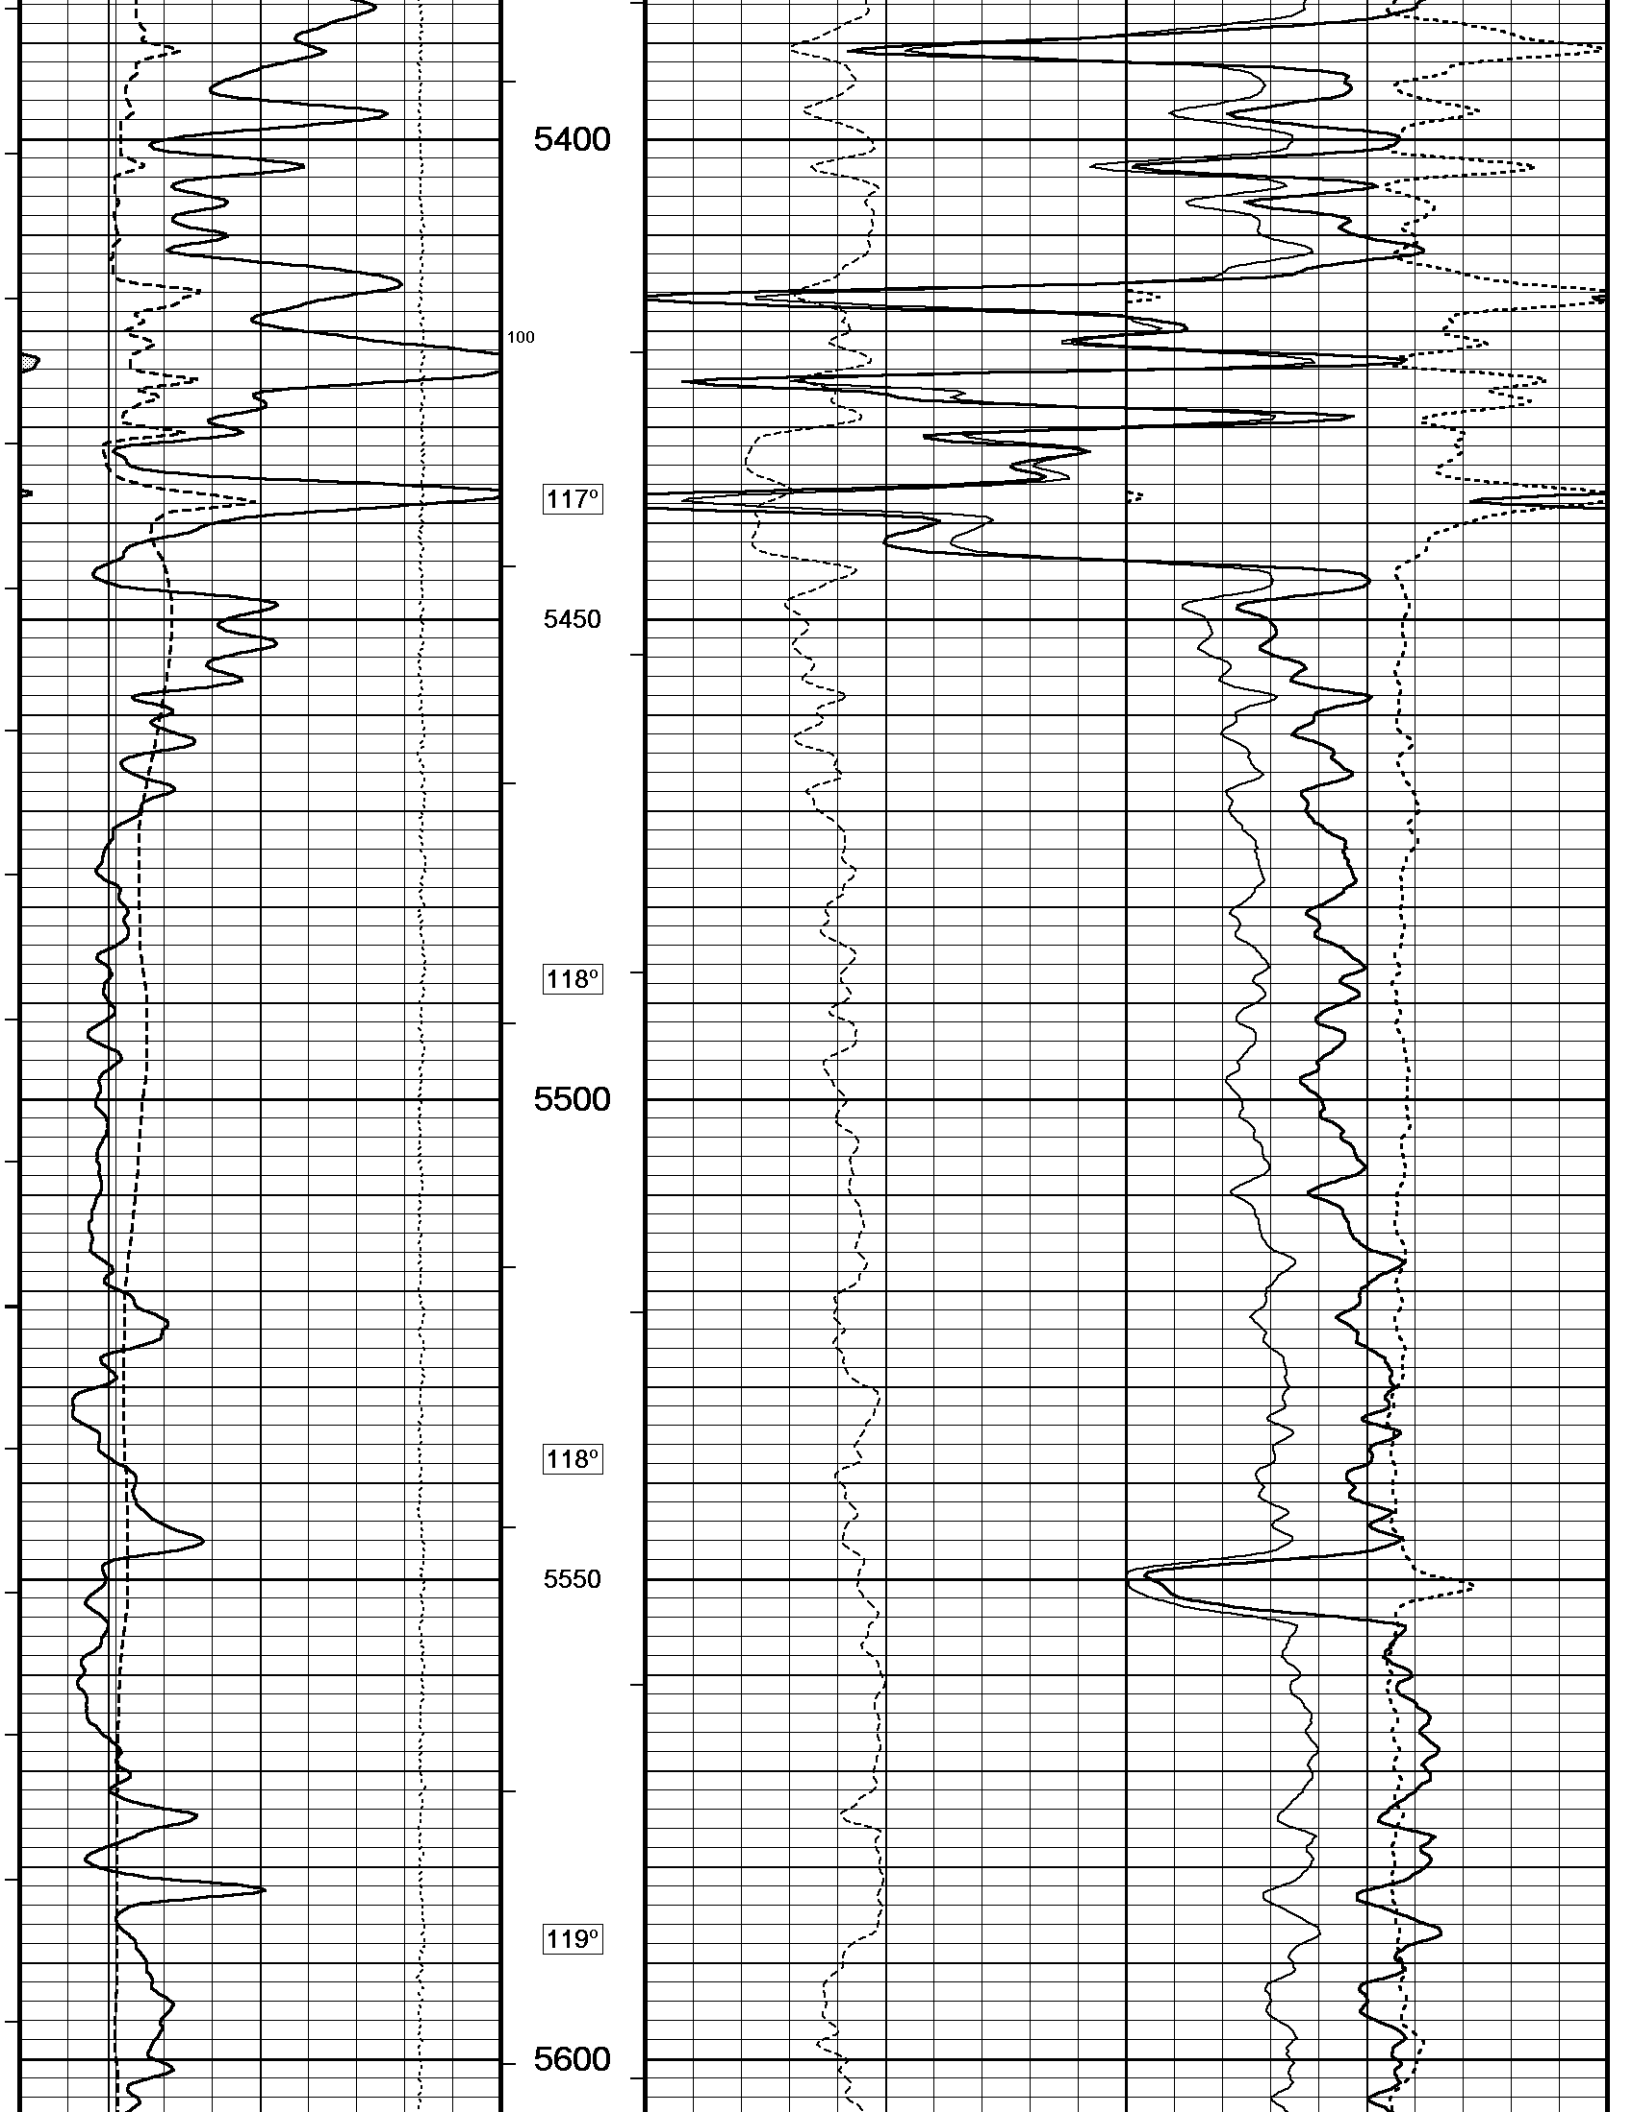

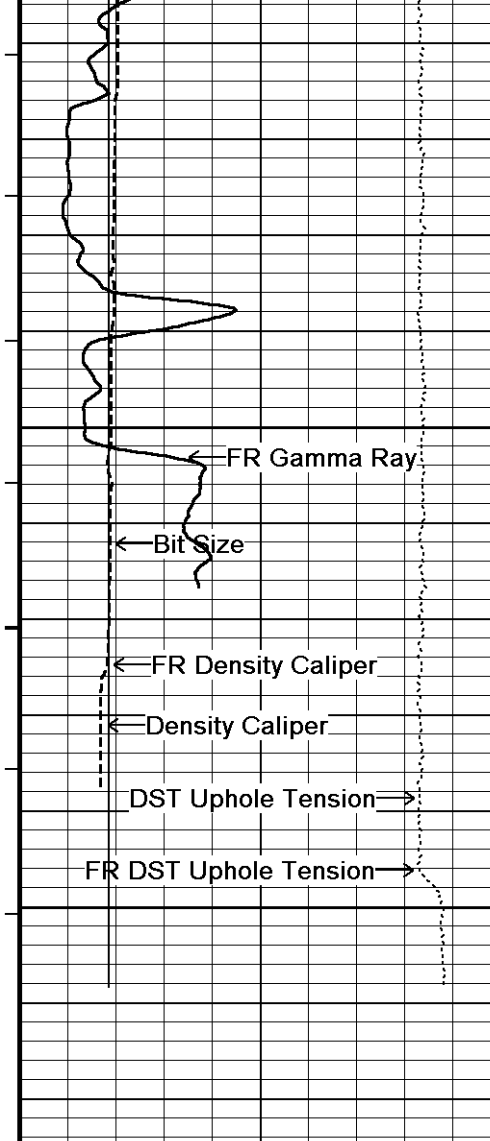

118°

5650

5700

5724


Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

Replay Scale 1:240

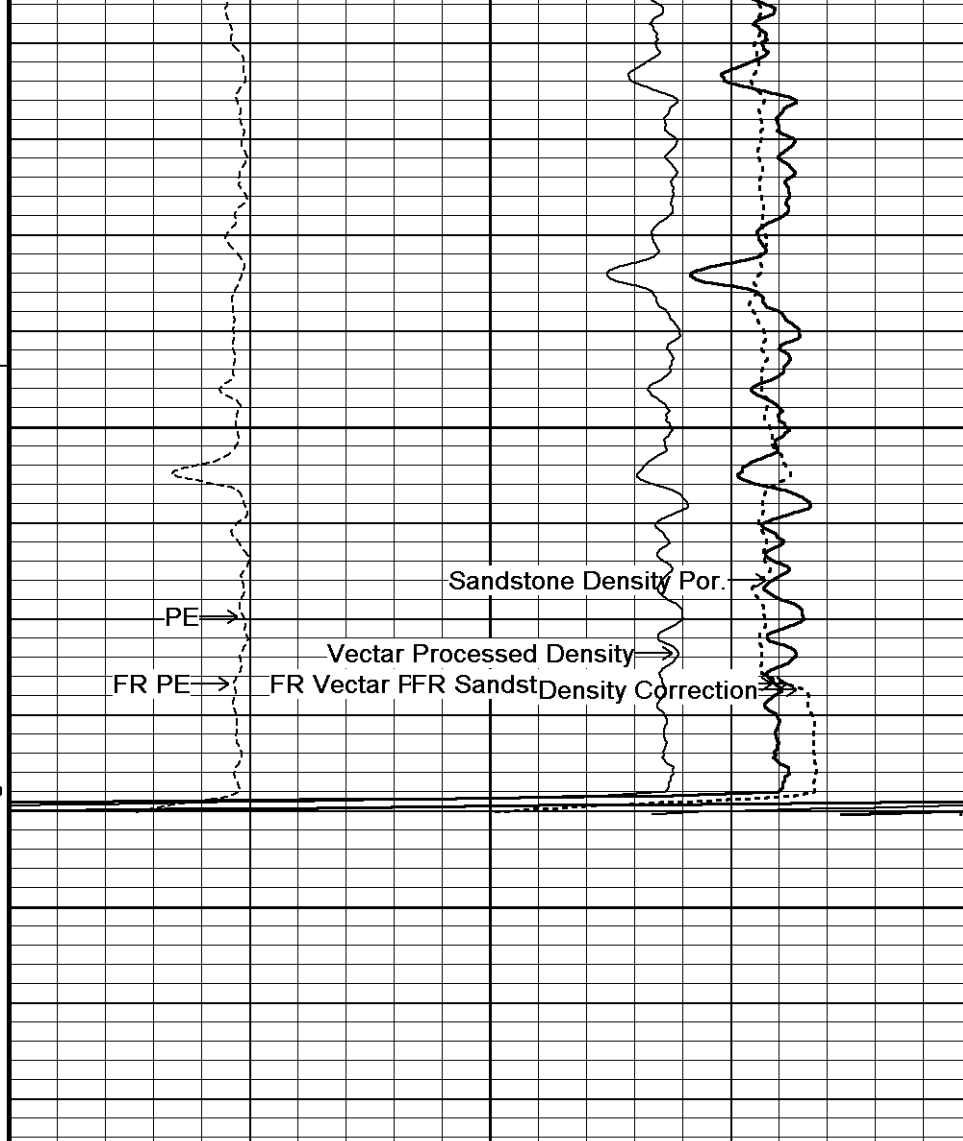

Timing Marks every 60.0 sec

Gamma Ray API 0 75 150

Density Caliper inches 6 11 16

Bit Size inches 6 11 16

DST Uphole Tension pounds 5000 0

Vector Processed Density grams/cc 2 2.25 2.50 2.75 3

Sandstone Density Por. percent 30 20 10 0 -10

PE barns/electron 0 5 10
 Density Correction grams/cc -0.25 0 0.25



REPEAT SECTION



BEFORE SURVEY CALIBRATION

C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2.dta

General Constants All 000

Last Edited on 12-JUN-2012,00:57

General Parameters

Mud Resistivity	0.520	ohm-metres
Mud Resistivity Temperature	86.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	Density Caliper	

Rwa Parameters

Porosity used	Base Density Porosity
Resistivity used	Array Ind. One Res Rt
RWA Constant A	1.000
RWA Constant M	2.000

Down-hole Tension Calibration SMS 0

Field Calibration on 11-JUN-2012 07:01

Reading No	Measured	Calibrated (lbs)
1	12381.30	0.00
2	13456.91	626.10

Gamma Calibration MCG-B 39

Field Calibration on 11-JUN-2012 22:28

	Measured	Calibrated (API)
Background	71	48
Calibrator (Gross)	1152	773
Calibrator (Net)	1081	725

Gamma Constants MCG-B 39

Last Edited on 12-JUN-2012,00:58

Gamma Calibrator Number	GRC038	
Mud Density	1.12	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

SP Calibration MCG-B 39

Field Calibration on 24-MAY-2012 10:26

	Measured	Calibrated (mV)
Reference 1	103.4	100.0
Reference 2	-97.4	-100.0

High Resolution Temperature Calibration MCG-B 39

Field Calibration on 02-APR-2012,14:03

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MCG-B 39

Last Edited on

Pre-filter Length	11
-------------------	----

Caliper Calibration MML-A 4

Base Calibration on 15-MAY-2012 17:25

Field Calibration on 11-JUN-2012 22:21

Base Calibration		
Reading No	Measured	Calibrator Size (in)

1	15117	5.98
2	18514	7.97
3	21781	9.86
4	25834	11.92
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
6.15	5.98

Micro Normal and Micro Inverse Calibration MML-A 4

Base Calibration on 15-MAY-2012 17:31
Field Check on 11-JUN-2012 22:22

Base Calibration

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.2	60.3	5.0	25.0
Micro Inverse	15.7	78.5	5.0	25.0

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	62.8	62.8
Micro Inverse	48.2	48.2

Micro Normal and Micro Inverse Constants MML-A 4

Last Edited on 05-JUN-2012,09:46

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	N/A	inches	

Neutron Calibration MDN-B.J 387

Base Calibration on 15-MAY-2012 16:34
Field Check on 11-JUN-2012 22:34

Base Calibration

Ratio	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	2995	90	3714	110
	33.447		33.764	

Field Calibrator at Base

Ratio	Calibrated (cps)
	1667 2508
	0.664

Field Check

Ratio	Calibrated (cps)
	1684 2520
	0.668

Neutron Constants MDN-B.J 387

Last Edited on 11-JUN-2012,22:29

Neutron Source Id	P0204NN	
Neutron Jig Number	5824NE	
Epithermal Neutron	No	
Caliper Source for Processing	Bit Size	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-B.J 352

Base Calibration on 15-MAY-2012 17:11
Field Check on 11-JUN-2012 21:59

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	963.4	126.8

Base Check 281.4

Field Check 281.5

FE Constants MFE-B.J 352

Last Edited on 11-JUN-2012,21:57

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Induction Calibration MAI-A.A 178

Base Calibration on 15-MAY-2012,14:15

Field Check on 11-JUN-2012 21:57

Base Calibration					
Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel	Low	High	Low	High	
1	17.6	484.7	9.3	966.2	
2	6.2	391.4	7.6	821.4	
3	4.0	264.5	5.2	566.0	
4	2.3	135.1	2.6	279.2	

Array Temperature 77.0 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	12.8	3763.7
2	0.0	0.0	29.7	3467.4
3	0.0	0.0	27.2	3014.2
4	0.0	0.0	18.8	2064.9
Deep	0.0	0.0	15.9	1995.4
Medium	0.0	0.0	40.1	3955.3
Shallow	0.0	0.0	45.4	5082.5

Array Temperature 0.0 83.1 Deg F

Induction Constants MAI-A.A 178

Last Edited on 11-JUN-2012,21:58

Induction Model	RtAP-WBM	
Caliper for Borehole Corr.	Density Caliper	
Hole Size for Borehole Correction	N/A	inches
Tool Centred	No	
Stand-off Type	Fins	
Stand-off	0.50	inches
Number of Fins on Stand-off	8.0000	
Stand-off Fin Angle	45.00	degrees
Stand-off Fin Width	0.5000	inches
Borehole Corr. Rm Source	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Squasher Start	0.0020	mhos/metre
Squasher Offset	N/A	mhos/metre

Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections		
Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants	
Archie Constant (A)	1.00
Cementation Exponent (M)	2.00

Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

High Resolution Temperature Calibration MAI-A.A 178

Field Calibration on 0C4030110004,

	Measured	Calibrated(Deg F)
Lower	32.00	32.00
Upper	68.00	68.00

High Resolution Temperature Constants MAI-A.A 178

Last Edited on 0C4060522000,

Pre-filter Length 11

Caliper Calibration MPD-B 35

Base Calibration on 15-MAY-2012 15:38

Field Calibration on 11-JUN-2012 22:00

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	21260	3.99
2	31424	5.98
3	41761	7.97
4	51280	9.86
5	61536	11.92
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
5.95	5.98

Photo Density Calibration MPD-B 35

Base Calibration on 15-MAY-2012 15:56

Field Check on 11-JUN-2012 22:19

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	62707	32170	59556	30836
Reference 2	26808	2860	24941	2541

Field Check at Base

1145.6 1360.5

Field Check

1139.6 1353.5

PE Calibration

Base Calibration	Measured			Calibrated
	WS	WH	Ratio	Ratio
Background	206	1009		
Reference 1	23065	62504	0.372	0.371
Reference 2	7038	26659	0.266	0.272

Field Check at Base

206.0 1009.0

Field Check

204.7 1004.2

Density Constants MPD-B 35

Last Edited on 12-JUN-2012,00:58

Density Source Id	18235B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.12	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc

CRCI	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

DOWNHOLE EQUIPMENT

C:\Minimus 11_03_4044\Data\O'Brien Ardrey 1-2\O'Brien Ardrey 1-2.dta

Compact Comms Gamma
MCG-B 39 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Comms Gamma
MCG-B 39 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-log
MML-A 4 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Micro-log
MML-A 4 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Neutron
MDN-B.J 387 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Neutron
MDN-B.J 387 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
MPD-B 35 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Density/Caliper
MPD-B 35 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focussed Electric
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in


Compact Focussed Electric
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
MAI-A.A 178 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
MAI-A.A 178 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 48.16 ft Weight: 383.6 lb

Total Length: 48.16 ft Weight: 383.6 lb

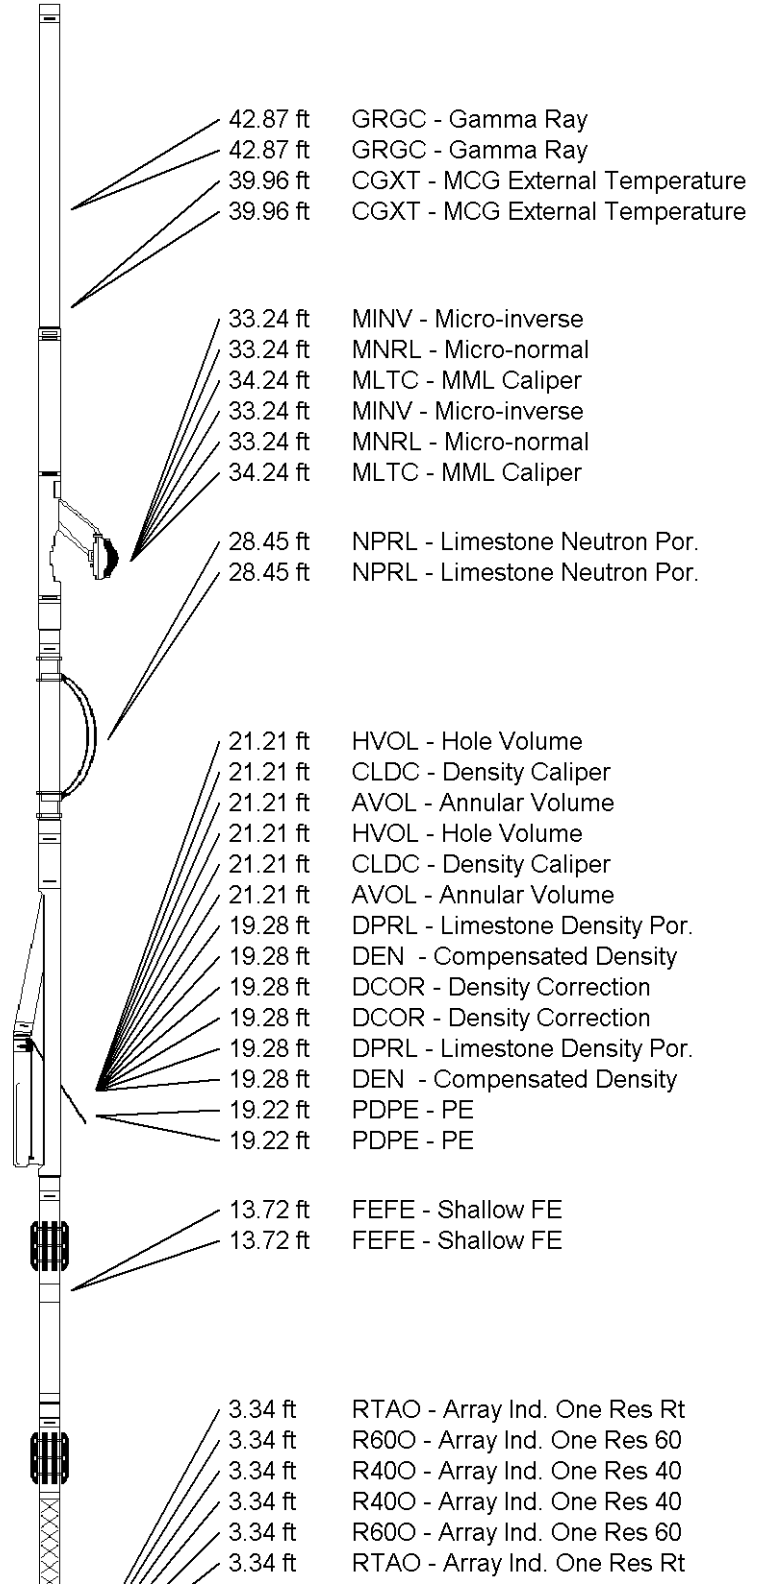

42.87 ft GRGC - Gamma Ray
42.87 ft GRGC - Gamma Ray
39.96 ft CGXT - MCG External Temperature
39.96 ft CGXT - MCG External Temperature


33.24 ft MINV - Micro-inverse
33.24 ft MNRL - Micro-normal
34.24 ft MLTC - MML Caliper
33.24 ft MINV - Micro-inverse
33.24 ft MNRL - Micro-normal
34.24 ft MLTC - MML Caliper

28.45 ft NPRL - Limestone Neutron Por.
28.45 ft NPRL - Limestone Neutron Por.

21.21 ft HVOL - Hole Volume
21.21 ft CLDC - Density Caliper
21.21 ft AVOL - Annular Volume
21.21 ft HVOL - Hole Volume
21.21 ft CLDC - Density Caliper
21.21 ft AVOL - Annular Volume
19.28 ft DPRL - Limestone Density Por.
19.28 ft DEN - Compensated Density
19.28 ft DCOR - Density Correction
19.28 ft DCOR - Density Correction
19.28 ft DPRL - Limestone Density Por.
19.28 ft DEN - Compensated Density
19.22 ft PDPE - PE
19.22 ft PDPE - PE

13.72 ft FEFE - Shallow FE
13.72 ft FEFE - Shallow FE

3.34 ft RTAO - Array Ind. One Res Rt
3.34 ft R600 - Array Ind. One Res 60
3.34 ft R400 - Array Ind. One Res 40
3.34 ft R400 - Array Ind. One Res 40
3.34 ft R600 - Array Ind. One Res 60
3.34 ft RTAO - Array Ind. One Res Rt



0.23 ft SPCG - Spontaneous Potential
 0.23 ft SPCG - Spontaneous Potential
 Tool Zero (0.13ft from bottom)
 Tool Zero (0.13ft from bottom)
 -0.13 ft SMTU - DST Uphole Tension
 -0.13 ft SMTU - DST Uphole Tension
 All measurements relative to tool zero.
 All measurements relative to tool zero.

COMPANY O'BRIEN ENERGY RESOURCES CORP.
WELL ARDREY #1-2
FIELD ARDREY
PROVINCE/COUNTY CLARK
COUNTRY/STATE U.S.A. / KANSAS

Elevation Kelly Bushing	2541.00	feet	First Reading	5676.00	feet
Elevation Drill Floor	2539.00	feet	Depth Driller	5700.00	feet
Elevation Ground Level	2529.00	feet	Depth Logger	5696.00	feet



Weatherford[®]

**COMPACT PHOTO DENSITY
 COMPENSATED NEUTRON
 LOG**

