



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-009-25,716-00-00

Company John Roy Evans Oil Company, LLC

Well Bieberle No. 9

Field Redwing

County Barton State

Kansas

Location

NE SW SW SE
440' FSL & 2250' FEL

Other Services
RAG

Sec: 32

Twp: 17 S

Rge: 12 W

Elevation

Permanent Datum Ground Level
Log Measured From Kelly Bushing
Drilling Measured From Kelly Bushing

Elevation
K.B. 1819
D.F. 1819
G.L. 1812

Date

7/11/2012

Run Number

Two

Depth Driller

3370

Depth Logger

3365

Bottom Logged Interval

3364

Top Log Interval

2800

Casing Driller

8.625 @ 715

Casing Logger

710

Bit Size

8.625

Type Fluid in Hole

Chemical

Salinity, ppm CL

6000

Density / Viscosity

9.4 54

pH / Fluid Loss

10.5 8.8

Source of Sample

Flowline

Rm @ Meas. Temp

.75 @ 82

Rmf @ Meas. Temp

.56 @ 82

Rmc @ Meas. Temp

1.01 @ 82

Source of Rmf / Rmc

Charts

Rm @ BHT

.56 @ 110

Operating Rig Time

3 Hours

Max Rec. Temp. F

110

Equipment Number

17

Location

Hays

Recorded By

D. Martin

Witnessed By

Jim Musgrove

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Redwing, KS
W Edge of Town, N Into

Database File: c:\warrior\data\john roy evans_bieberle no. 9\jrehd.db
Dataset Pathname: rag/jrerag
Presentation Format: micro
Dataset Creation: Wed Jul 11 18:42:57 2012
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

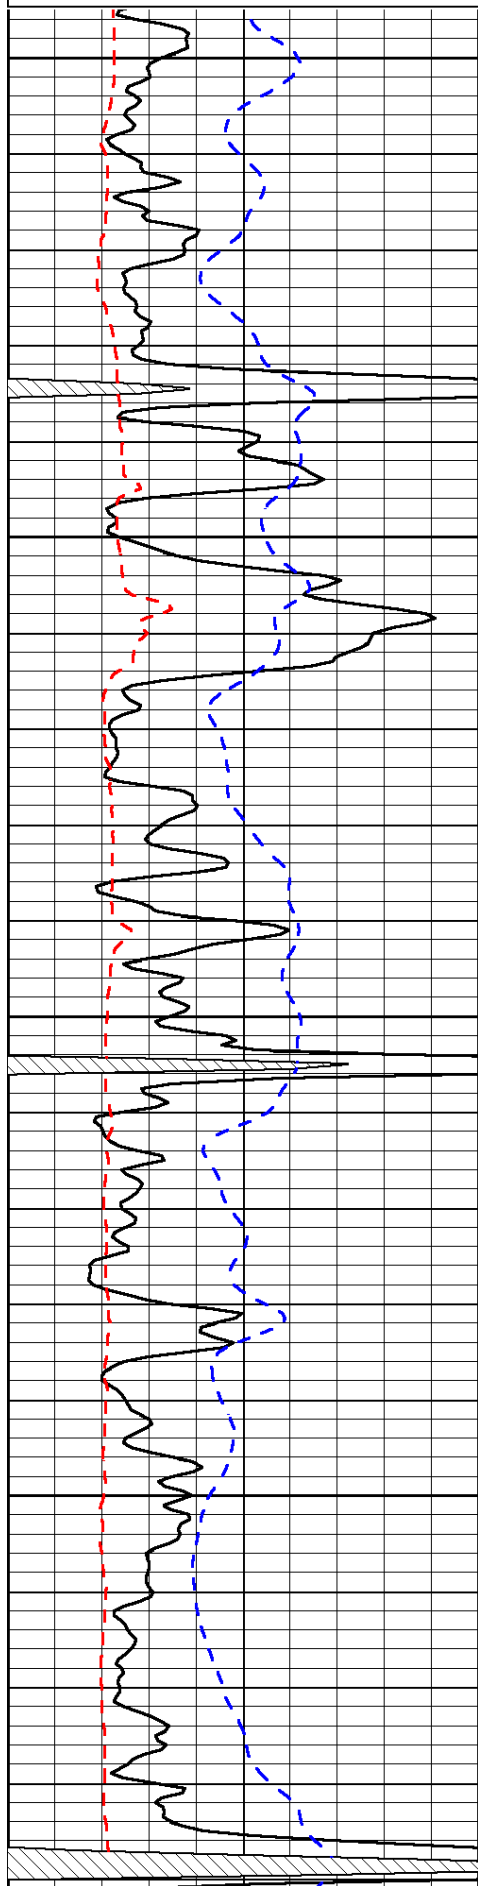

2800


2850

2900

2950

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


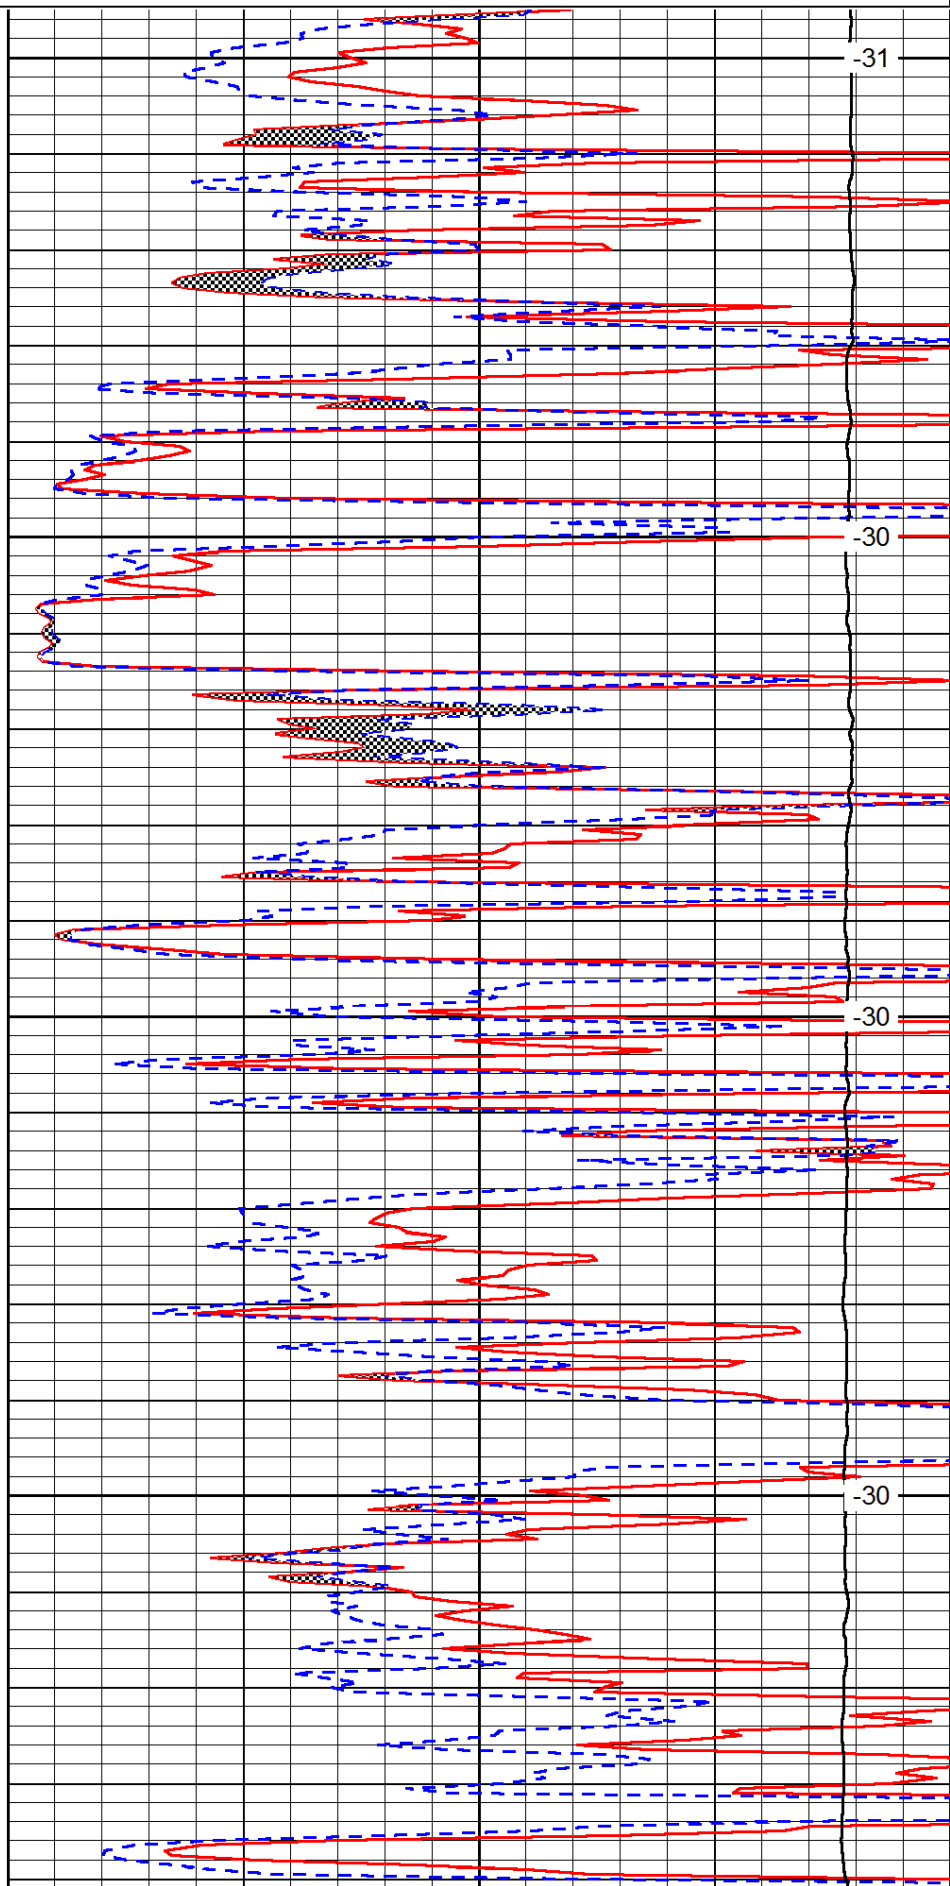



-31

-30

-30

-30

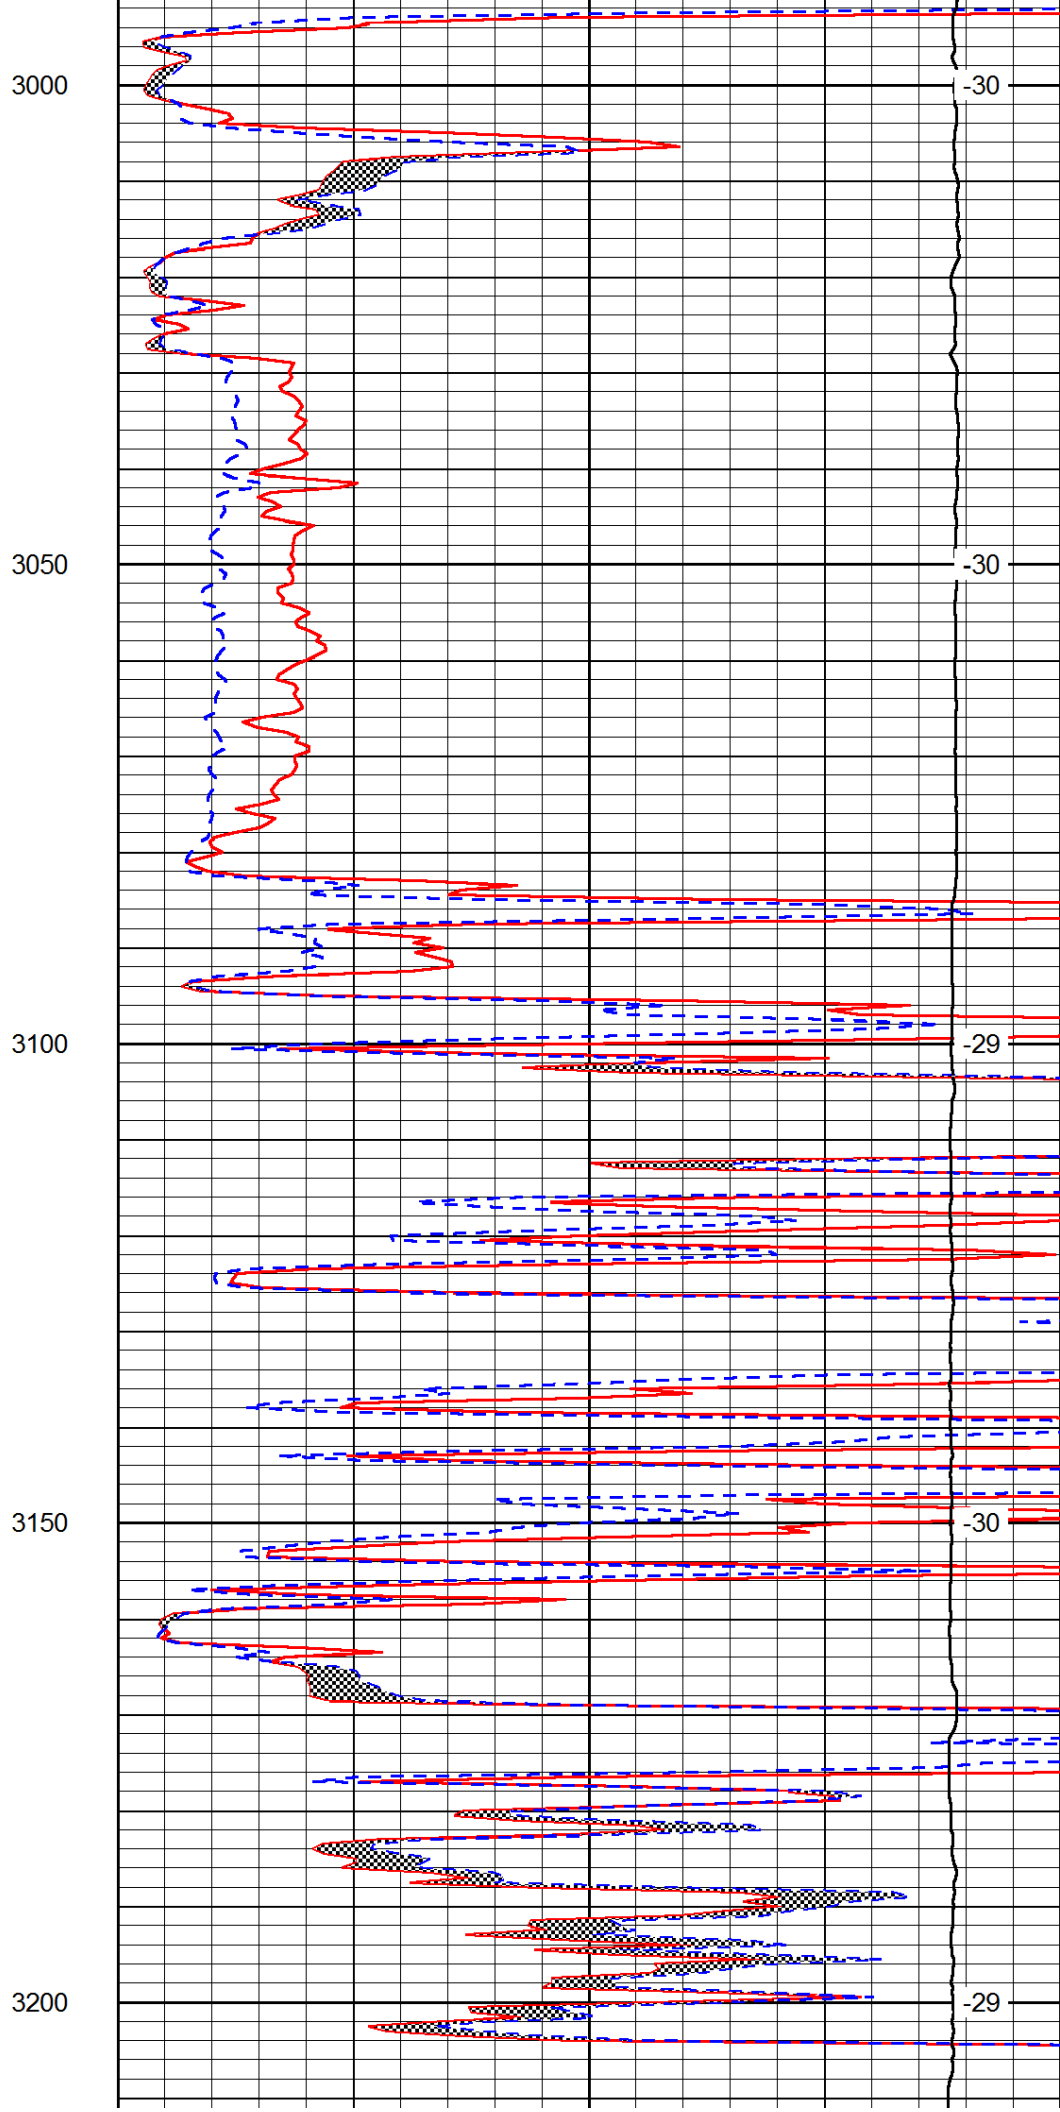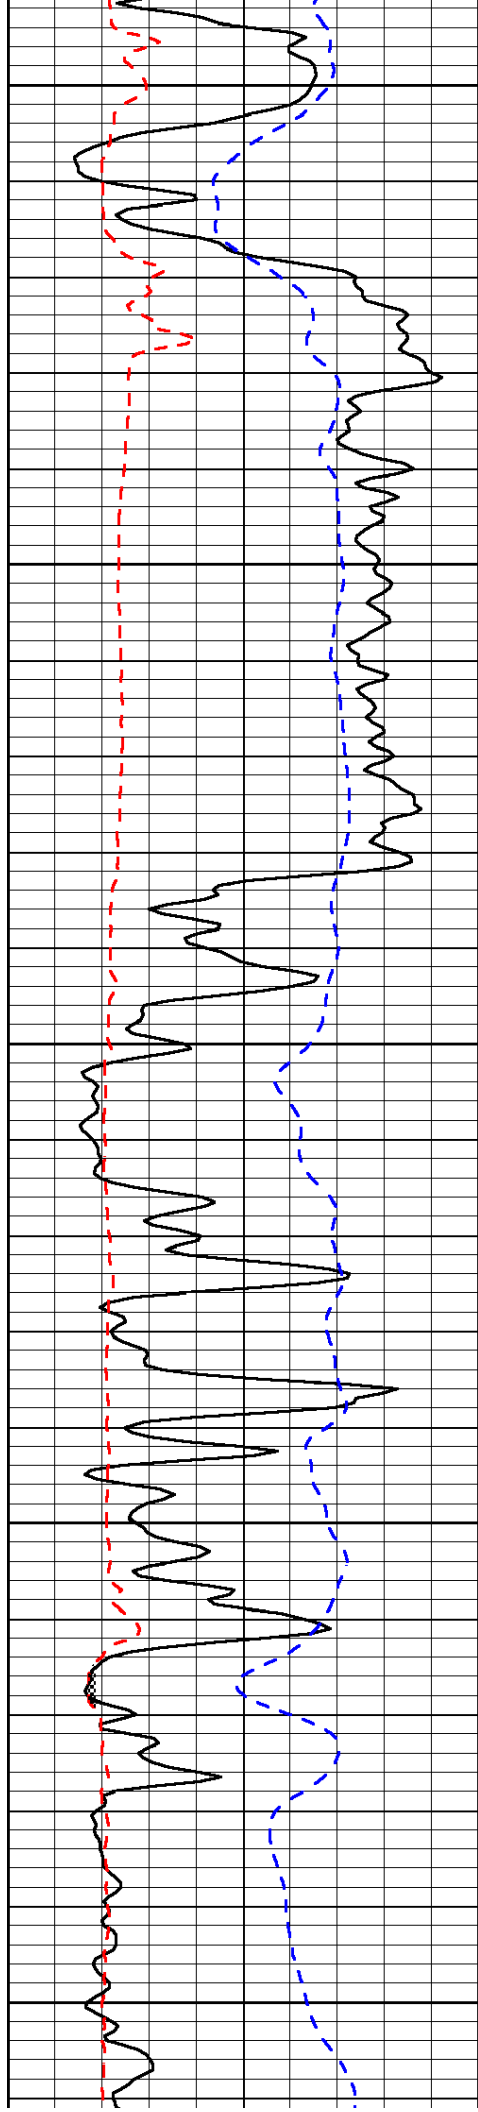

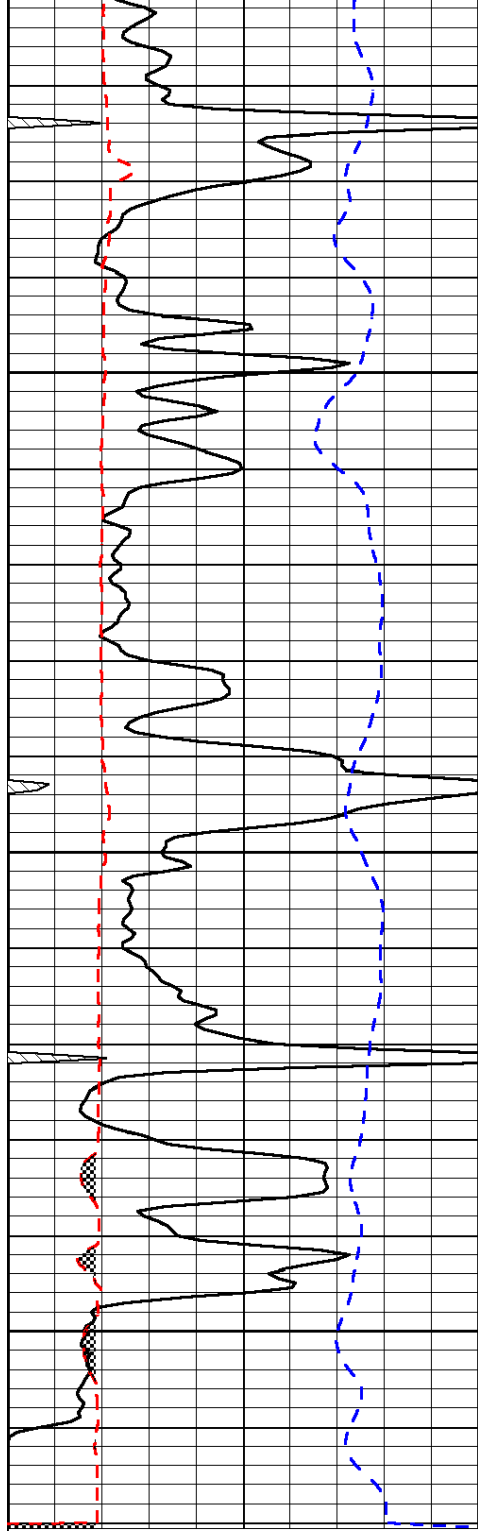


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

3250

3300

3350

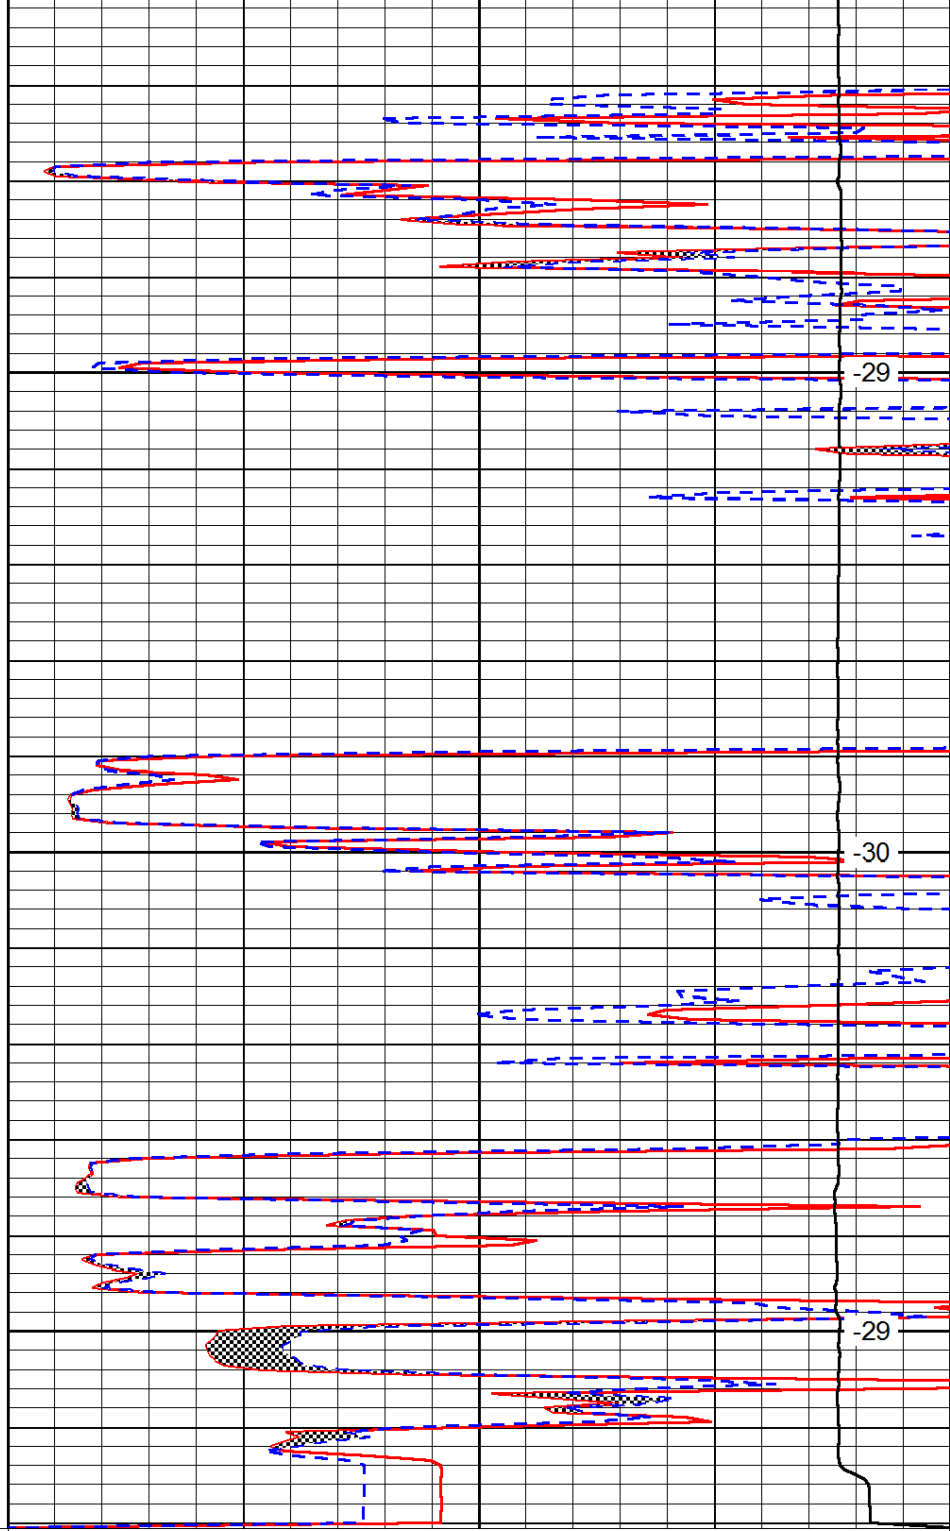

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD