



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Cholla Production, LLC		
	Well Seltmann #1-24		
	Field N/A		
	County Rush	State	Kansas
15-165-21977-00-00	Location 2290' FSL & 1250' FWL	Other Services CNL/CDL DIL/BHCS	
	Sec: 24	Twp: 19S	Rge: 20W
Permanent Datum	Ground Level	Elevation 2172	
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 2180 D.F. 2172 G.L. 2172	
Date	6/11/2012		
Run Number	Two		
Depth Driller	4515		
Depth Logger	4515		
Bottom Logged Interval	4514		
Top Log Interval	3200		
Casing Driller	8.625 @ 604		
Casing Logger	604		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	7700		
Density / Viscosity	9.7 54		
pH / Fluid Loss	10.0 10.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	0.44 @ 70		
Rmf @ Meas. Temp	0.33 @ 70		
Rmc @ Meas. Temp	0.60 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.25 @ 123		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	123		
Equipment Number	91		
Location	Hays		
Recorded By	D. Schmidt		
Witnessed By	Clayton Erickson		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Nekoma,
4 W to 140th, 5 S to V rd, 1 E to 150th, 1 S to W rd,
1/4 E, N into

Database File: c:\warrior\data\cholla_seltmann #1-24\cholla_061112hd.db
Dataset Pathname: dil/chostack
Presentation Format: micro
Dataset Creation: Mon Jun 11 18:13:16 2012
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:210		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

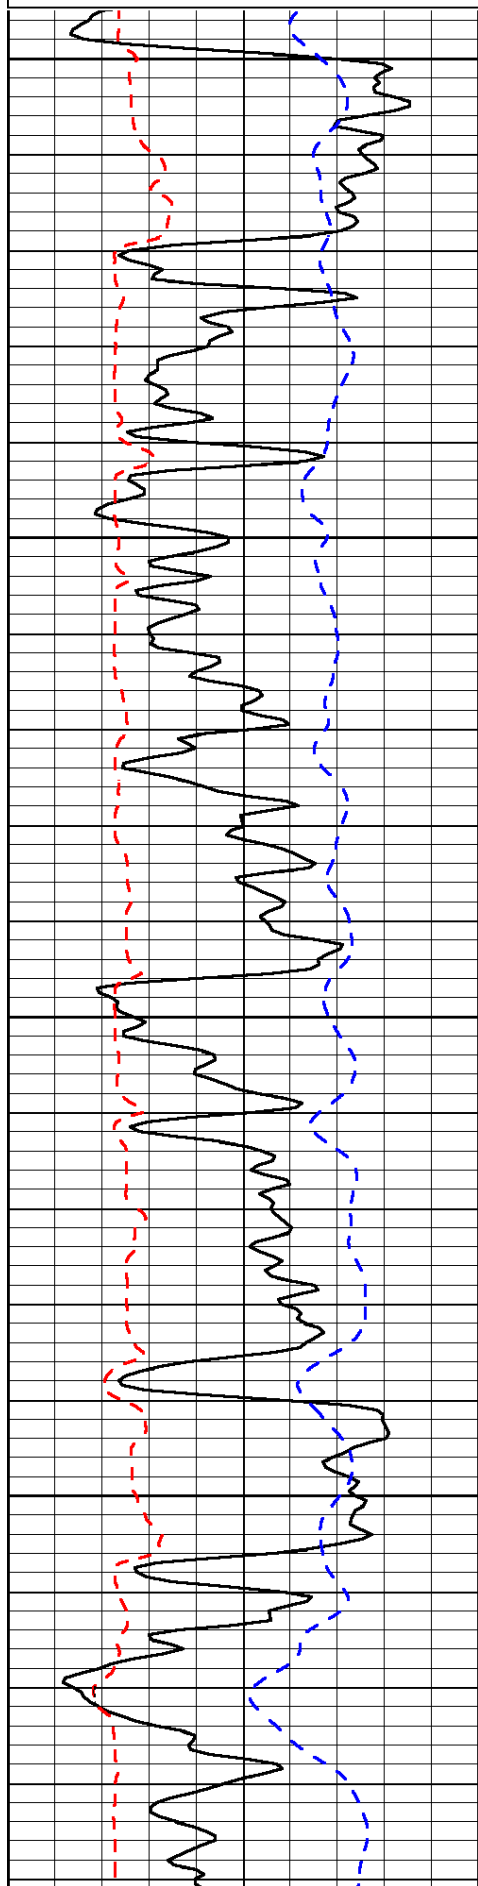




3200


3250

3300

3350

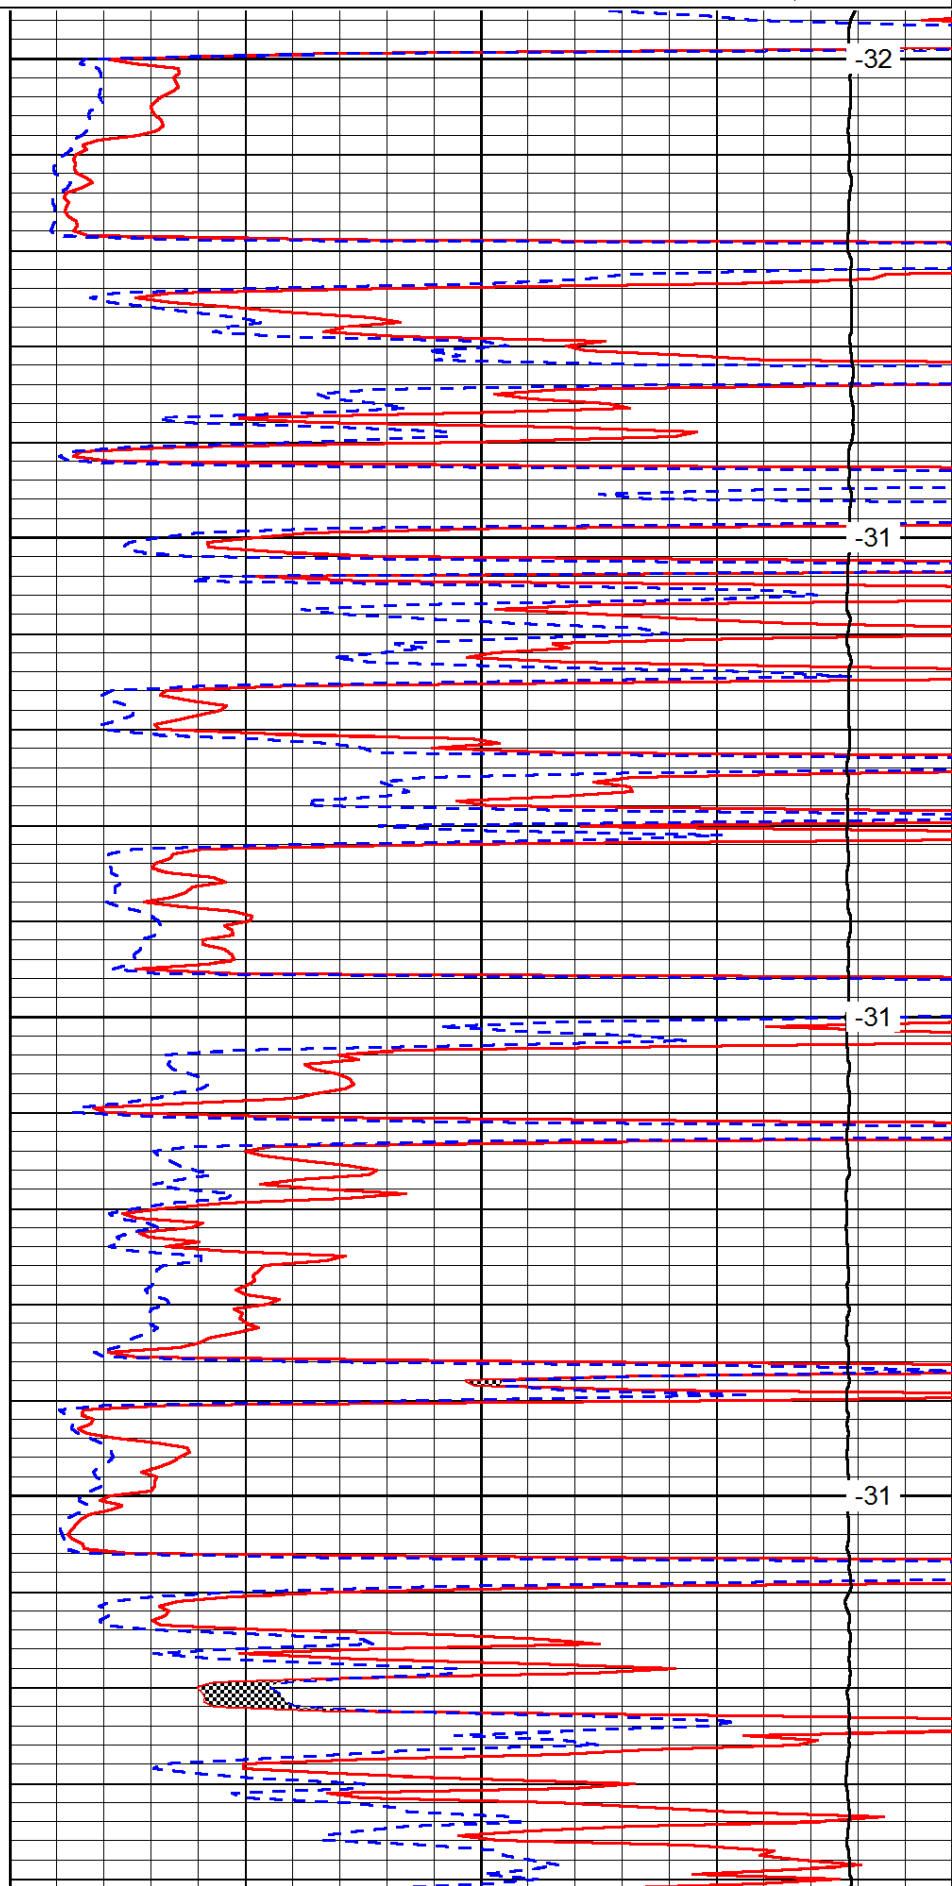

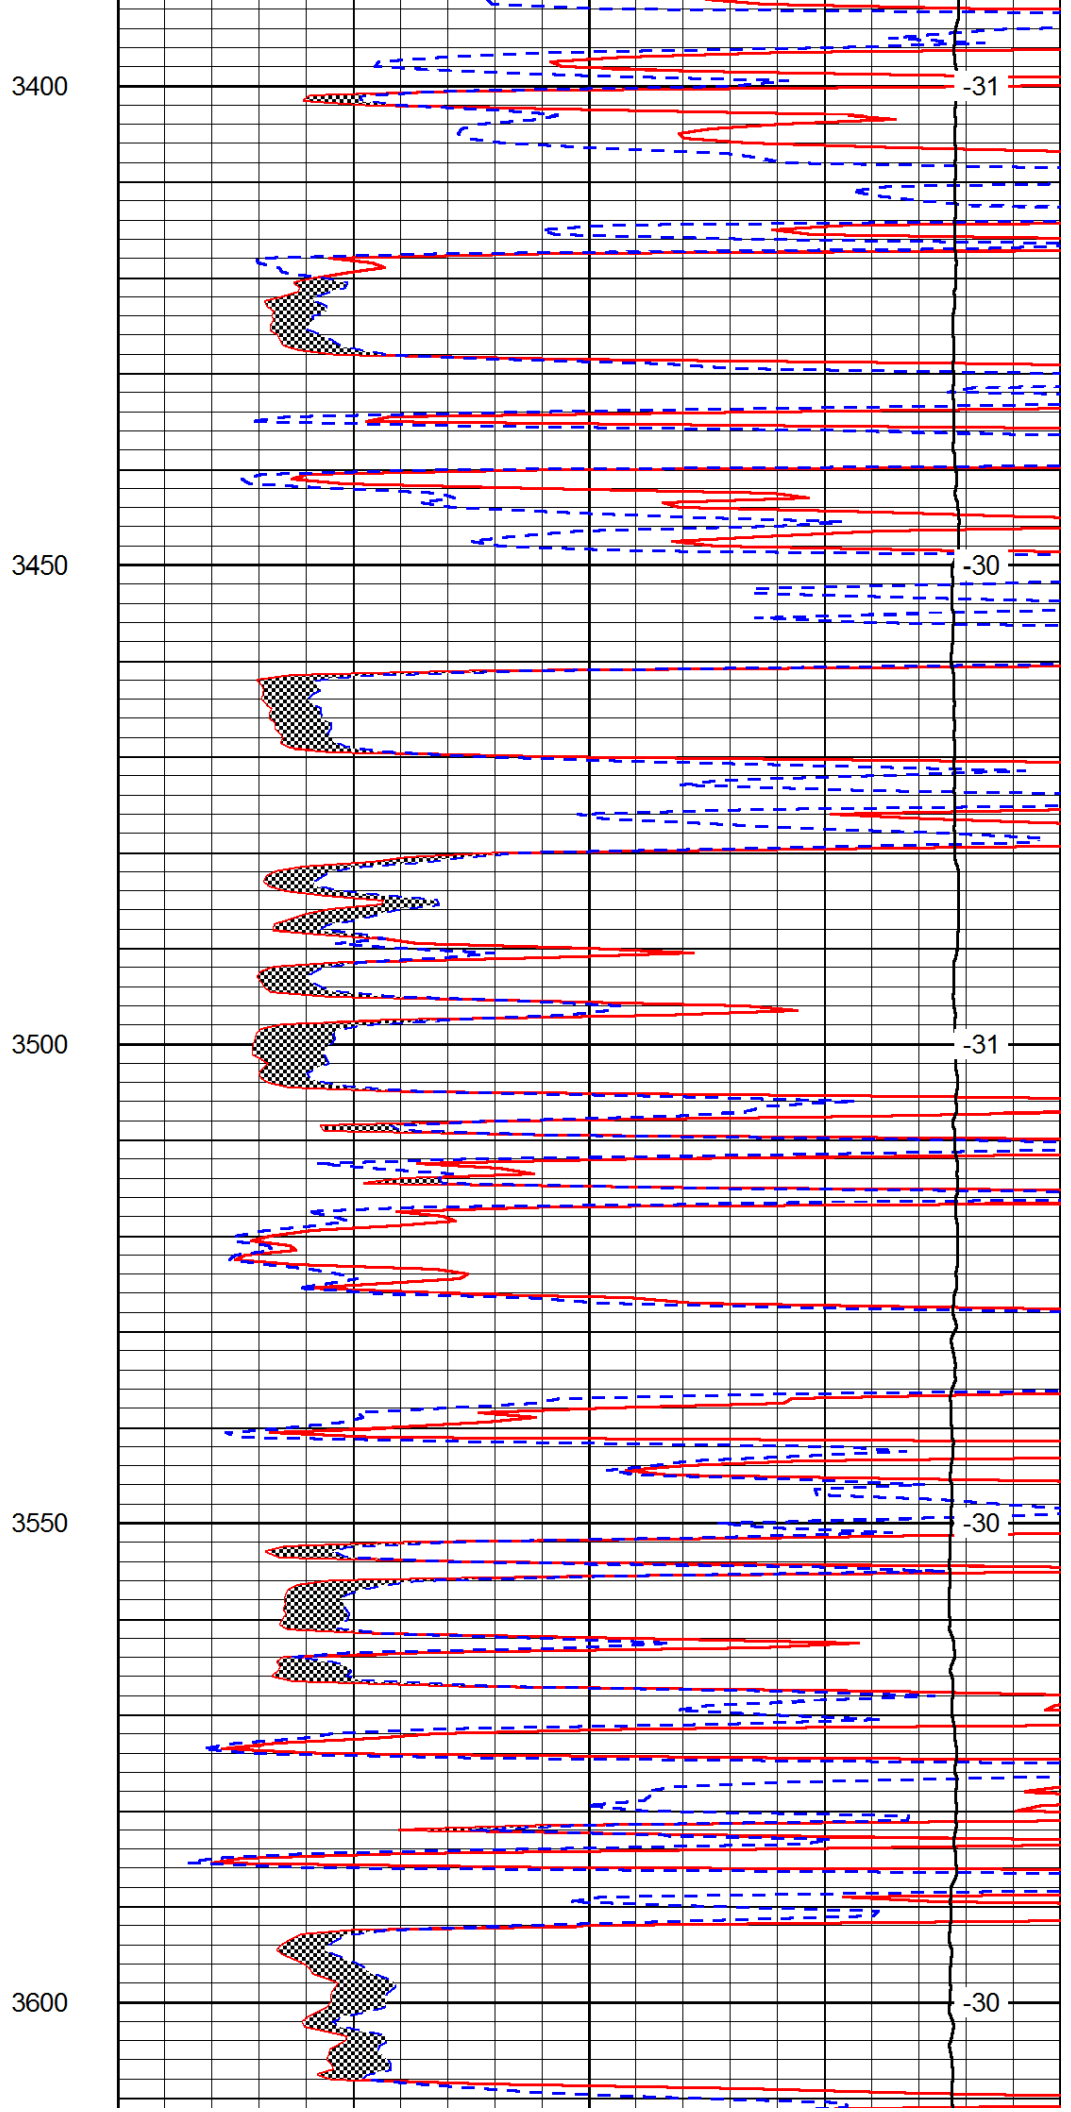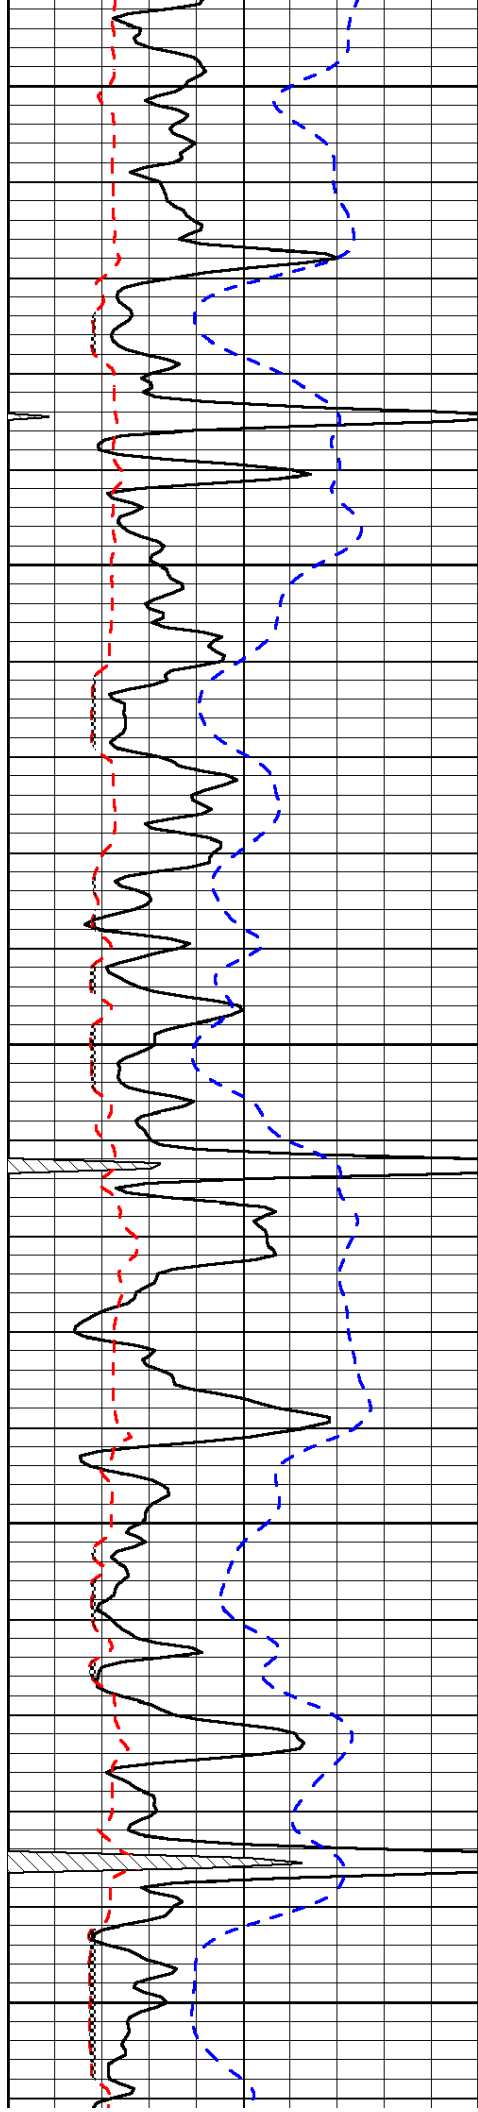

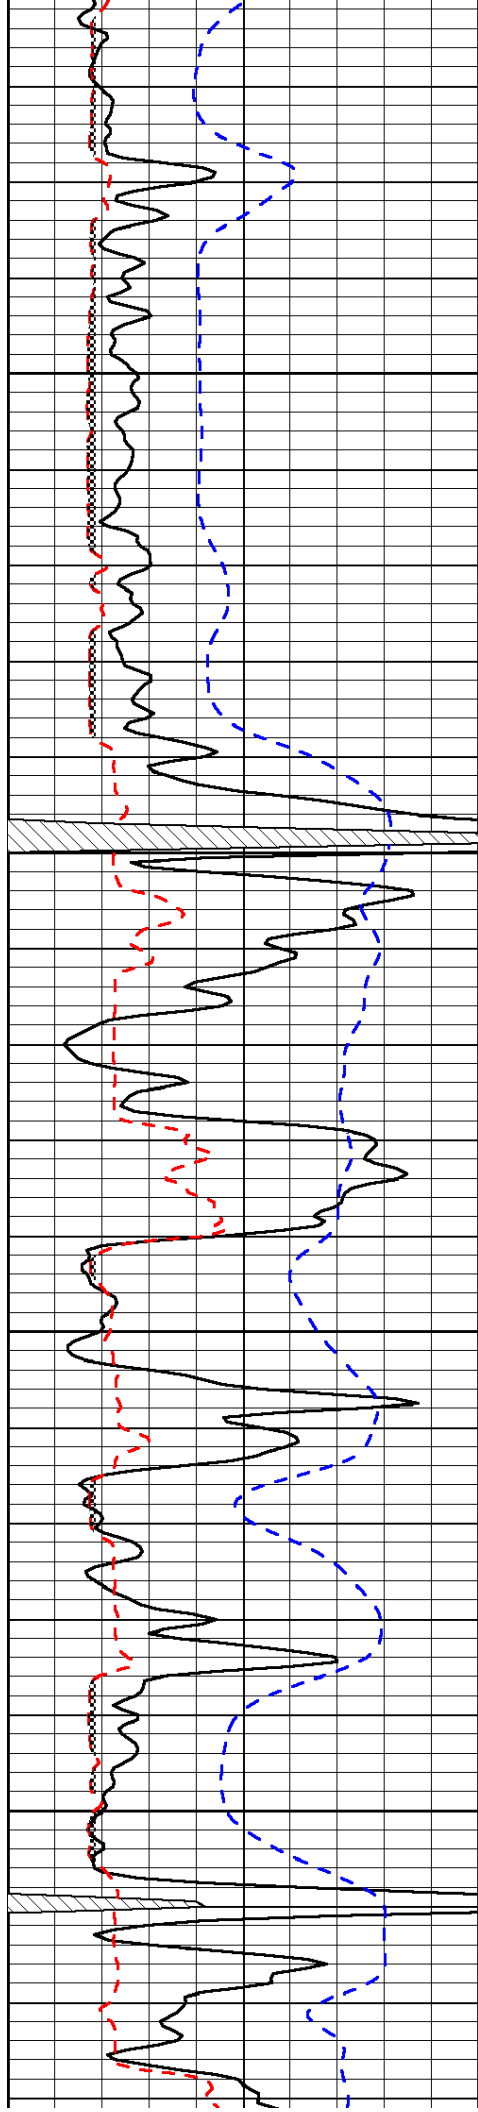


3650

3700

3750

3800


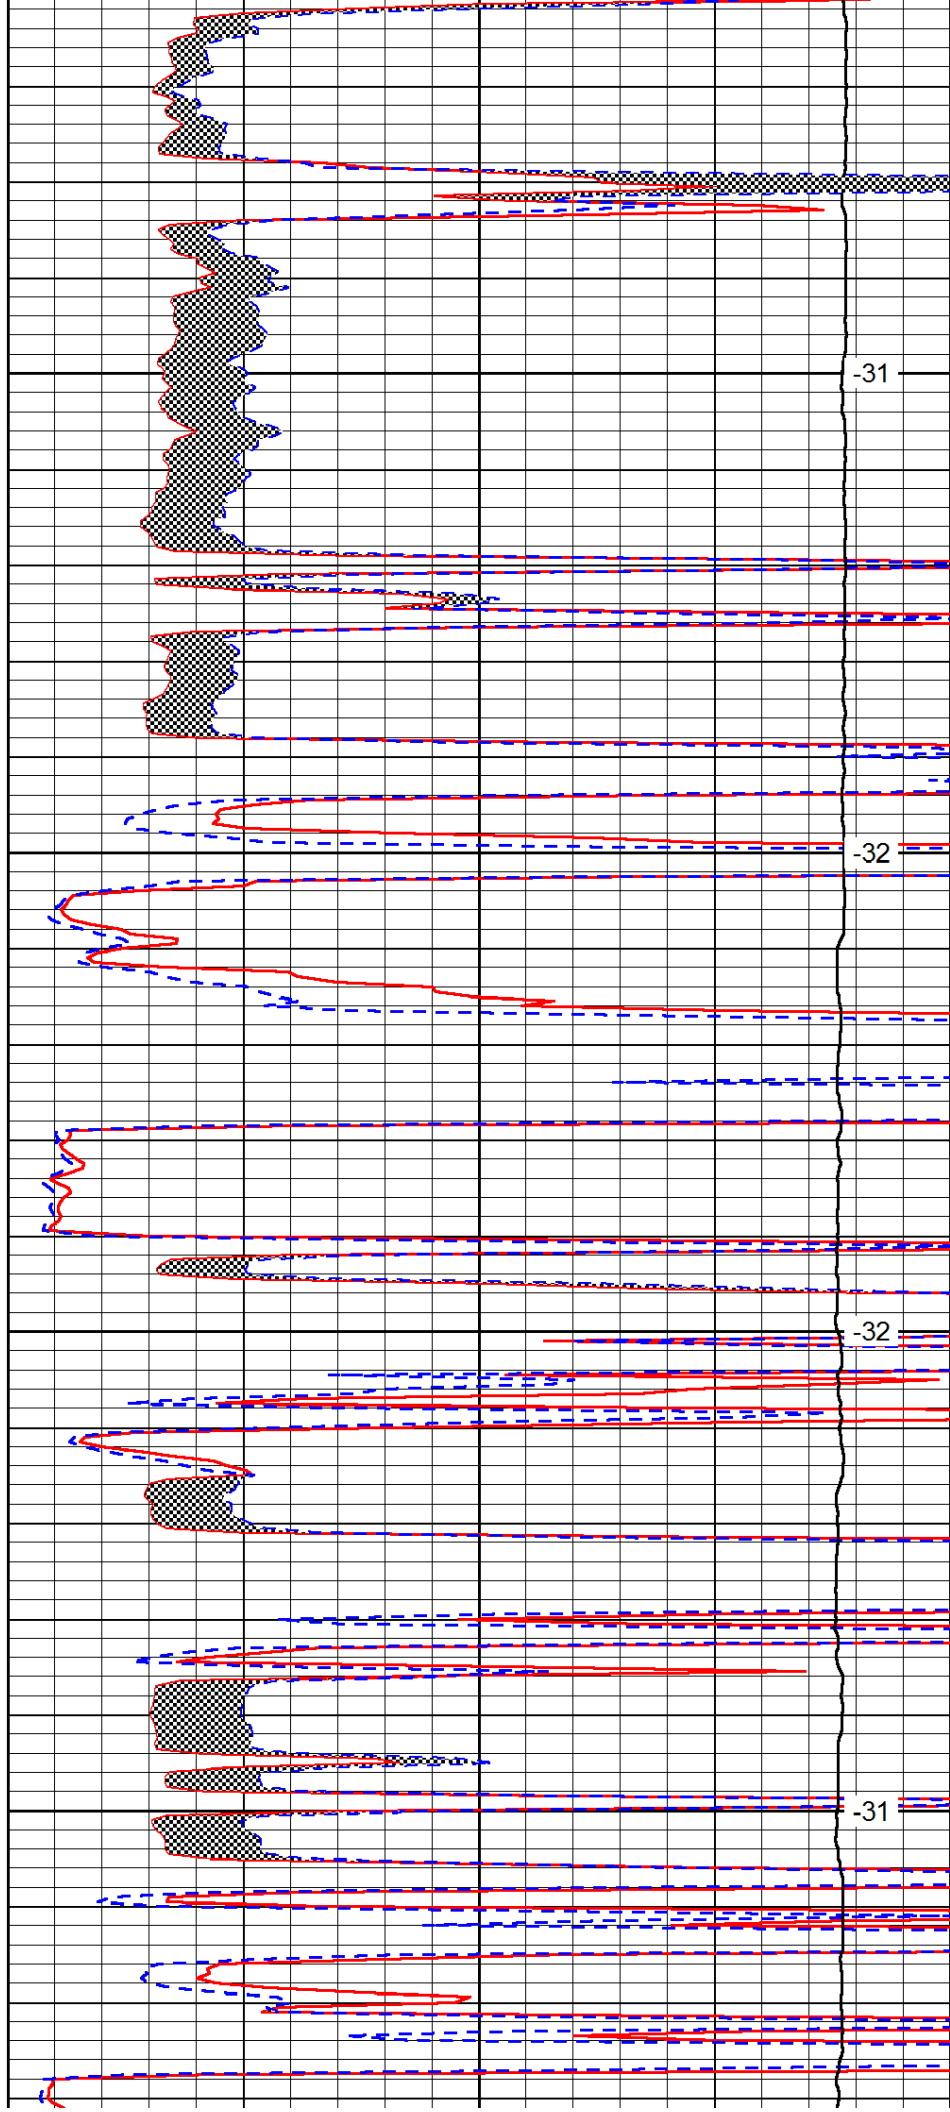



-31

-32

-32

-31

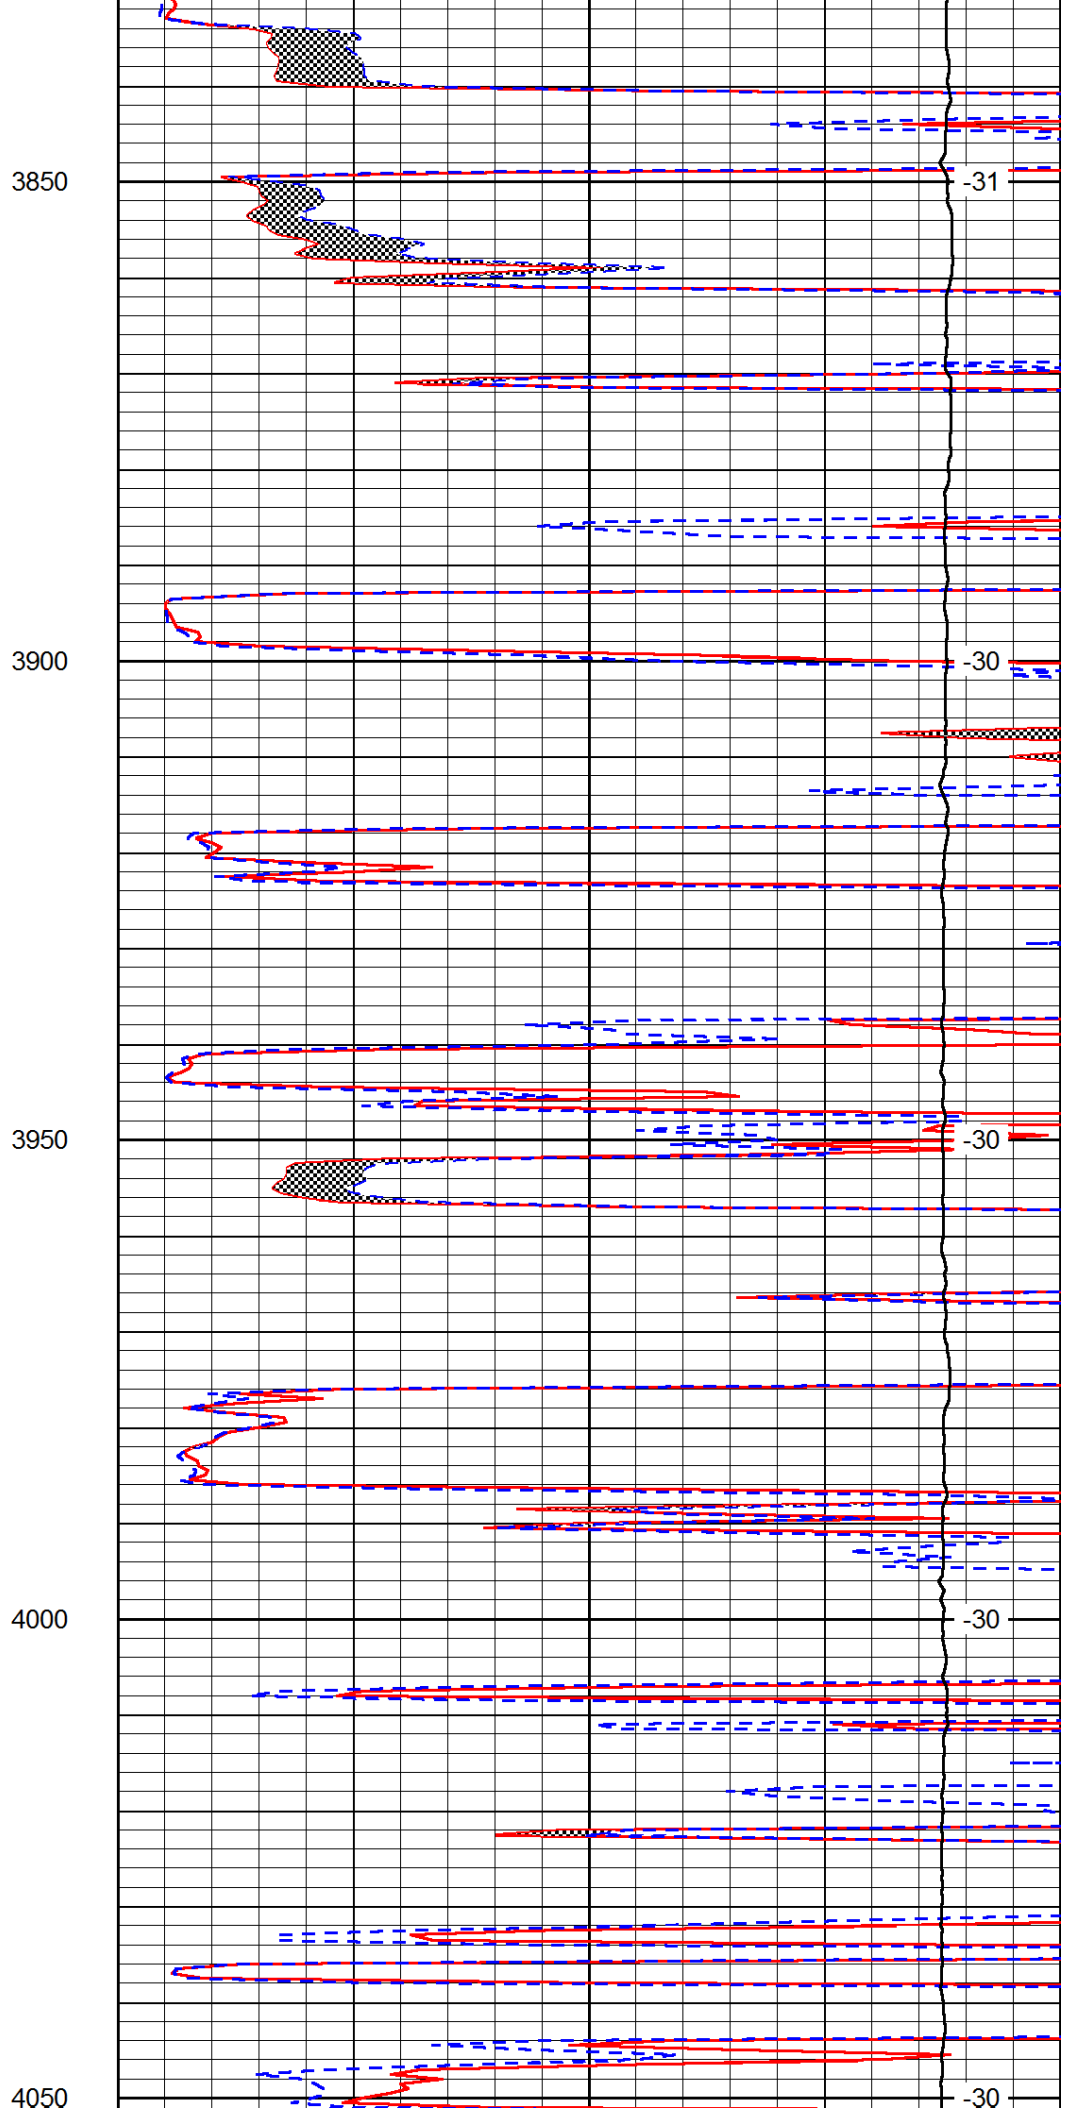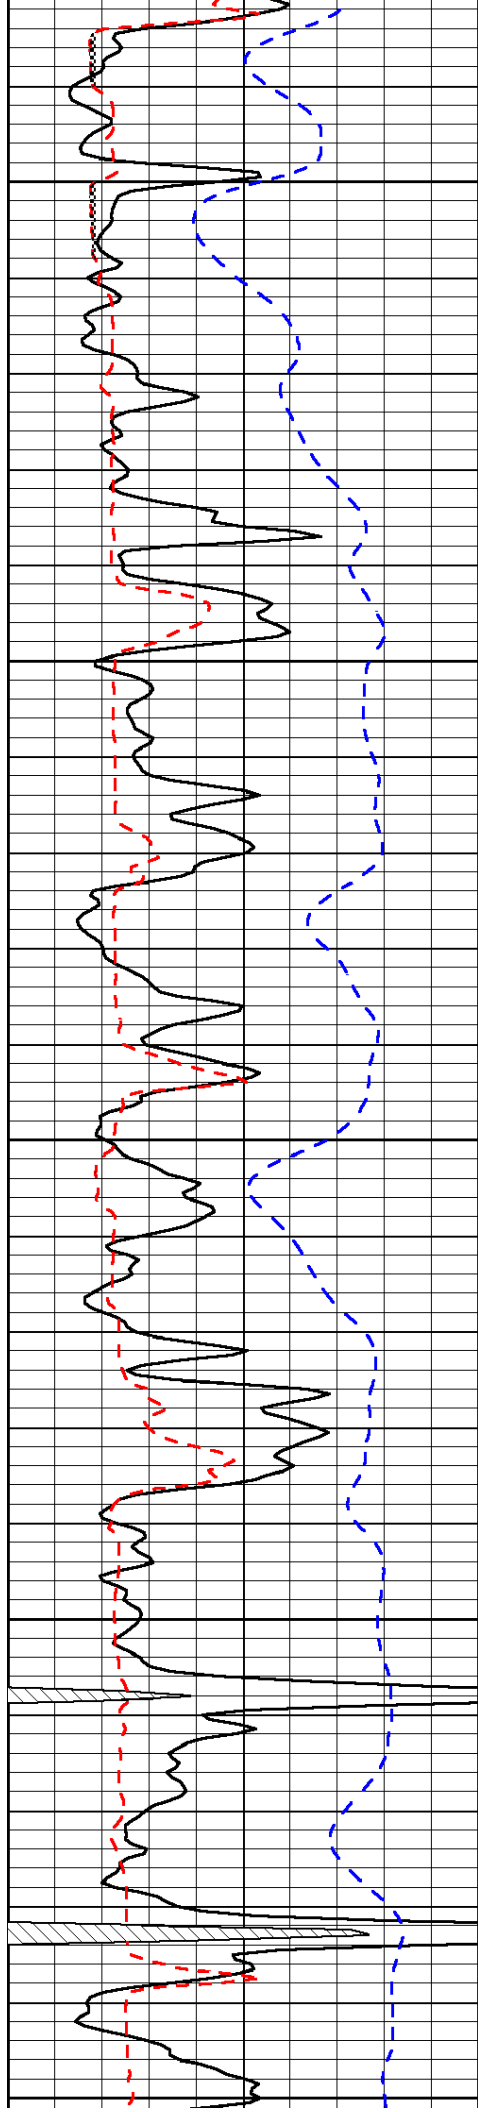

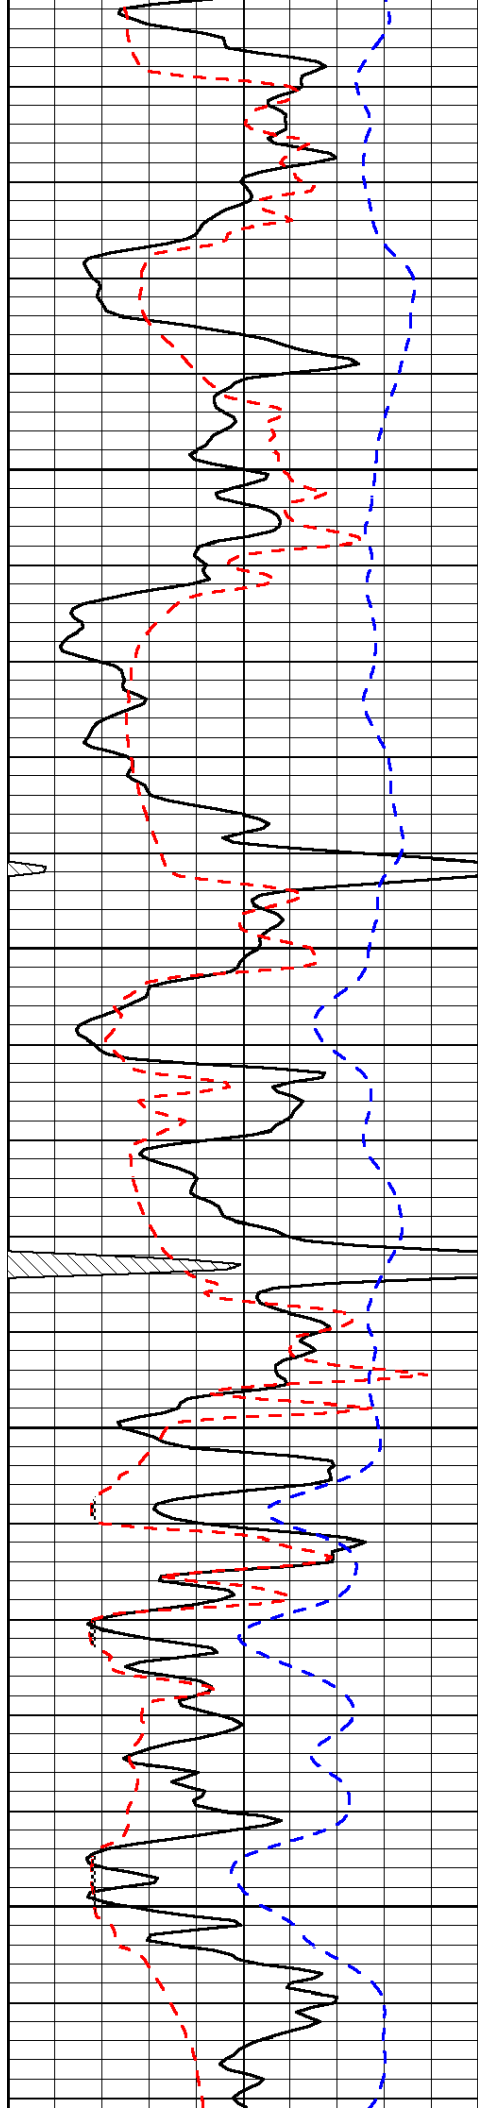


4100

4150

4200

4250

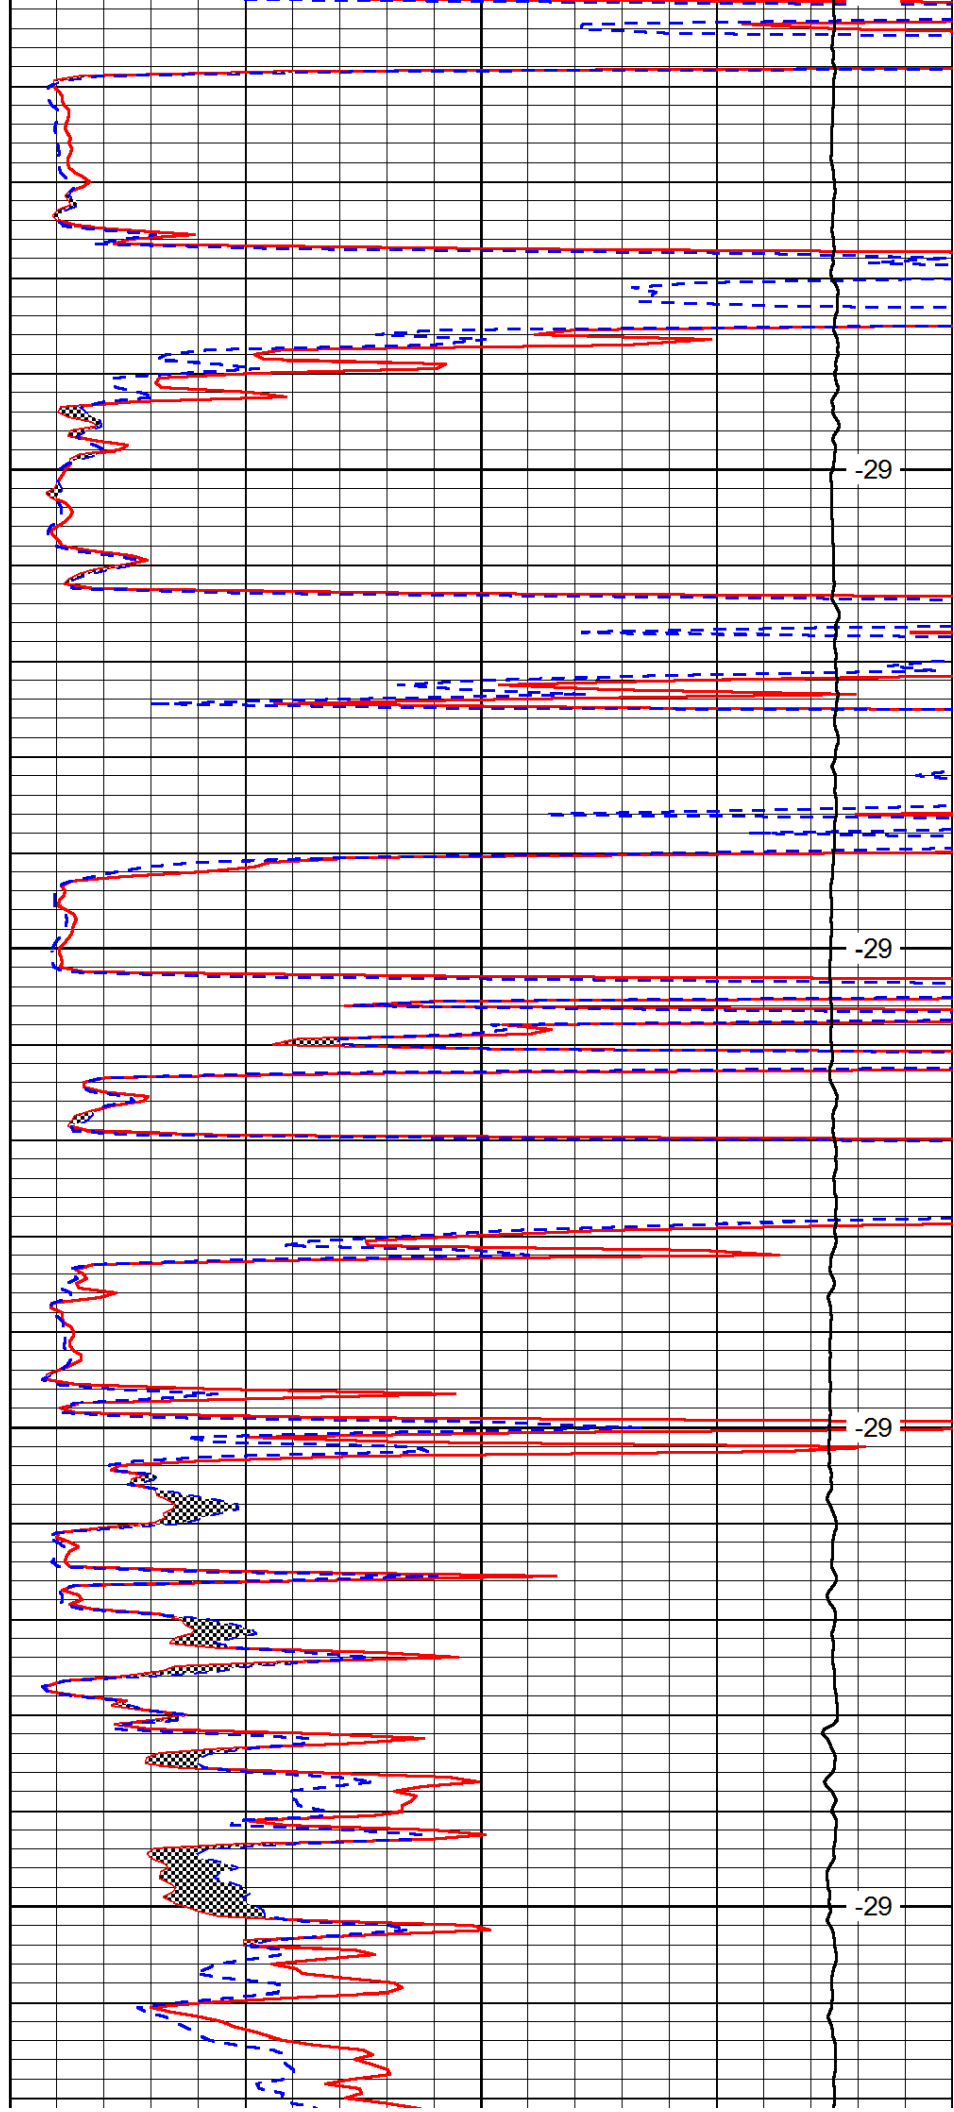


-29

-29

-29

-29

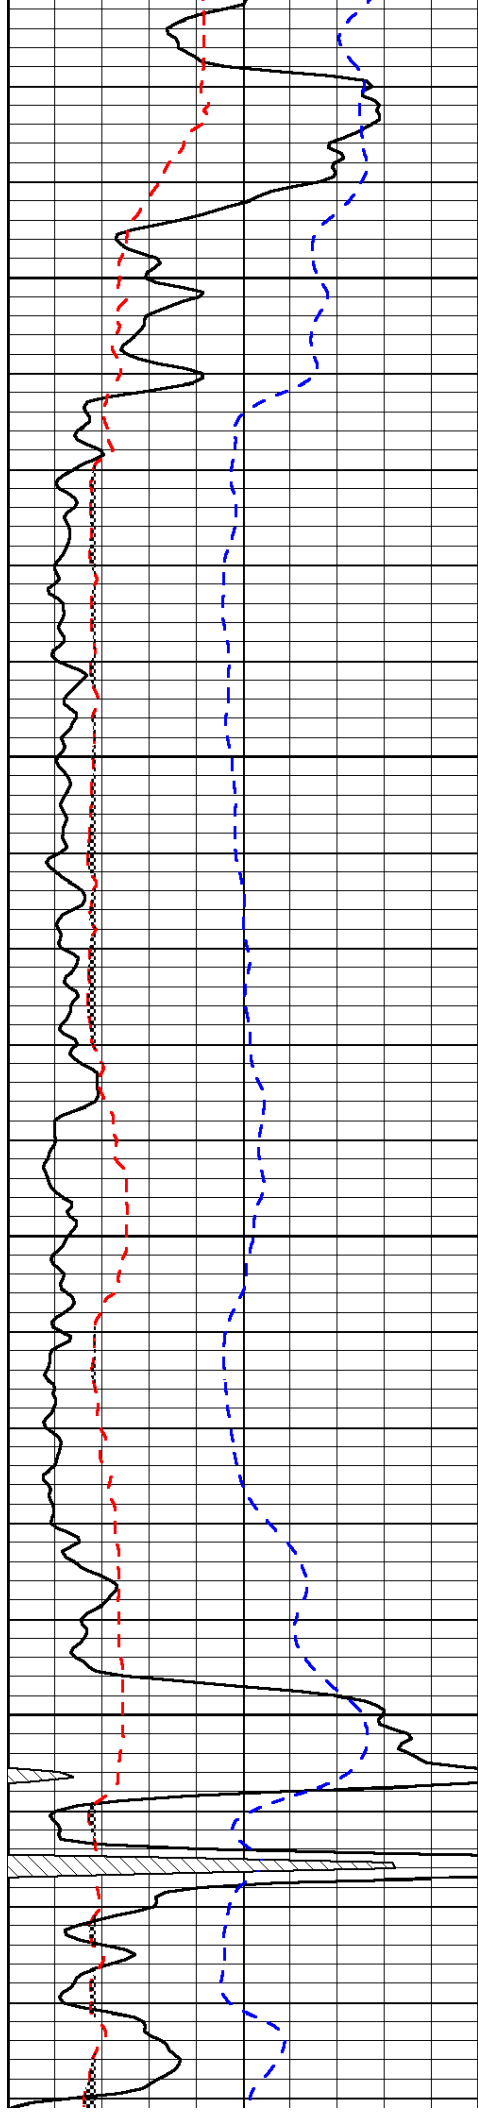


4300

4350

4400

4450

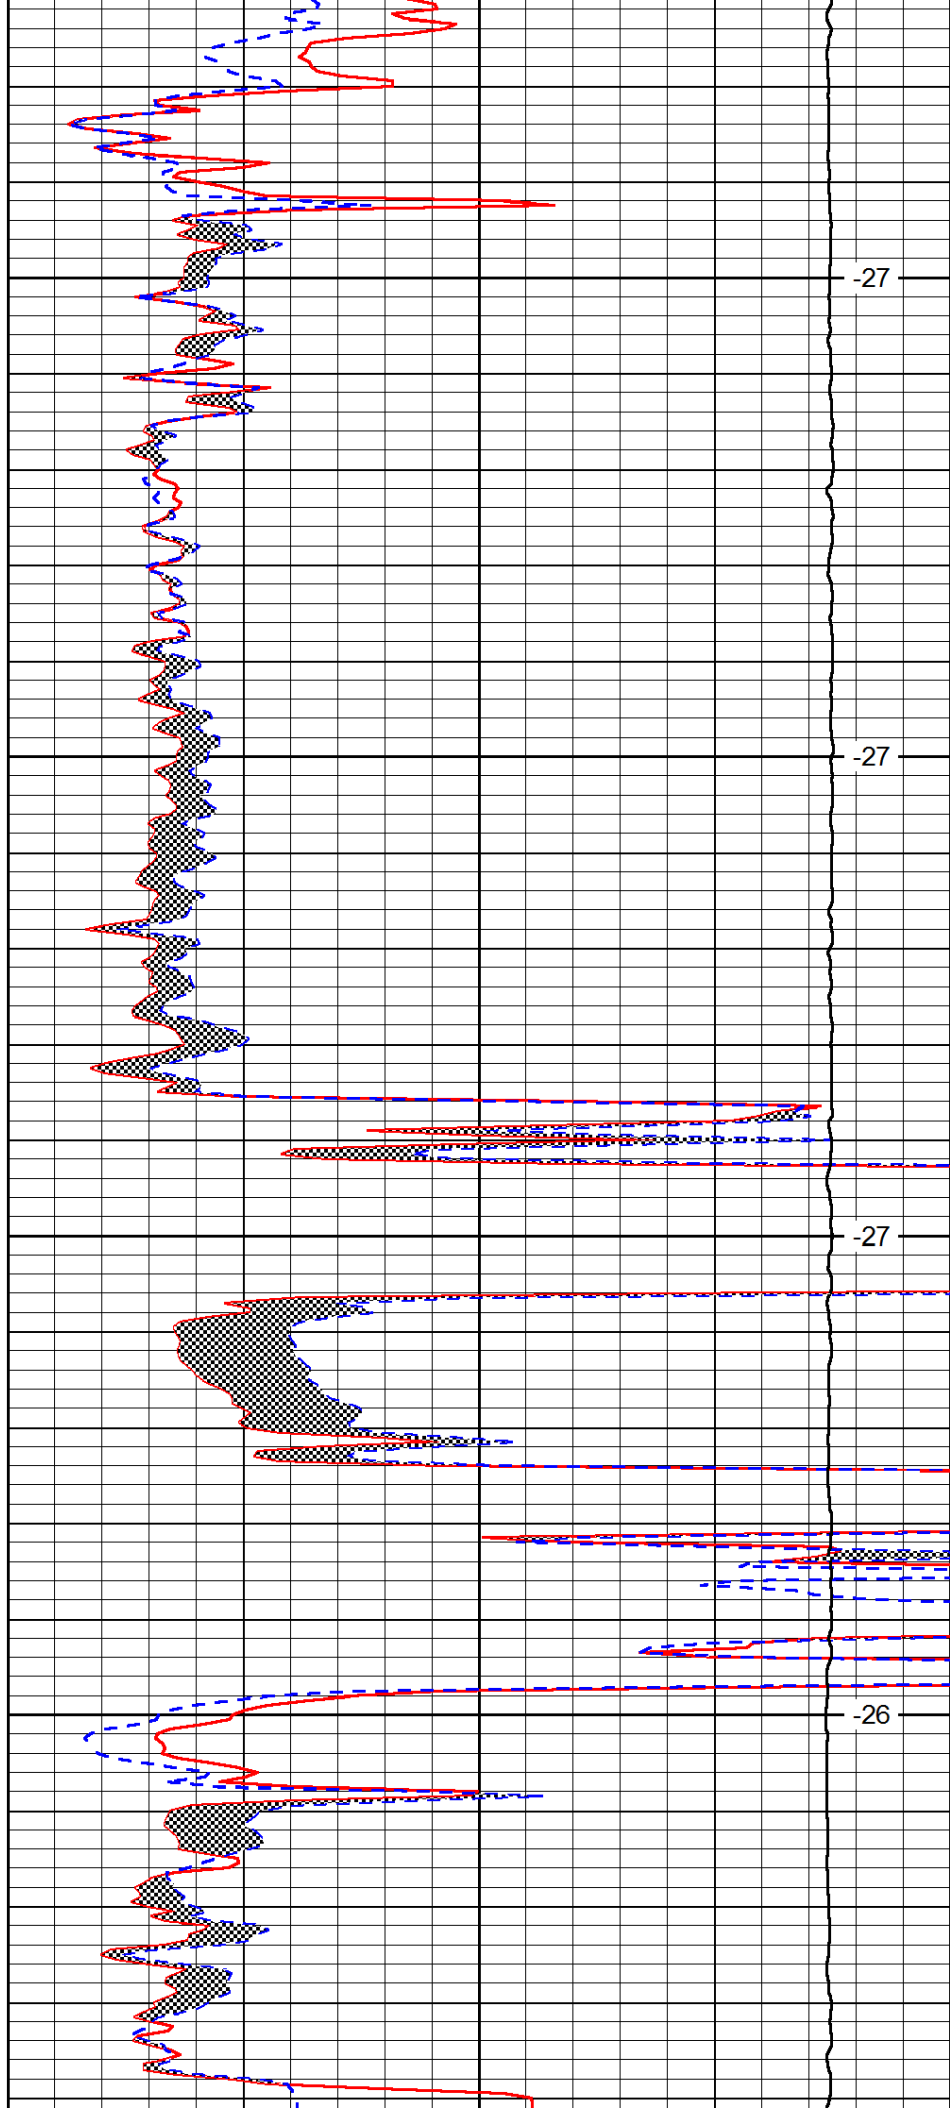


-27


-27

-27

-26

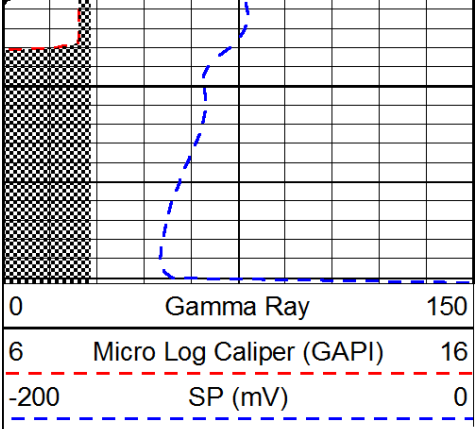

4500

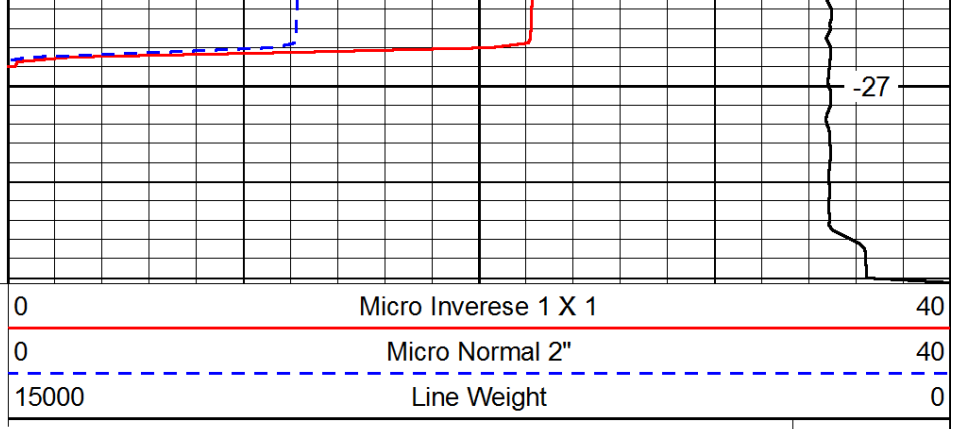

-27

LSPD