

~~15163-21188-0001~~

15-163-19079-00-00


Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

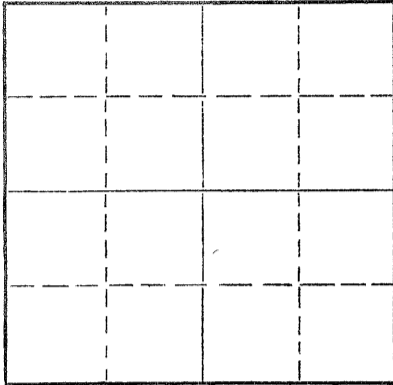

Locate well correctly on above
Section Plat

Location as "NE/CNW*SW*" or footage from lines. Rooks County. Sec. 4 Twp. 75 Rge. 19 (E) X (W) w/a SE/4

Lease Owner Sh King Oil Operations

Lease Name Loringston Well No. 1-13

Office Address 639 Main Russell KS 671065

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 3-13 19 83

Application for plugging filed 9-17 19 82

Application for plugging approved 10-14 19 82

Plugging commenced 10-25 19 82

Plugging completed 10-26 19 82

Reason for abandonment of well or producing formation T/A Tried to reenter

but pipe was collapsed at 1105'

If a producing well is abandoned, date of last production Approximately 1982

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Don Hammel - Plainville

Producing formation carbuckle of Kansas City Depth to top 3456 Bottom 3471 Total Depth of Well 3471 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
N/A						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Loaded hole with water truck, ran 3' perf. & 37 jts. 2 1/2 EUE 8rd tubing, pumped 150 sacks down tubing, started to pull tubing, tubing was hung up, barked off from tubing, got 130 jts back out left 7 jts & 3' perf., pumped 150 sacks down 8 1/2" surface, hooked up to 5 1/2", pumped another 150 sacks down 5 1/2", pressure went up to 1500, string down.

Re-8-82
12-8-82

Name of Plugging Contractor Rapid Well Service
Address PO Box 208 Russell KS 671065

STATE OF Kansas, COUNTY OF Russell, ss.

Employee of owner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) Elmer L. Froehel
Box 177 Russell Kansas 671065
(Address)

SUBSCRIBED AND SWORN TO before me this 8 day of December, 19 82

My commission expires 12-18-84
Dorothy Mashburn Notary Public.