


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

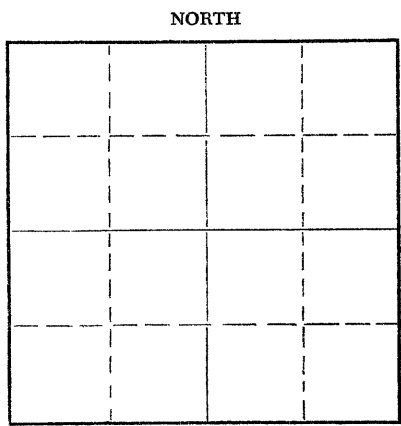

Locate well correctly on above
Section Plat

Ellis County. Sec. 6 Twp. 11S Rge. 20W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SW
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Schneider Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 25, 1957
Application for plugging filed June 14, 1957
Application for plugging approved June 14, 1957
Plugging commenced June 25, 1957
Plugging completed June 25, 1957
Reason for abandonment of well or producing formation No commercial quantities of oil found.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3655 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	5-2-57	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it to the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with crushed rock to 3615',
dumped 5 sacks cement at 3615' with dump
bailer. Top of cement, 3585'. Pumped in
25 sacks Gel-Mud and 100 sacks cement by
Halliburton Cement Company to plug well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Miller Casing Pulling Company
Address P. O. Box 711, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Stanley J. Bounds (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. IMPERIAL OIL OF KANSAS, INC.

(Signature) BY: Stanley J. Bounds
903 Union National Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of July, 19 57

My commission expires December 19, 1960

Louetta M. Duncan
Louetta M. Duncan Notary Public.

PLUGGING
FILE: SEC 6 T. 11 R. 20W
BOOK PAGE 20 LINE 32

RECEIVED
STATE CORPORATION COMMISSION
JUL 11 1957
JUL 11 1957
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

Imperial Oil of Kansas, Inc.
 903 Union National Building
 Wichita 2, Kansas

Schneider No. 1
 NW NW SW Sec. 6-11S-20W
 Ellis County, Kansas

Total Depth: 3655'

Elevation: 2054' R.B.
 Production: D & A

Commenced: 5-2-57 Completed: 5-10-57

Contractor: Imperial Oil of Kansas, Inc.
 Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 250' with 200 sacks cement.

Figures indicate bottom of formations:

Surface Sand & Shale	980'		<u>TOPS</u>	
Dakota Sand	1215'	Anhydrite	1490'	(/ 564)
Red Bed - Shale	1490'	Heebner	3298'	(-1244)
Anhydrite	1532'	Toronto	3321'	(-1267)
Shale & Shells	2055'	Lansing	3335'	(-1281)
Shale	2175'	Conglomerate	3606'	(-1552)
Shale & Lime	3351'	Arbuckle	3645'	(-1591)
Lime	3655'	Total Depth	3655'	(-1601)
Total Depth	3655'			

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Ray L. Bacon
 Vice President

Subscribed and sworn to before me this 24th day of June, 1957.

My Commission Expires:

December 19, 1960

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 11, 1957
 JUL 11 1957

CONSERVATION DIVISION
 Wichita, Kansas

Luetta M. Duncan
 Notary Public

PLUGGING
 FILE SEC 6 T 11 R 20W
 BOOK PAGE 20 LINE 32