



DIGITAL LOG (785) 625-3858

Dual Induction Log

API No.	15-097-21728-00-00		
Company	Berecxco, LLC		
Well	Gary #1-5		
Field	Wildcat		
County	Kiowa	State	Kansas
Location	E2 W2 SE NE 1980' FNL / 770' FEL		Other Services CNL / CDL MEL / BHCS
Sec: 5	Twp: 30S	Rge: 16W	Elevation K.B. 1915 D.F. 1902 G.L. 1902
Permanent Datum	Ground Level	Elevation 1902	
Log Measured From	Kelly Bushing	13 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	5/27/2012		
Run Number	One		
Depth Driller	4978		
Depth Logger	4974		
Bottom Logged Interval	4973		
Top Log Interval	300		
Casing Driller	8.625 @ 322		
Casing Logger	329		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	8100		
Density / Viscosity	9.2	55	
pH / Fluid Loss	9.5	10.8	
Source of Sample	Flowline		
Rm @ Meas. Temp	0.28 @ 80		
Rmf @ Meas. Temp	0.21 @ 80		
Rmc @ Meas. Temp	0.38 @ 80		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.18 @ 126		
Operating Rig Time	6 Hours		
Max Rec. Temp. F	126		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Ed Grieves		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Belvidere, KS:
N on High Str., Cross Bridge & CG,
Right at Fork, 1/2 to CG, L into

Database File: berexcohd.db
Dataset Pathname: dil/bermain
Presentation Format: dil2in
Dataset Creation: Sun May 27 21:45:30 2012
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray	150
-200	SP	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500




LSPD


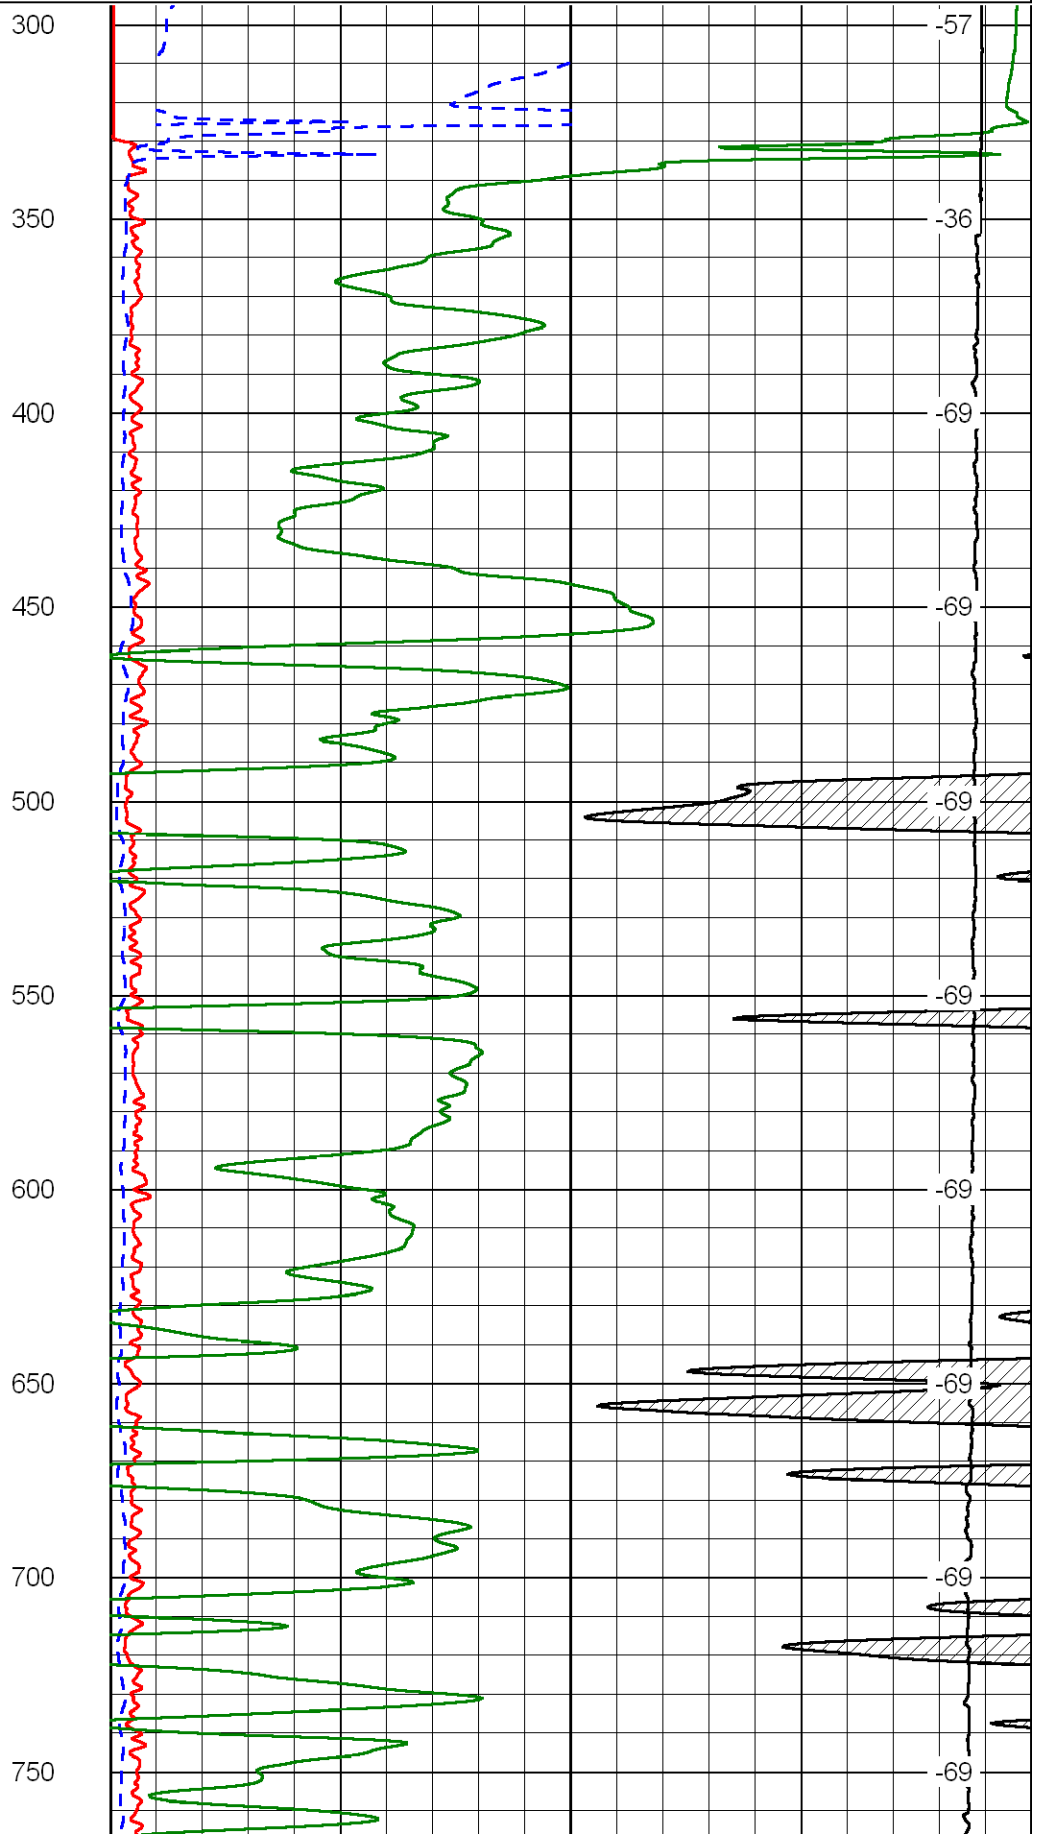
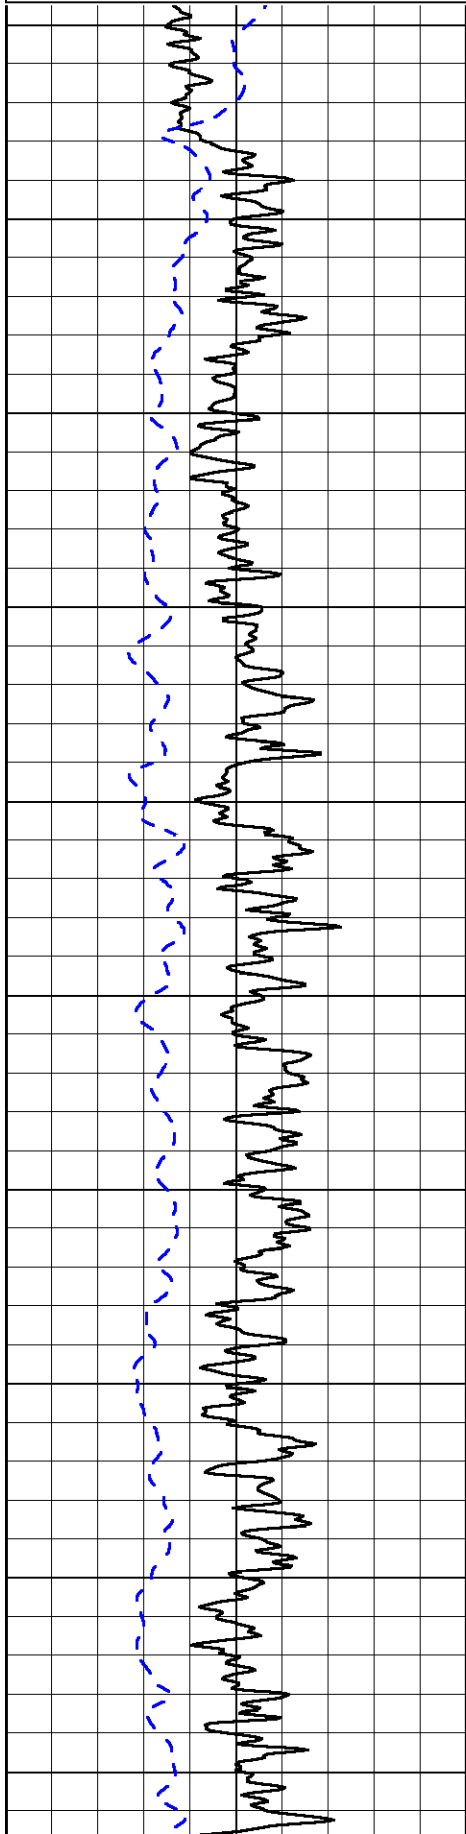




300
350
400
450
500
550
600
650
700
750




-57
-36
-69
-69
-69
-69
-69
-69
-69
-69


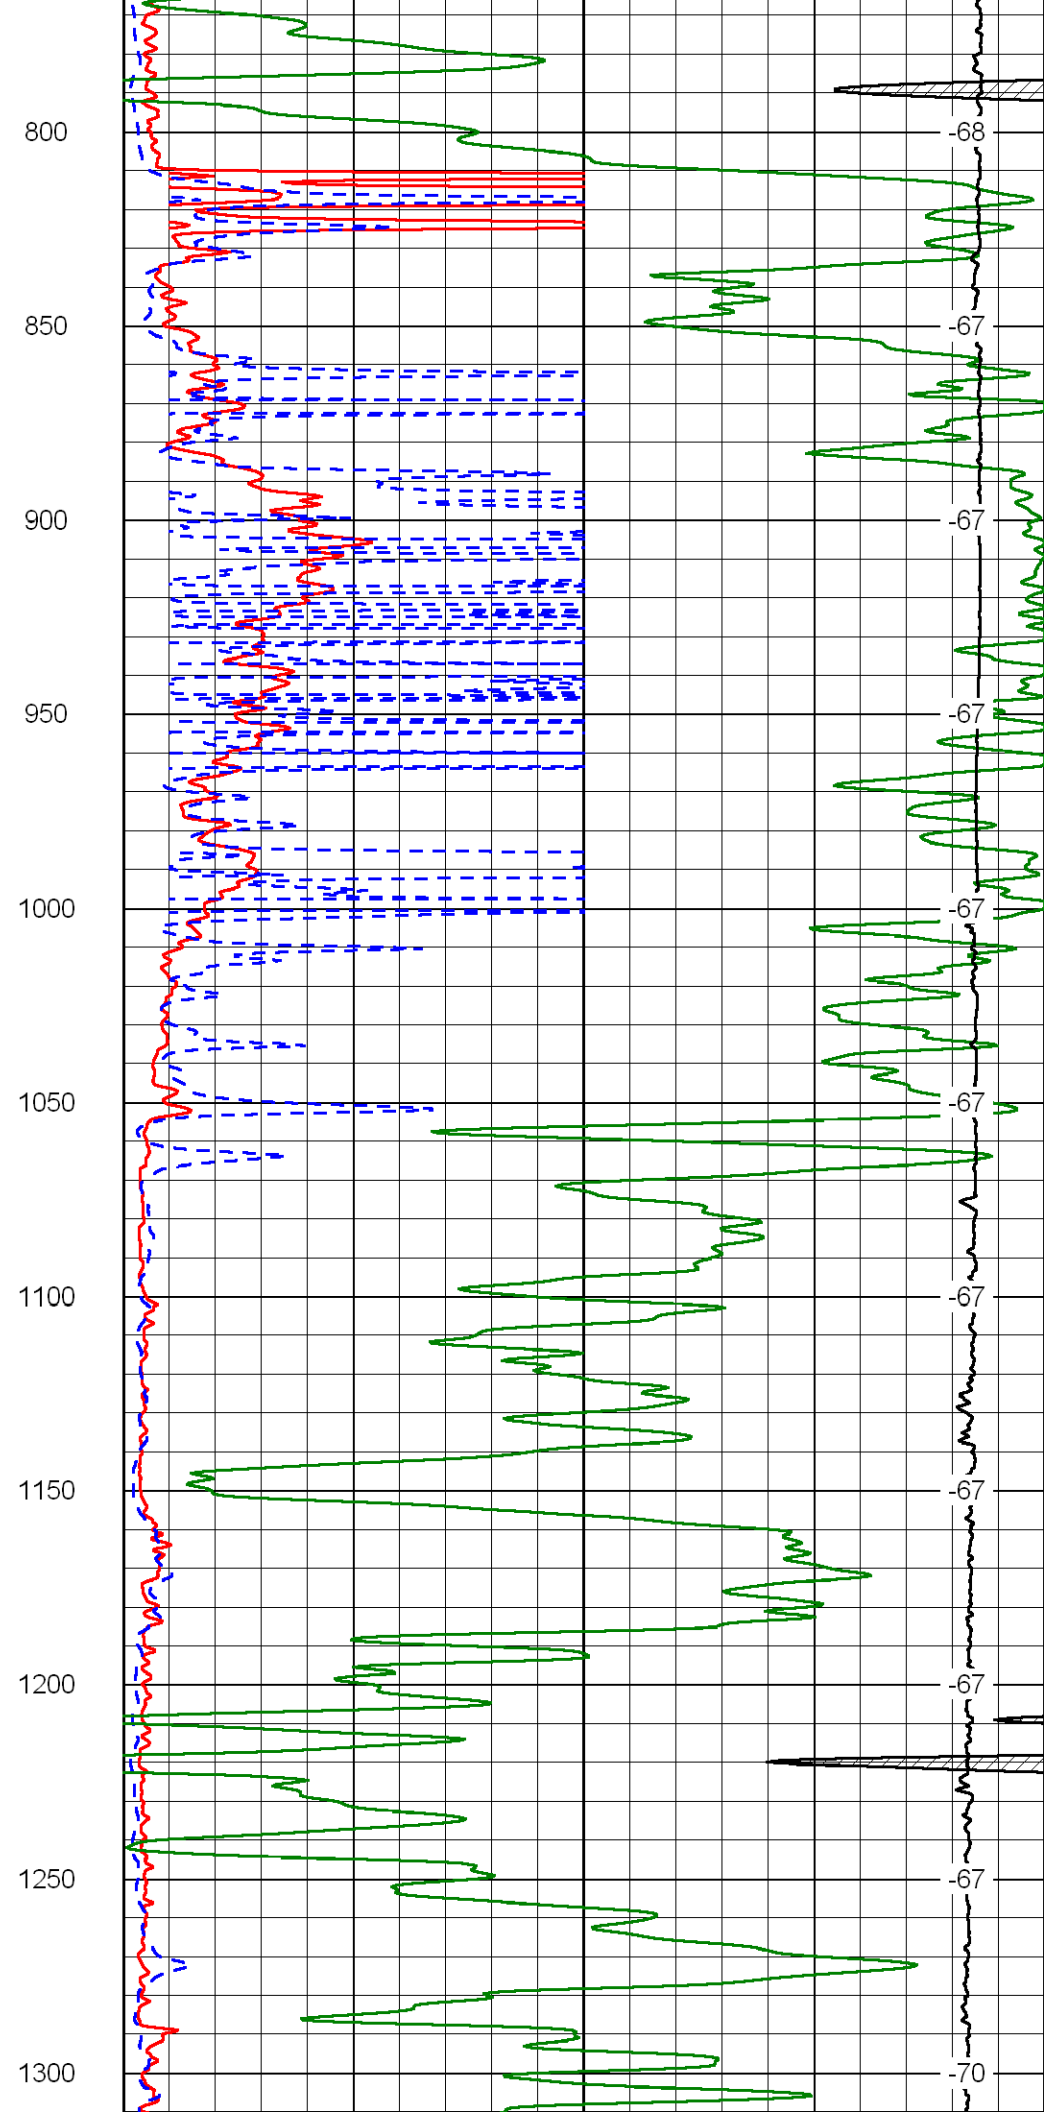
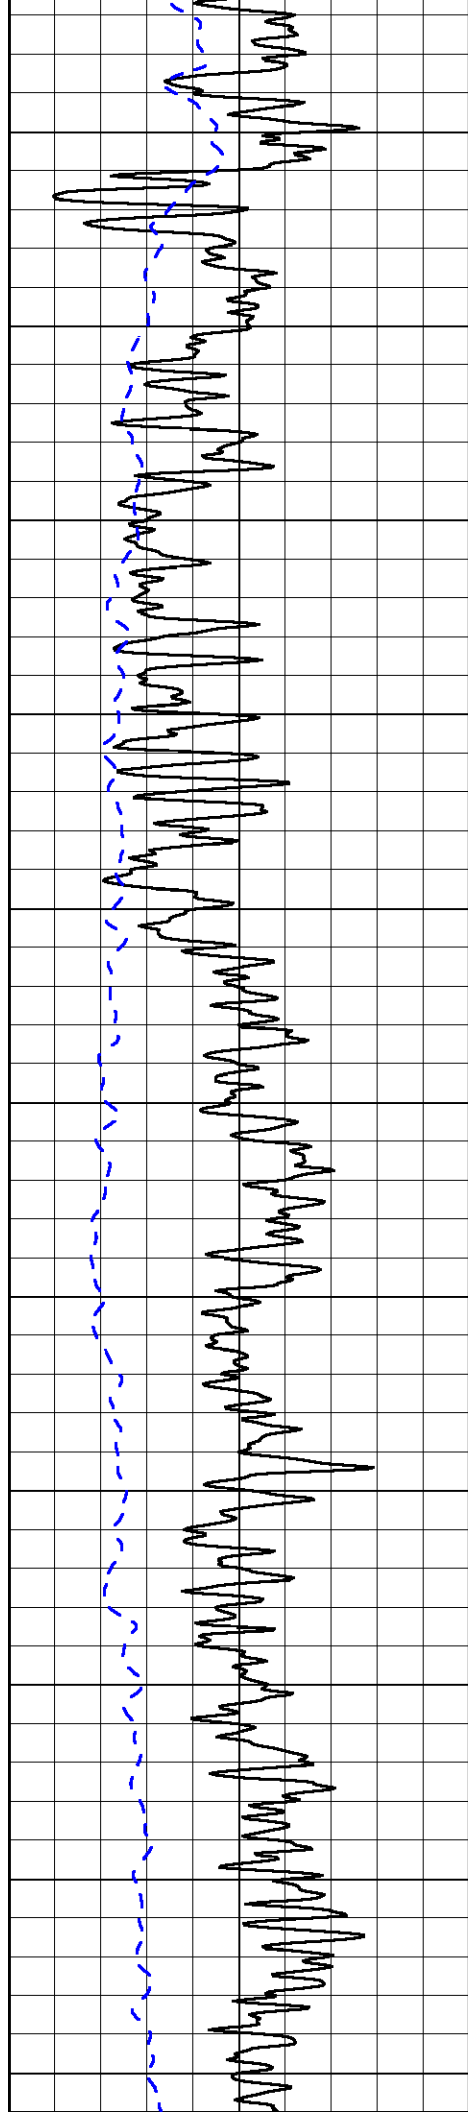


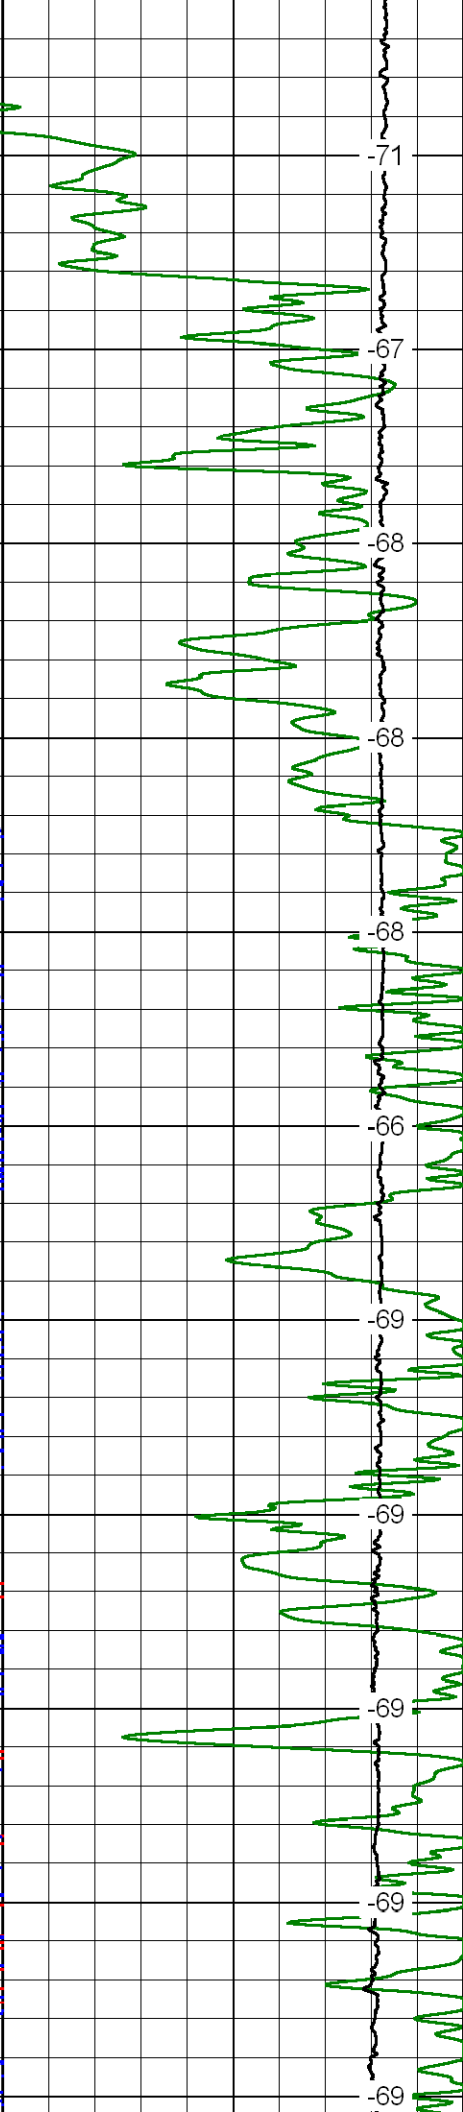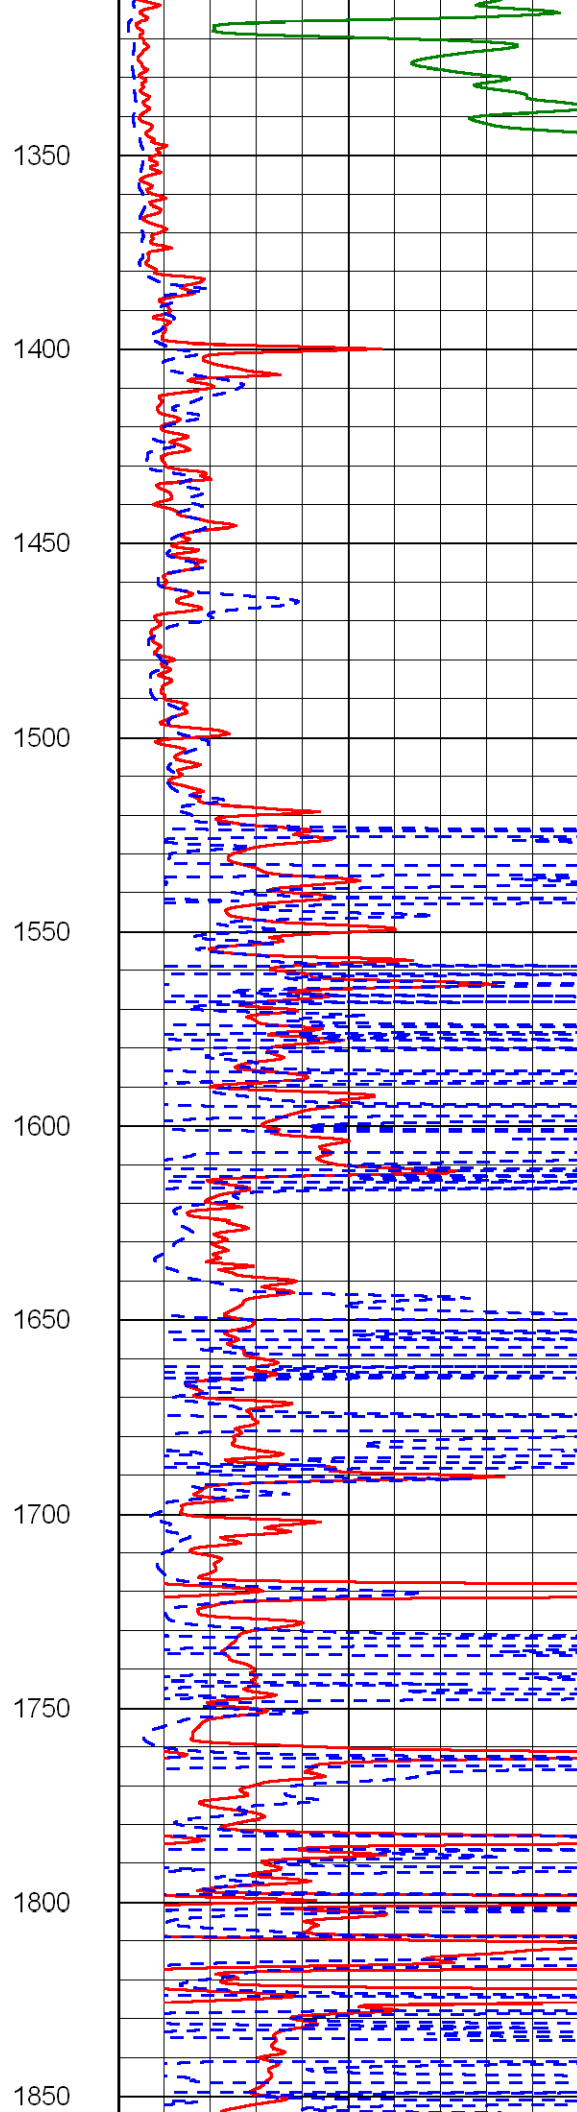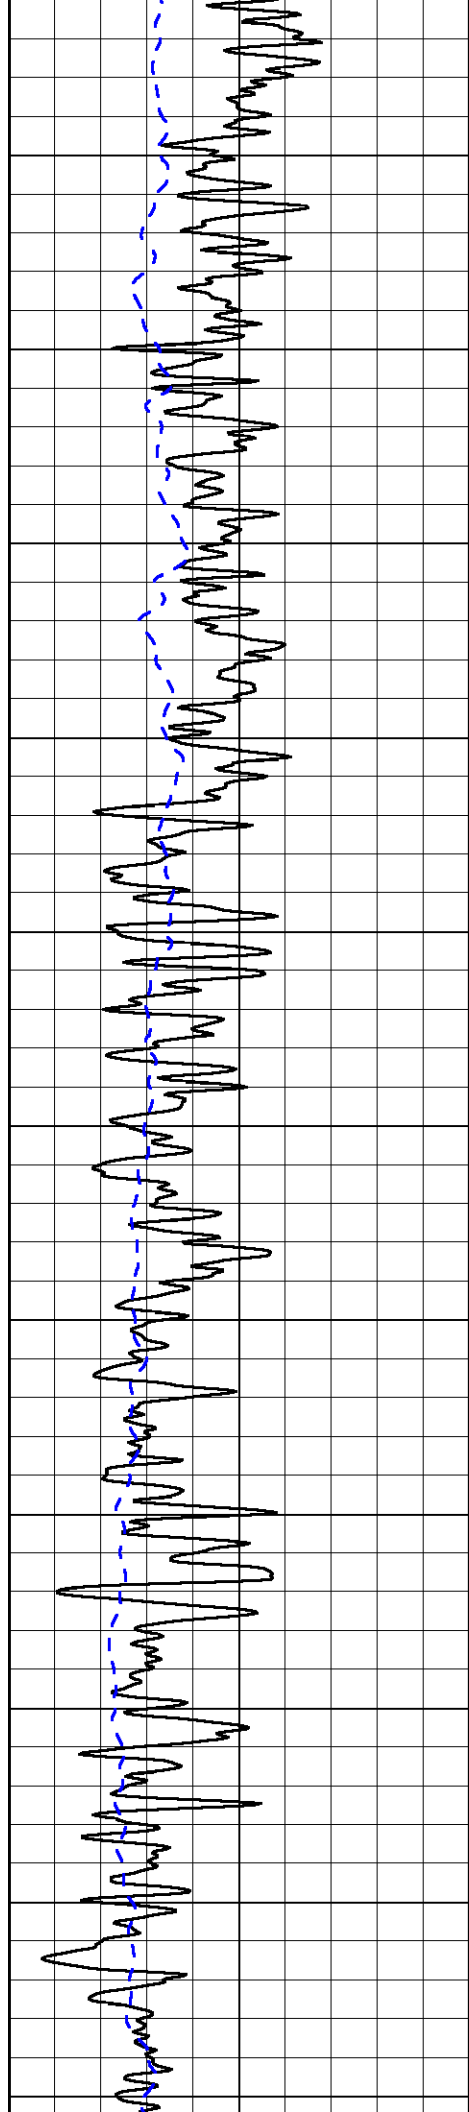


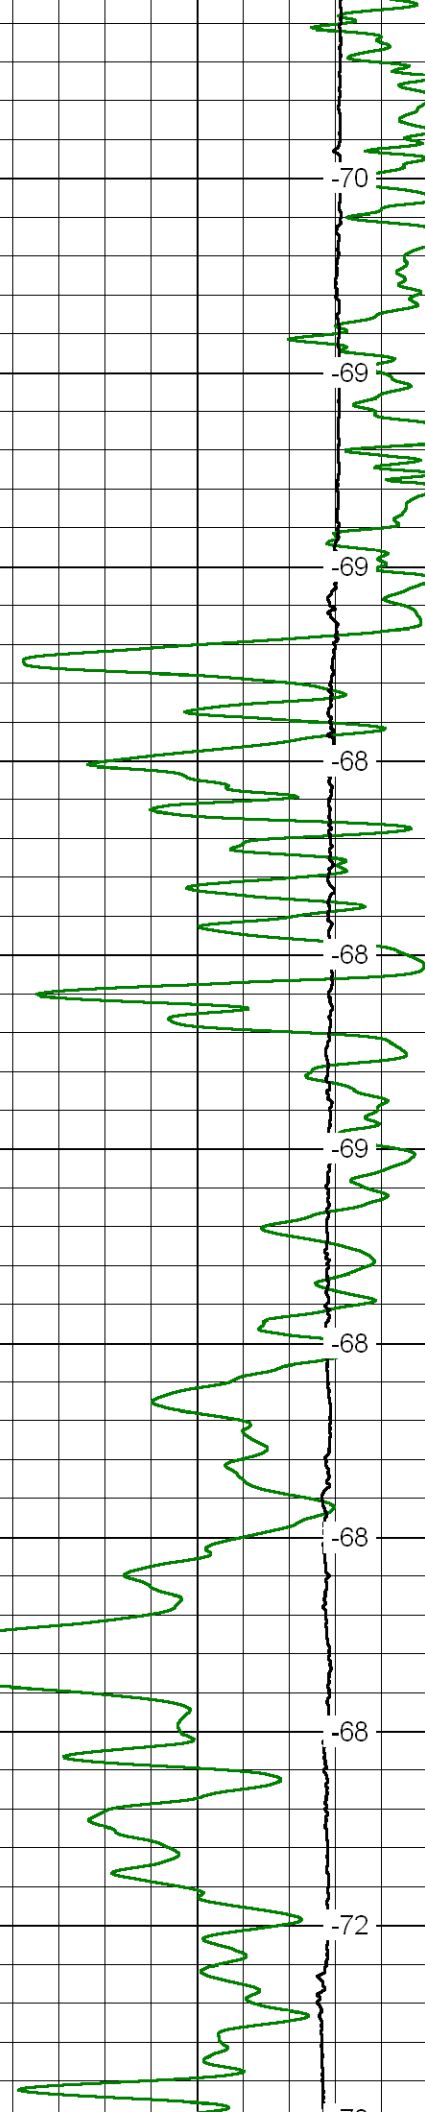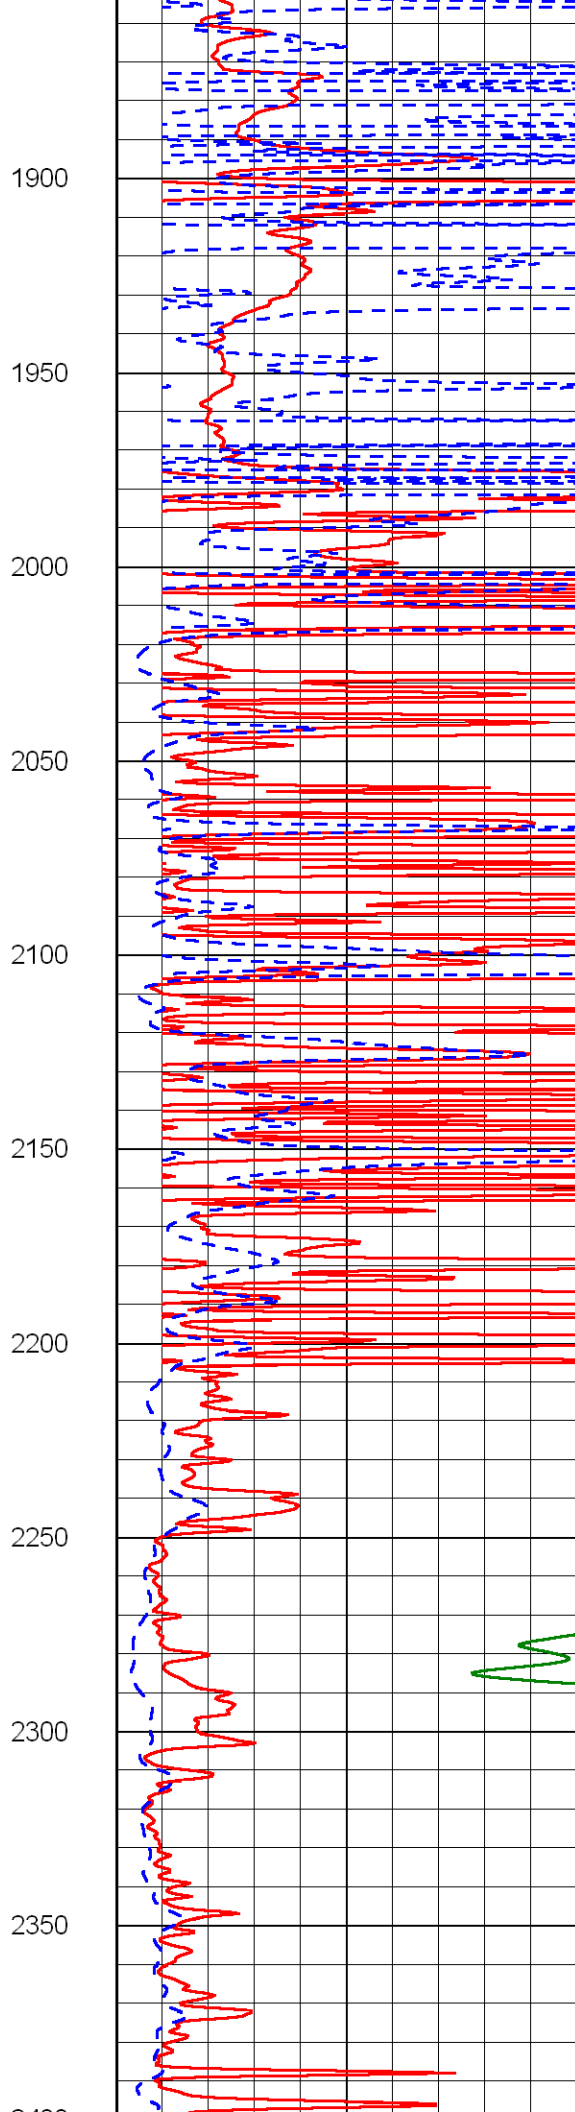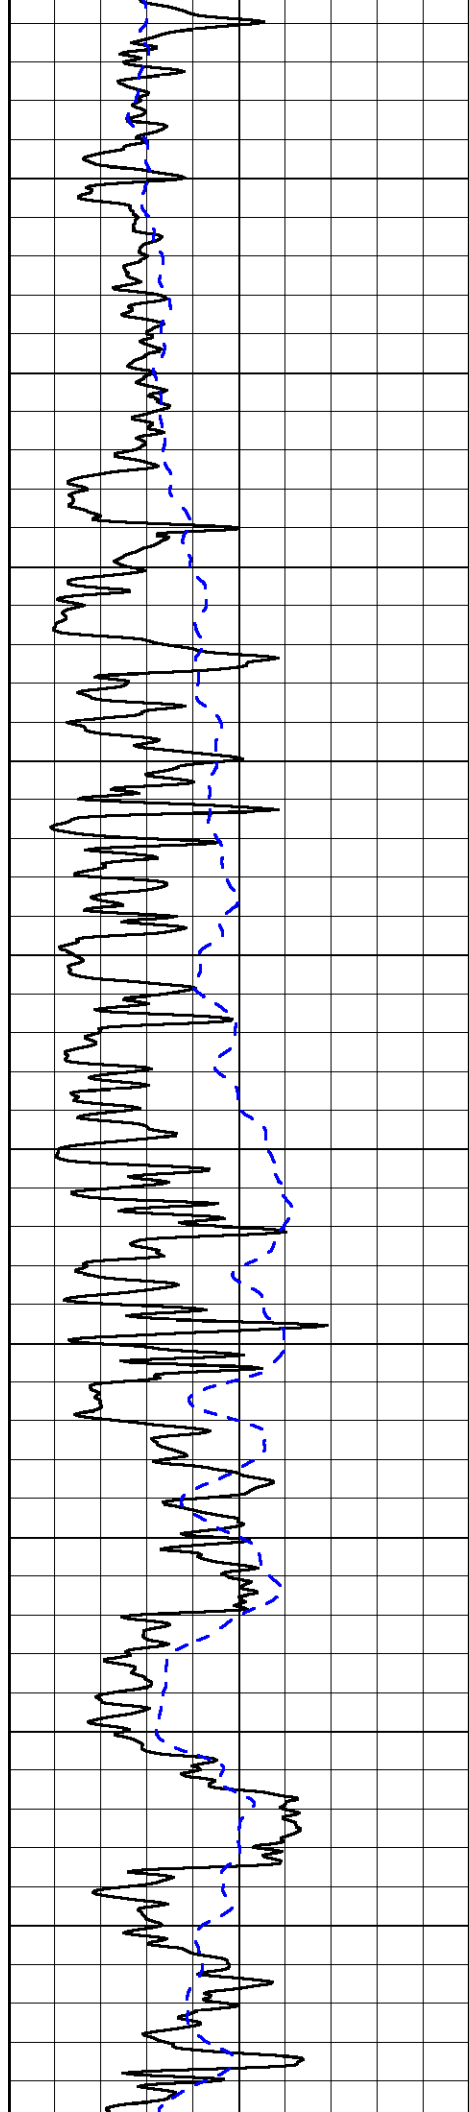

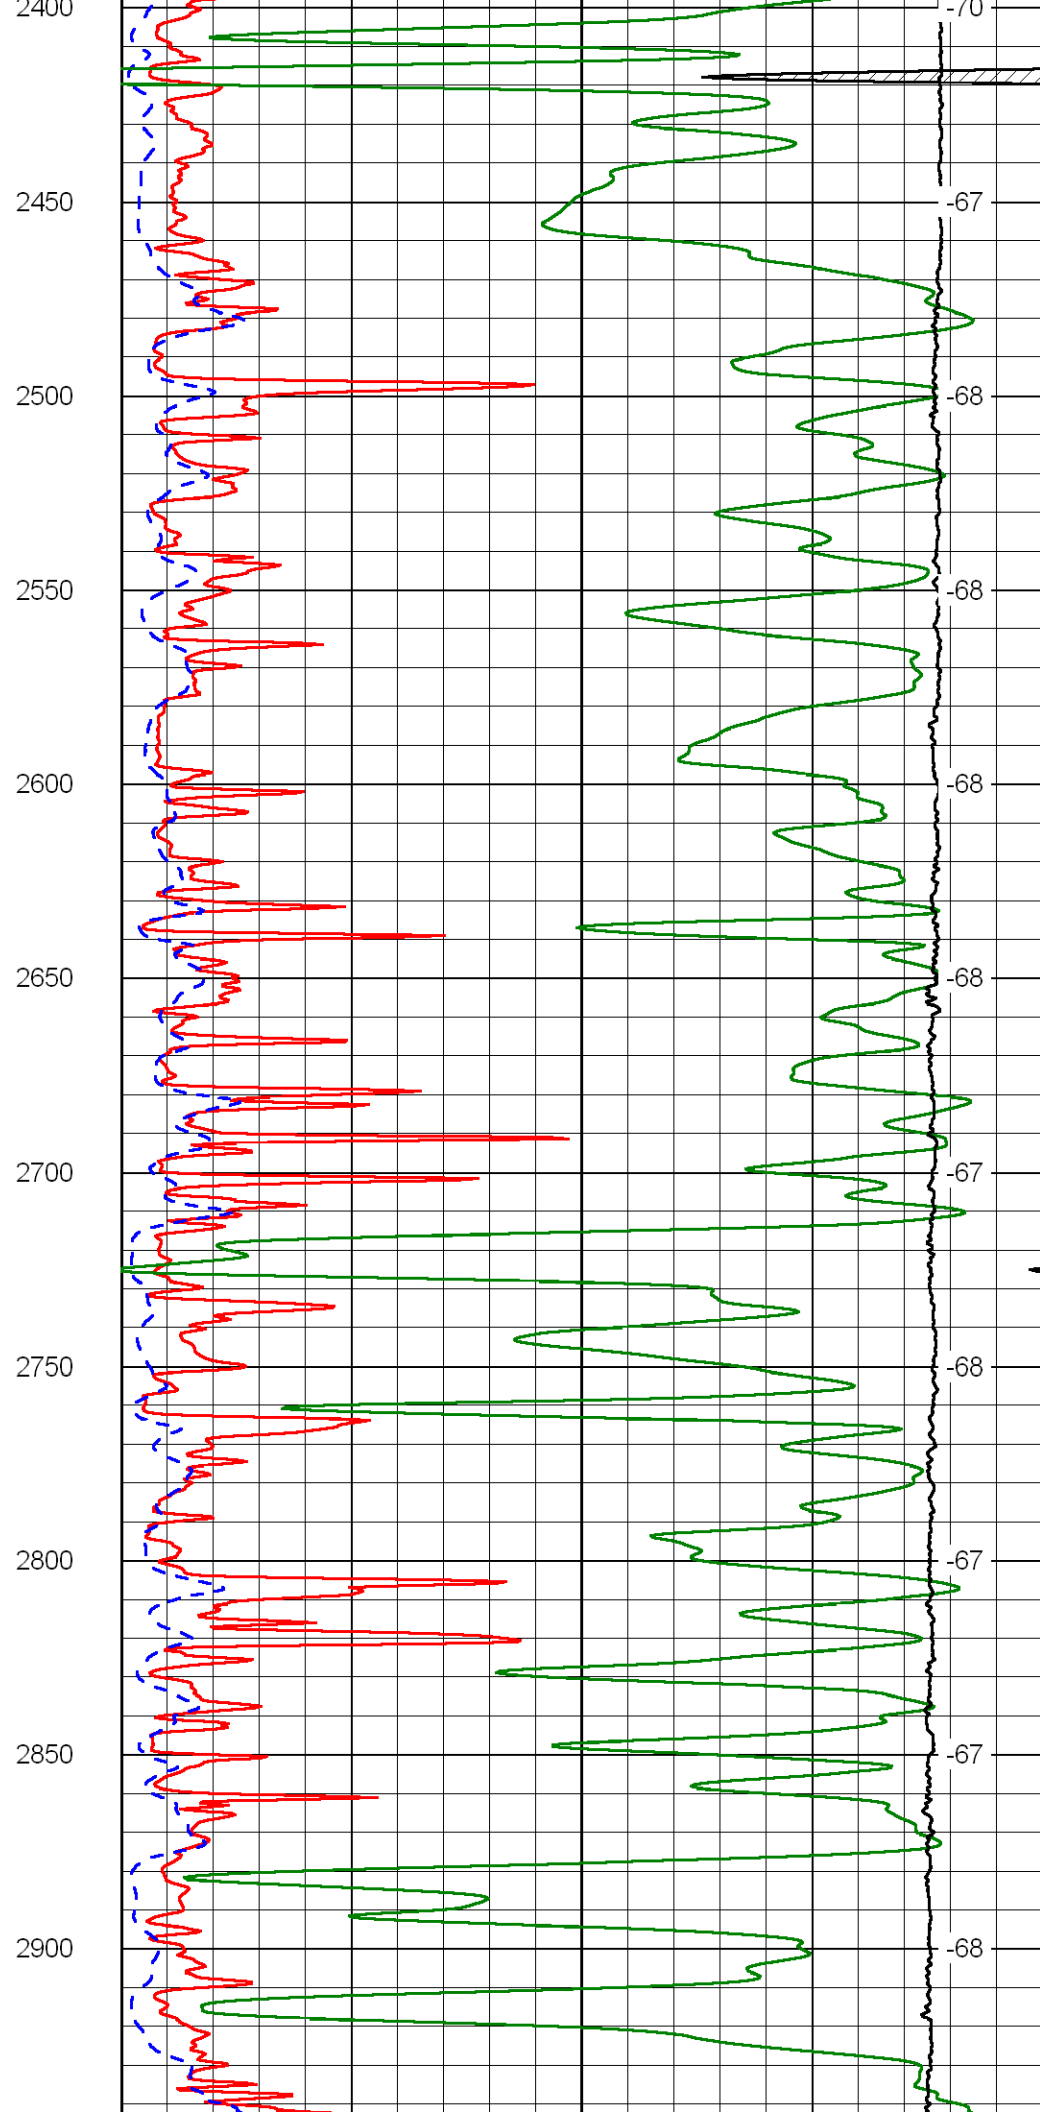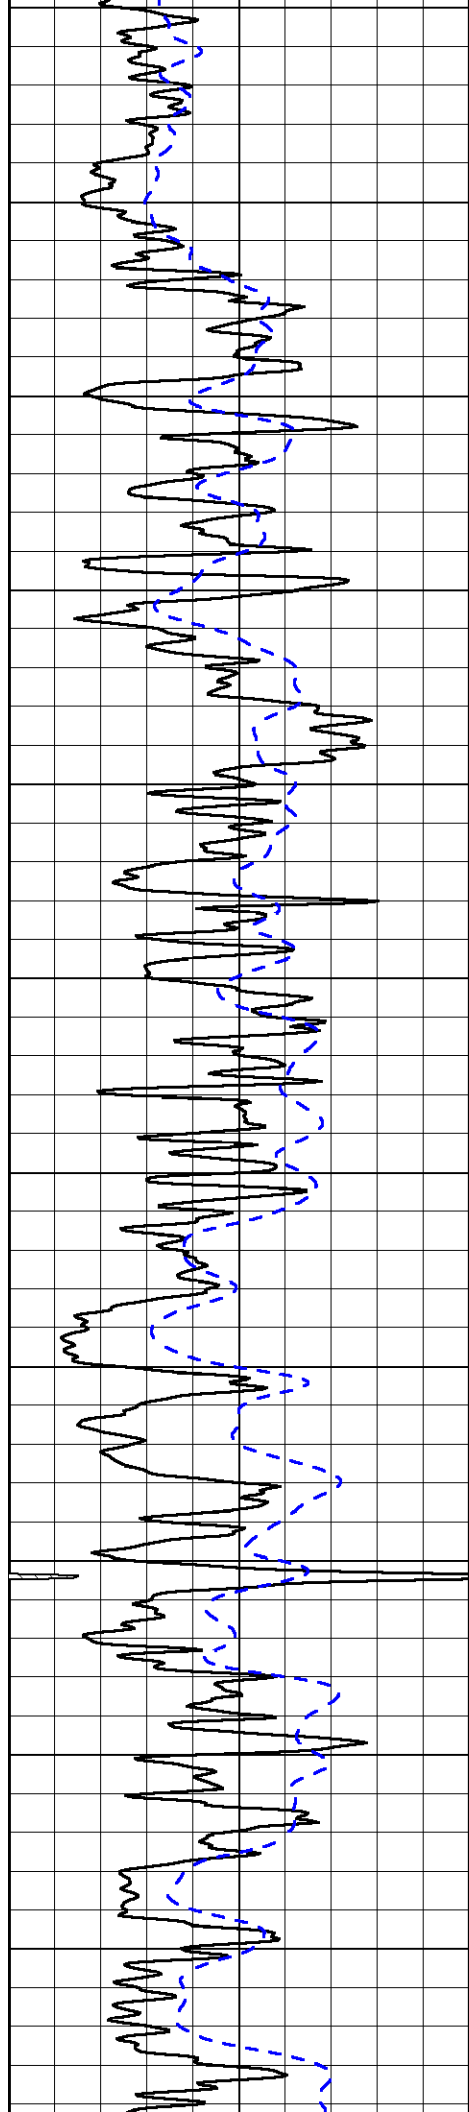

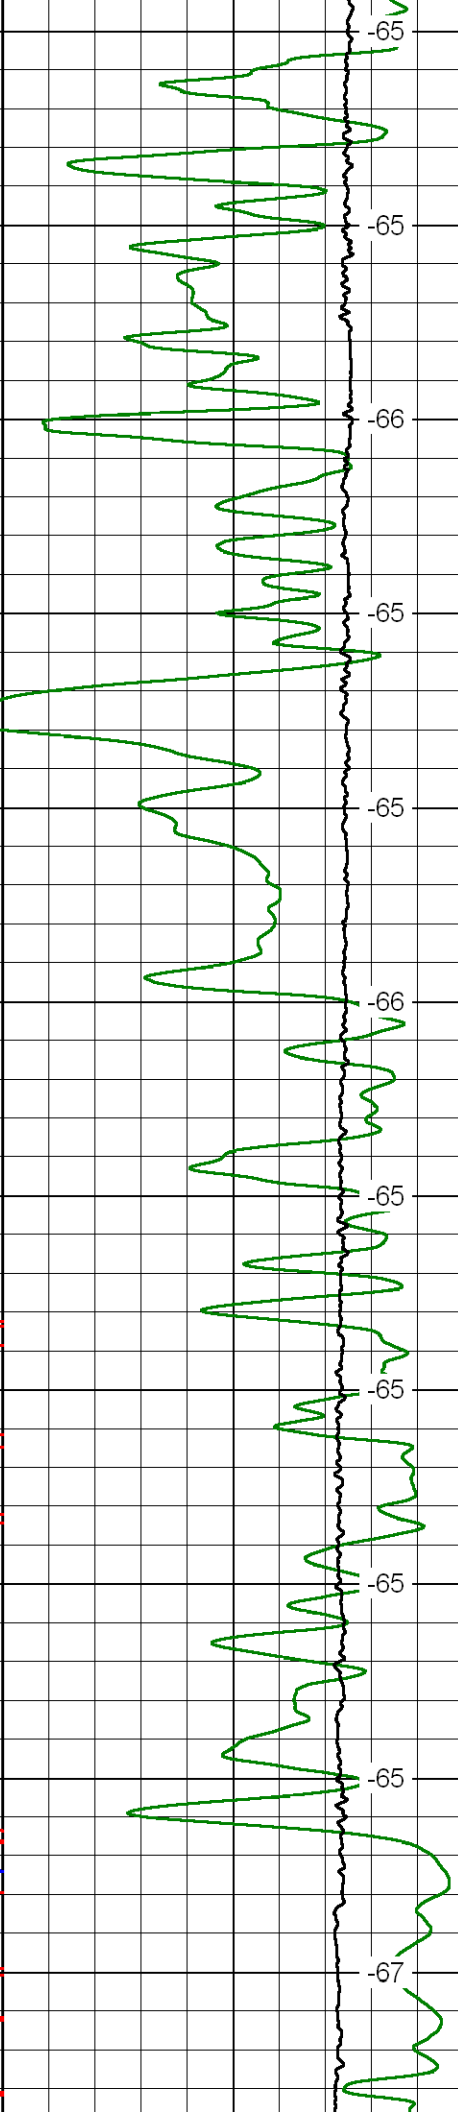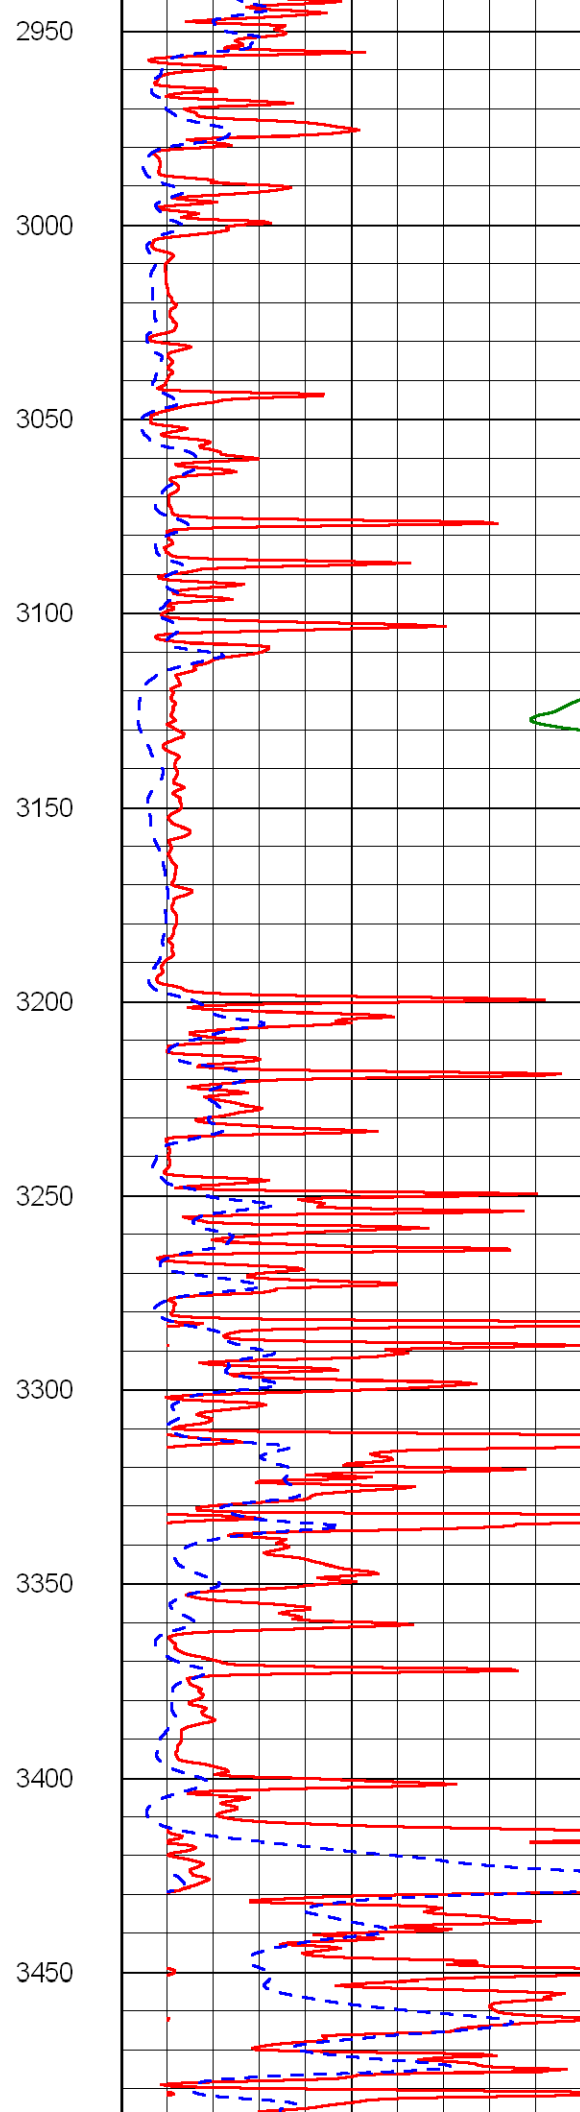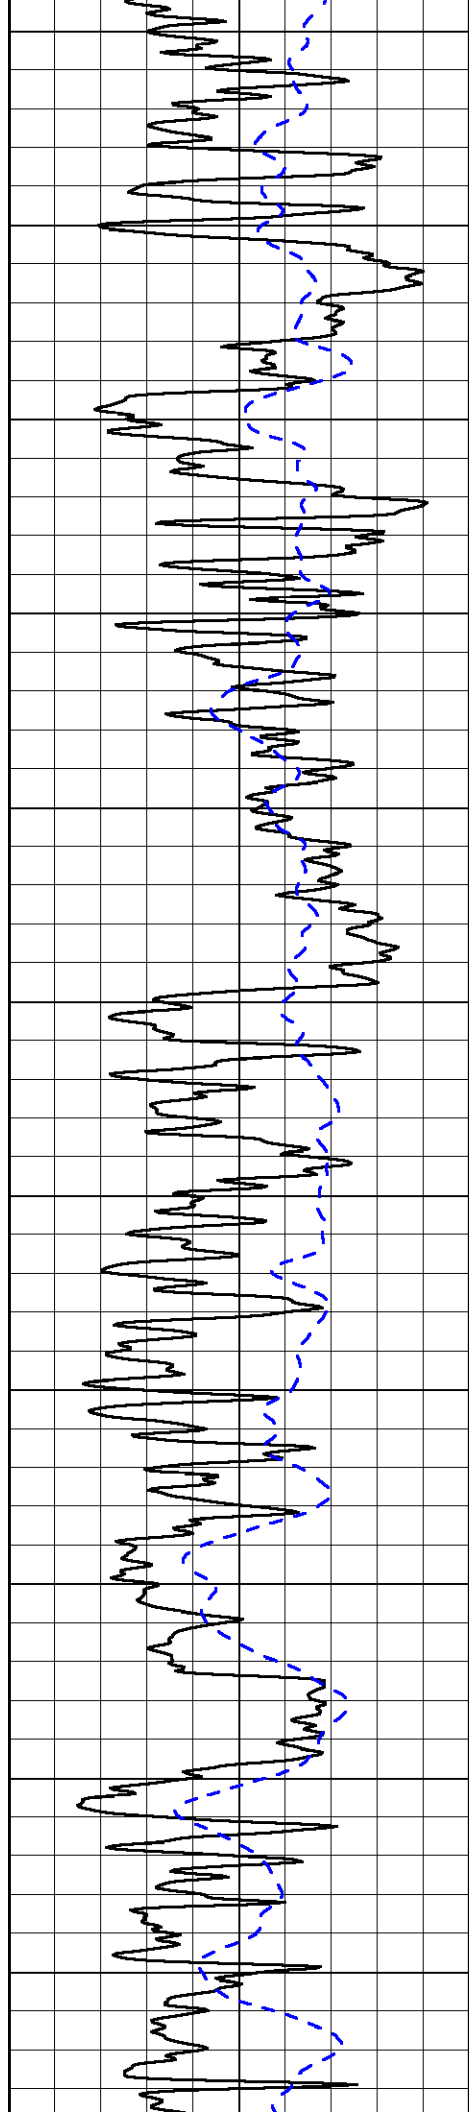

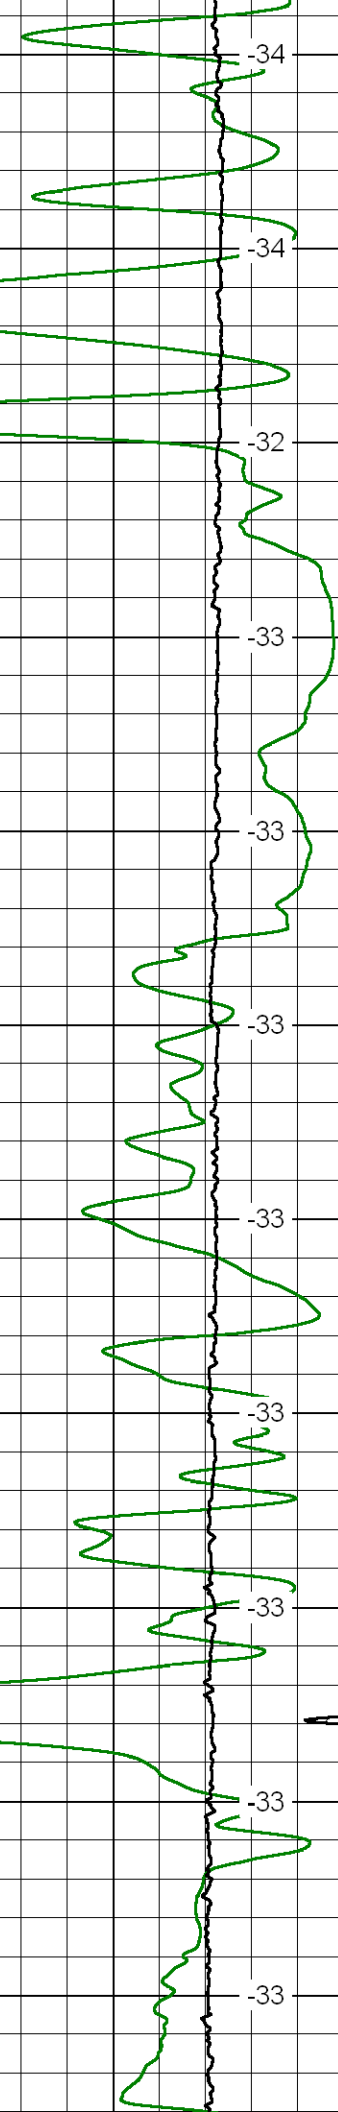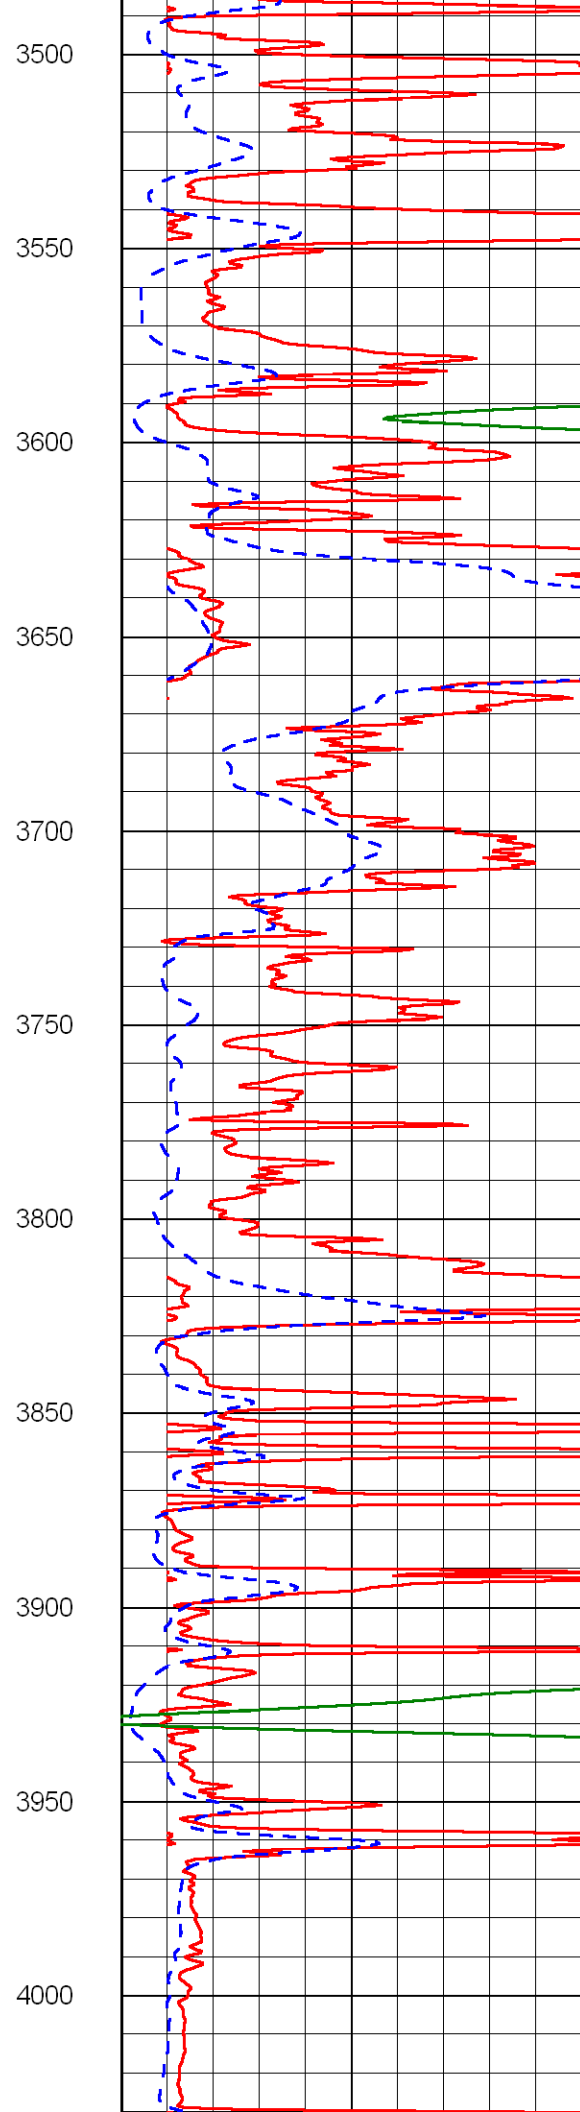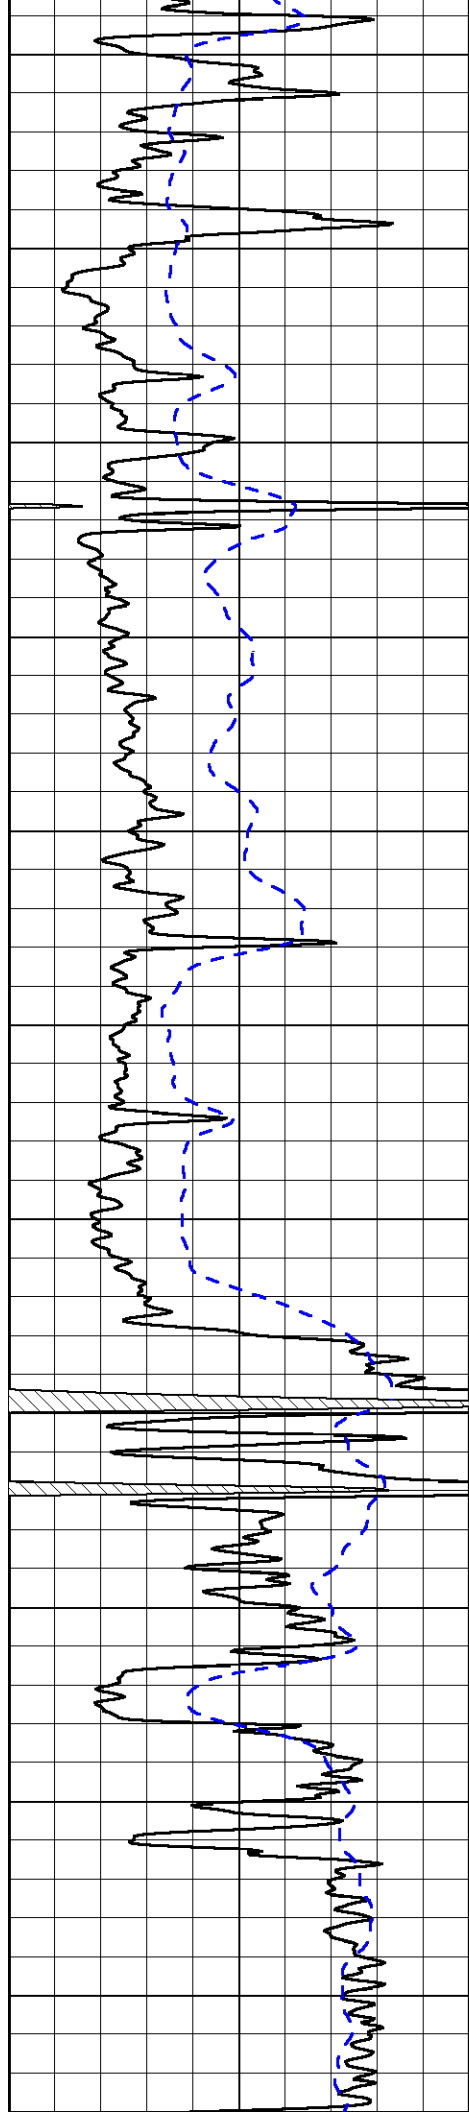

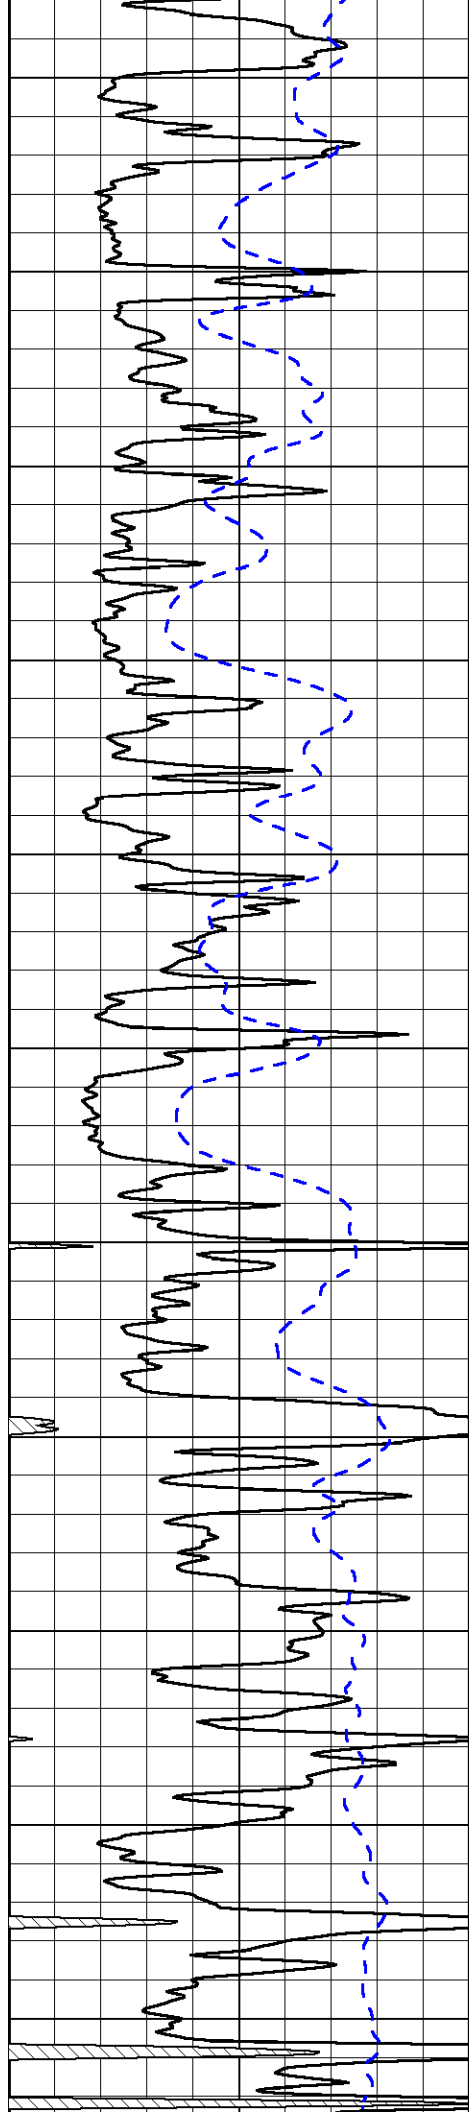

4050

4100

4150

4200

4250

4300


4350

4400

4450

4500

4550

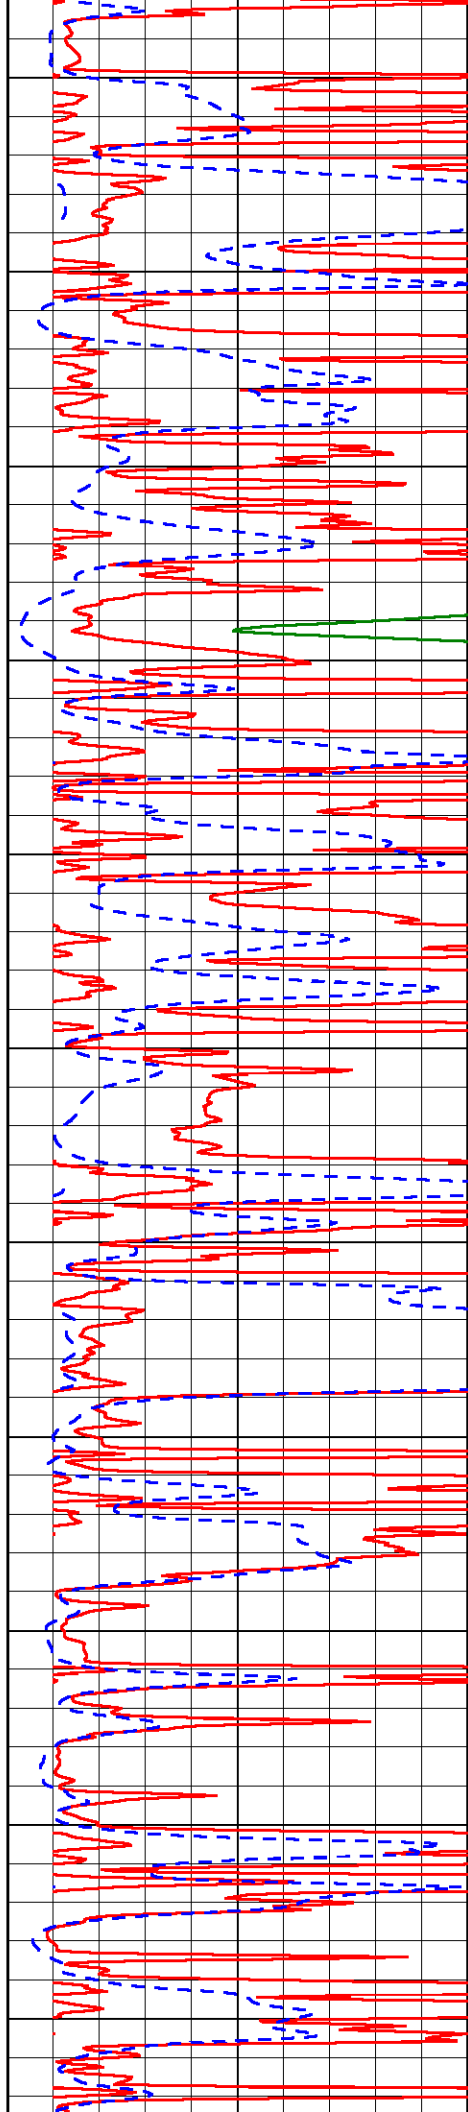

-33

-32

-32

-32

-32

-32


-32


-32

-32

-32

-31

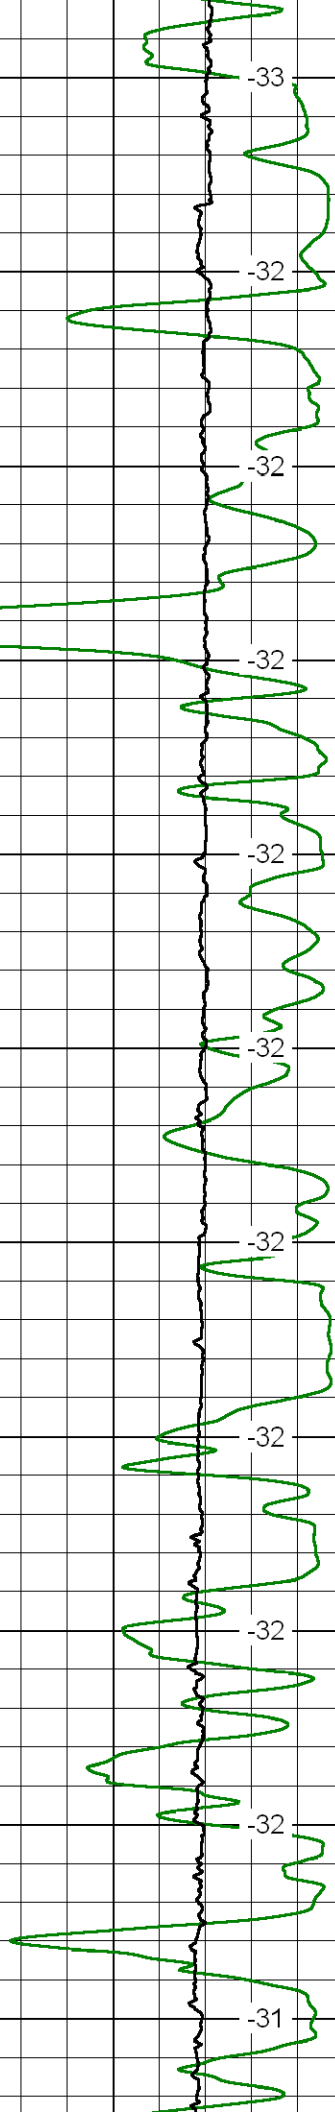

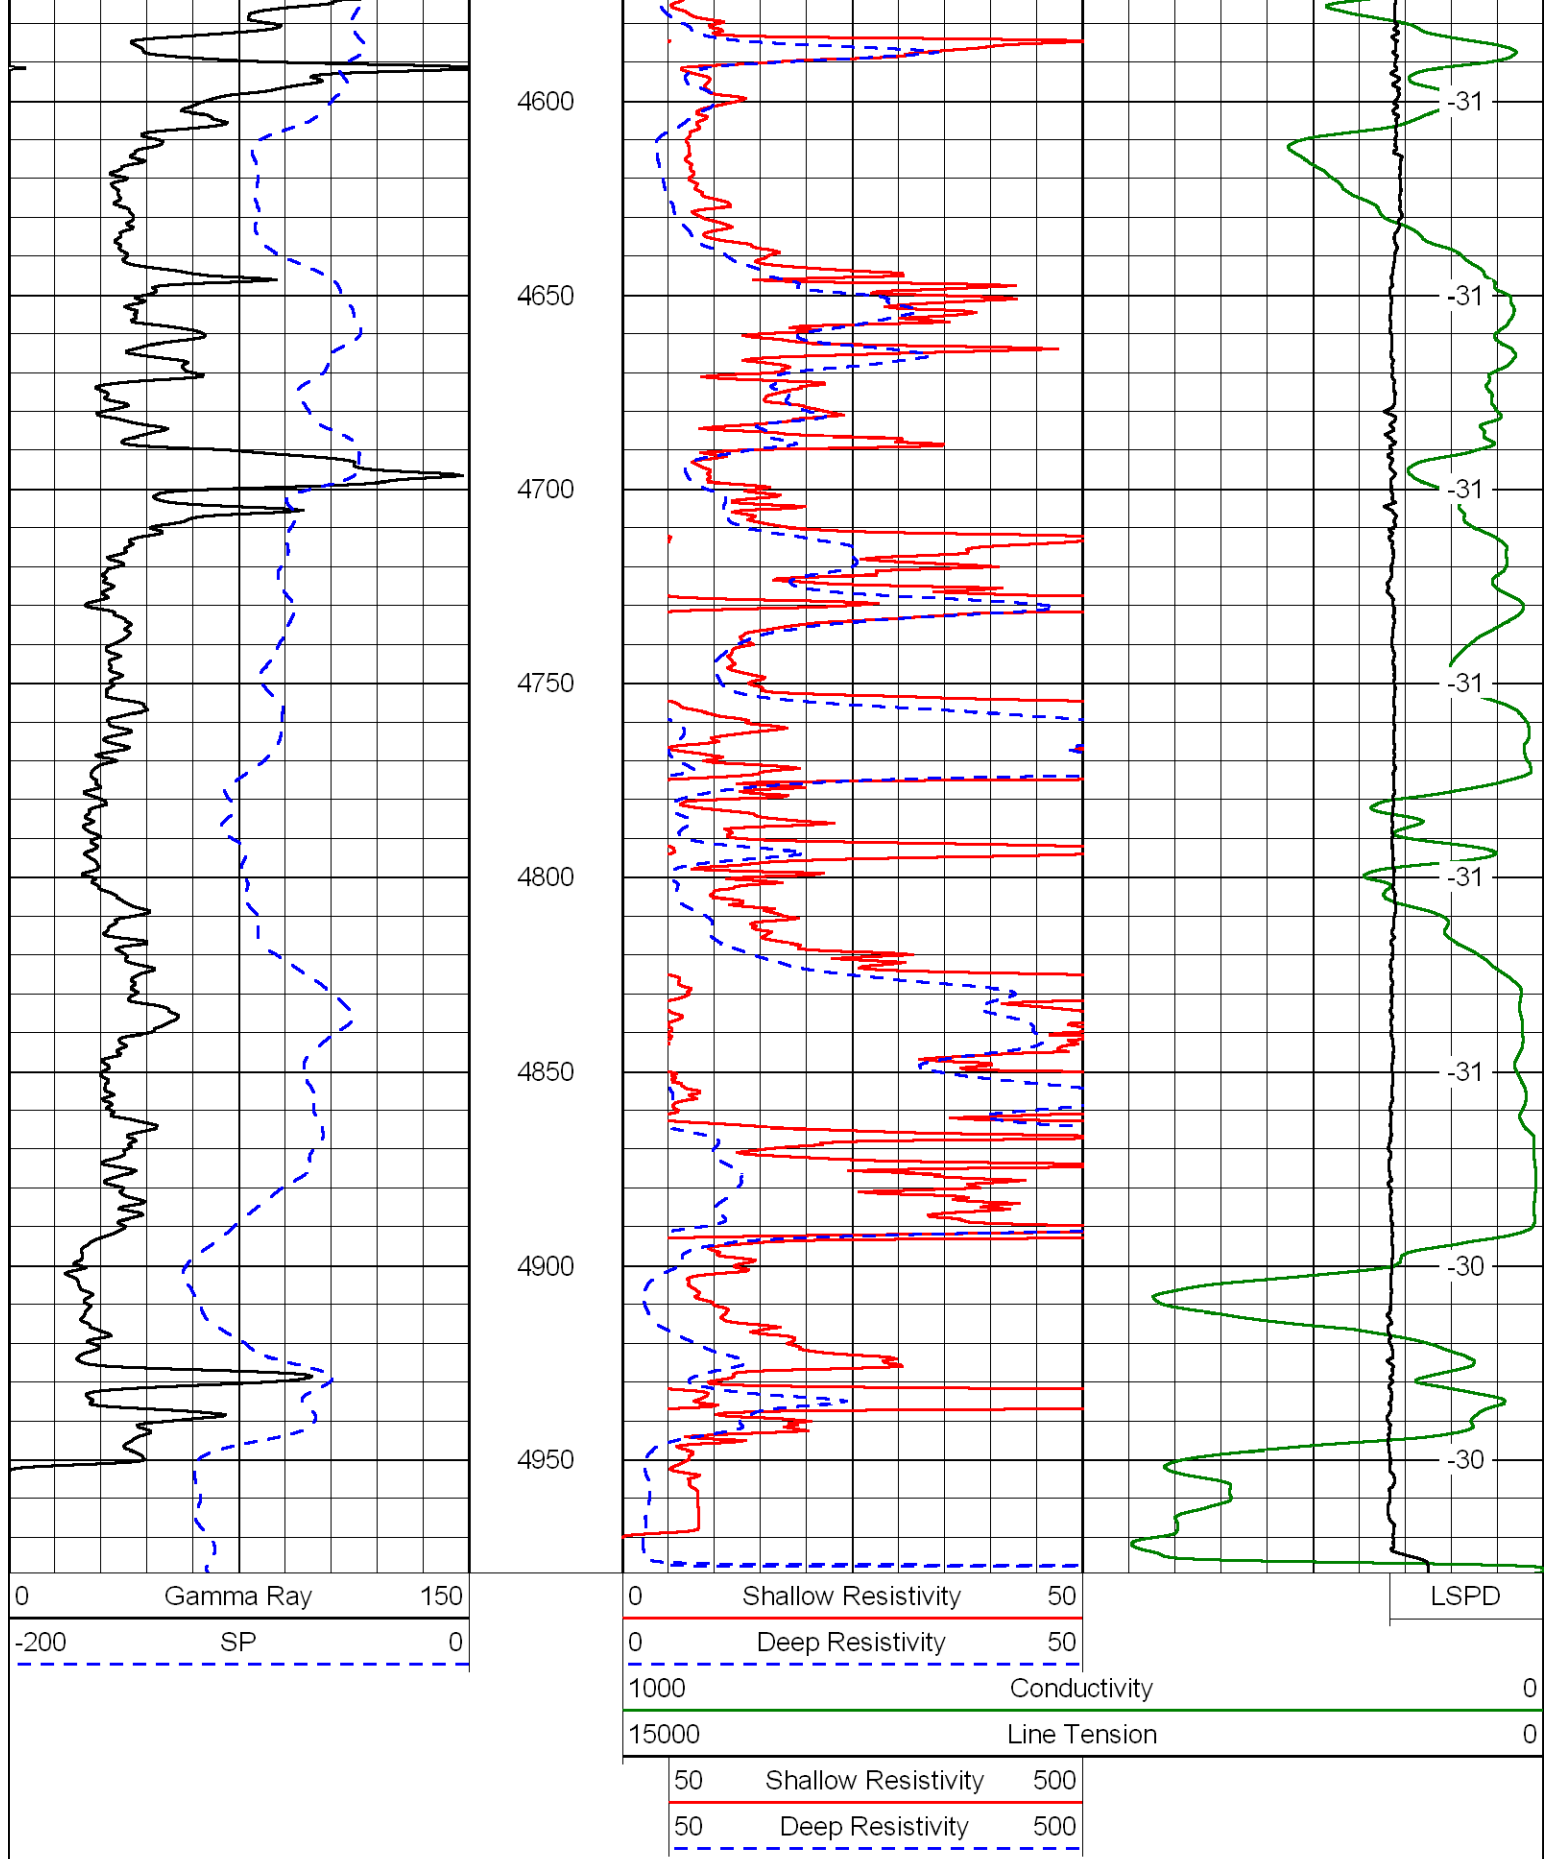


Database File: berexcohd.db
Dataset Pathname: dil/bermain
Presentation Format: dil
Dataset Creation: Sun May 27 21:45:30 2012
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0

LSPD

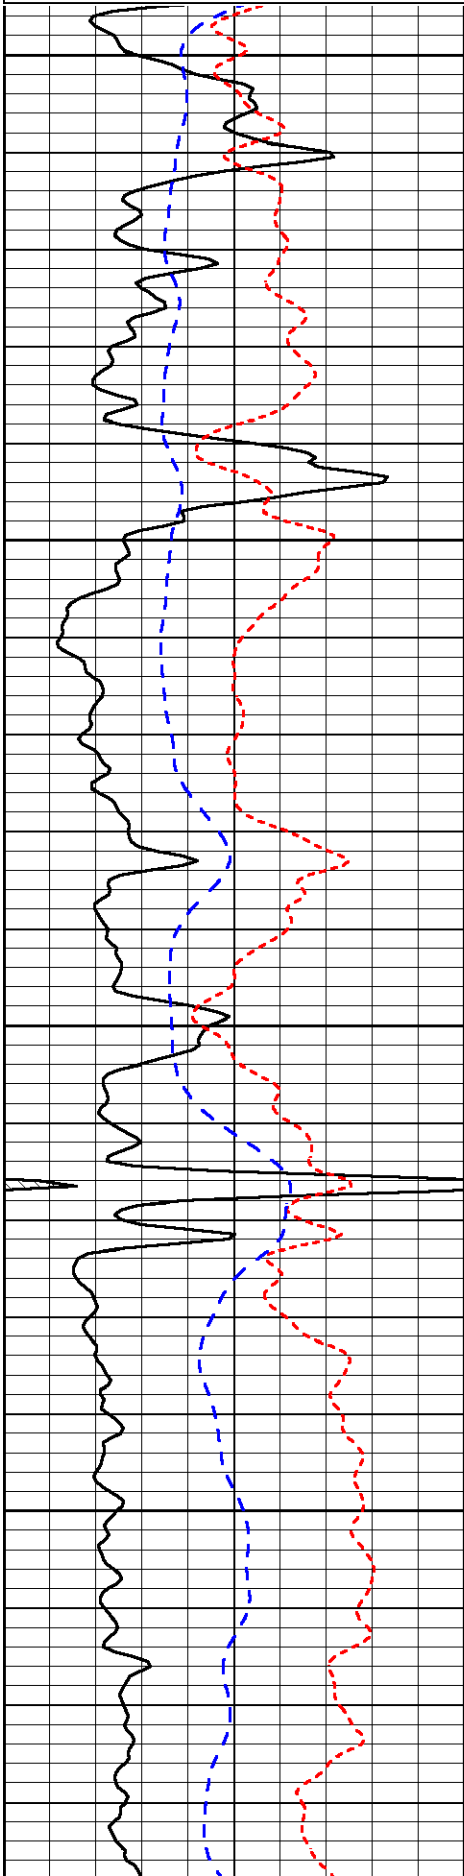


3500

3550

3600

3650

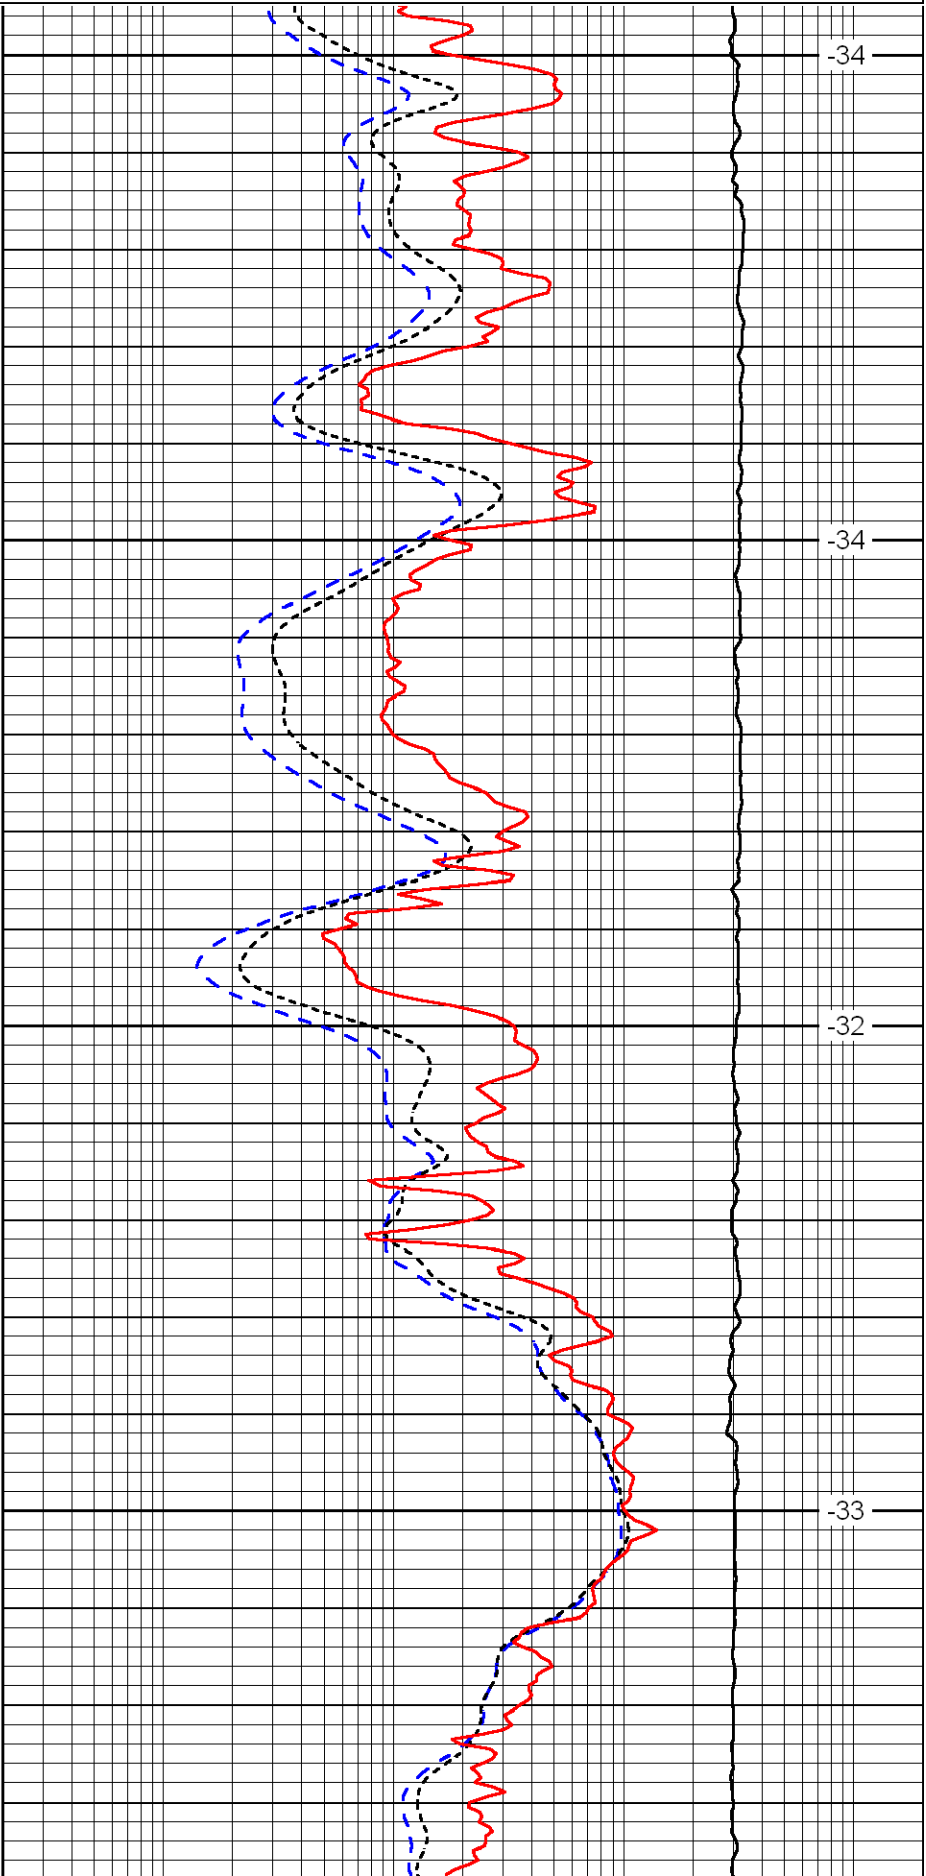


-34

-34

-32

-33

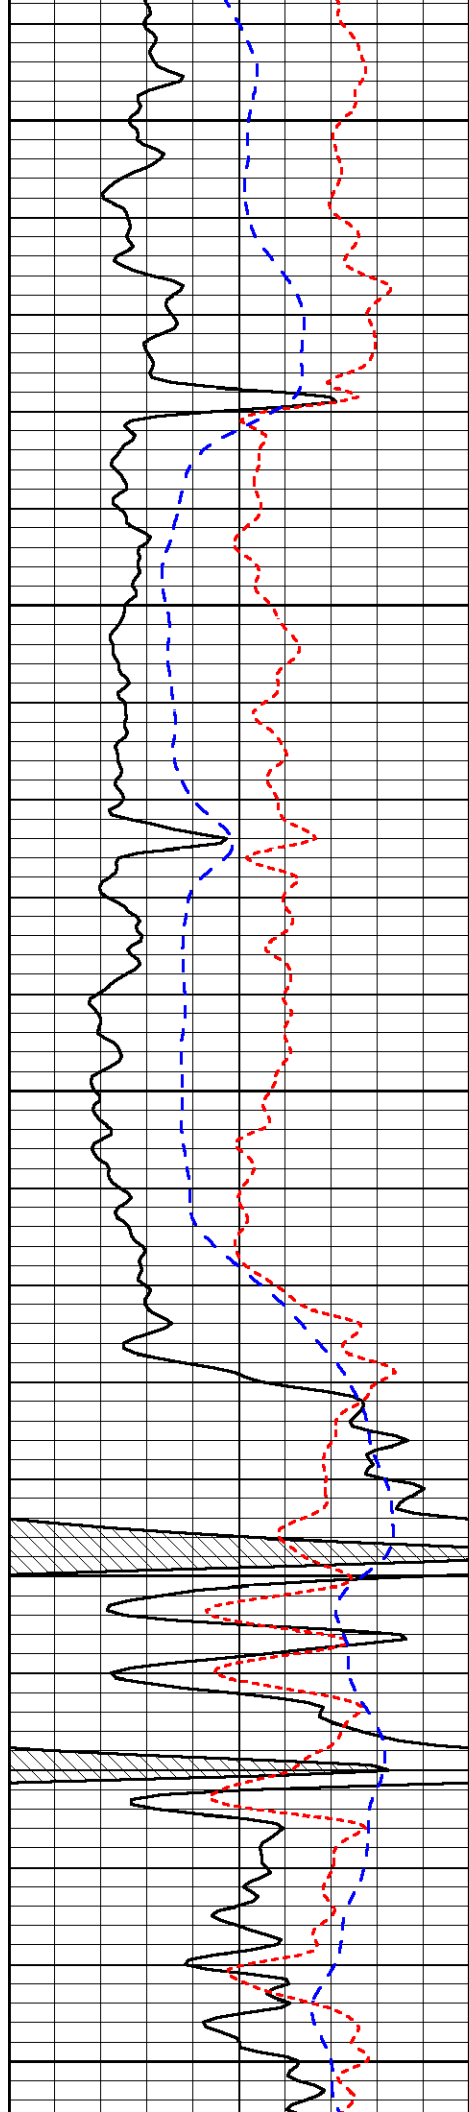


3700

3750

3800

3850

3900

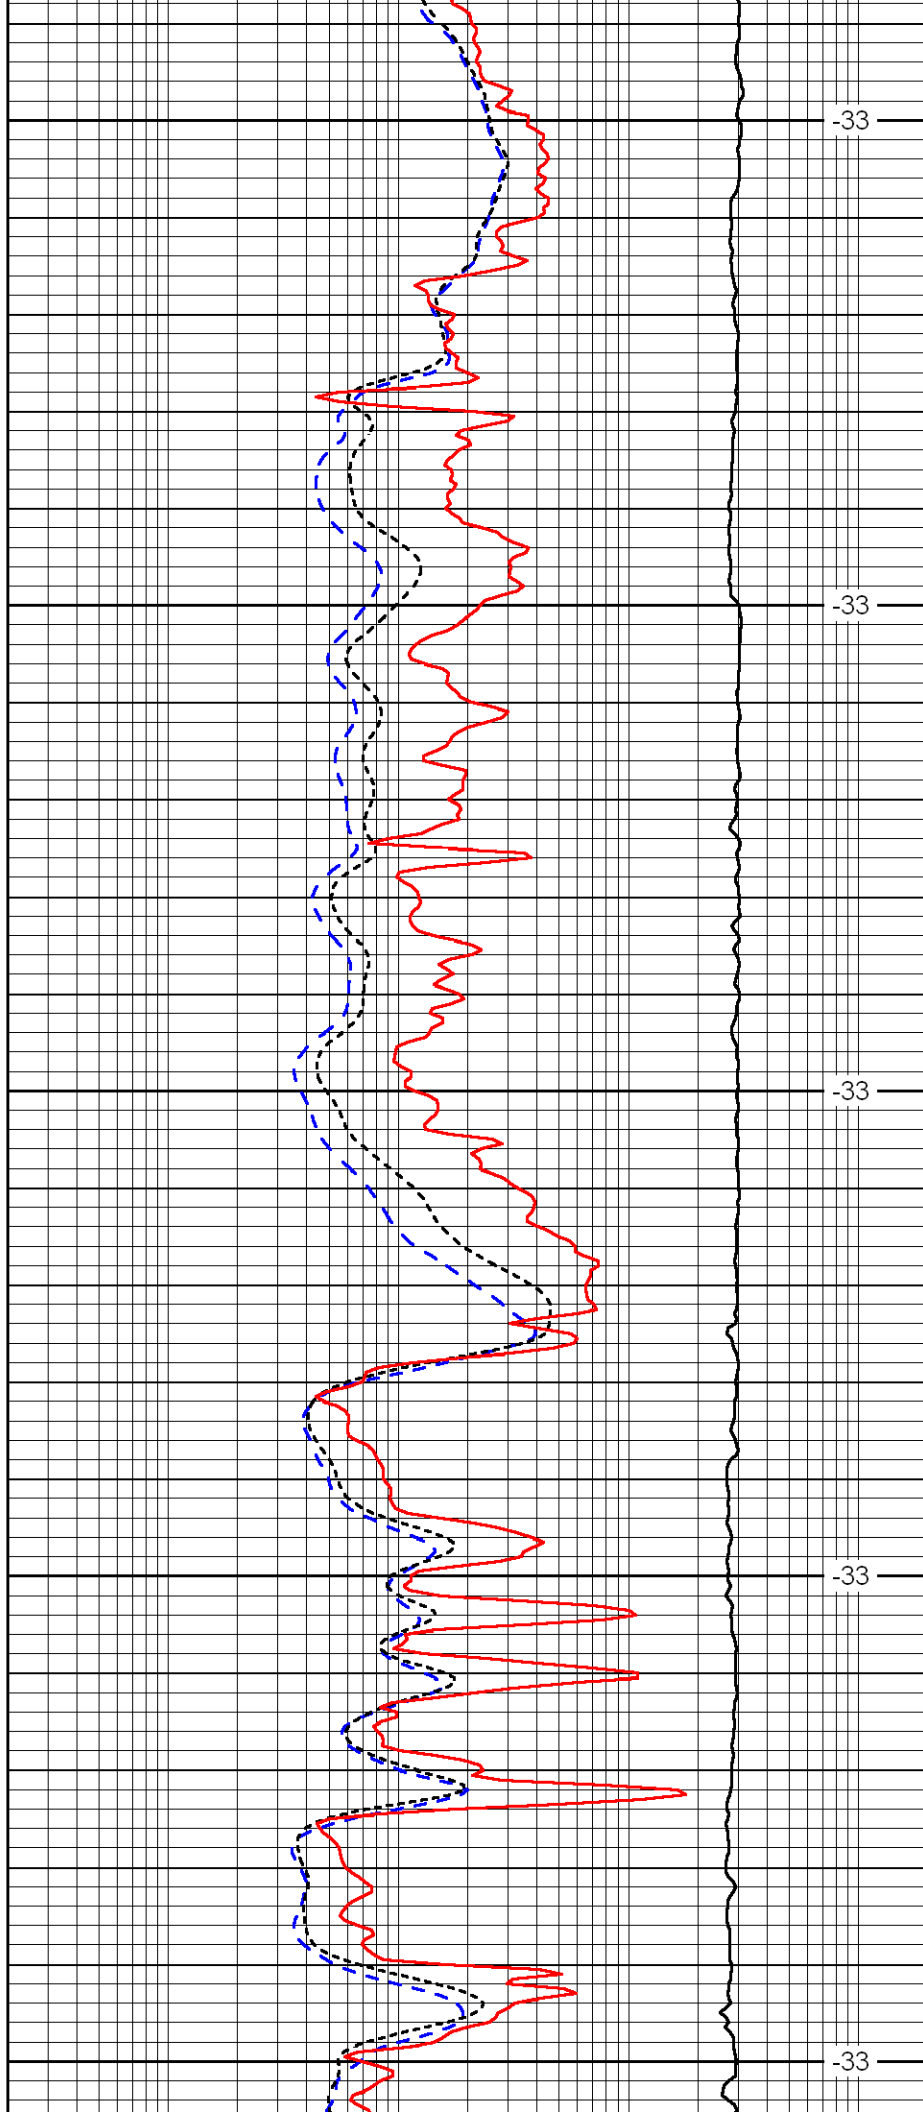


-33

-33

-33

-33

-33

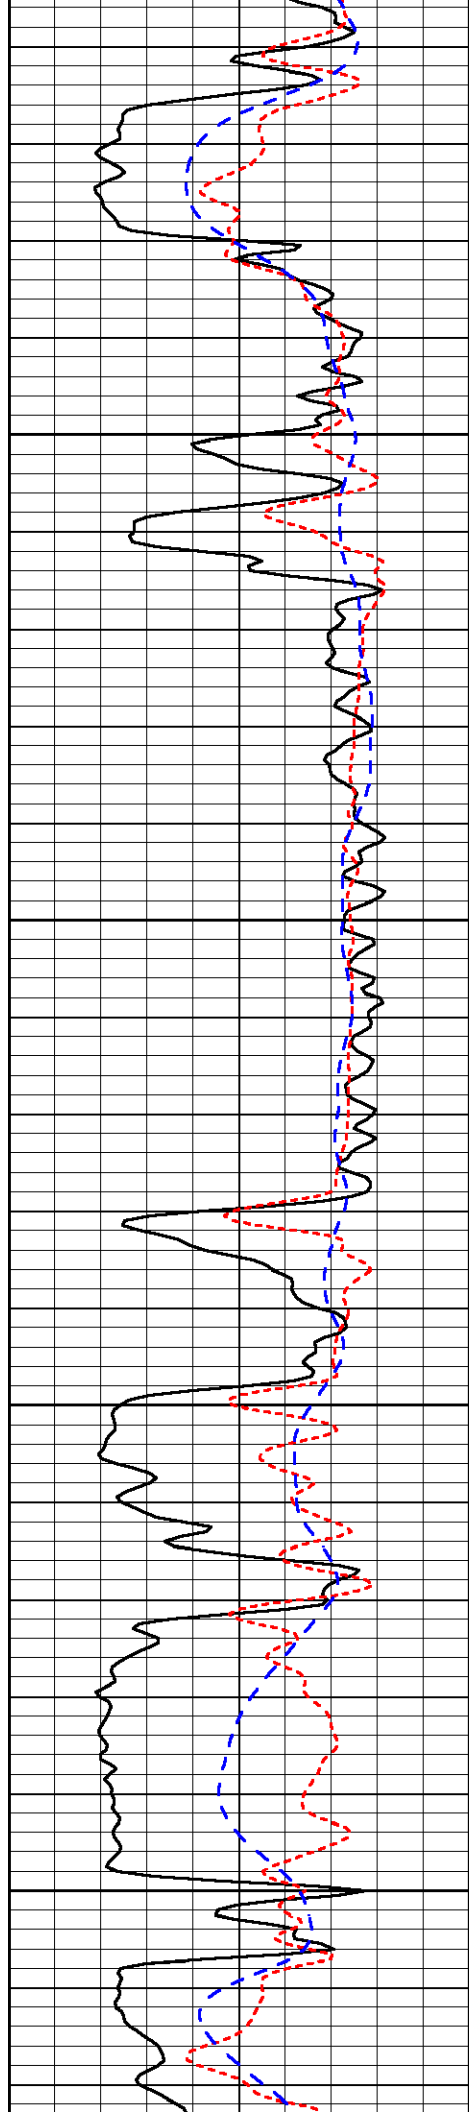


3950

4000

4050

4100

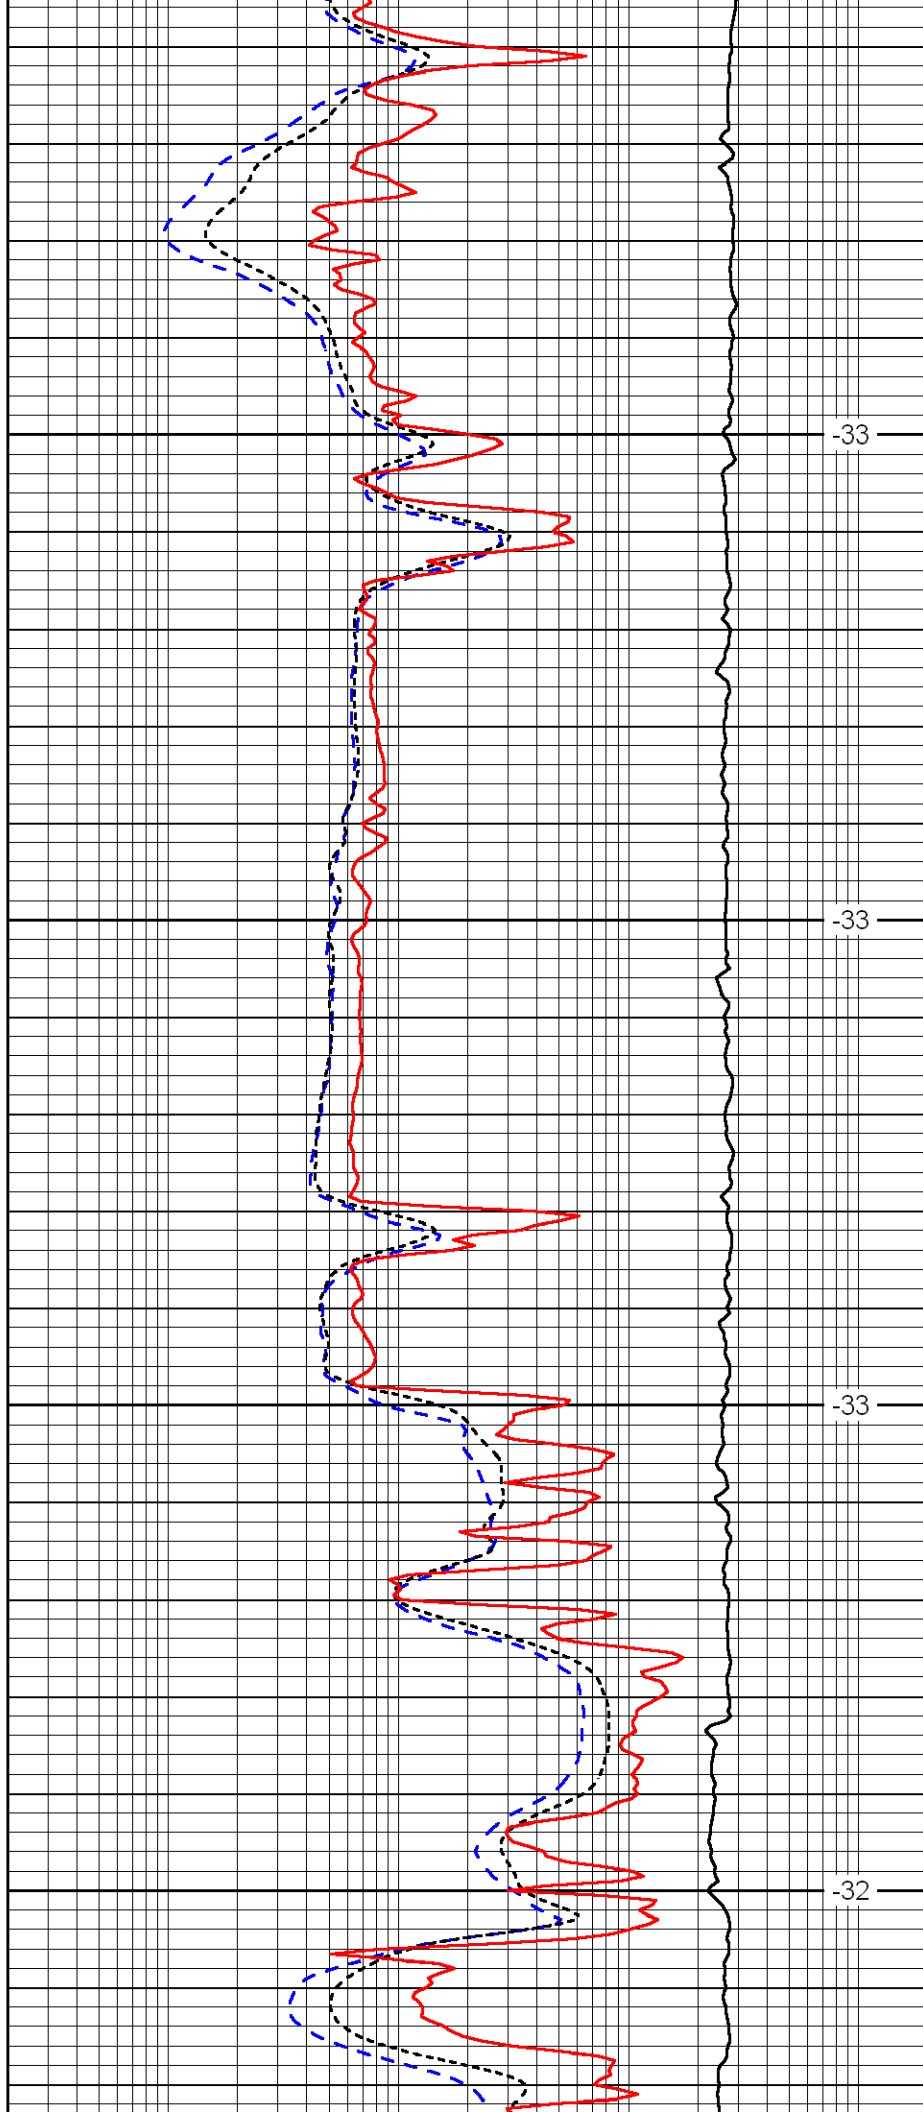


-33

-33

-33

-32

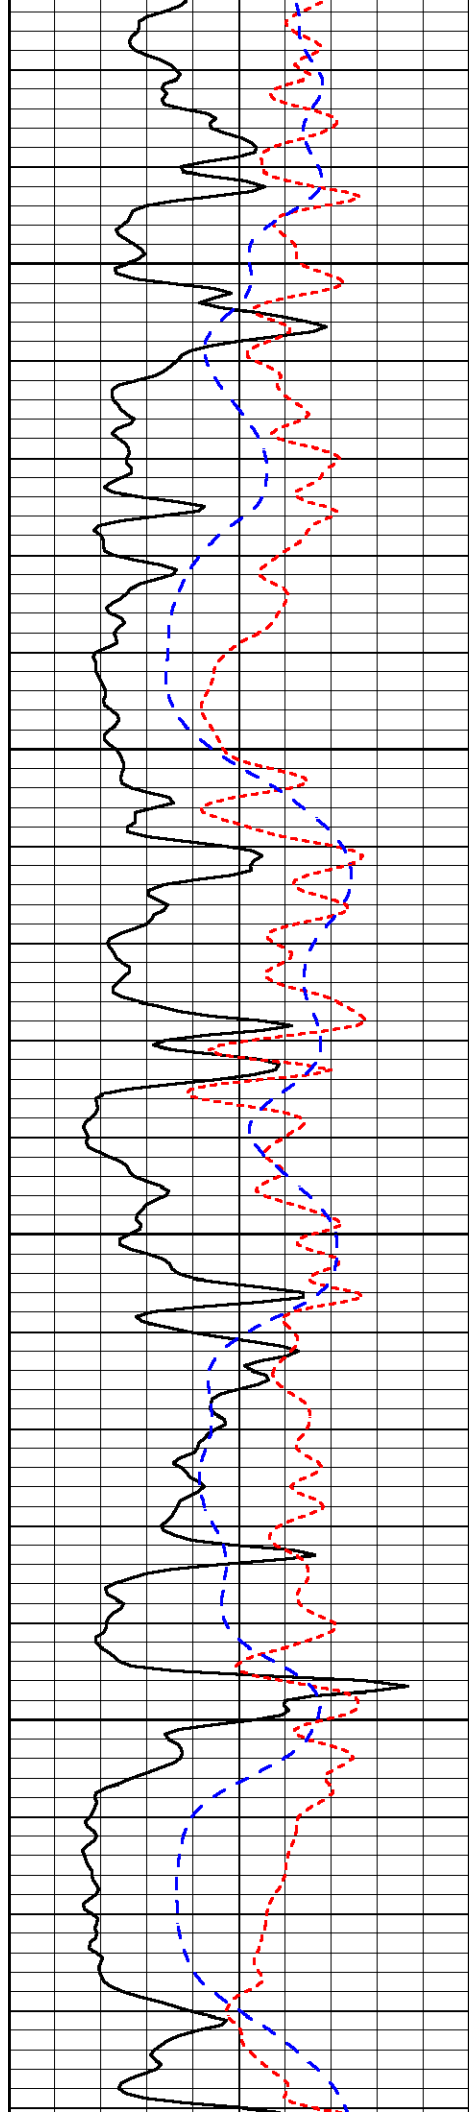


4150

4200

4250

4300

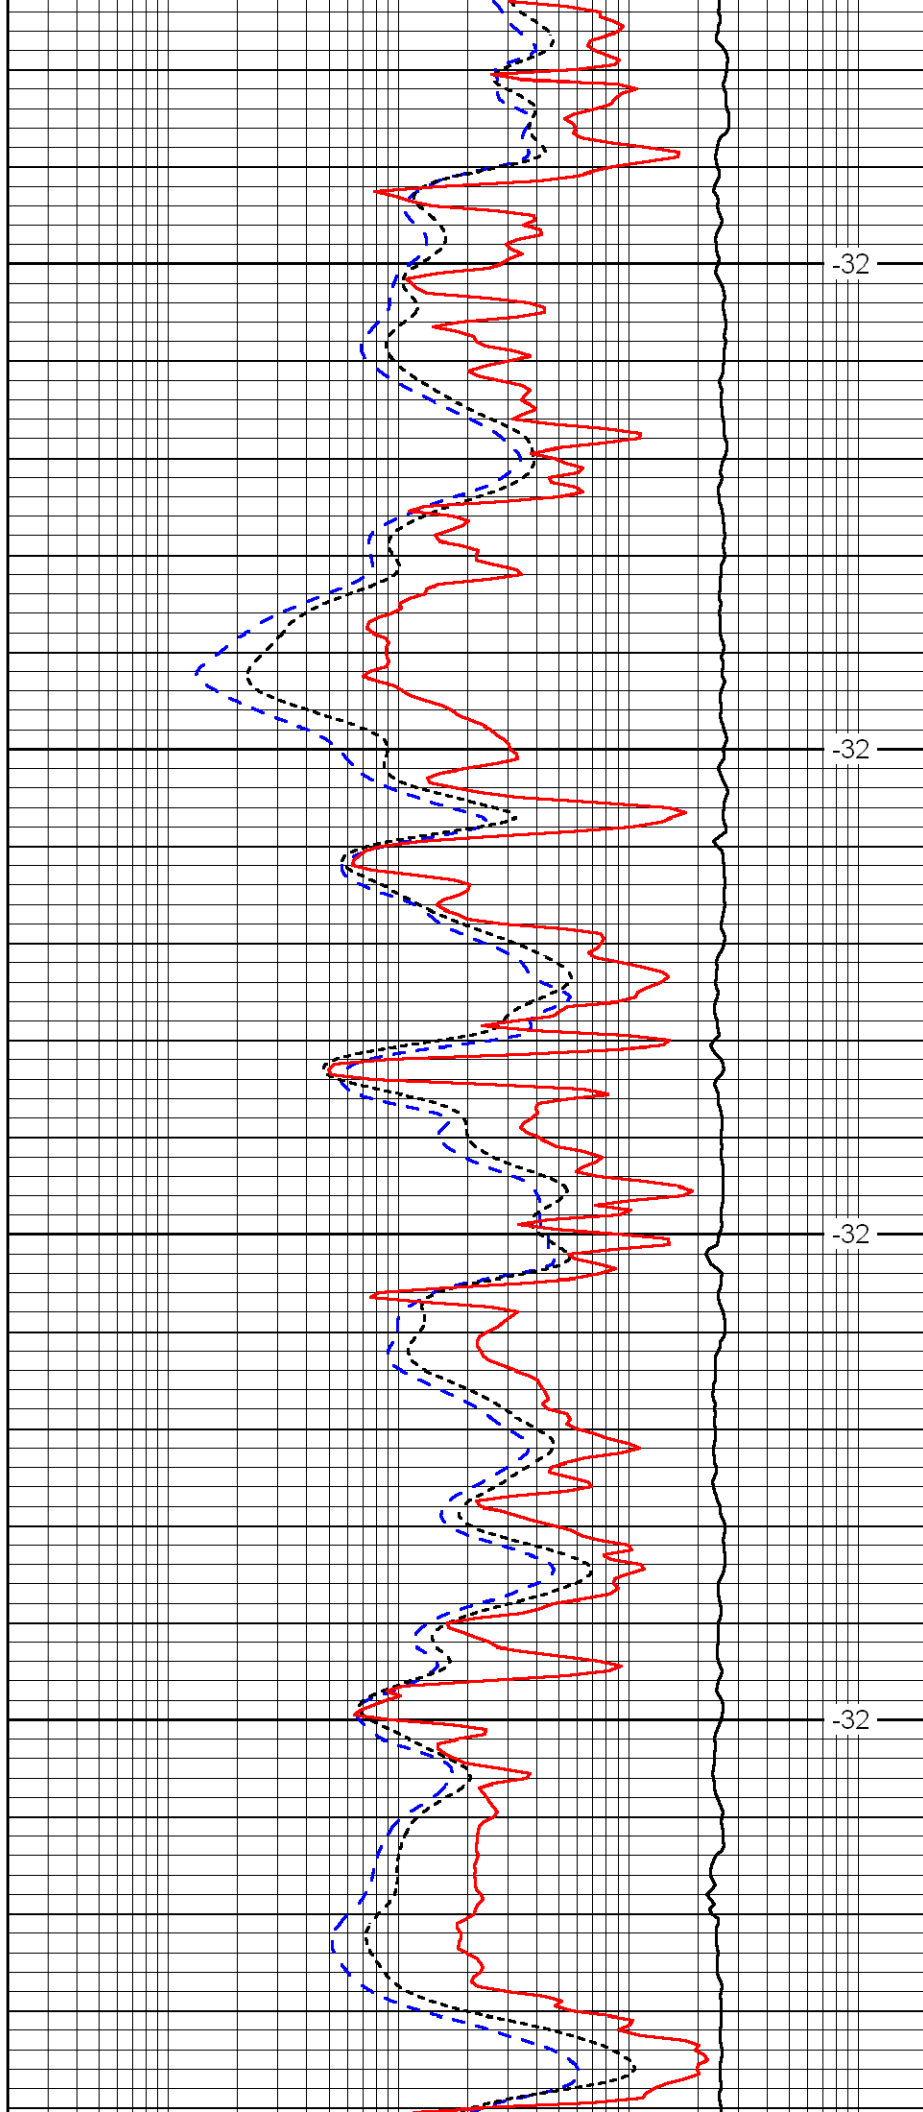


-32

-32

-32

-32

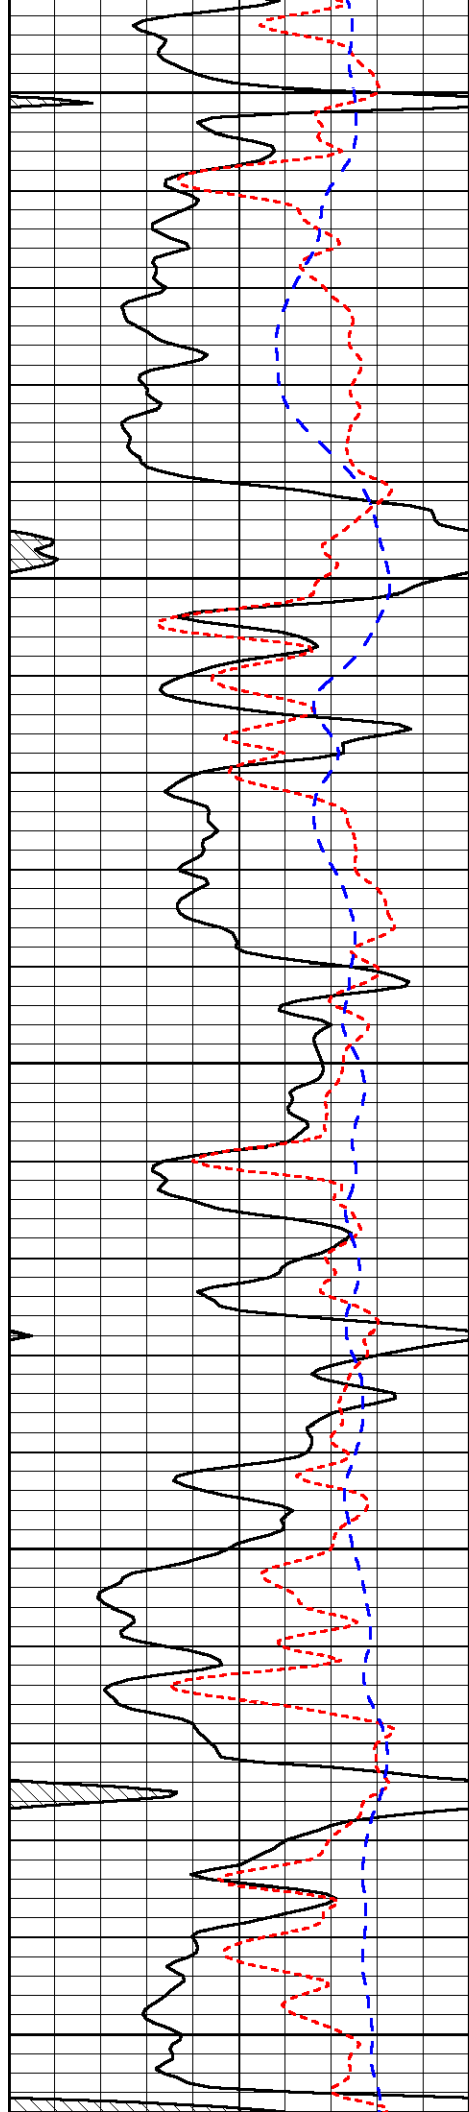


4350

4400

4450

4500

4550

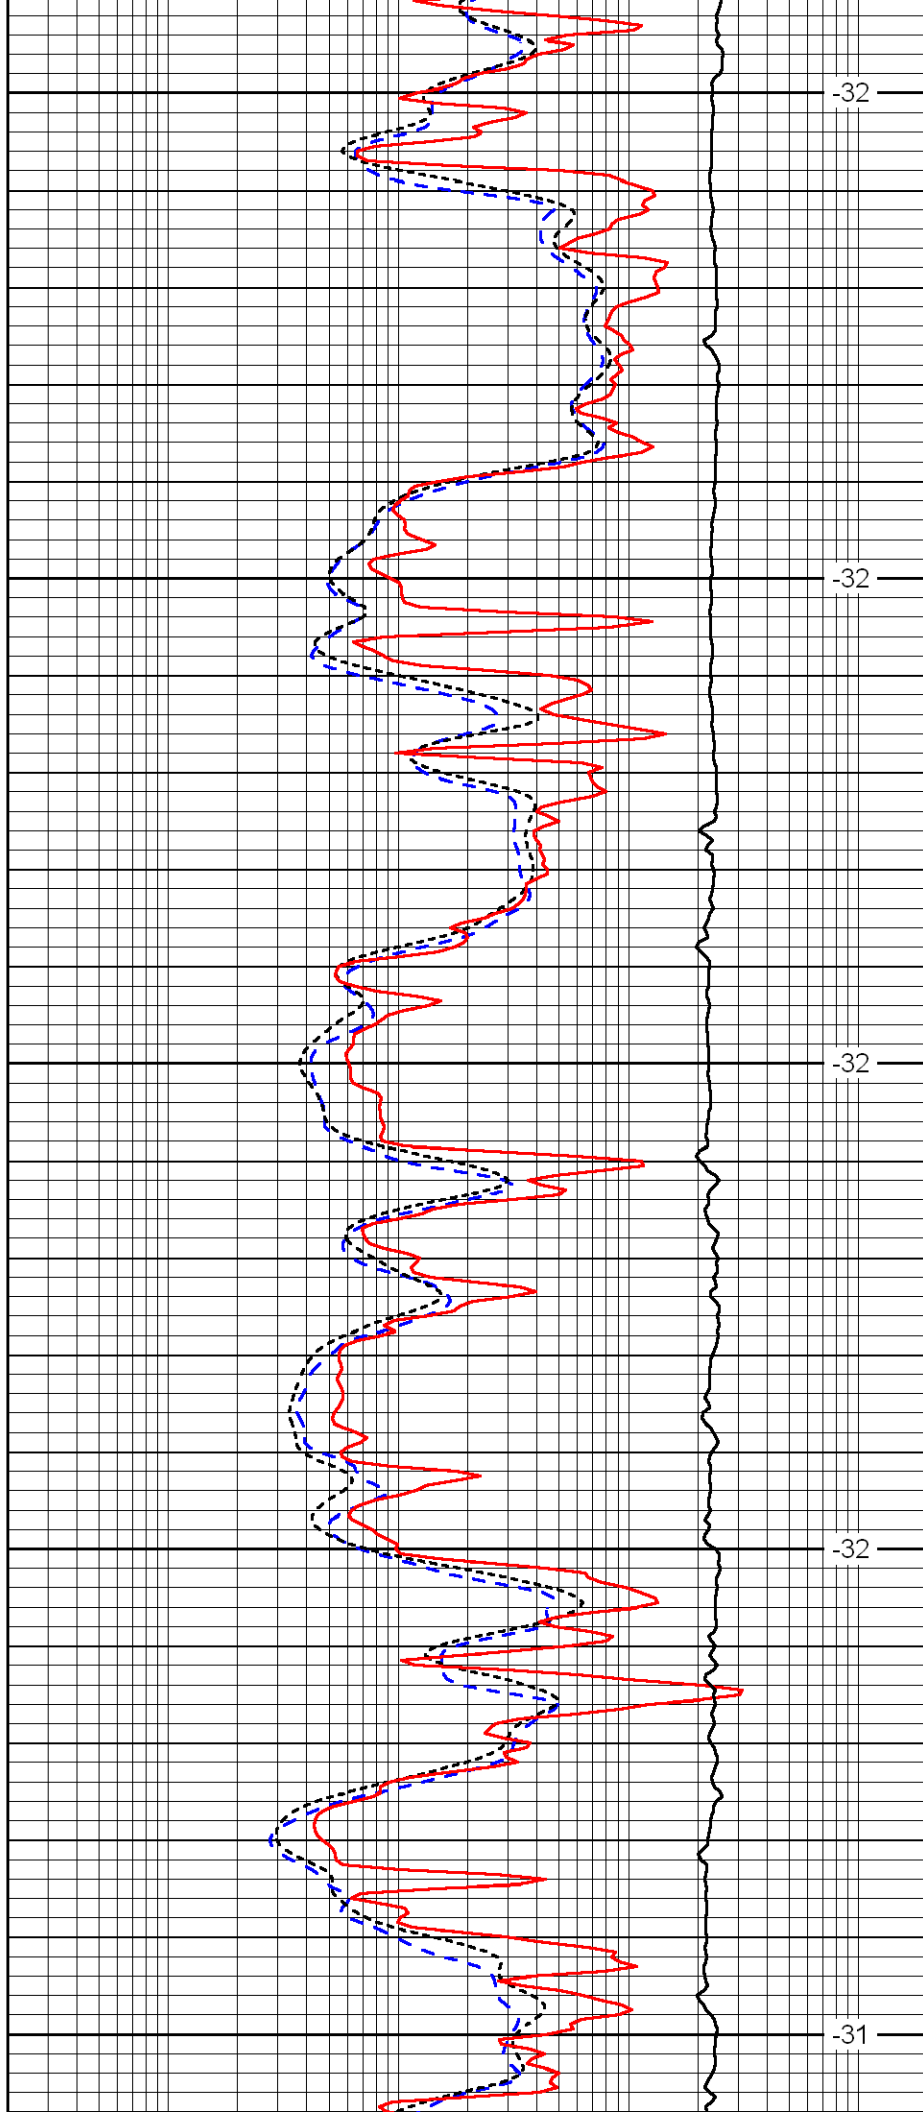


-32

-32

-32

-32

-31

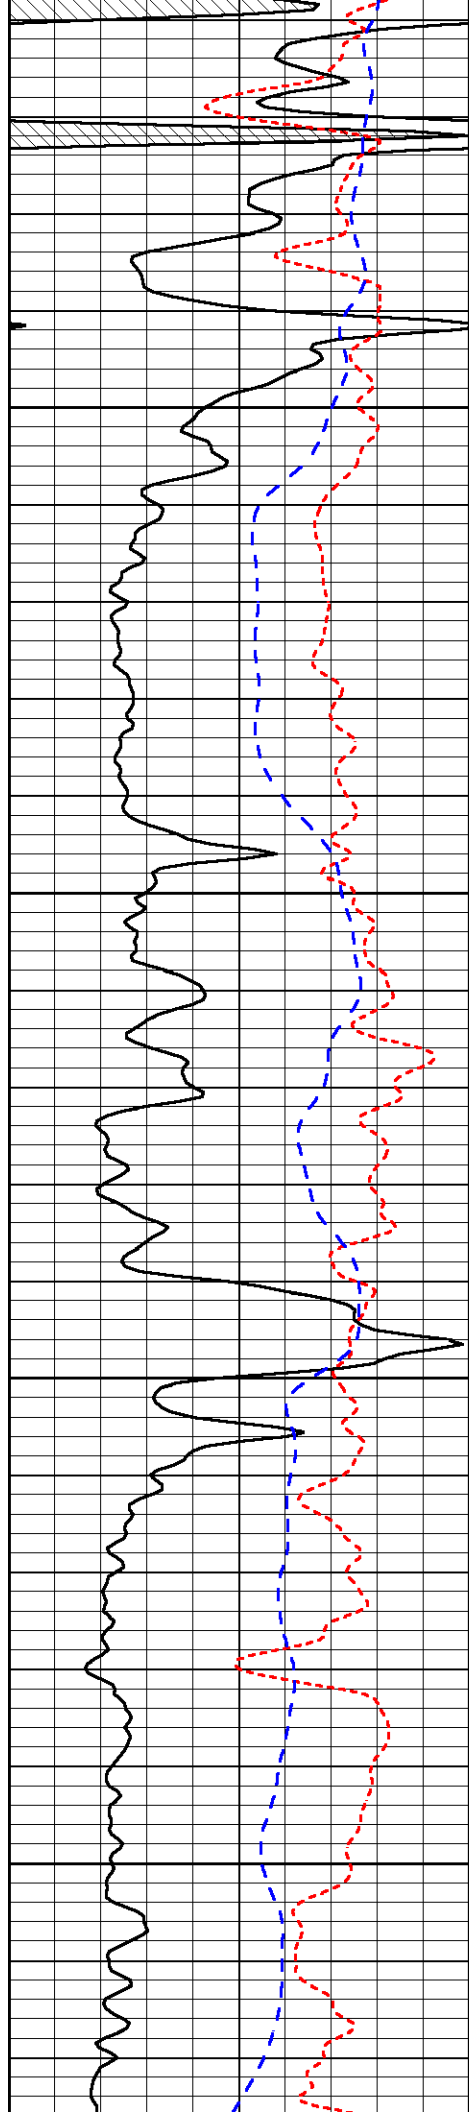


4600

4650

4700

4750

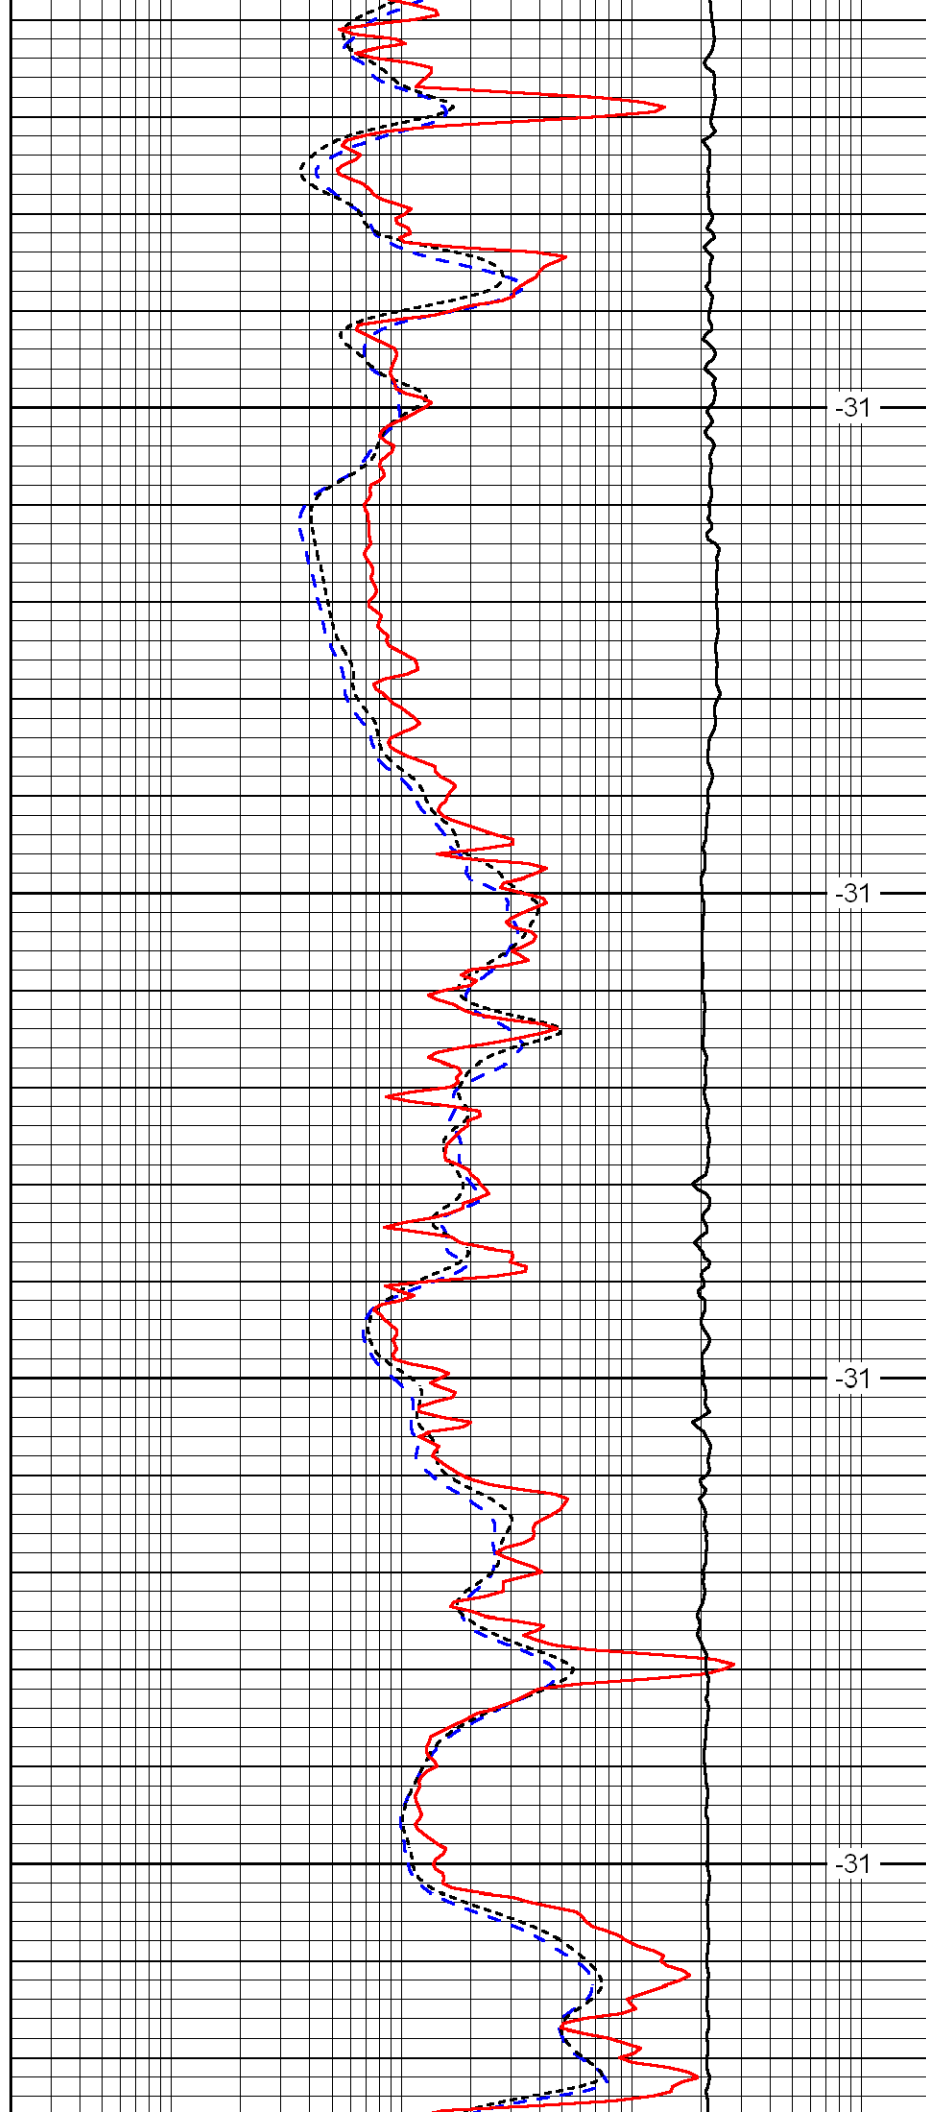


-31

-31

-31

-31

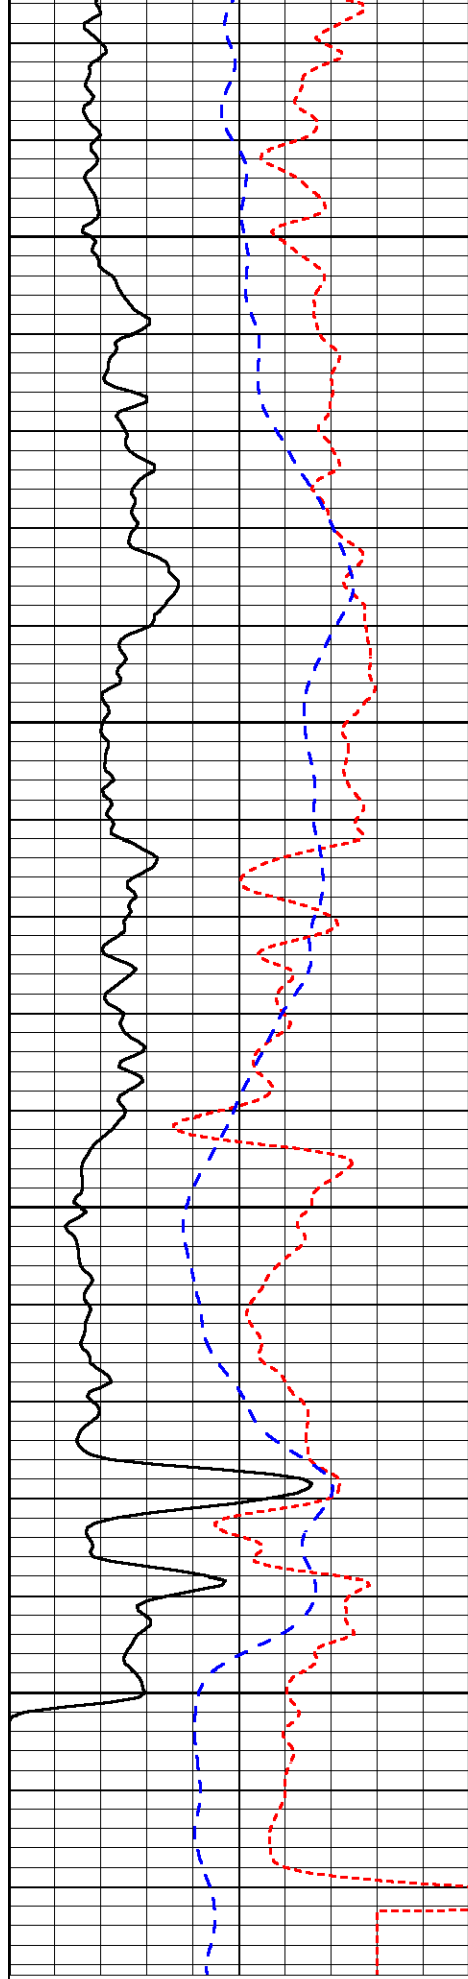


0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

4800

4850

4900

4950

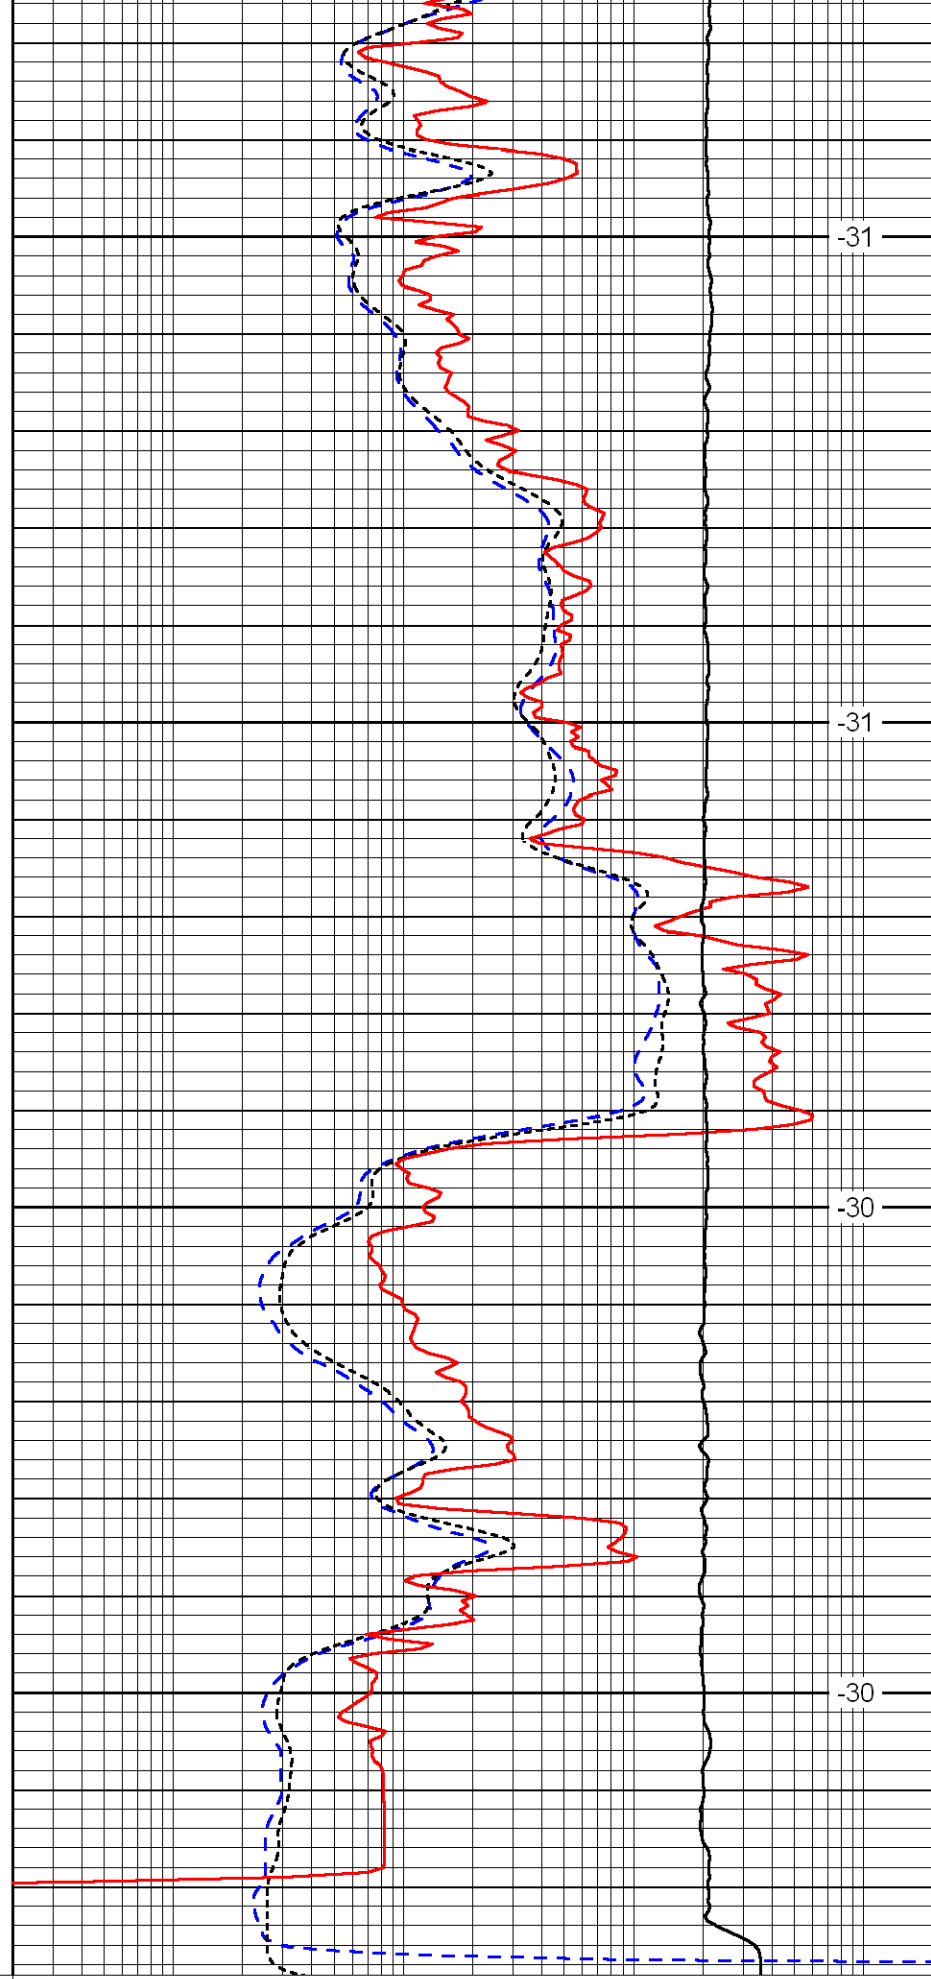

-31

-31

-30

-30

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000

			10000	Line Tension	0
					LSPD