



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCL/VDL

Company SPEEDY WELL SERVICE
Well McMILLAN # 600
Field PERU-SEDAN
County CHAUTAUQUA
State KANSAS

Company SPEEDY WELL SERVICE
Well McMILLAN # 600
Field PERU-SEDAN
County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27208
SEC 27 TWP 34S RGE 12E
SE NW NW NW
4631' FSL & 4849' FEL
Permanent Datum Elevation 972'
Log Measured From
Drilling Measured From
Other Services
Elevation
K.B.
D.F.
G.L. 972'

Date	8-8-12
Run Number	1
Depth Driller	1200'
Depth Logger	1158'
Bottom Logged Interval	1157'
Top Log Interval	SURFACE
Open Hole Size	---
Type Fluid	WATER
Density / Viscosity	---
Max. Recorded Temp.	---
Estimated Cement Top	SURFACE
Time Well Ready	---
Time Logger on Bottom	---
Equipment Number	3
Location	DEWEY
Recorded By	HERREN
Witnessed By	M/R MILLER

Borehole Record		Tubing Record	
Run Number	Bit	From	To
		Size	Weight
		From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	8.625"		SURFACE	40'
Prot. String				
Production String	4.5"		SURFACE	
Liner				TD

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline

GAMMA RAY CEMENT BOND

Database File: todd.db
Dataset Pathname: todd/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Wed Aug 03 07:34:23 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240

Collar Locator	-1	-2	Amplitude (mV)	100	200	Variable Density	120
Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	350			

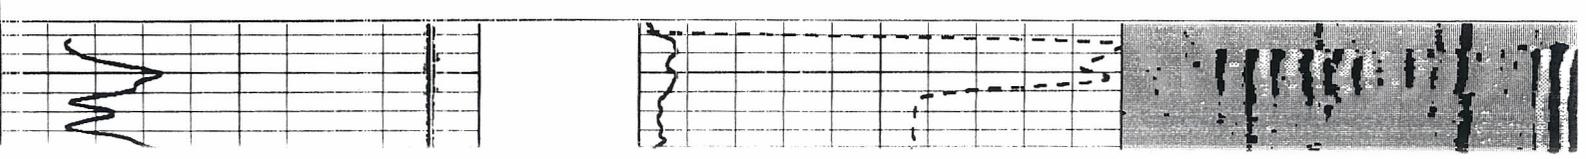

Collar Locator -1




Gamma Ray (GAPI) (GAPI) 60




Amplitude (mV) 100 200


Travel Time (usec) 350

Variable Density

1200

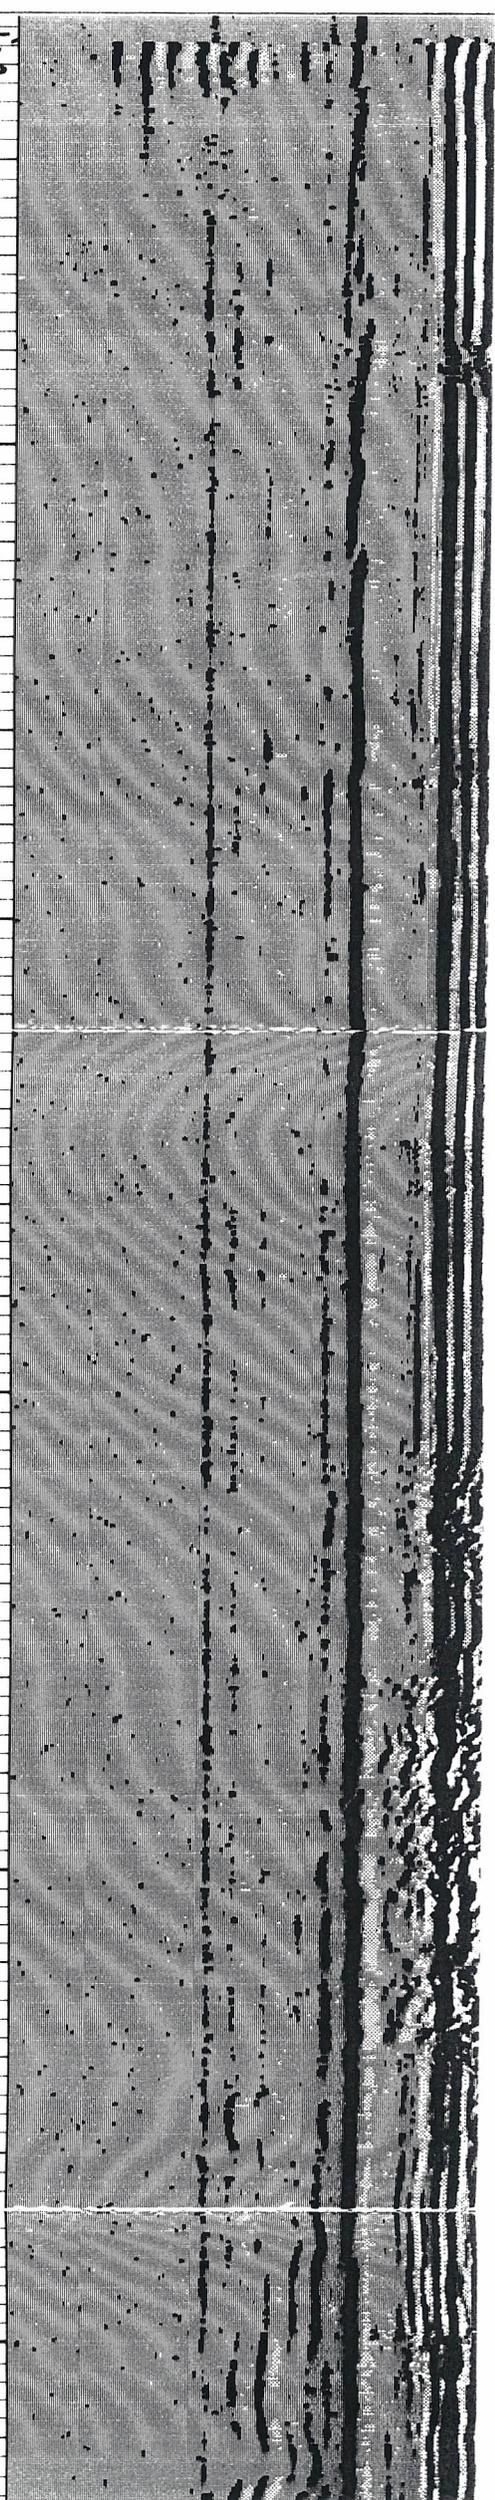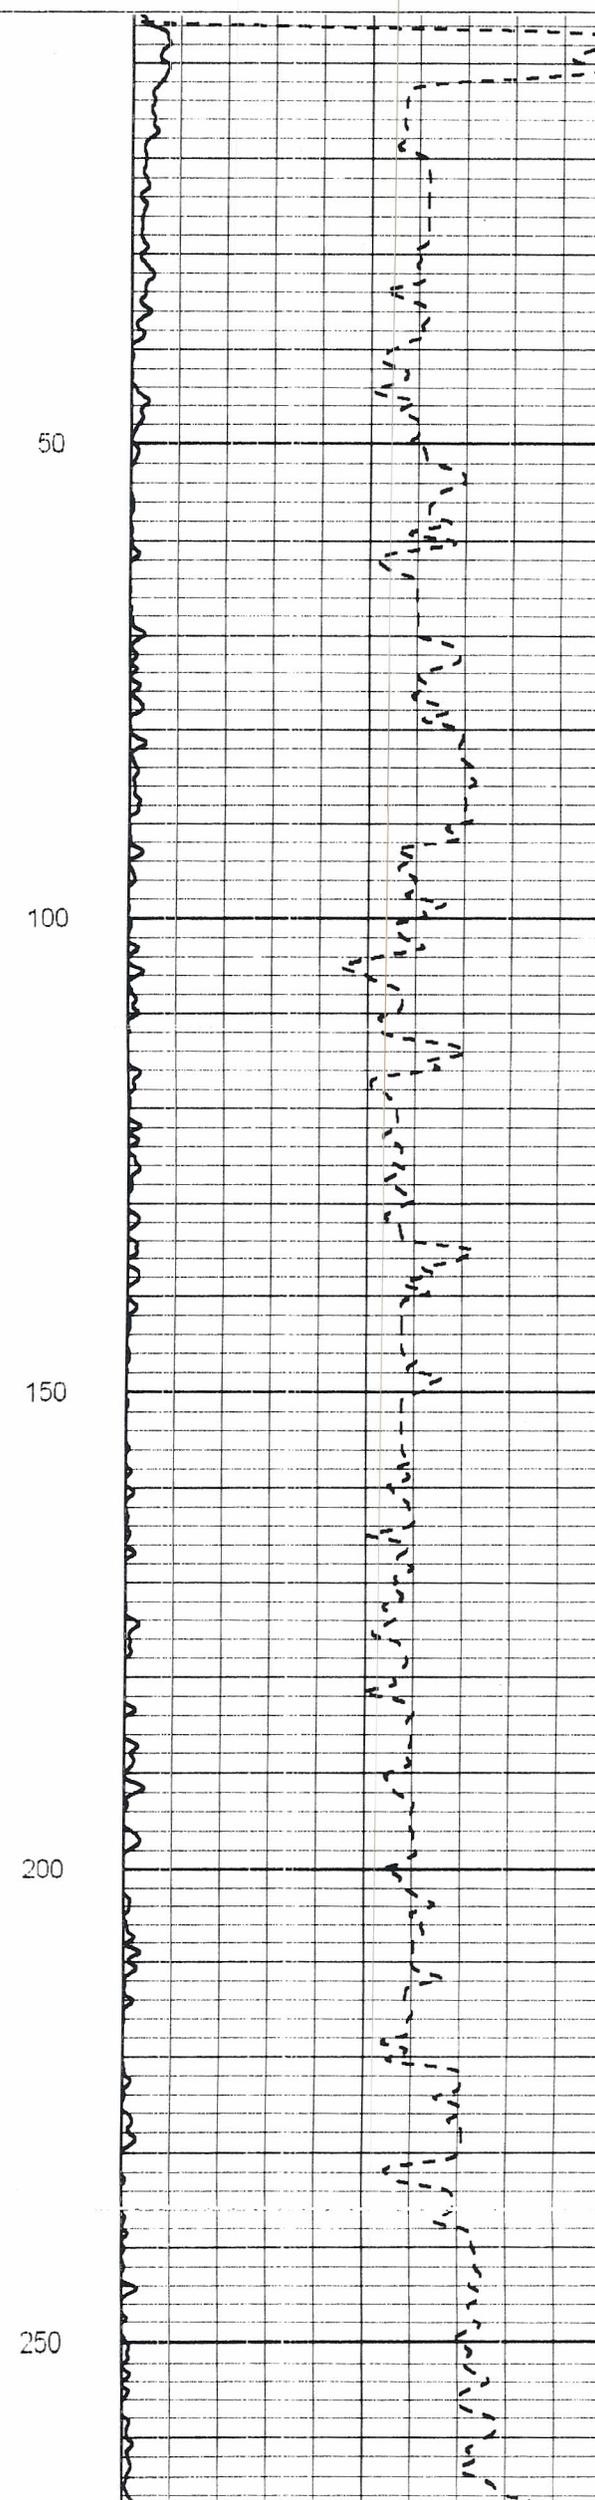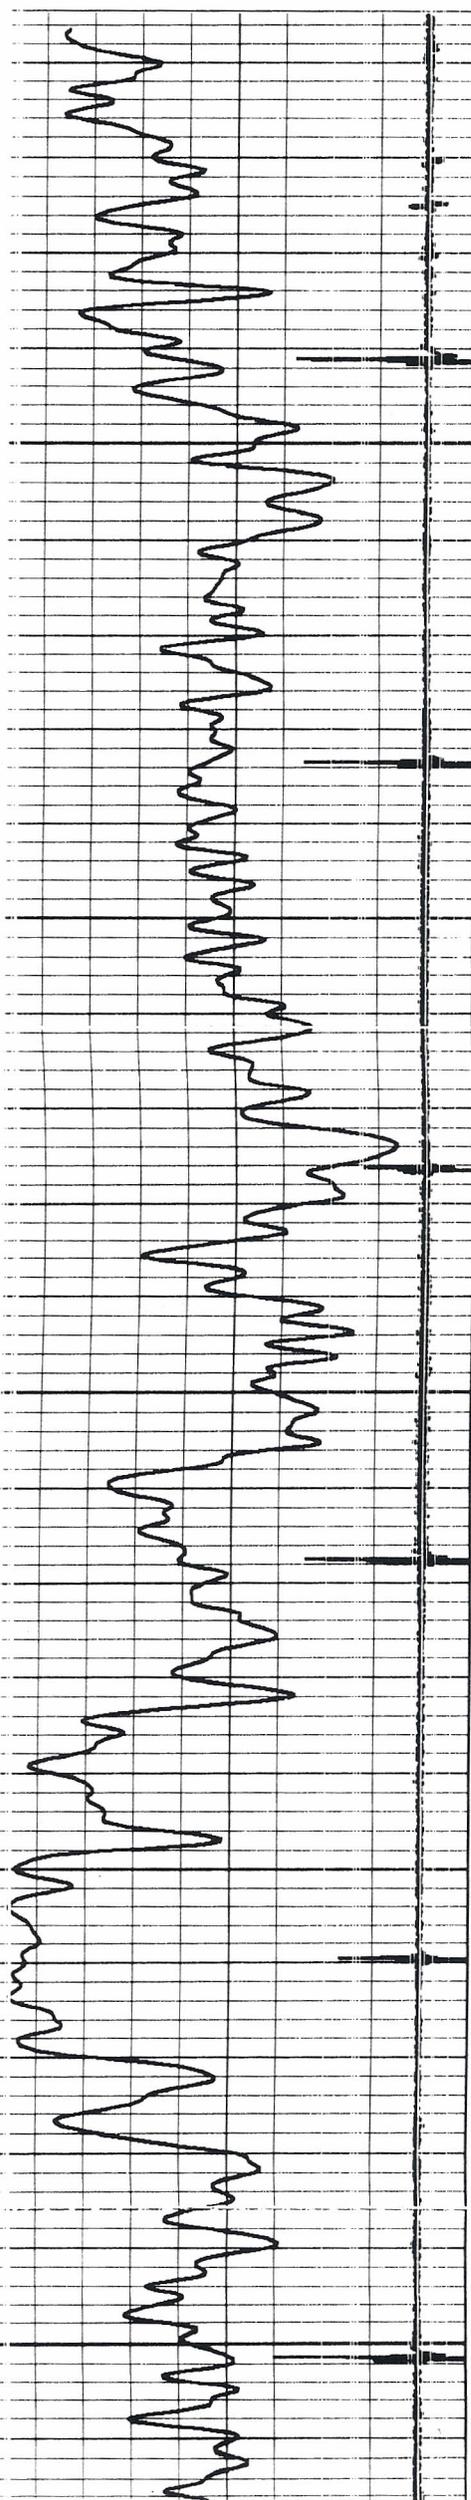

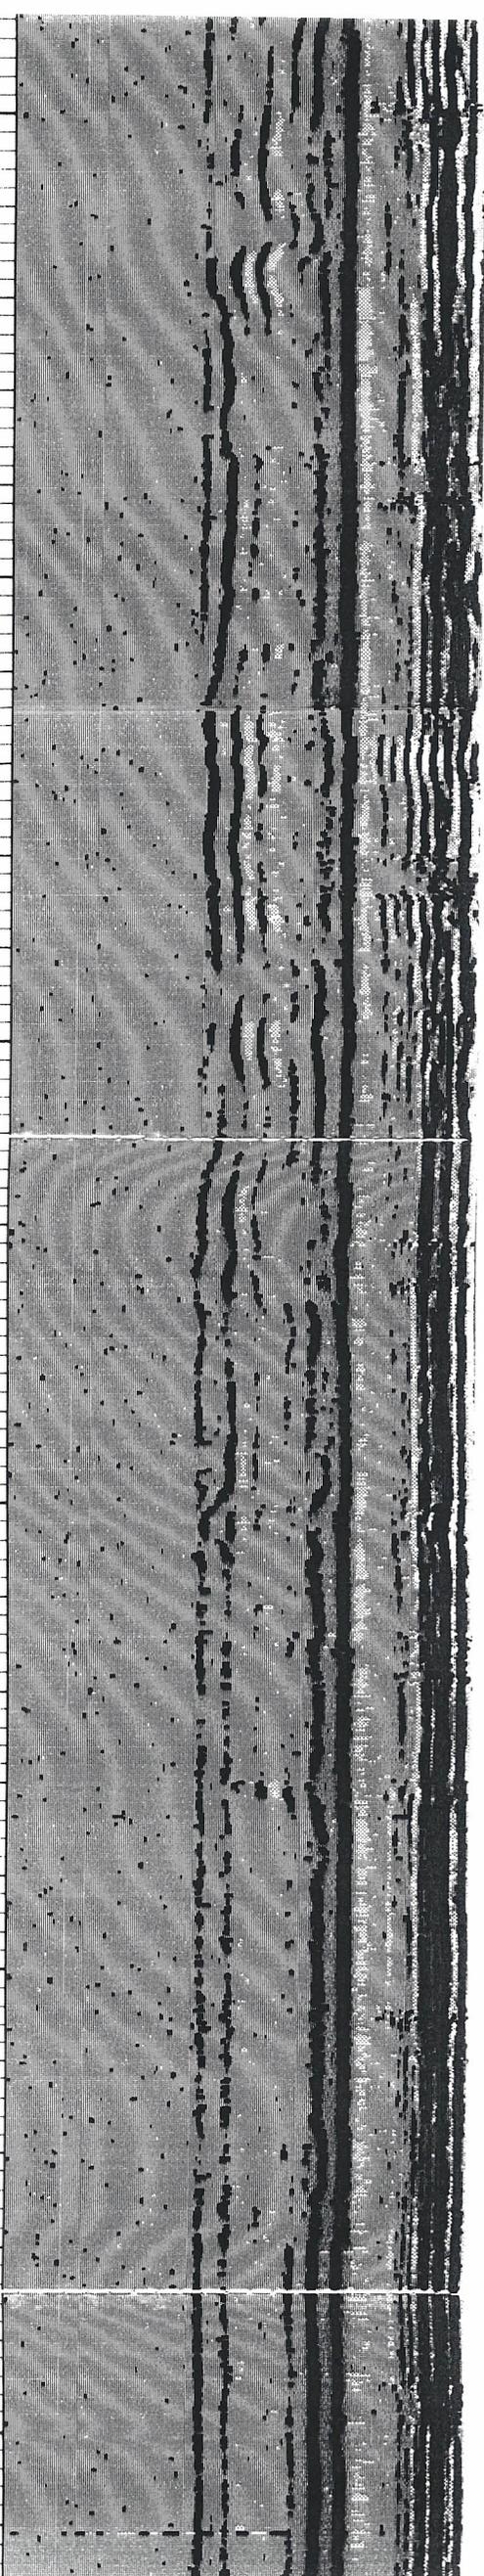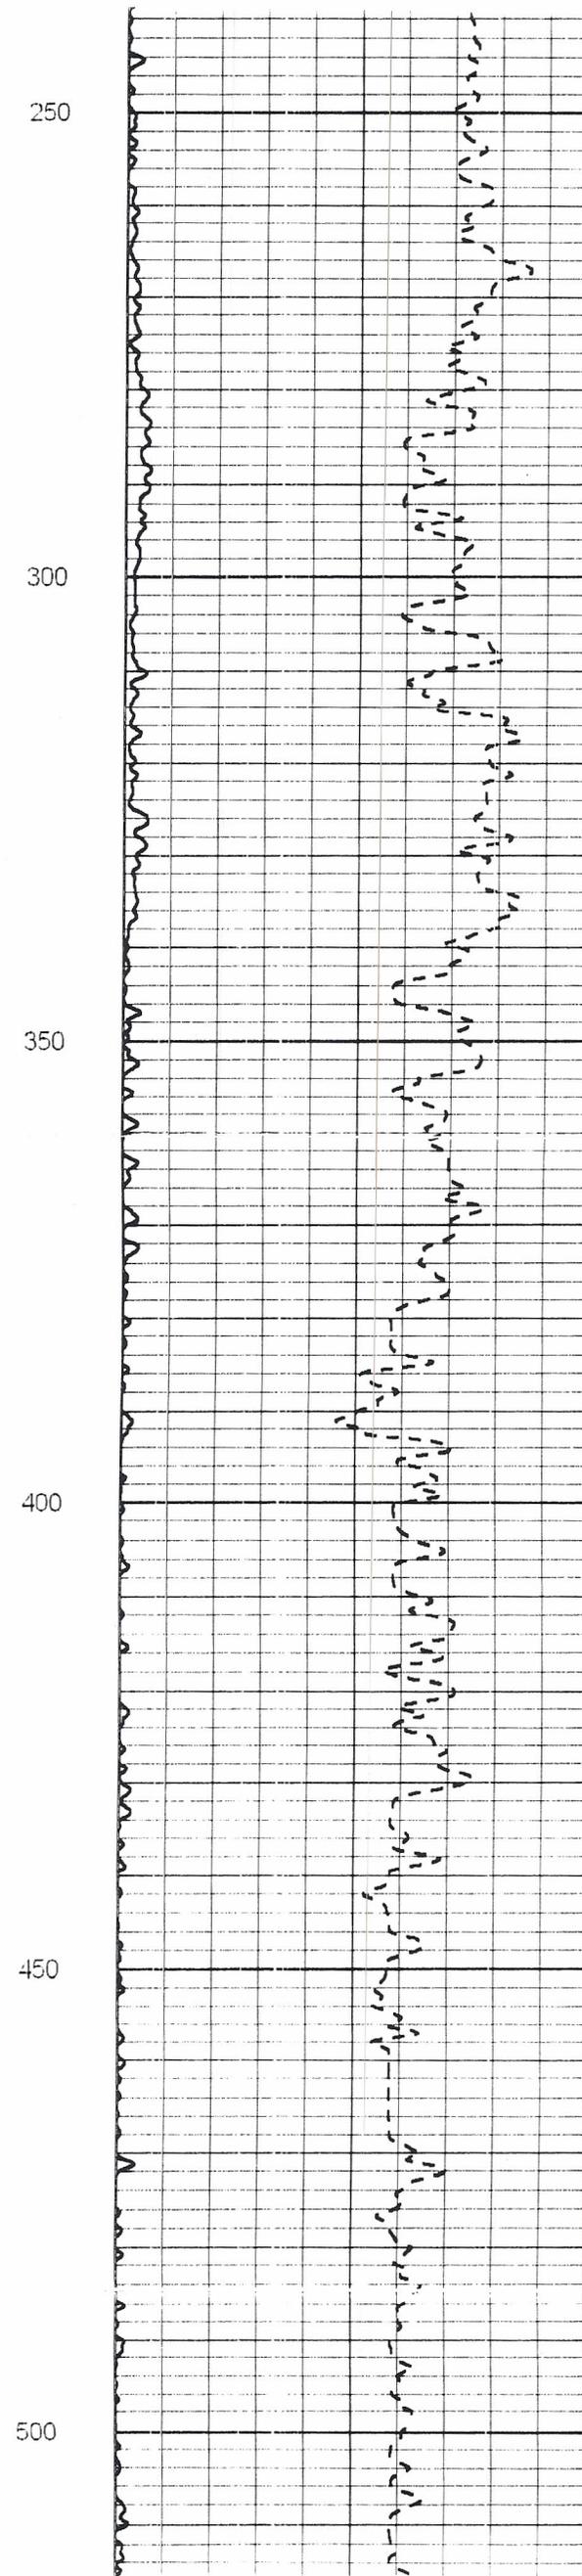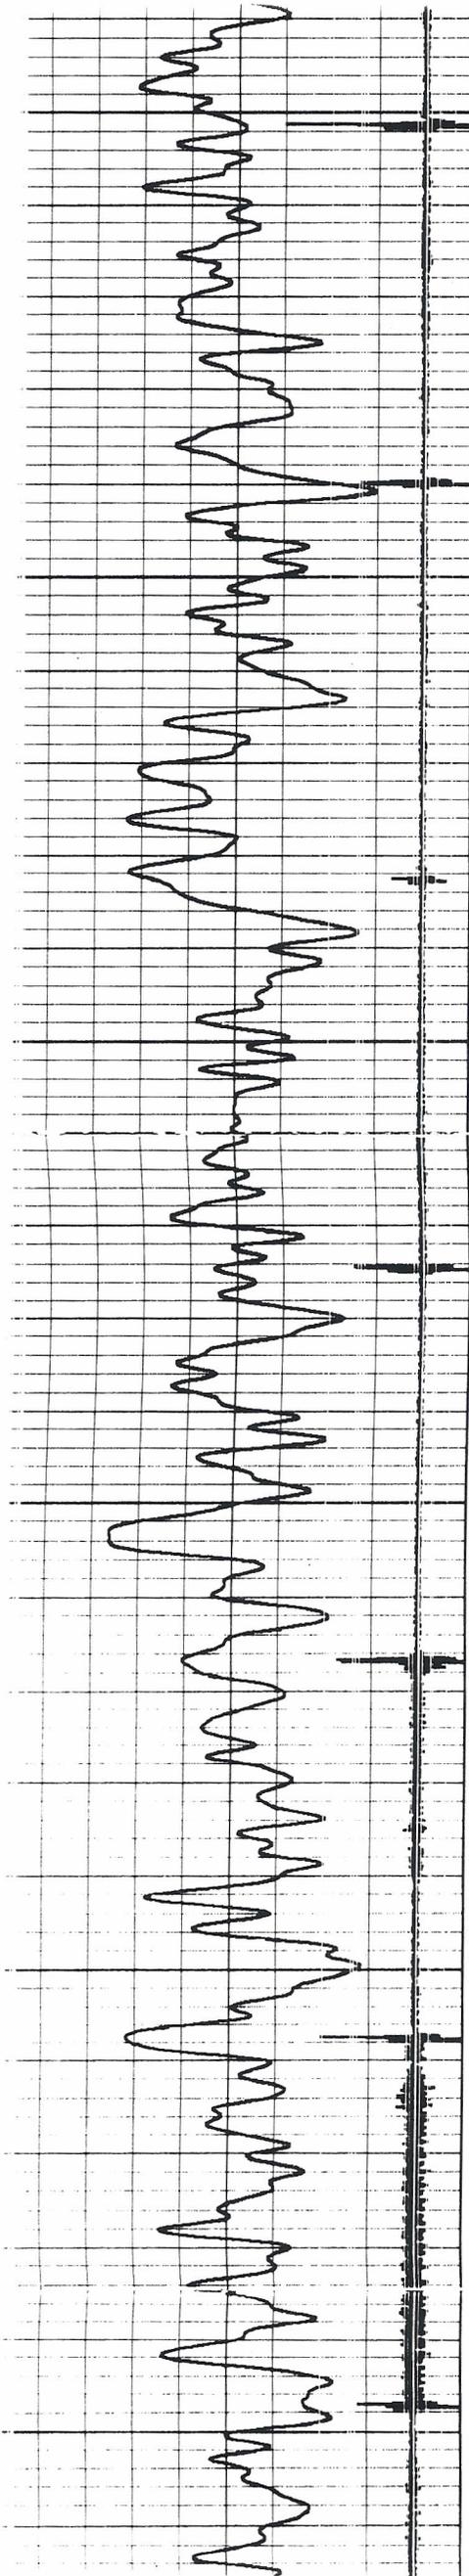

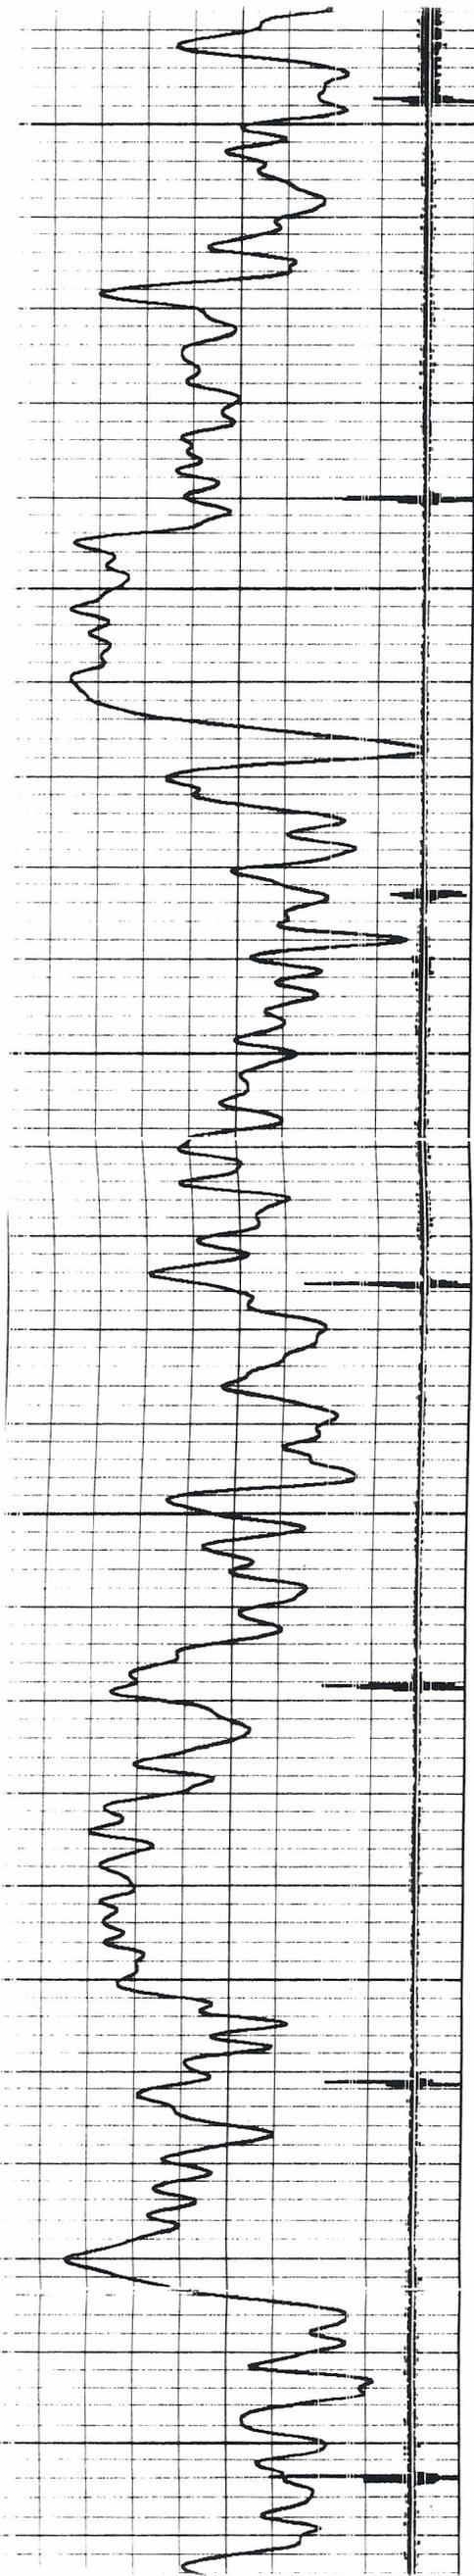

500



550




600


650

700

750

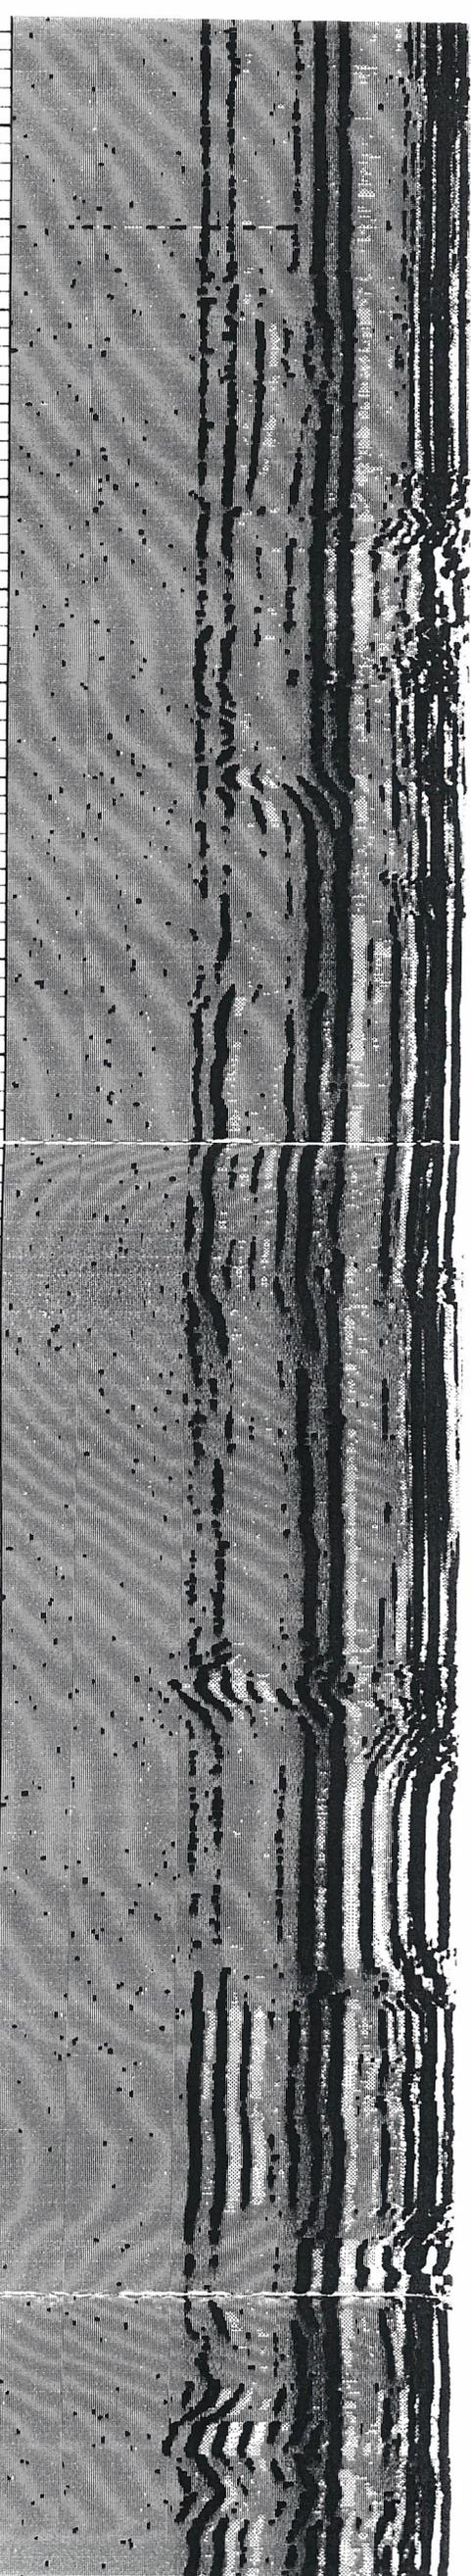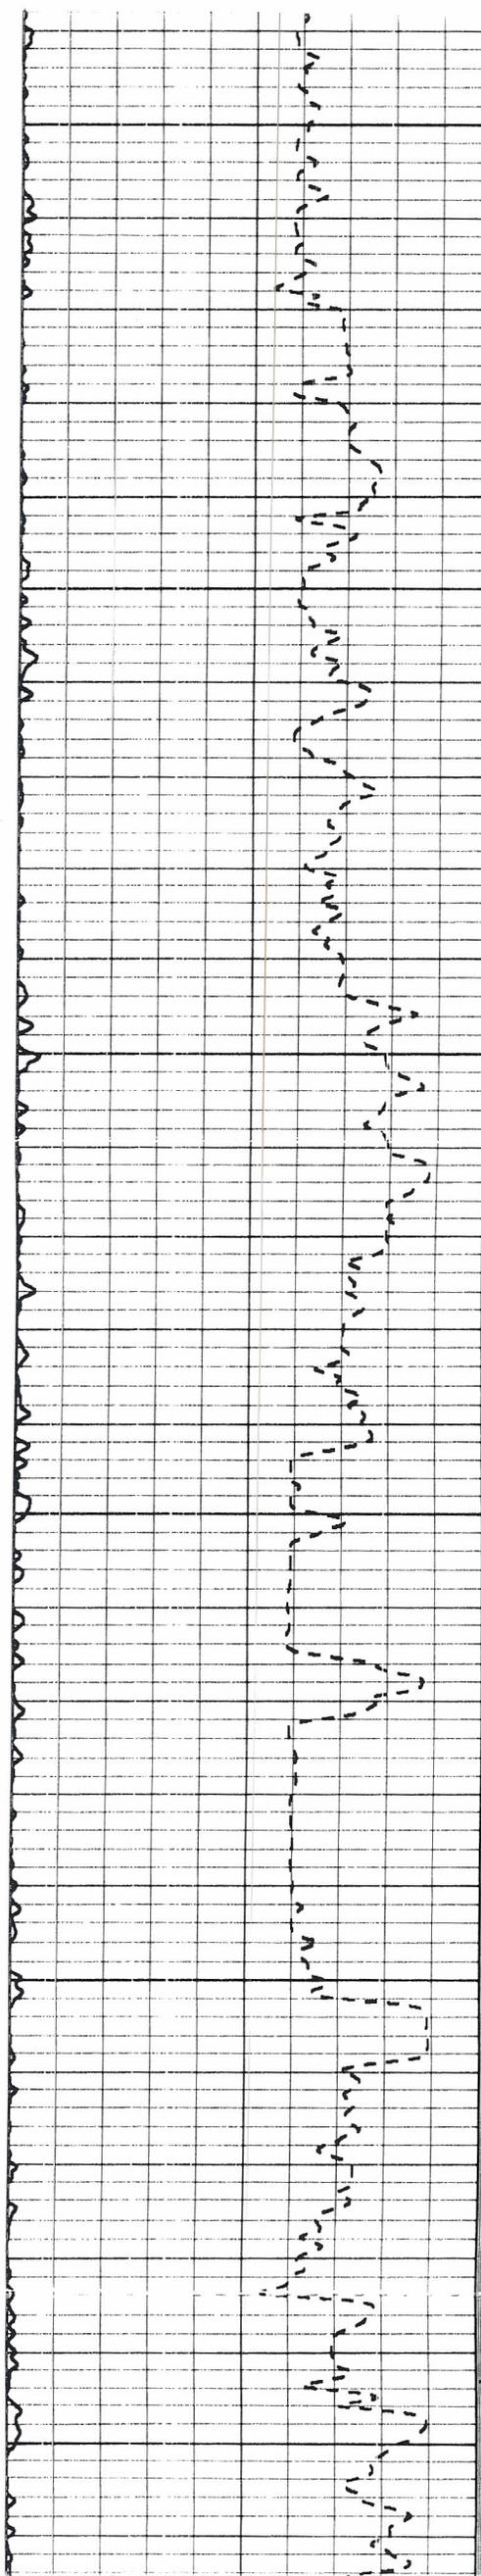

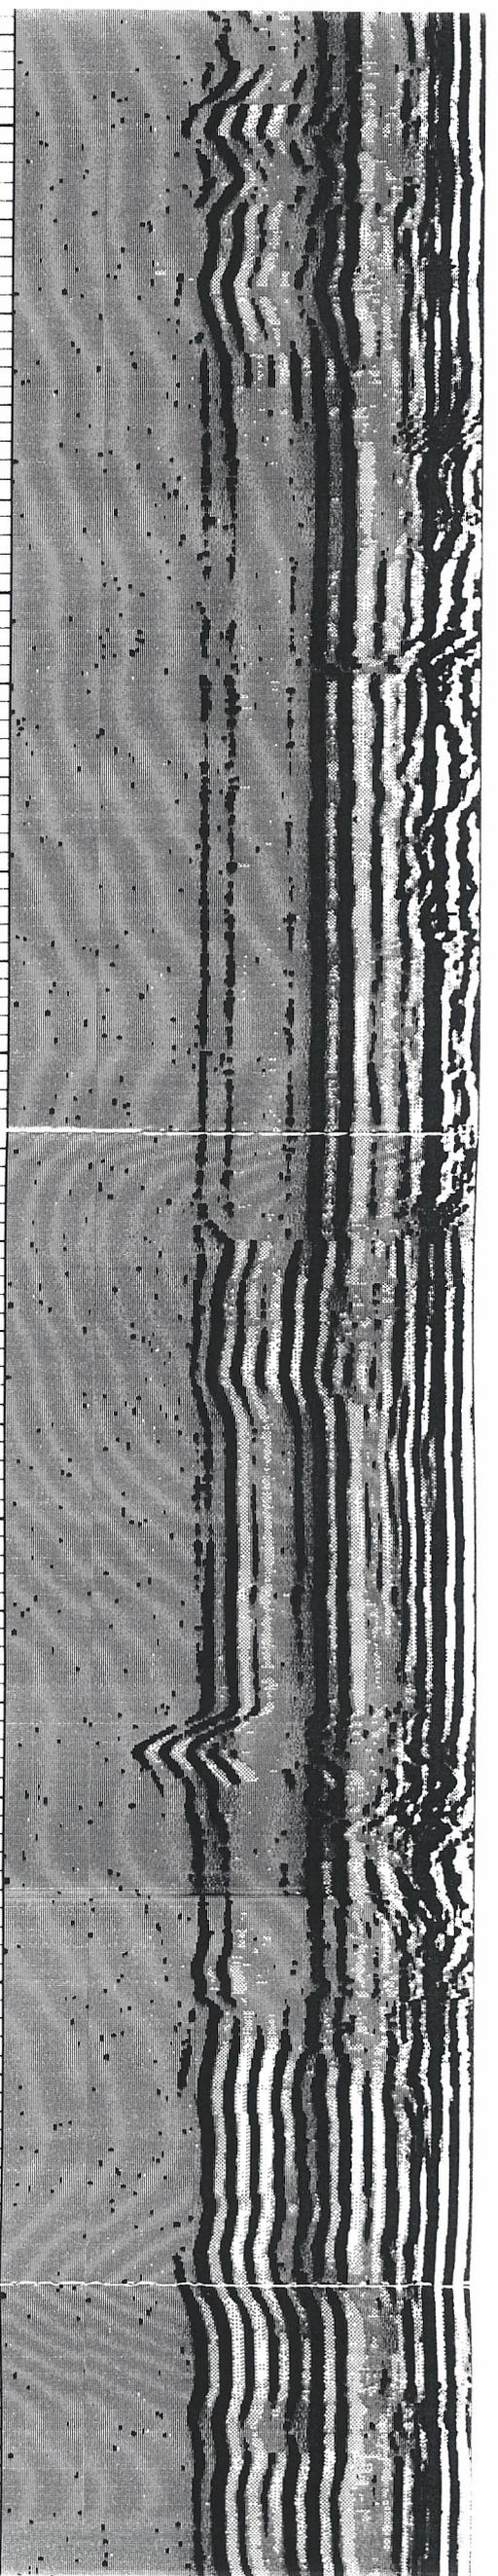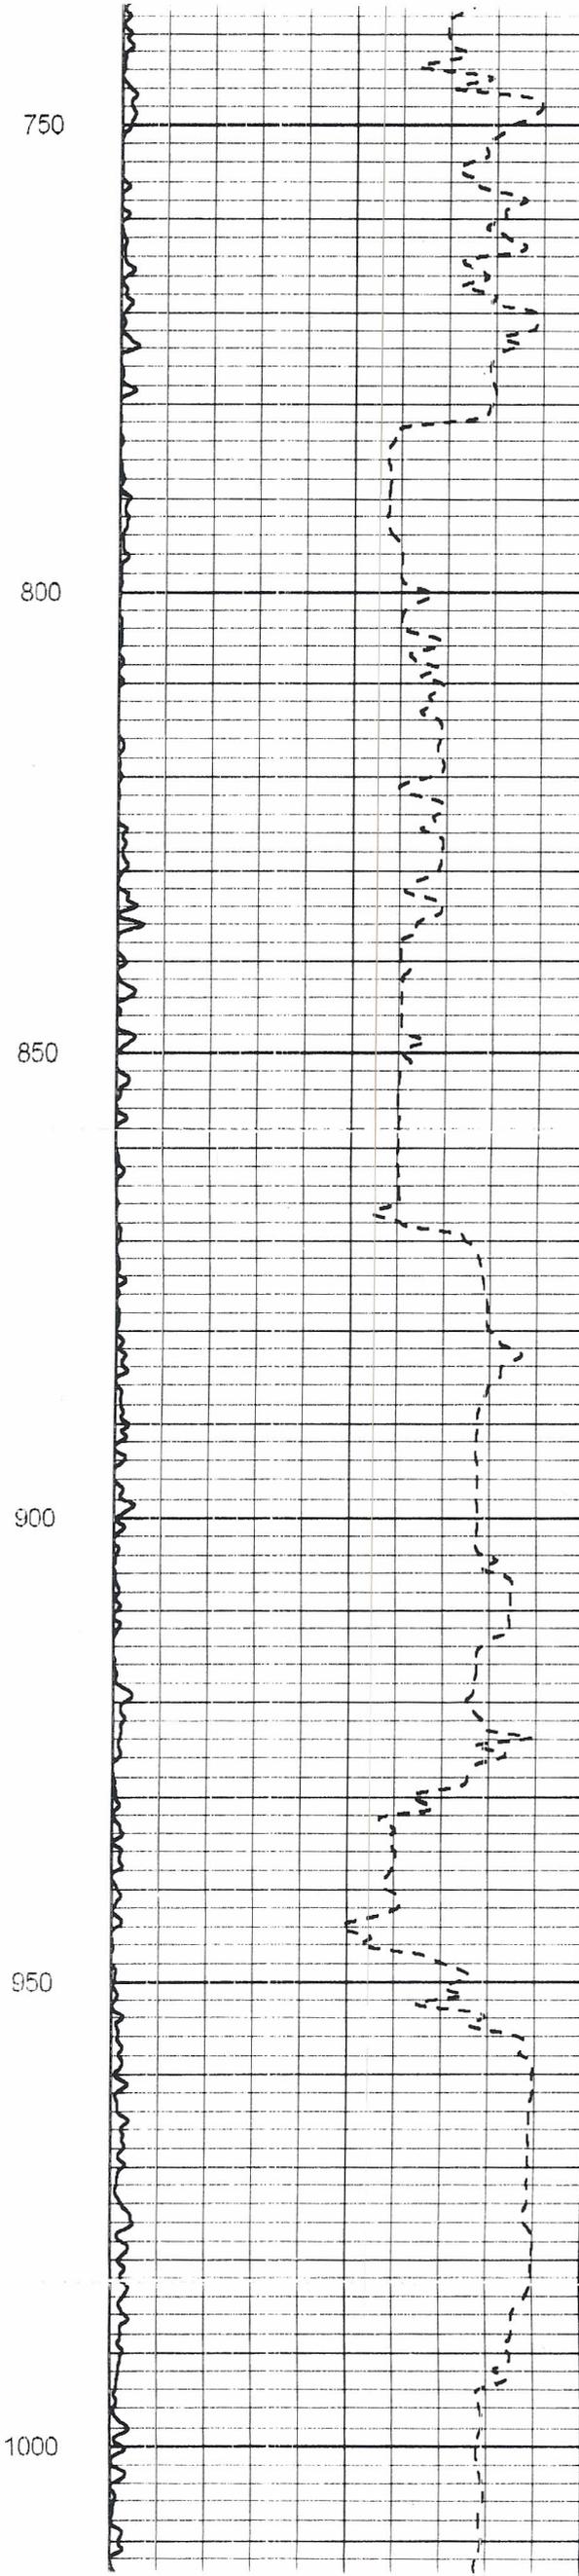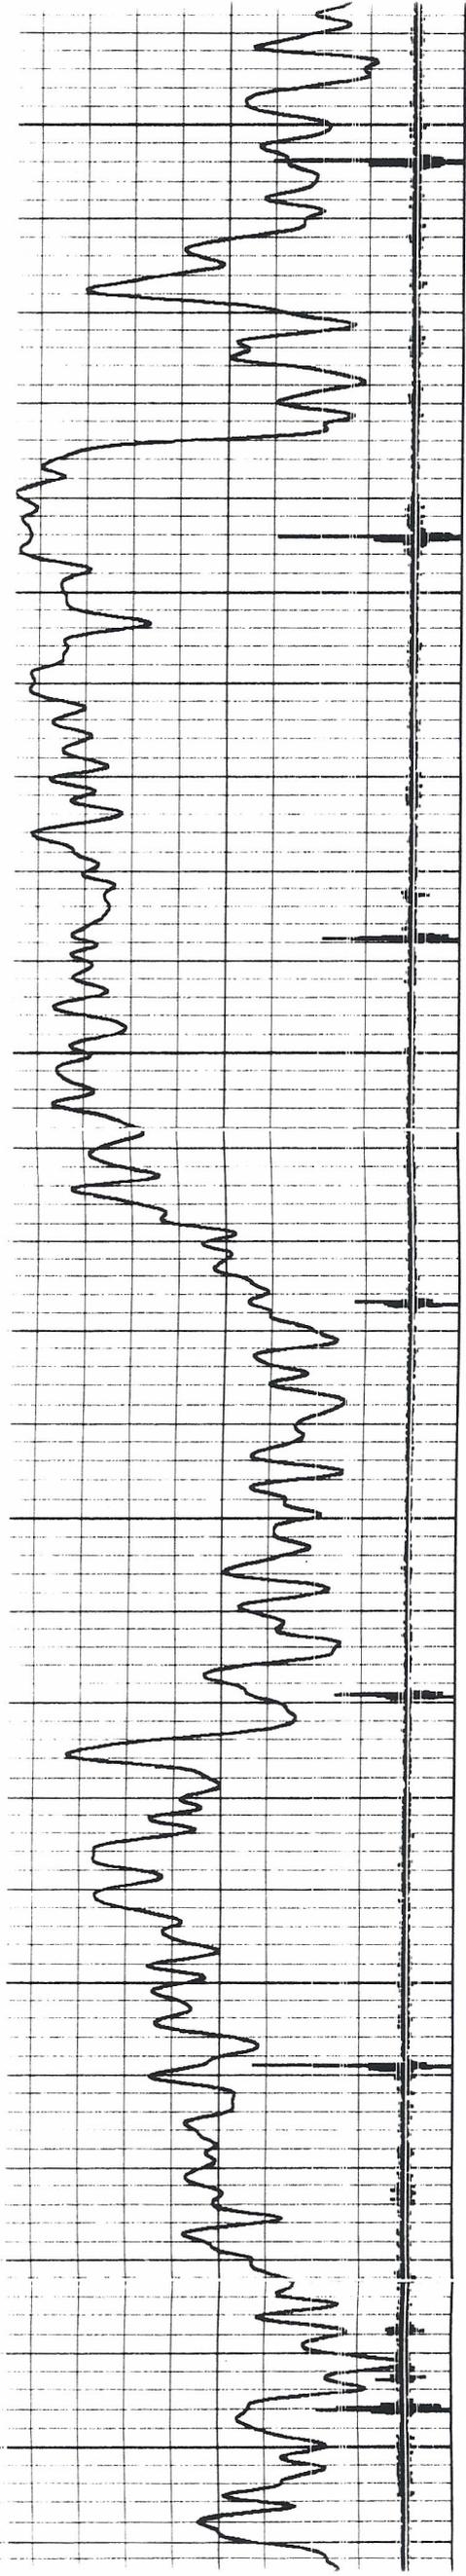

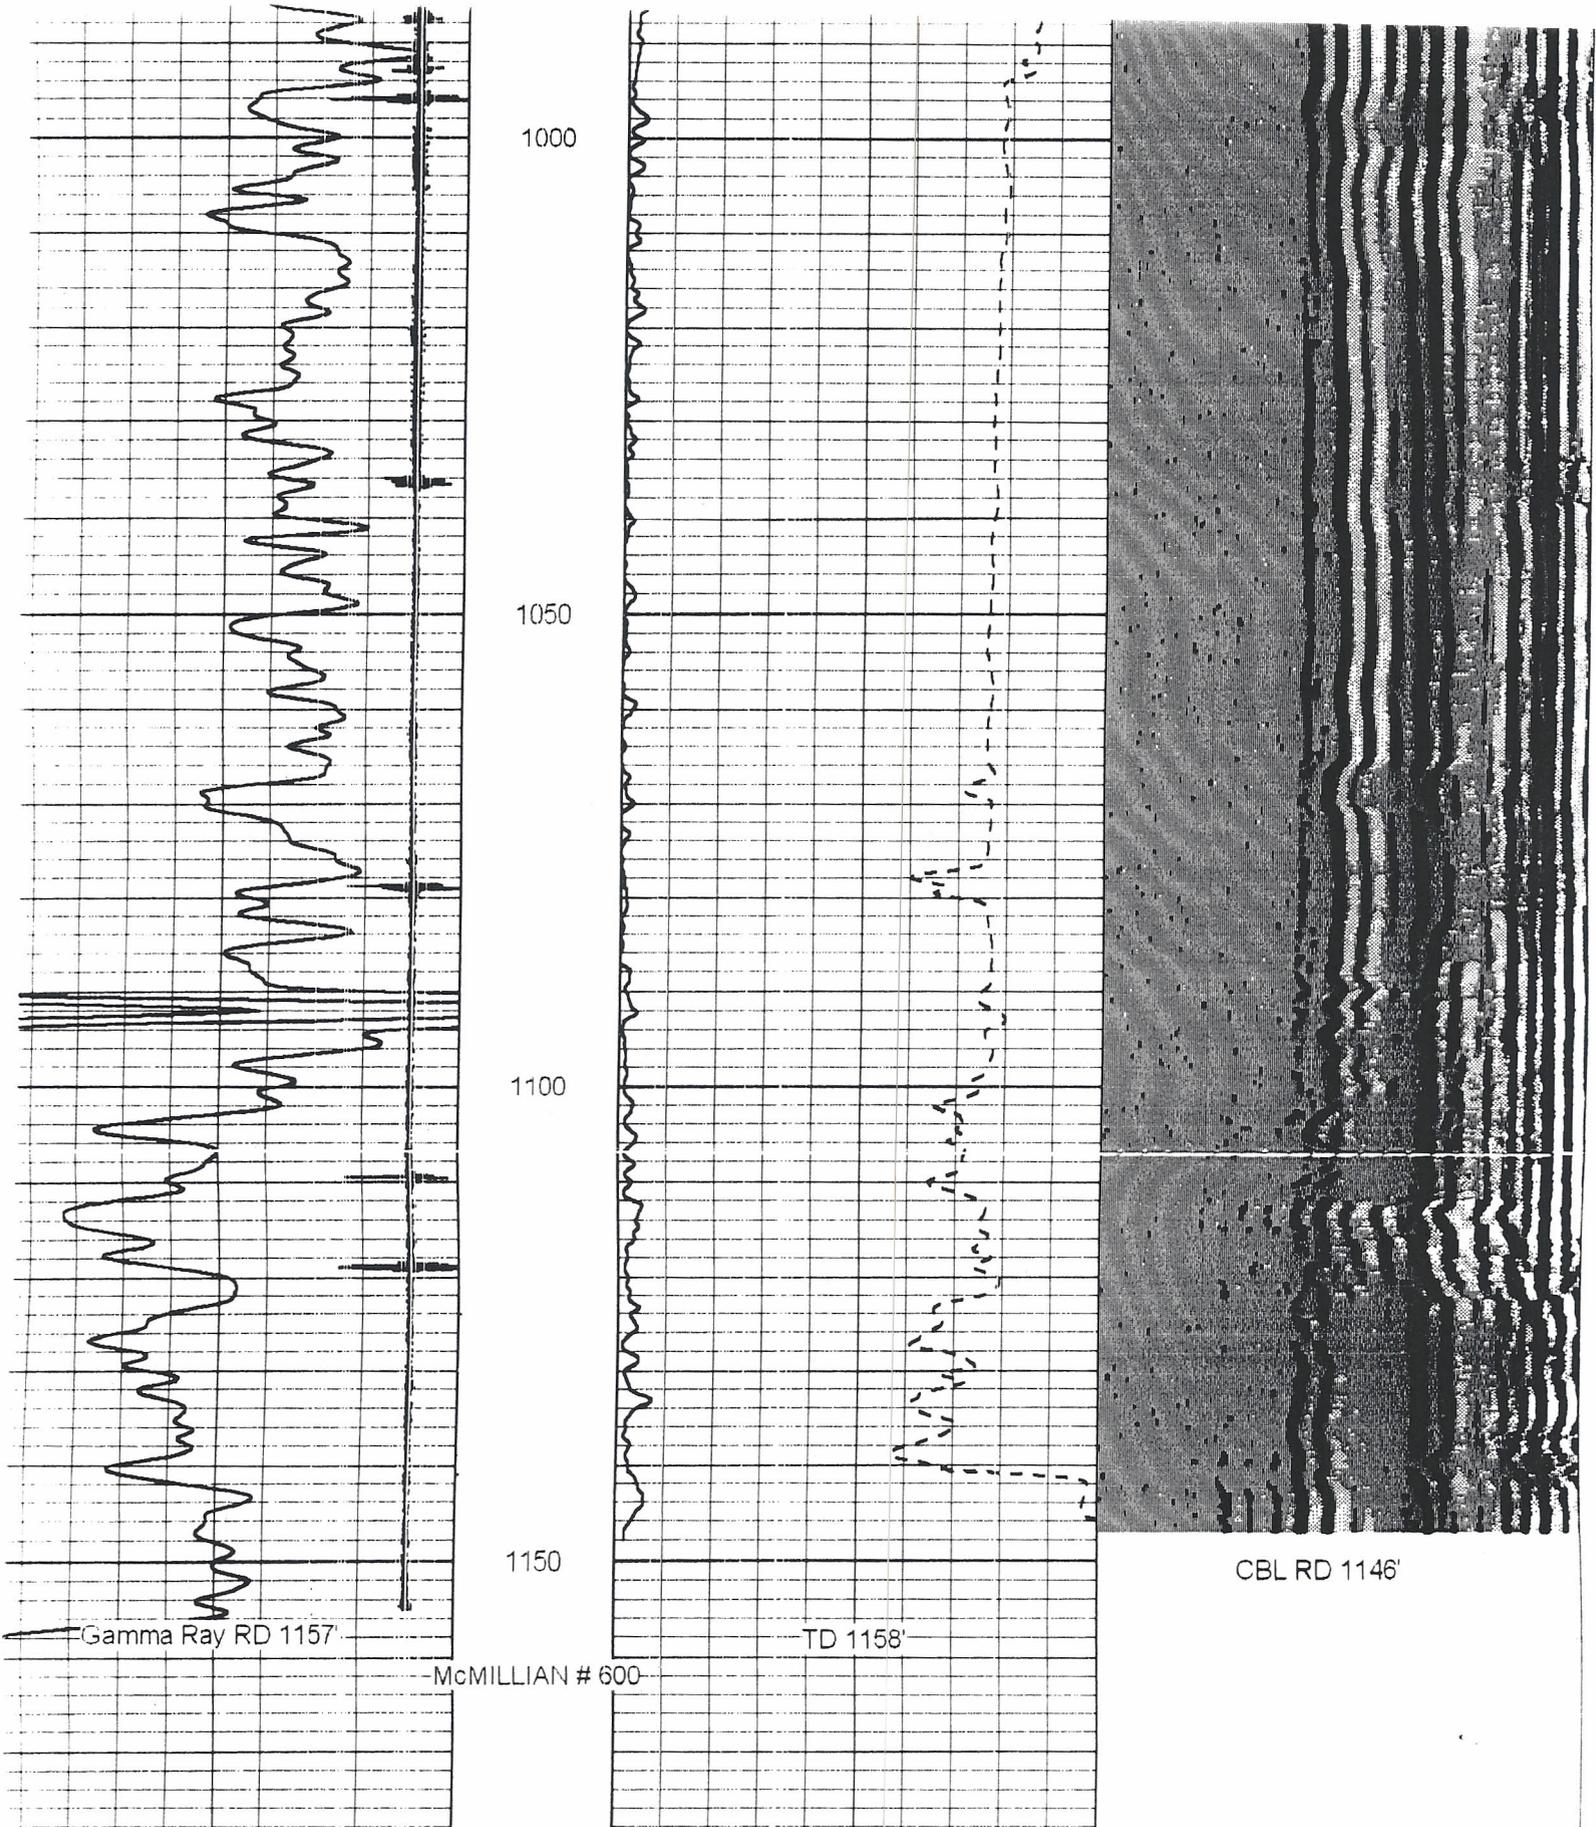

Collar Locator	-1	-2	Amplitude (mV)	100	200	Variable Density	1200
Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	350			