

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-20745-00-00
Spot: SENE Sec/Twnshp/Rge: 15-17S-24W
3300 feet from S Section Line, 660 feet from E Section Line
Lease Name: NEYER B Well #: 2
County: NESS Total Vertical Depth: 4568 feet

Operator License No.: 32754
Op Name: ELYSIUM ENERGY, L.L.C.
Address: 1625 BROADWAY, SU 2000
DENVER, CO 80202

PROD Size: 5.5 feet: 4532
SURF Size: 8.625 feet: 212

148 46

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/08/2005 12:30 PM

Plug Co. License No.: 32970 Plug Co. Name: H-D OIL FIELD SERVICE, INC.

Proposal Rcvd. from: JERRY WIRTZ Company: ELYSIUM ENERGY Phone: (303) 592-8600

Proposed Plugging Method: PUMP 35 SX CMT & 200# HULLS AT 4300' WITH TUBING. PULL TUBING TO 1800' & SPOT 30 SX CMT. PUMP 40 SX AT 1300'. PRESSURE TEST. PERFORATE @ 950' & PUMP 160 SX CMT. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER
Date/Time Plugging Completed: 06/08/2005 6:30 PM

WitnessType: COMPLETE (100%)
KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 35 SX CMT & 200# HULLS @ 4300' WITH TUBING. PULL TUBING TO 1800' & SPOT 30 SX COMMON CMT WITH 3% CC. CAME UP TO 1300' & PUMPED 40 SX COMMON CMT W/3% CC. PULLED TUBING OUT OF HOLE. WAIT 2 HOURS. PRESSURE CASING TO 500# & HELD. PERFORATE AT 950' & PUMP 160 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 300#. DID NOT GET CIRCULATION. PUMPED 150 SX CMT DOWN BACKSIDE. MAXIMUM PRESURE 350#. SHUT IN PRESSURE 200#.

Perfs:


Top	Bot	Thru	Comments
4470	4476		

INVOICED
DATE 6-21-05
INV. NO. 2005061842

Remarks: USED 60/40 POZMIX 6% GEL & COMMON CMT WITH 3% CC BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: TBG

District: 01

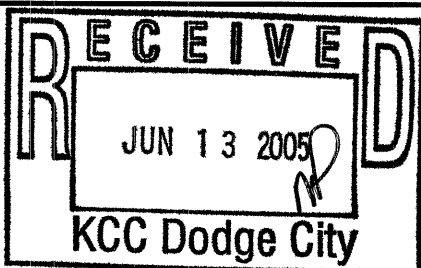

Signed

Michael Maier
(TECHNICIAN)

RECEIVED
JUN 21 2005
KCC WICHITA