



Weatherford[®]

MICRORESISTIVITY LOG

COMPANY

SHAKESPEARE OIL COMPANY, INC.

WELL

JANZEN #1-26

FIELD

WILDCAT

PROVINCE/COUNTY

SCOTT

COUNTRY/STATE

U.S.A. / KANSAS

LOCATION

2000' FSL & 900' FEL

SE/4

SEC 26

TWP 16S

RGE 34W

Other Services

MAI/MFE

MSS

MPD/MDN

Permit Number

15-171-20909

Permanent Datum G.L., Elevation 3109 feet

Log Measured From KB

Drilling Measured From K.B.

Date

15-OCT-2012

Run Number

ONE

Depth Driller

4870.00

Depth Logger

4867.00

First Reading

4821.00

Last Reading

3850.00

Casing Driller

264.00

Casing Logger

264.00

Bit Size

7.875

Hole Fluid Type

CHEMICAL

Density / Viscosity

9.30 lb/USg

PH / Fluid Loss

10.00

Sample Source

FLOWLINE

Rm @ Measured Temp

0.51 @ 87.0

Rmf @ Measured Temp

0.41 @ 87.0

Rmc @ Measured Temp

0.61 @ 87.0

Source Rmf / Rmc

CALC

Rm @ BHT

0.40 @ 111.0

Time Since Circulation

4 HOURS

Max Recorded Temp

111.00

Equipment Name

COMPACT

Equipment / Base

13096

Recorded By

LYNN SCOTT

Witnessed By

TIM PRIEST

S.O.# / JOB#

3537891

LB12-275

Elevations:
KB 3119.00
DF 3118.00
GL 3109.00

BOREHOLE RECORD

Last Edited: 15-OCT-2012 08:51

Bit Size
inches
7.875

Depth From
feet
264.00

Depth To
feet
4867.00


CASING RECORD


Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	264.00	24.00

REMARKS

Tools Used: MPD, MCG, MDN, MFE, MAI, MSS, MML
Hardware: MPD: 8 inch profile plate used. MAI, MFE, and MSS: 0.5 Inch standoffs used. MDN: Dual Bowspring used.
2.71 G/CC Limestone density matrix used to calculate porosity.
Sonic porosity calculated using 47.5 usec/ft Limestone scale.
Borehole rugosity, tight pulls, and washouts will affect data quality.
All intervals logged and scaled per customer's request.
Annular volume with 5.5 inch production casing from TD to the top of detail = 227 cubic feet
Total hole volume from TD to Surface casing= 2294 cubic feet
Service order #3537891
Rig: HD #2
Engineer: L. Scott
Operator(s): B. Johnson

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

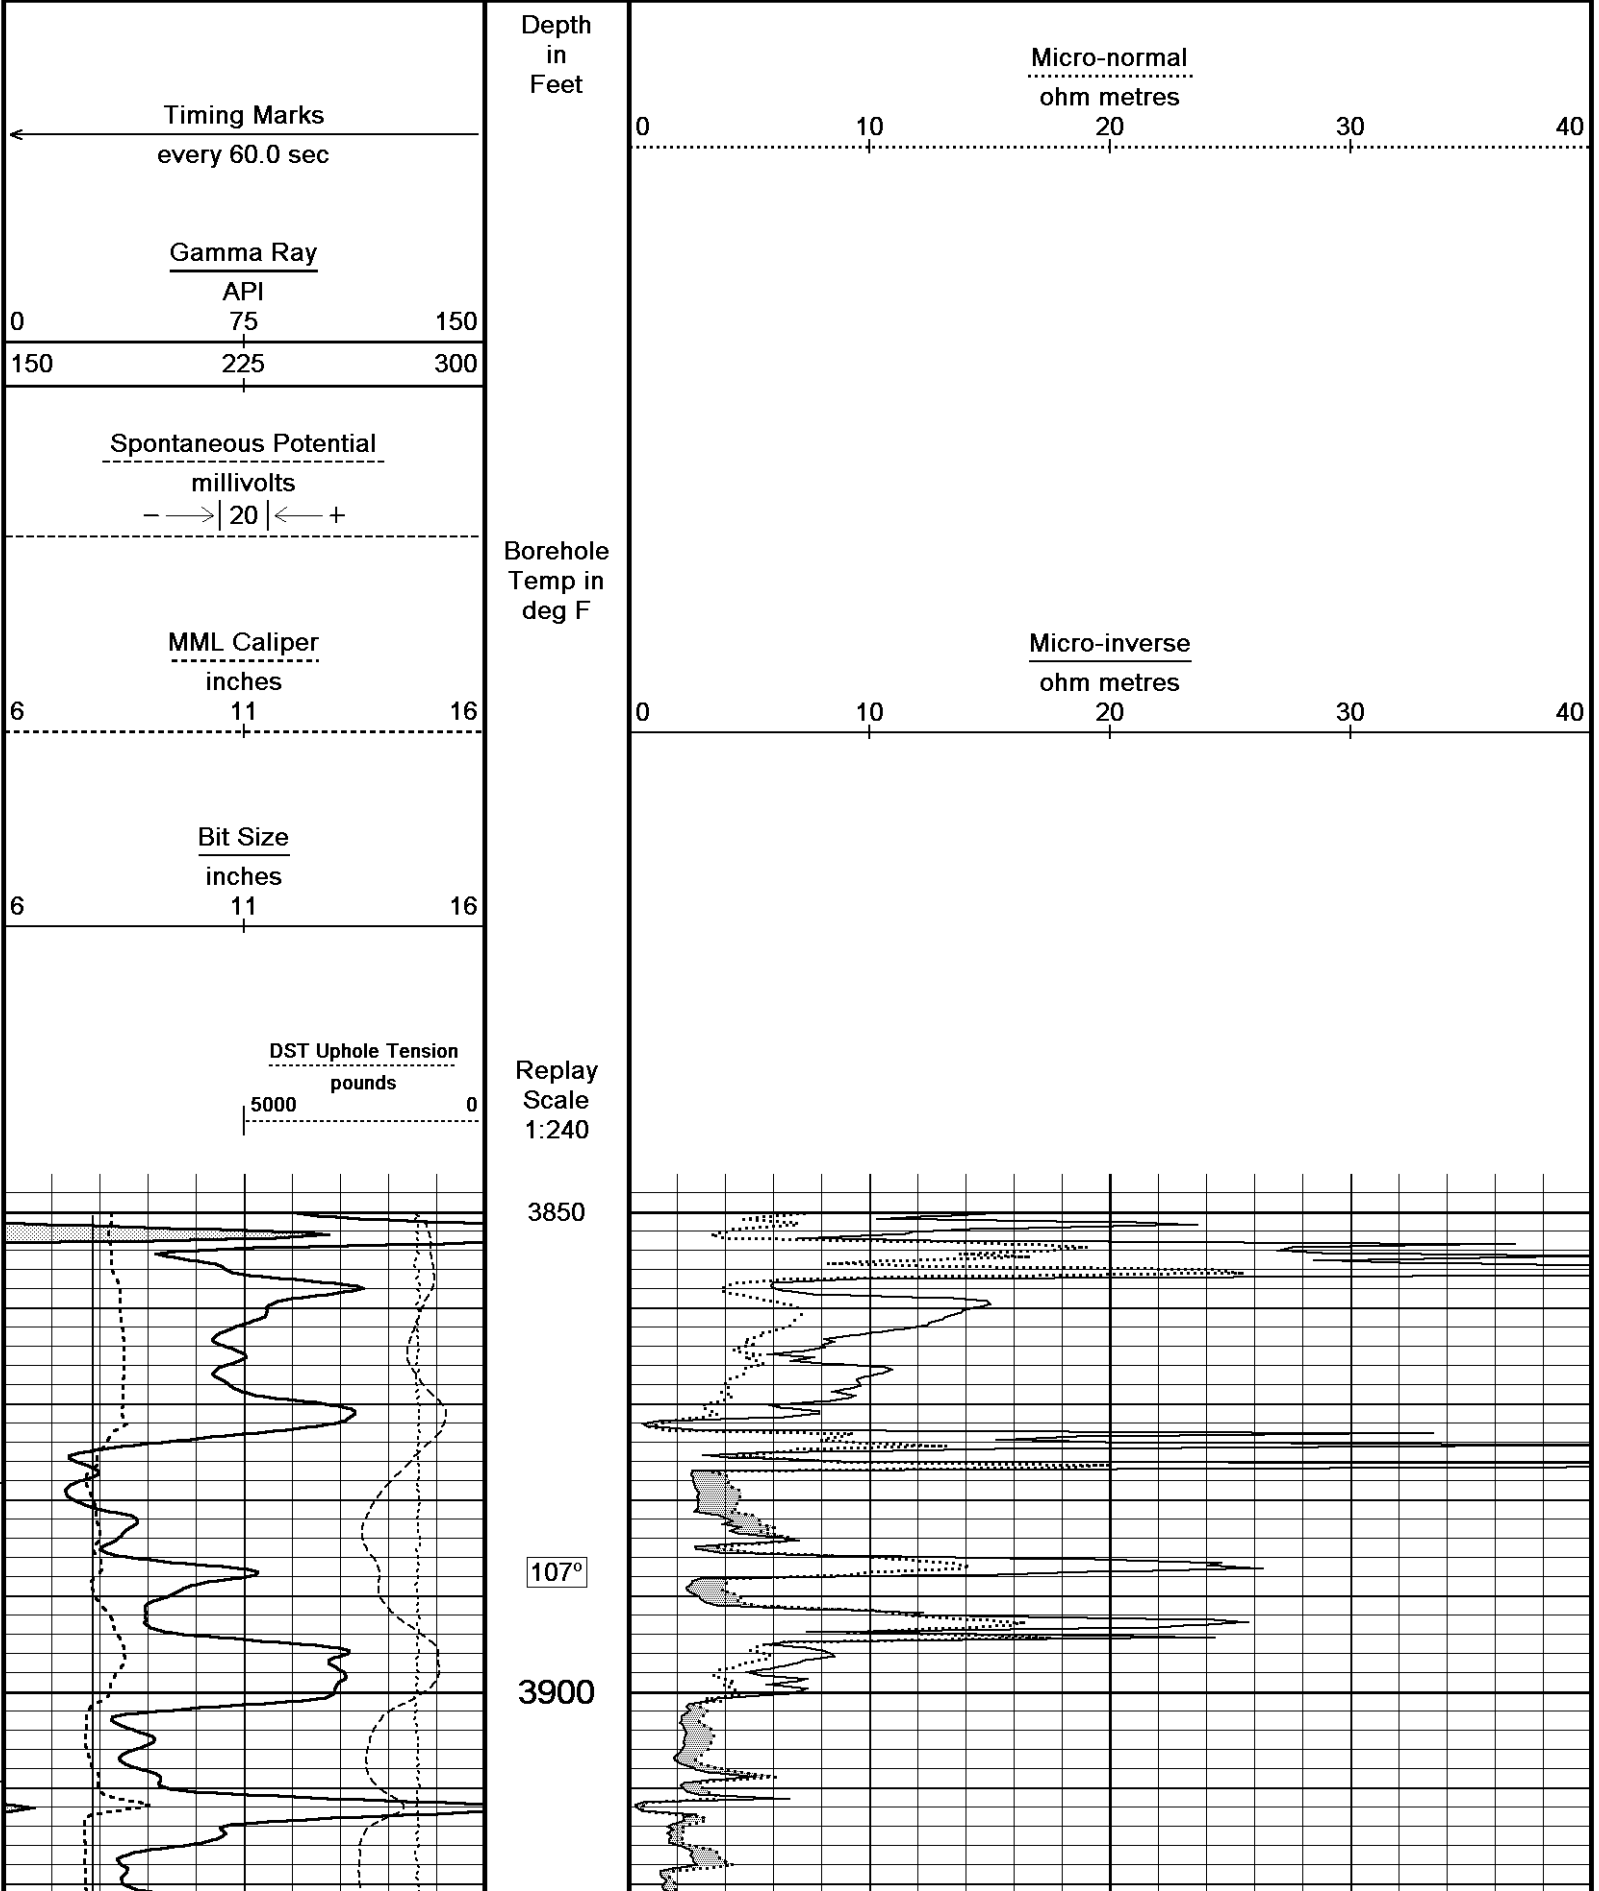

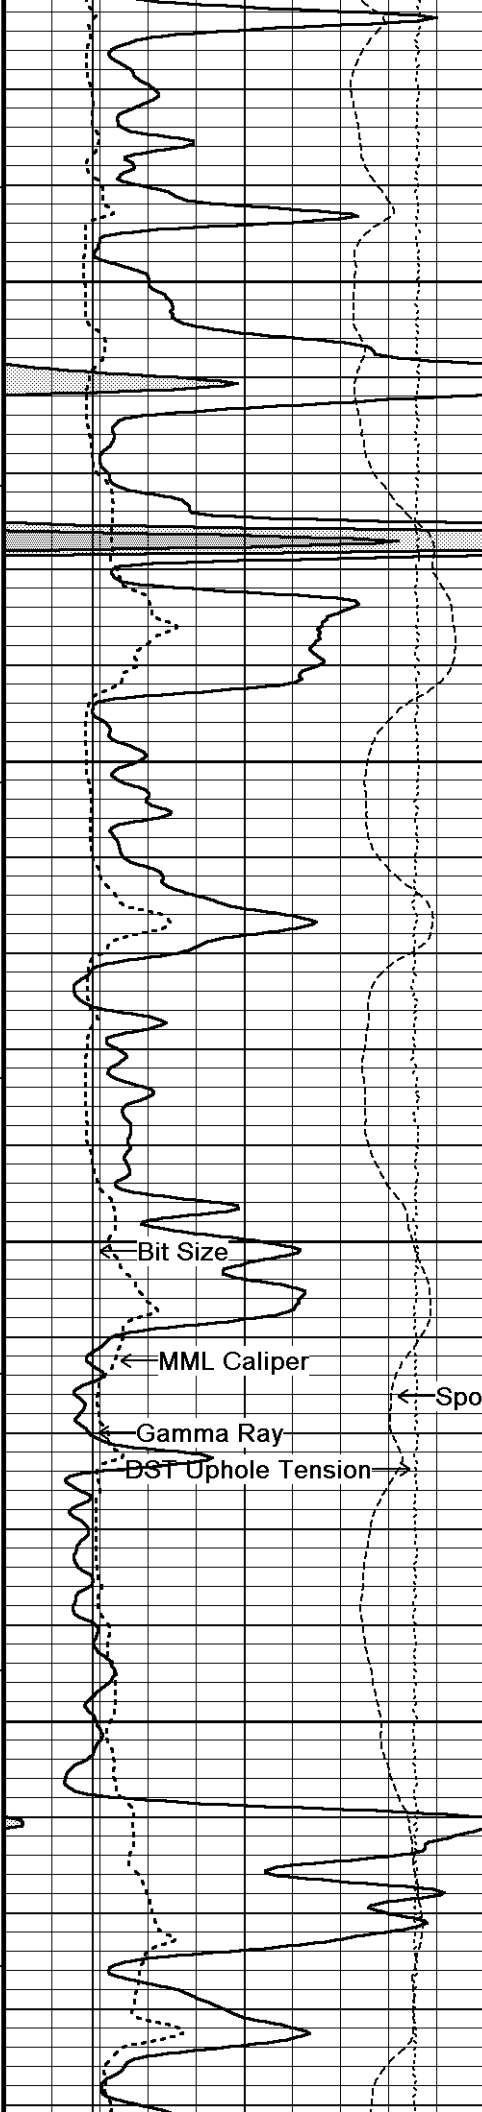

107°

3950

108°

4000


108°

4050

108°

4100


108°

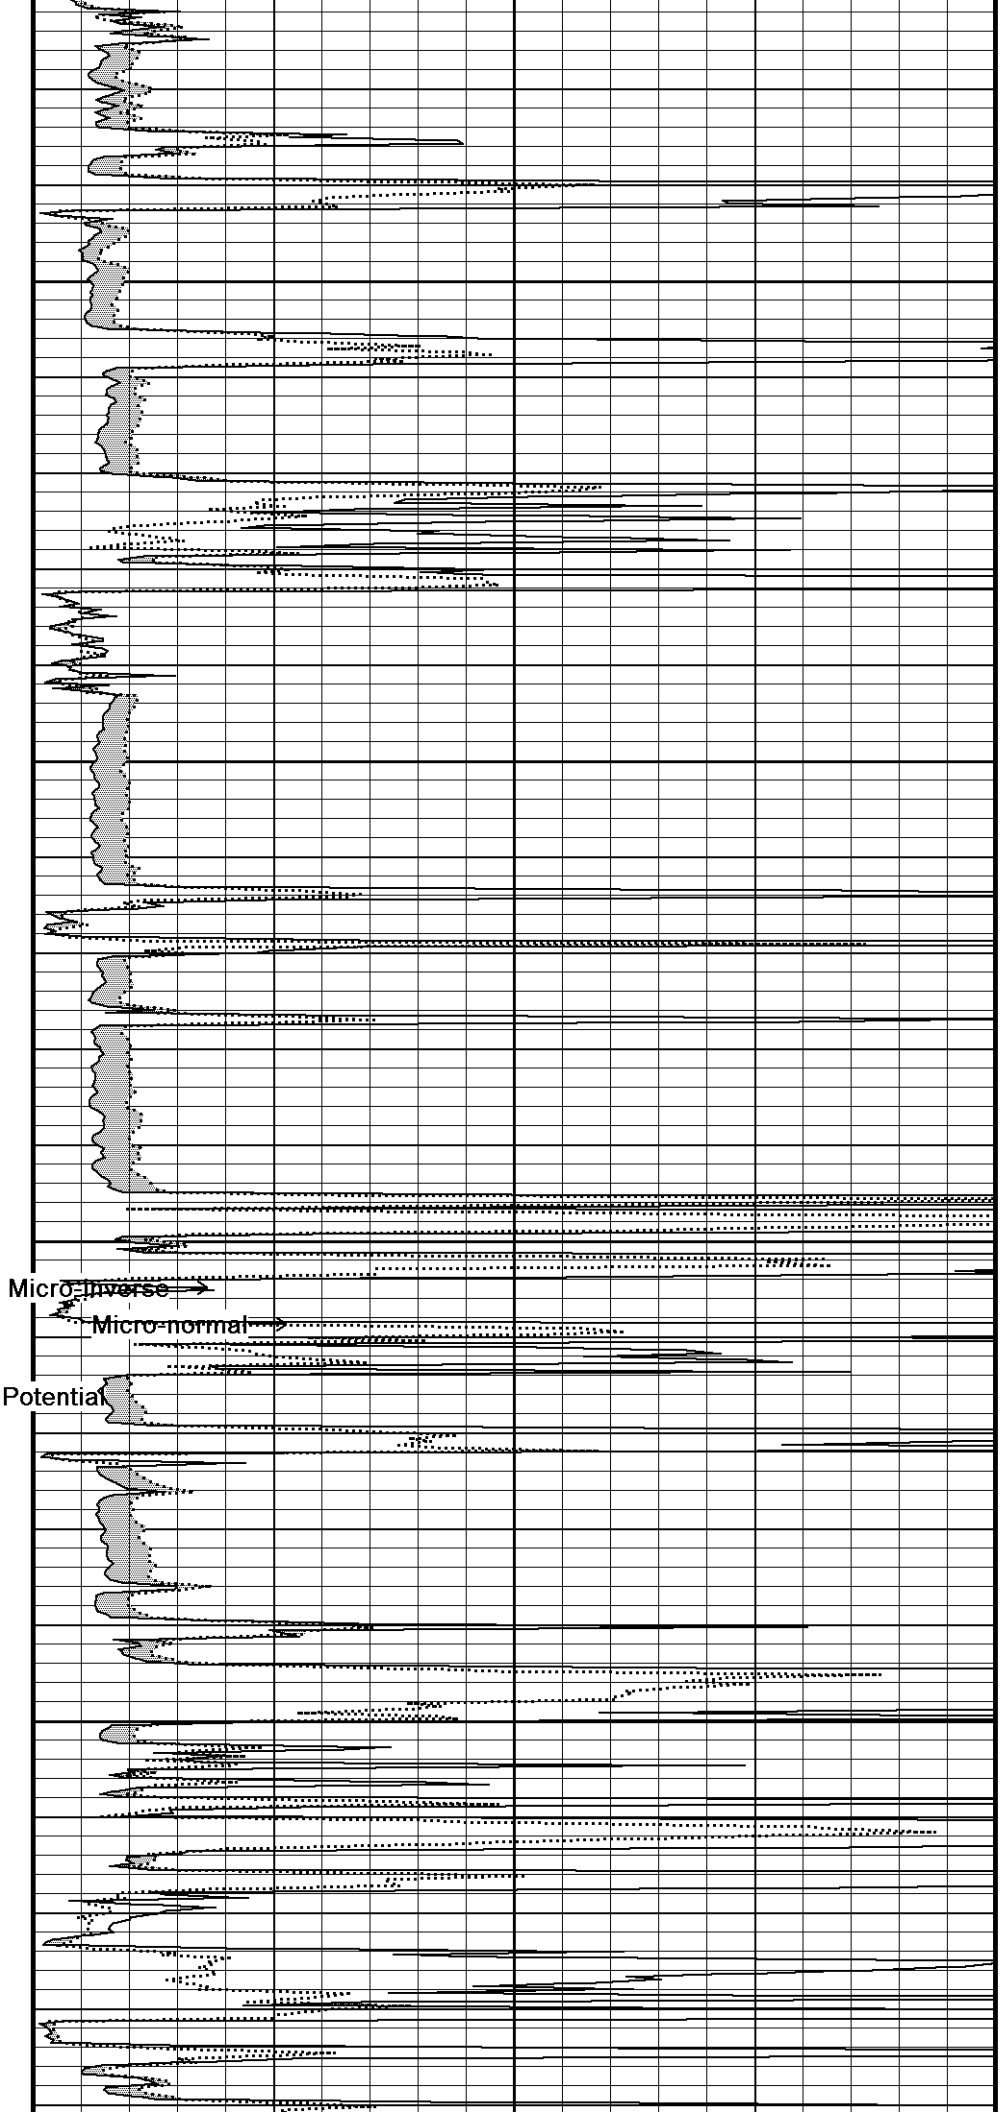

Micro-Inverse

Micro-normal

Spontaneous Potential

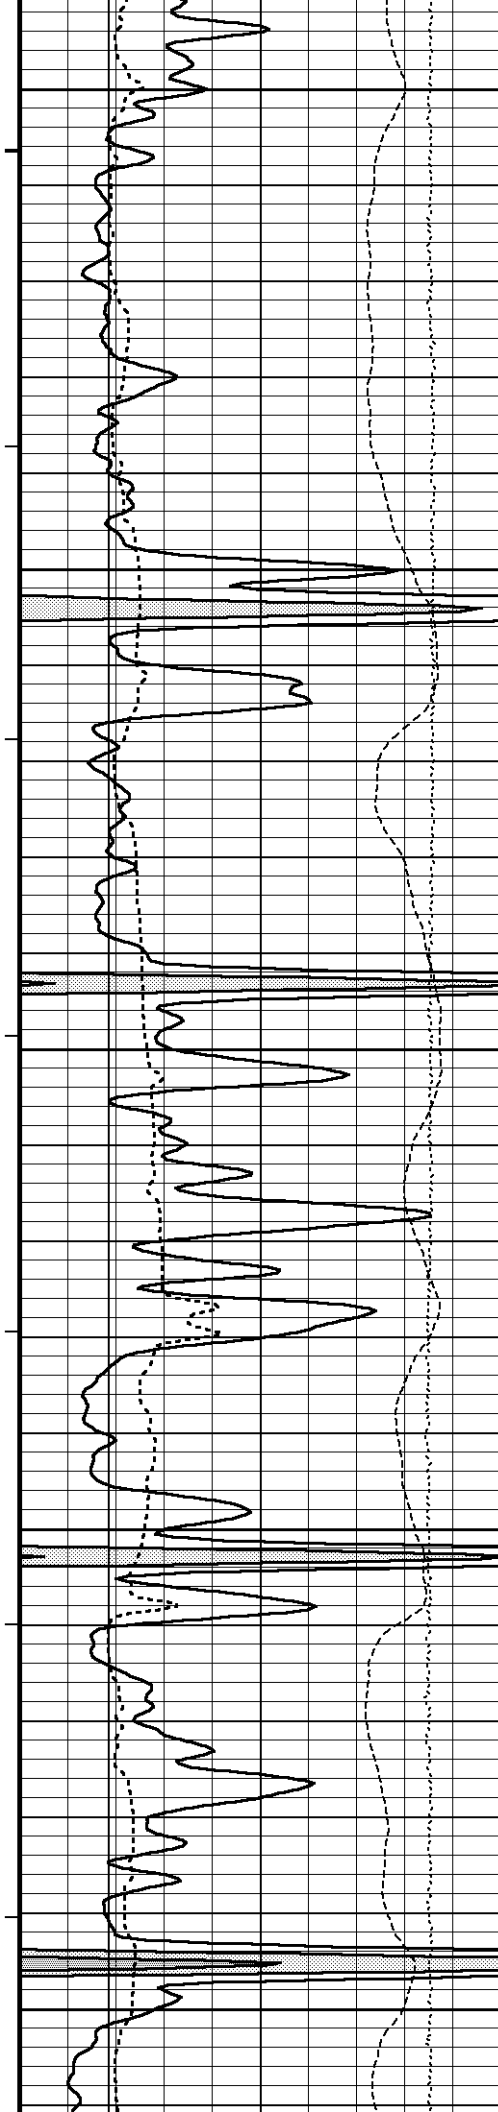

4150

108°

4200

109°


4250


109°

4300

109°

4350

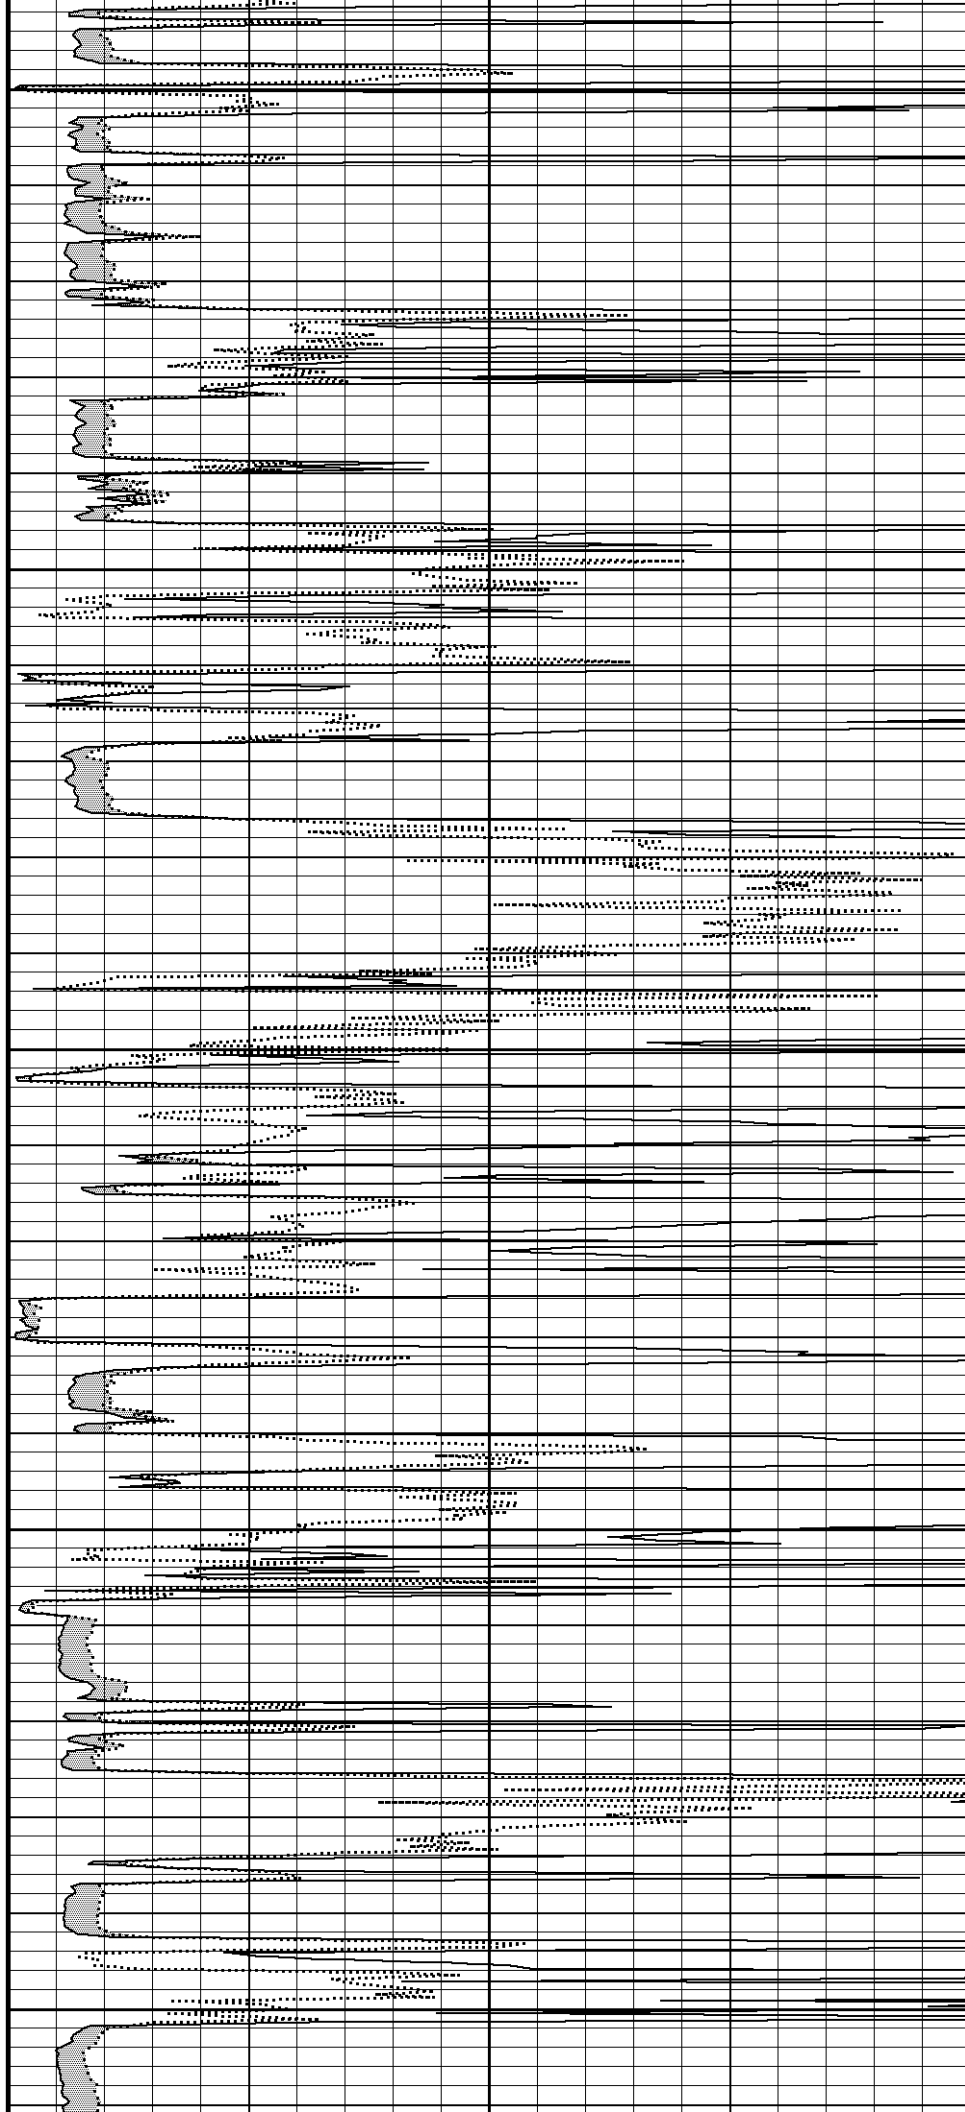

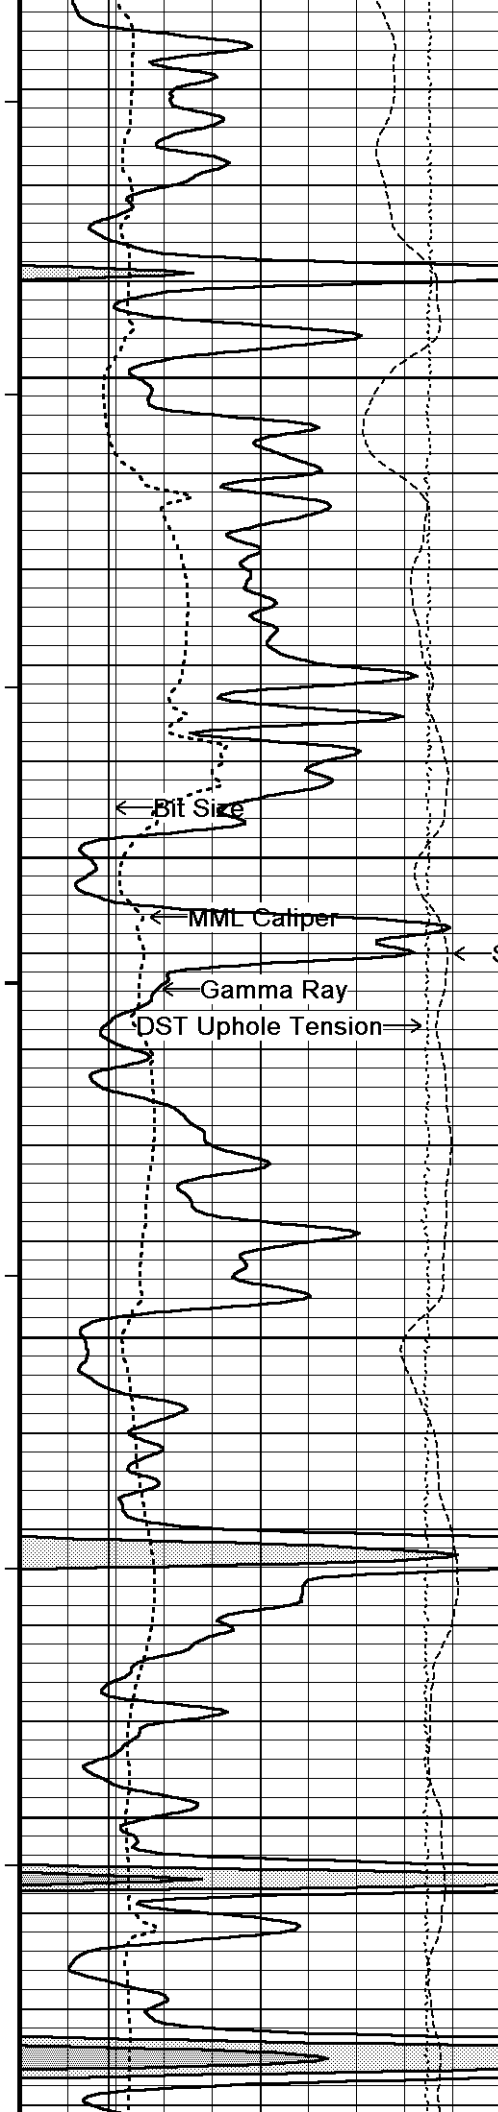

110°

4400

110°

Micro-inverse
Micro-normal


Spontaneous Potential


110°

4500

111°

4550

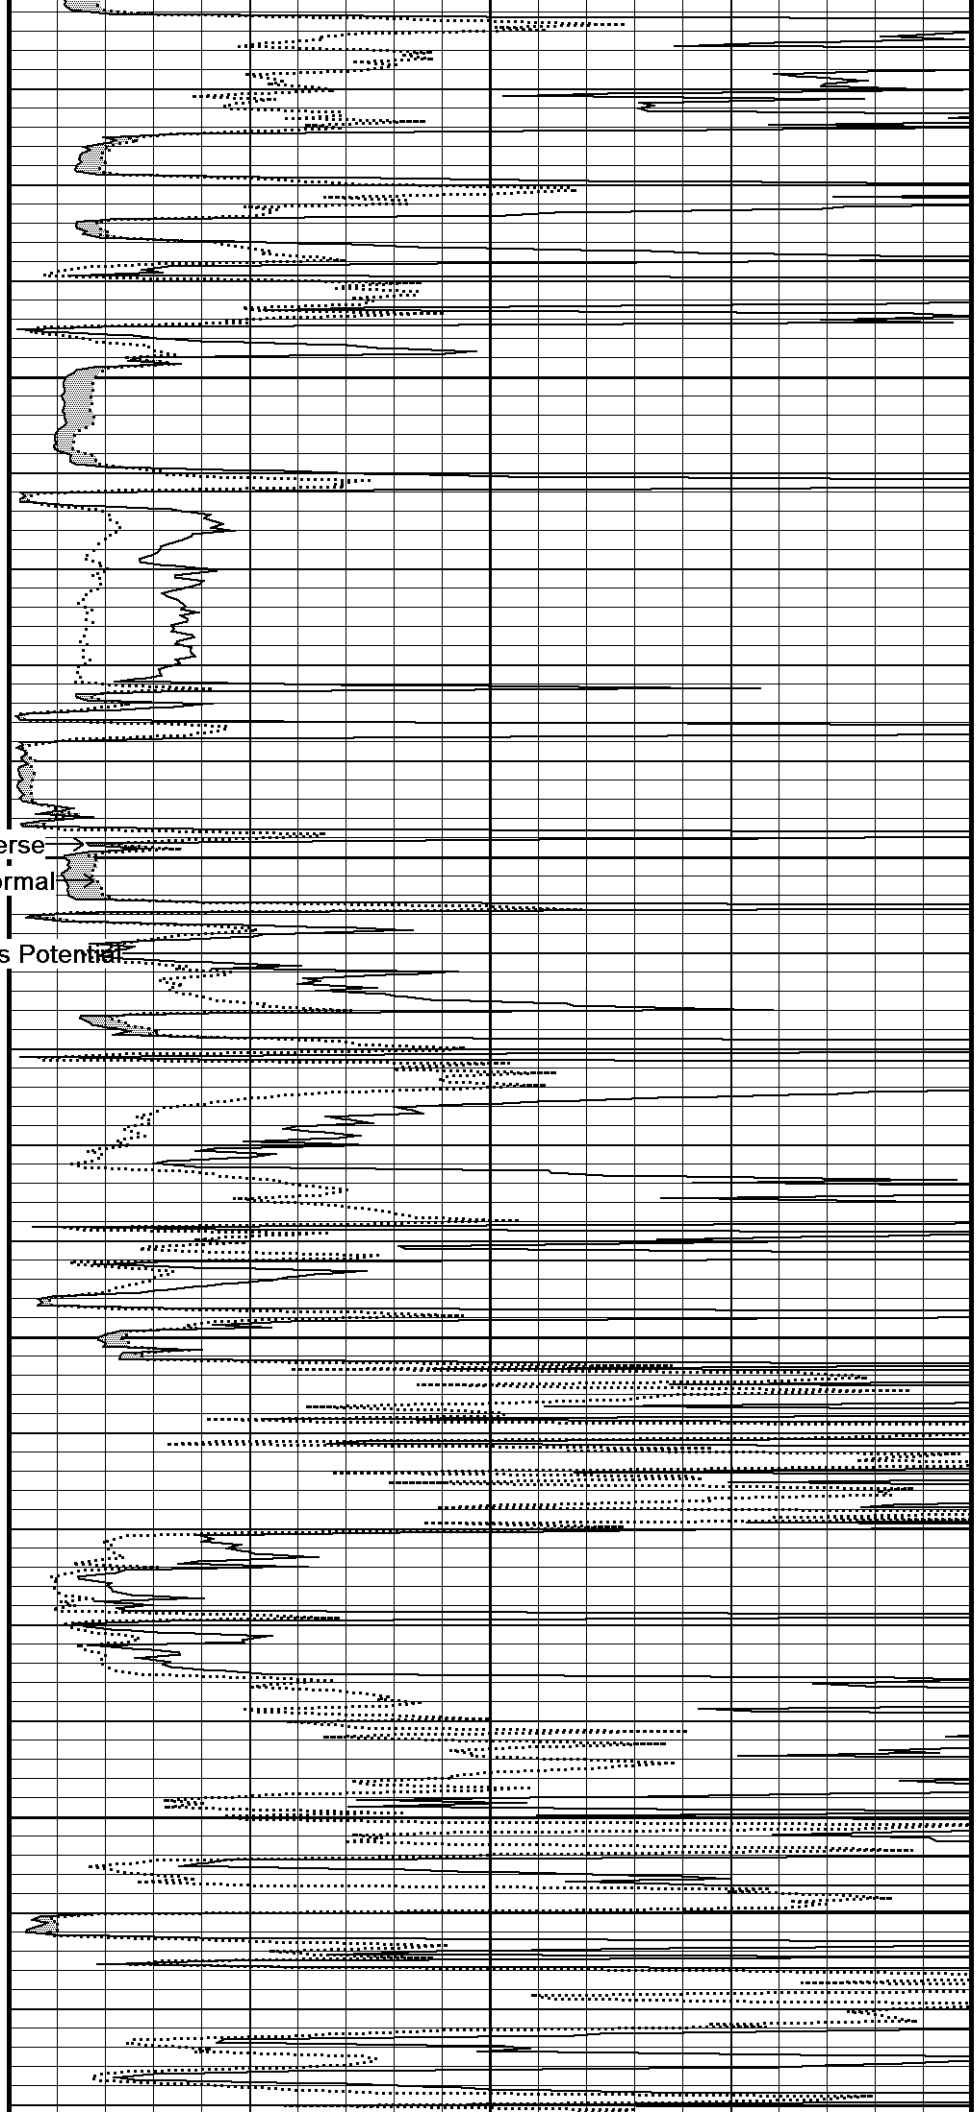

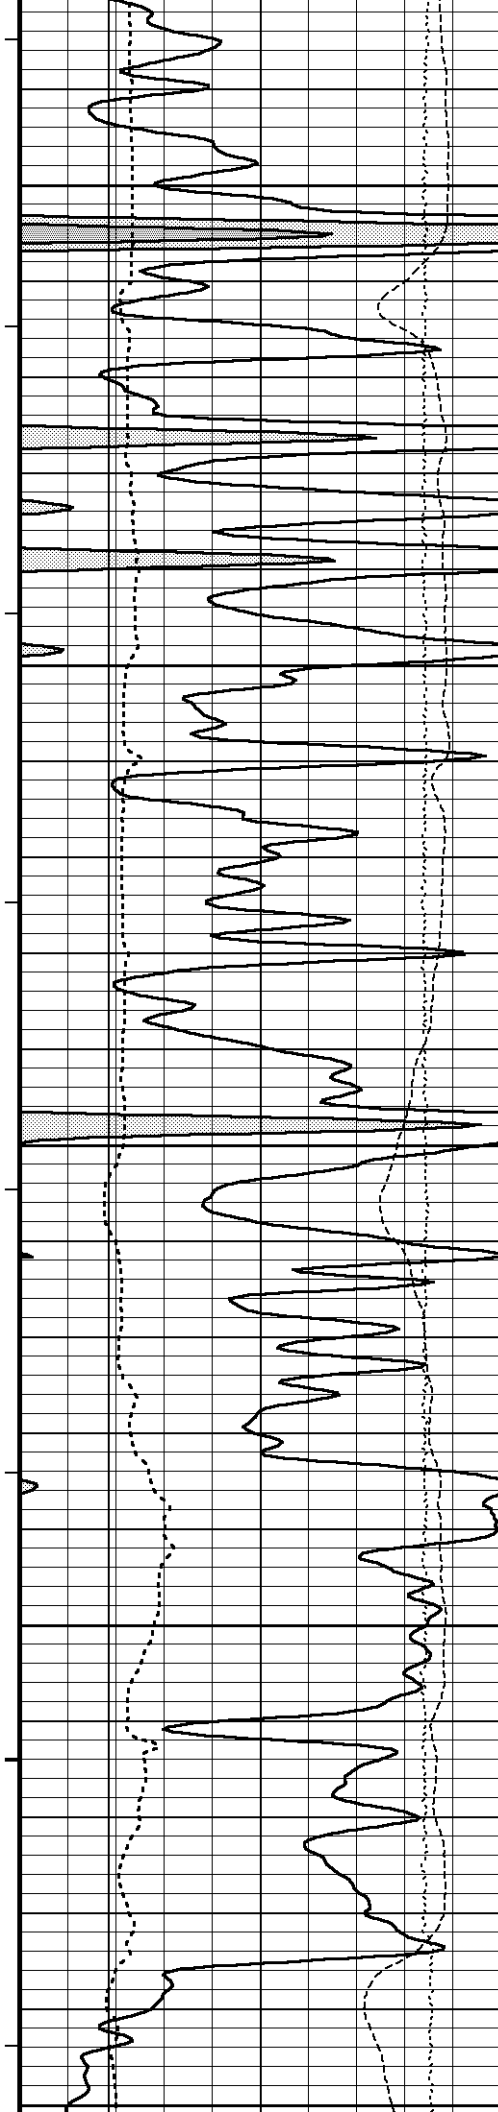

111°

4600

111°

4650

112°


4700


112°

4750

111°

4800

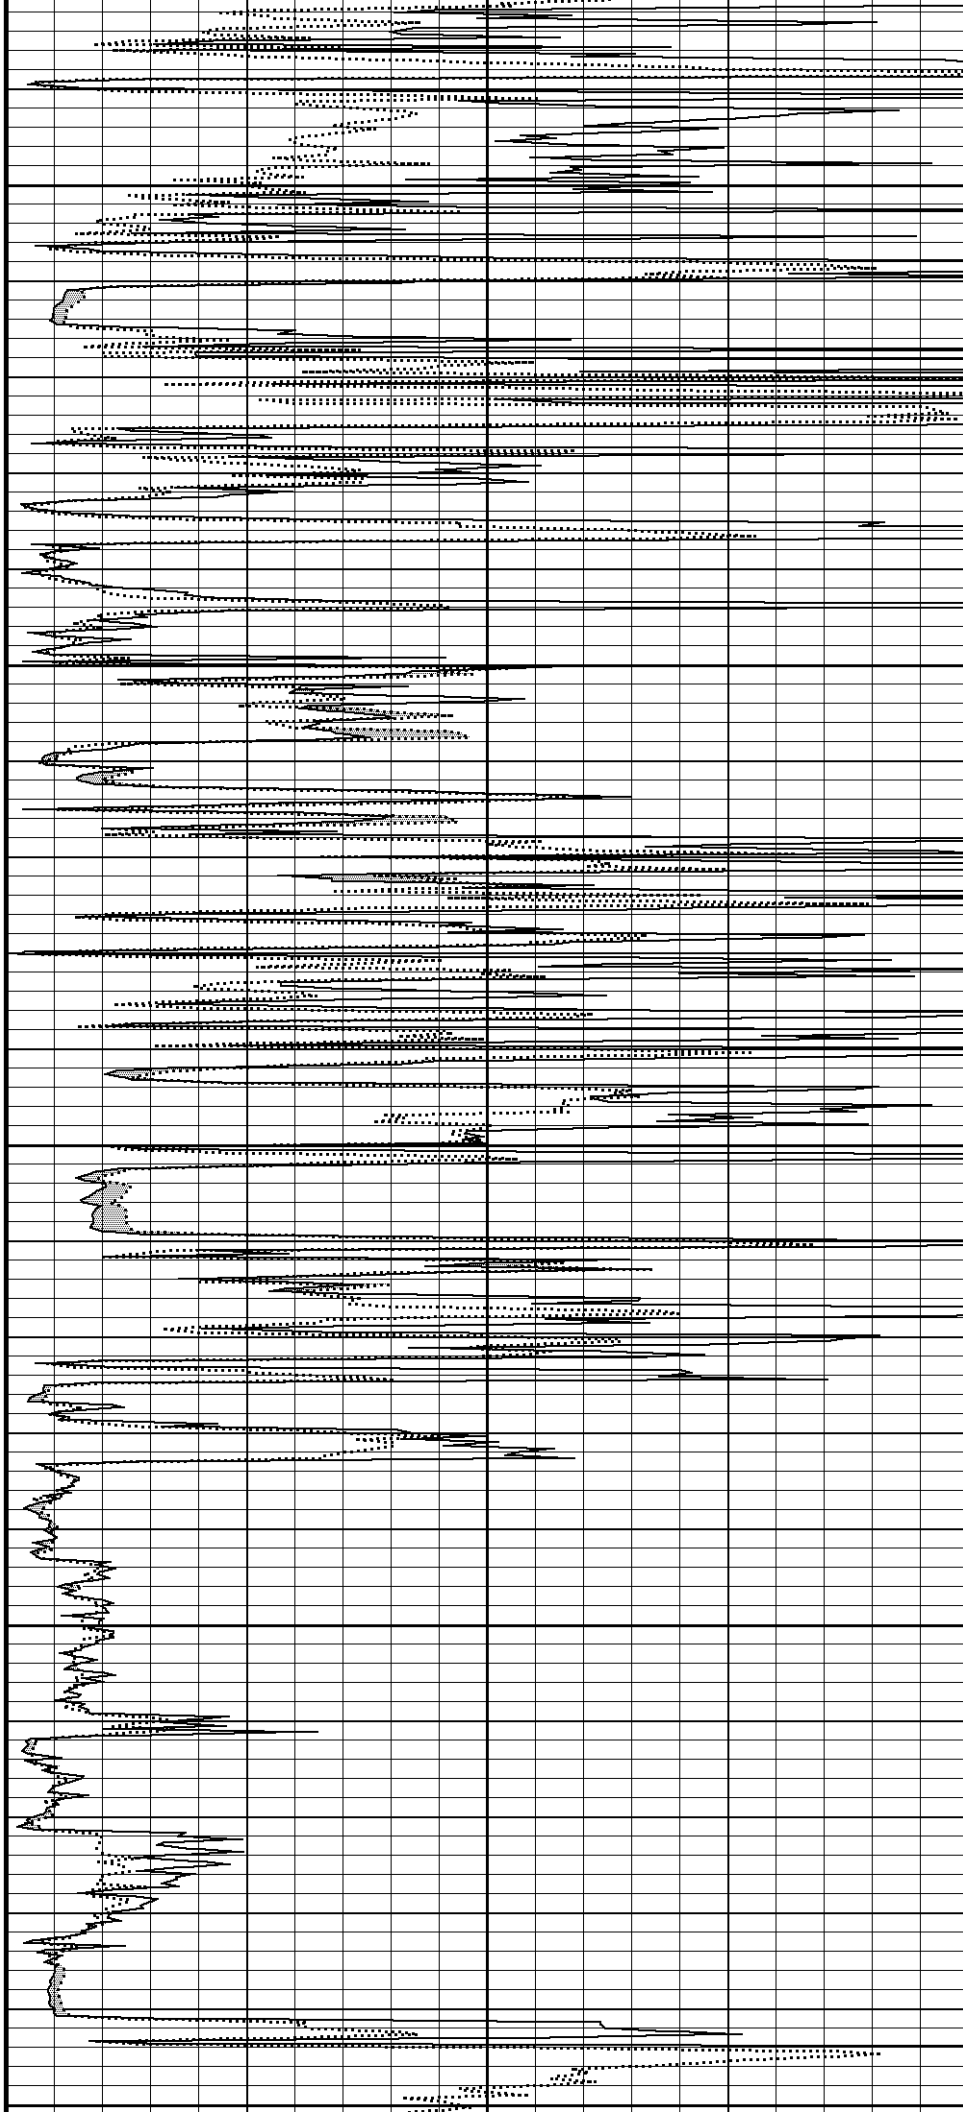

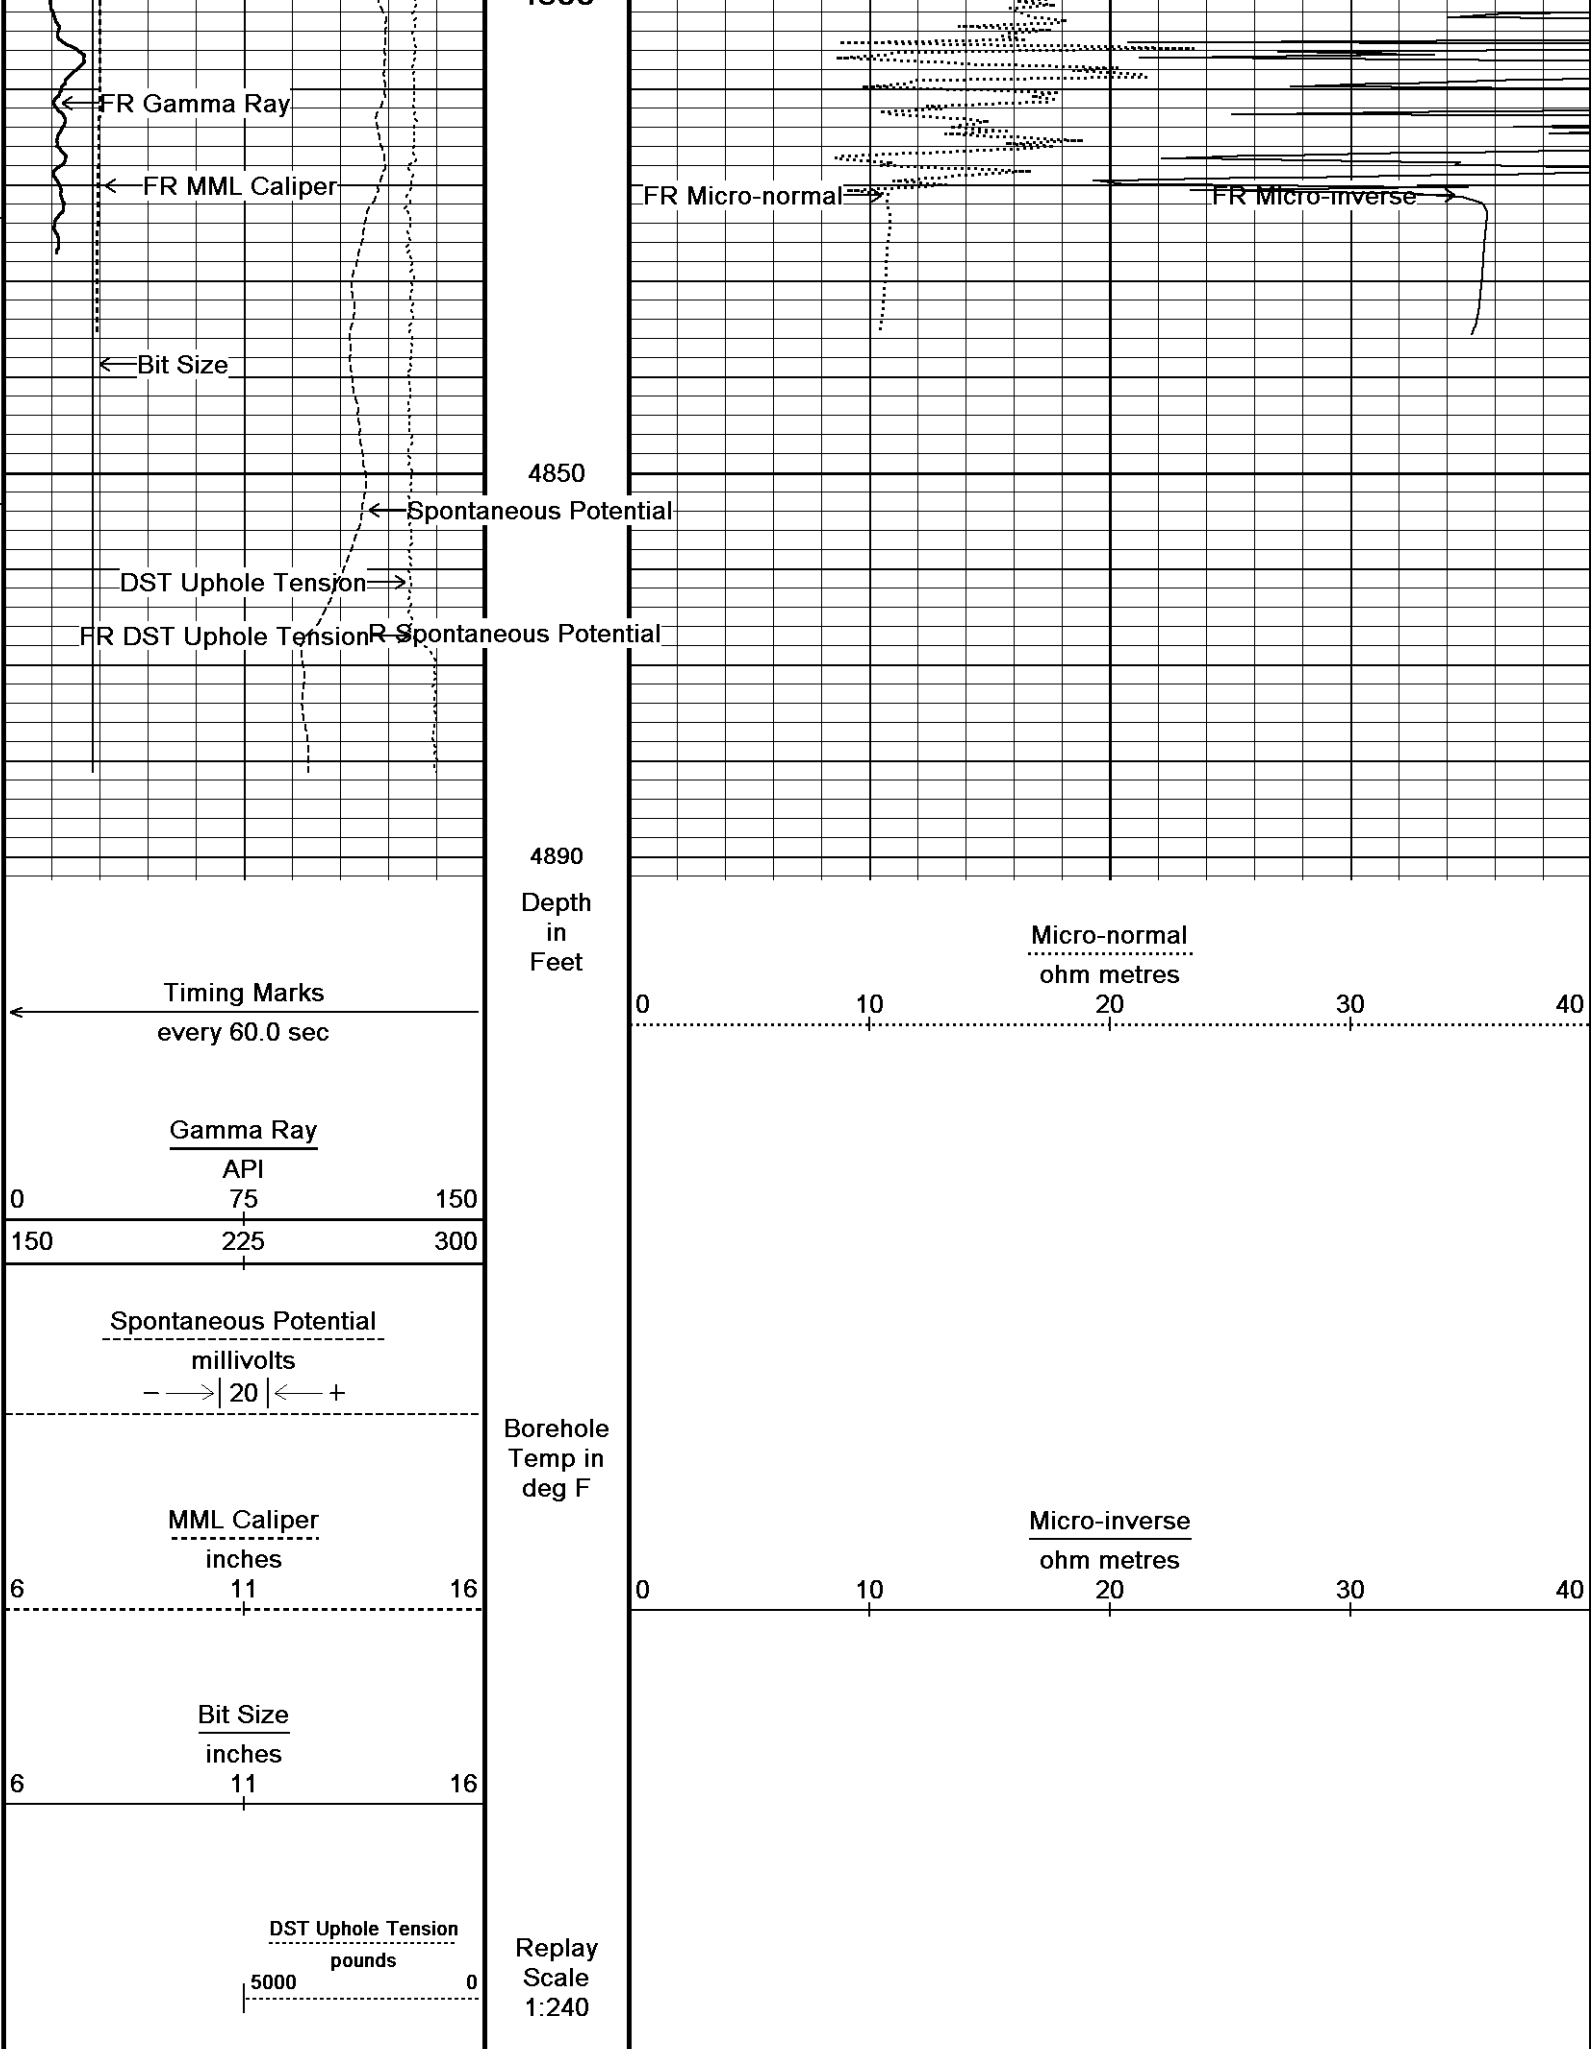

↑

5 INCH MAIN

↑

↓

REPEAT SECTION

↓


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 15-OCT-2012 11:34

Filename: C:\Minimus 13.02.6600\Data\Shakespeare...\Shakespeare Oil Company Janzen 1-26_001.dta

Recorded on 15-OCT-2012 08:45

System Versions: Logged with 13.02.6600 Plotted with 13.02.6600

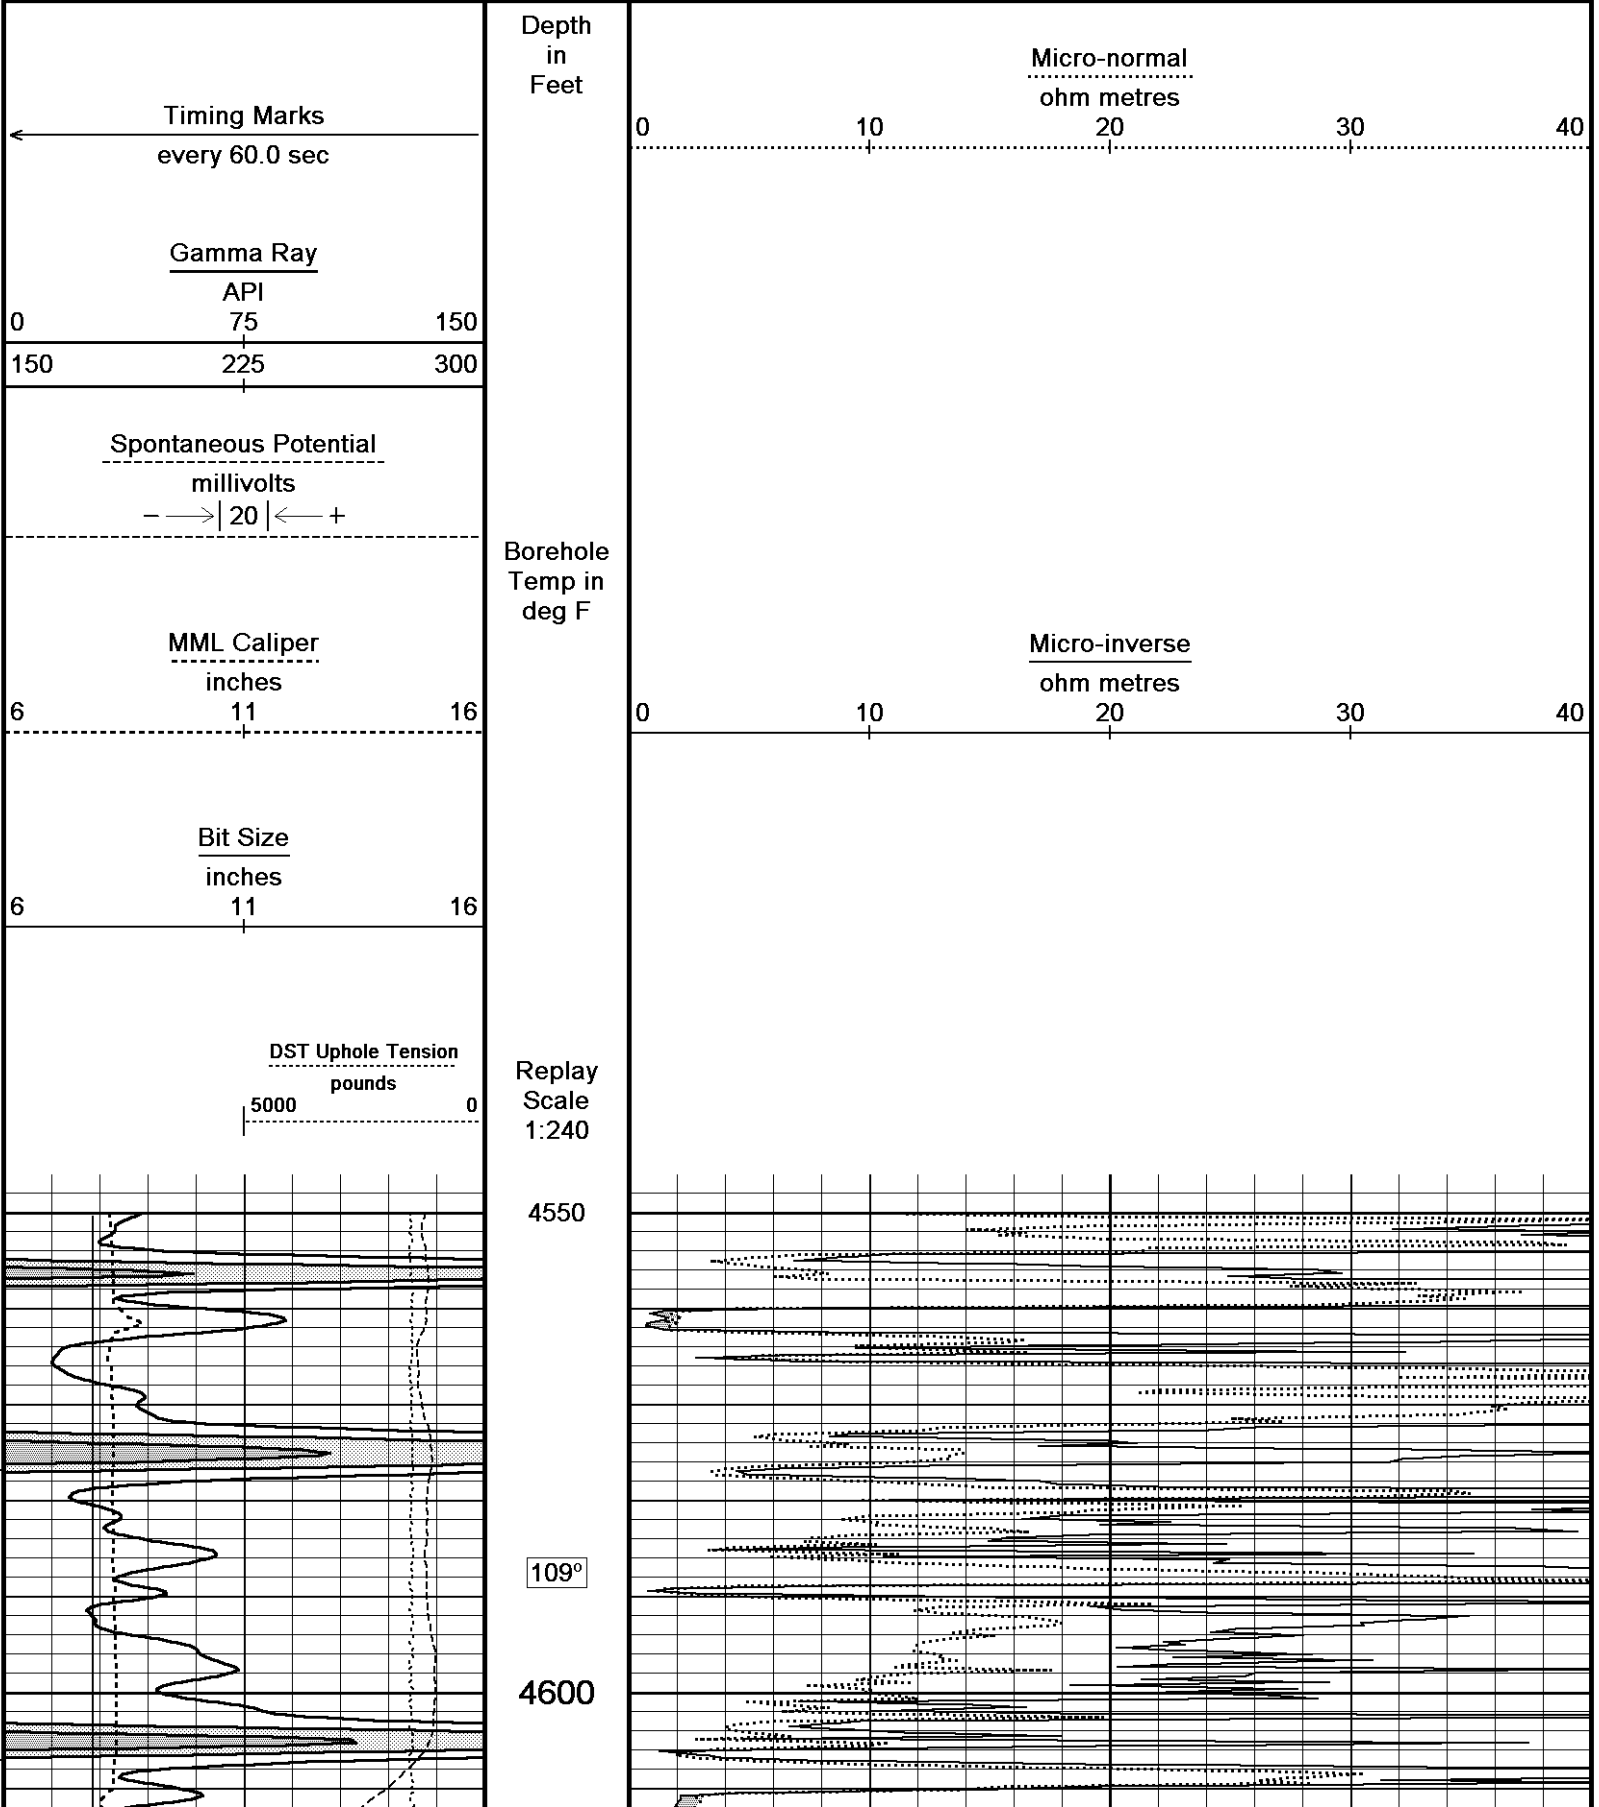

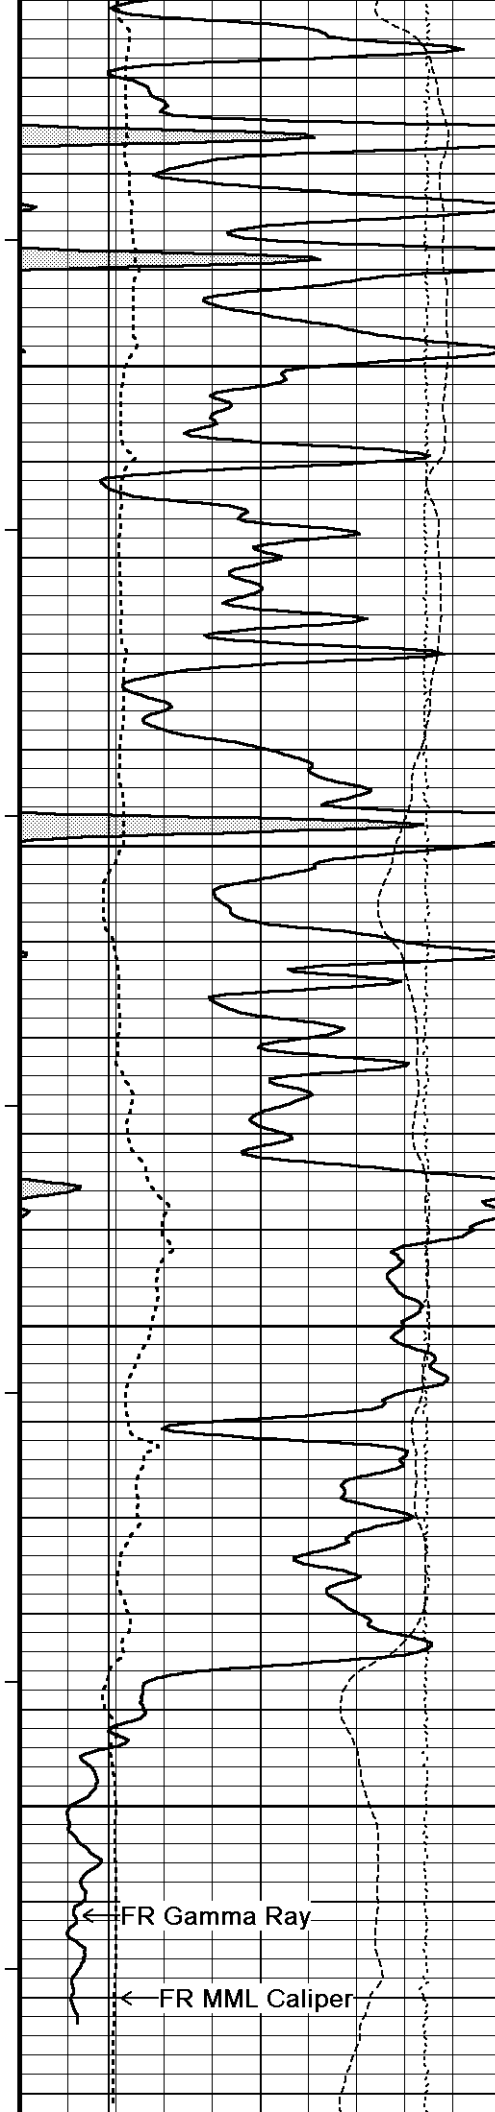

110°

4650

110°

4700

110°

4750

109°


4800

← FR Gamma Ray

← FR MML Caliper

FR Micro-normal →

FR Micro-inverse →

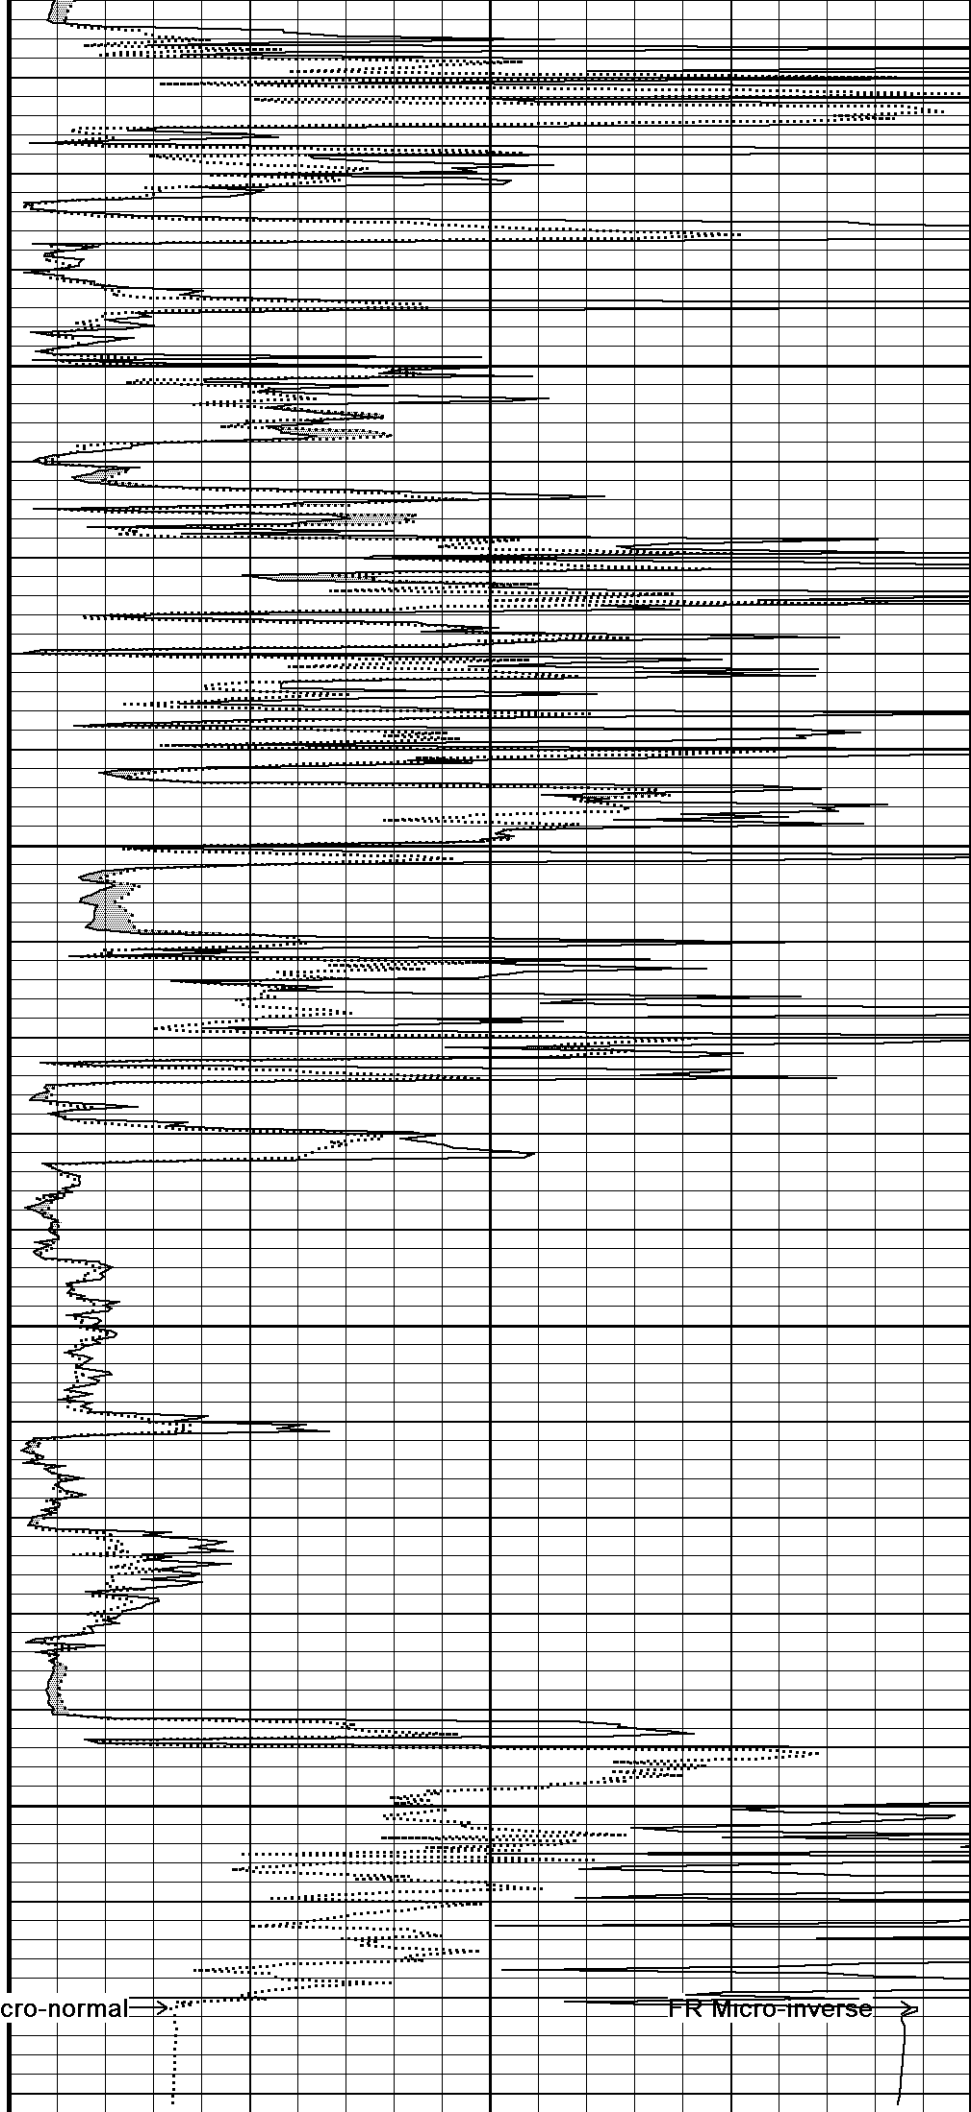

General Parameters		
Mud Resistivity	0.510	ohm-metres
Mud Resistivity Temperature	87.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	
Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	Density Caliper	
Rwa Parameters		
Porosity used	Base Density Porosity	
Resistivity used	Array Ind. Four Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	

Down-hole Tension Calibration SMS 0			Field Calibration on 10-SEP-2012 04:28
Reading No	Measured	Calibrated (lbs)	
1	15456.86	0.00	
2	16071.78	384.00	

Gamma Calibration MCG-D.K 442			Field Calibration on 14-OCT-2012 02:07
	Measured	Calibrated (API)	
Background	69	46	
Calibrator (Gross)	1152	771	
Calibrator (Net)	1083	725	

Gamma Constants MCG-D.K 442			Last Edited on 14-OCT-2012,08:31
Gamma Calibrator Number	GRC38		
Mud Density	1.12	gm/cc	
Caliper Source for Processing	Density Caliper		
Tool Position	Eccentred		
Concentration of KCl	0.00	kppm	

SP Calibration MCG-D.K 442			Field Calibration on 17-JUL-2012 16:34
	Measured	Calibrated (mV)	
Reference 1	100.2	100.0	
Reference 2	-99.9	-100.0	

High Resolution Temperature Calibration MCG-D.K 442			Field Calibration on 17-JUL-2012,16:35
	Measured	Calibrated(Deg F)	
Lower	50.00	50.00	
Upper	100.00	100.00	

High Resolution Temperature Constants MCG-D.K 442			Last Edited on
Pre-filter Length	11		

Caliper Calibration MML-A 16			Base Calibration on 30-SEP-2012 19:38 Field Calibration on 14-OCT-2012 02:01
Base Calibration			
Reading No	Measured	Calibrator Size (in)	
1	13888	5.98	
2	16946	7.97	
3	20169	9.86	
4	23996	11.92	
5	0	0.00	
6	N/A	N/A	
Field Calibration			
	Measured Caliper (in)	Actual Caliper (in)	
	6.03	5.98	

Micro Normal and Micro Inverse Calibration MML-A 16			Base Calibration on 30-SEP-2012 19:42 Field Check on 14-OCT-2012 02:02
Base Calibration			

Base Calibration		Measured		Calibrated (ohm-m)	
Channel	Resistor 1	Resistor 2	Resistor 1	Resistor 2	
Micro Normal	12.2	60.2	5.0	25.0	
Micro Inverse	15.6	78.4	5.0	25.0	
		Base Check (ohm-m)		Field Check (ohm-m)	
Micro Normal		62.9		62.9	
Micro Inverse		48.2		48.2	

Micro Normal and Micro Inverse Constants MML-A 16				Last Edited on 14-OCT-2012,02:01	
Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159				
Micro Normal K Factor	1.0000				
Micro Inverse K Factor	1.0000				
Standoff Offset	N/A		inches		

Neutron Calibration MDN-A.B 66				Base Calibration on 10-OCT-2012 14:12	
				Field Check on 14-OCT-2012 02:13	
Base Calibration					
		Measured		Calibrated (cps)	
	Near	Far	Near	Far	
	3058	95	3714	110	
Ratio	32.033		33.764		
Field Calibrator at Base					
			Calibrated (cps)		
			1673	2395	
Ratio	0.698				
Field Check					
			Calibrated (cps)		
			1678	2400	
Ratio	0.699				

Neutron Constants MDN-A.B 66			Last Edited on 14-OCT-2012,08:31		
Neutron Source Id	P0204NN				
Neutron Jig Number	5824NE				
Epithermal Neutron	No				
Caliper Source for Processing	Density Caliper				
Stand-off	0.00	inches			
Mud Density	1.00	gm/cc			
Limestone Sigma	7.10	cu			
Sandstone Sigma	4.26	cu			
Dolomite Sigma	4.70	cu			
Formation Pressure Source	Constant Value				
Formation Pressure	0.00	kpsi			
Temperature Source	Constant Value				
Temperature	68.00	degrees F			
Mud Salinity	0.00	kppm			
Salinity Correction	Not Applied				
Formation Fluid Salinity Source	Constant Value				
Formation Fluid Salinity	0.00	kppm			
Barite Mud Correction	Not Applied				

FE Calibration MFE-B.J 353			Base Calibration on 01-OCT-2012 09:16 Field Check on 14-OCT-2012 01:52	
Base Calibration				
	Measured	Calibrated (ohm-m)		
Reference 1	0.0	0.0		
Reference 2	965.2	126.8		
Base Check				280.7
Field Check				280.9

FE Constants MFE-B.J 353				Last Edited on 14-OCT-2012,08:30	
Running Mode		No Sleeve			
MFE K Factor		0.1268			
Caliper Source for FE correction		Density Caliper			
Caliper Value for FE correction		N/A		inches	
Rm Source for FE correction		Temperature Corr			
Temp. for Rm Corr.		MCG External Temperature			

Last Edited on 15-OCT-2012.06:36

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A		
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A	
Use 4' Waveform to derive TR	N/A	
Use 5' Waveform to derive TR	N/A	
Use 6' Waveform to derive TR	N/A	
3' Waveform Discriminator Level	N/A	mV
4' Waveform Discriminator Level	N/A	mV
5' Waveform Discriminator Level	N/A	mV
6' Waveform Discriminator Level	N/A	mV
3' Waveform Filter	N/A	
4' Waveform Filter	N/A	
5' Waveform Filter	N/A	
6' Waveform Filter	N/A	

Semblance Level	N/A	
Semblance Window Width	N/A	micro-sec
Sonic 1 Despiker	N/A	N/A
Sonic 2 Despiker	N/A	N/A

High Resolution Temperature Calibration MAI-A.A 167

Field Calibration on 17-JUL-2012,13:53

	Measured	Calibrated(Deg F)
Lower	1.00	33.80
Upper	11.00	51.80

High Resolution Temperature Constants MAI-A.A 167

Last Edited on 17-JUL-2012,13:49

Pre-filter Length	11
-------------------	----

Base Calibration

Test Loop Calibration

Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	17.3	474.2	9.3	966.2
2	6.3	388.4	7.6	821.4
3	3.3	259.4	5.2	566.0
4	1.9	133.0	2.6	279.2

Array Temperature 76.8 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	12.3	3841.0
2	0.0	0.0	29.3	3478.5
3	0.0	0.0	28.9	3054.3
4	0.0	0.0	19.7	2082.6
Deep	0.0	0.0	18.5	2049.7
Medium	0.0	0.0	42.1	3992.9
Shallow	0.0	0.0	42.5	5056.6

Array Temperature 0.0 64.3 Deg F

Induction Constants MAI-A.A 167

Last Edited on 14-OCT-2012,08:30

Induction Model		RtAP-WBM	
Caliper for Borehole Corr.		Density Caliper	
Hole Size for Borehole Correction		N/A	inches
Tool Centred		No	
Stand-off Type		Fins	
Stand-off		0.50	inches
Number of Fins on Stand-off		8.0000	
Stand-off Fin Angle		45.00	degrees
Stand-off Fin Width		0.5000	inches
Borehole Corr. Rm Source		Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start		0.0020	mhos/metre
Squasher Offset		N/A	mhos/metre
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

Caliper Calibration MPD-B 64

Base Calibration on 10-OCT-2012 12:35

Field Calibration on 14-OCT-2012 01:53

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	12128	3.99
2	20753	5.98
3	29254	7.97
4	37705	9.86
5	46206	11.82

5
646896
N/A11.92
N/A

Field Calibration

Measured Caliper (in)
5.95Actual Caliper (in)
5.98

Photo Density Calibration MPD-B 64

Base Calibration on 10-OCT-2012 12:54
Field Check on 14-OCT-2012 02:00Density Calibration
Base Calibration

Measured

Calibrated (sdu)

Near

Far

Near

Far

Reference 1

58951

32645

59556

30836

Reference 2

24760

2893

24941

2541

Field Check at Base

1181.6

1375.1

Field Check

1187.9

1371.9

PE Calibration

Base Calibration

Measured

Calibrated

WS

WH

Ratio

Ratio

Background

215

1053

Reference 1

22216

58751

0.381

0.371

Reference 2

6718

24623

0.276

0.272

Field Check at Base

215.0

1052.6

Field Check

215.0

1059.8

Density Constants MPD-B 64

Last Edited on 14-OCT-2012,08:30

Density Source Id

18235B

Nylon Calibrator Number

DNCE695

Aluminium Calibrator Number

DACD698

Density Shoe Profile

8 inch

Caliper Source for Processing

Density Caliper

PE Correction to Density

Not Applied

Mud Density

1.12

gm/cc

Mud Density Z/A Multiplier

1.11

Mud Filtrate Density

1.00

gm/cc

Dry Hole Mud Filtrate Density

1.00

gm/cc

DNCT

0.00

gm/cc

CRCT

0.00

gm/cc

Density Z/A Correction

Hybrid

Matrix Density (gm/cc)

Depth (ft)

2.87

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

DOWNHOLE EQUIPMENT

C:\Minimus 13.02.6600\Data\Shakespeare Oil Company Janzen 1-26\Shakespeare Oil Company Janzen 1-26_001.dta

Compact Comms Gamma

MCG-D.K 442 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in



55.39 ft

52.48 ft

GRGC - Gamma Ray

CGXT - MCG External Temperature

Compact Micro-log
MML-A 16 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Neutron
MDN-A.B 66 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in


Compact Density/Caliper
MPD-B 64 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focussed Electric
MFE-B.J 353 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Sonic
MSS-A.A 55 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in

Compact Induction
MAI-A.A 167 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 60.68 ft Weight: 456.4 lb

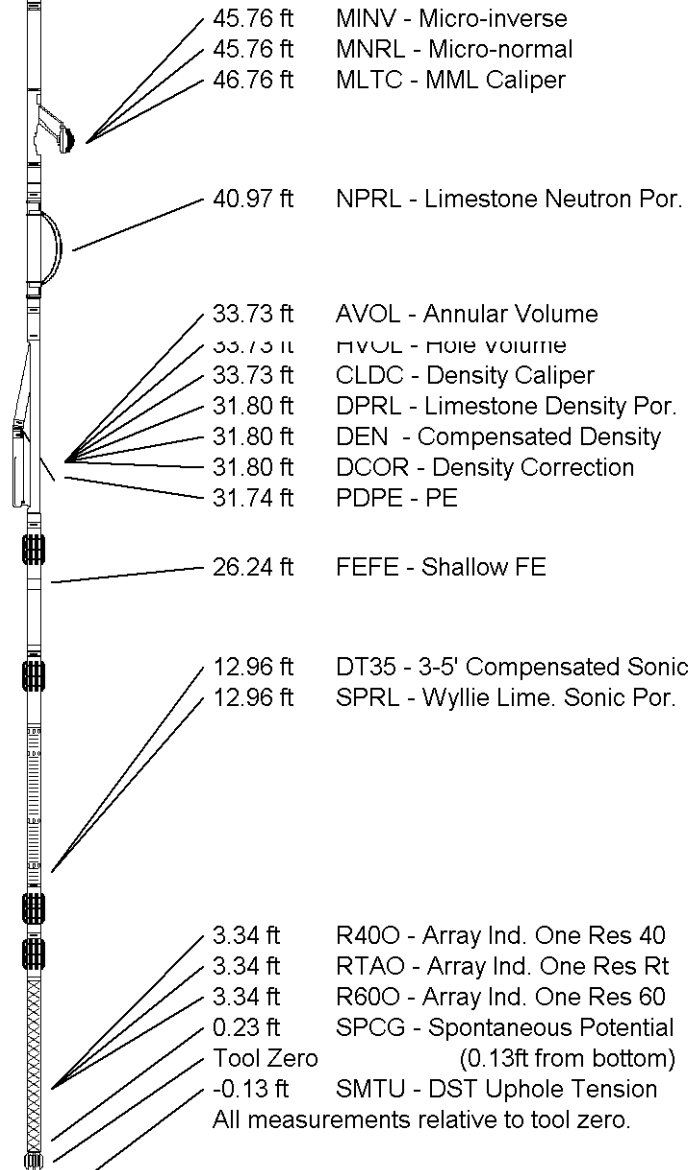

COMPANY	SHAKESPEARE OIL COMPANY, INC.
WELL	JANZEN #1-26
FIELD	WILDCAT
PROVINCE/COUNTY	SCOTT
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	3119.00	feet	First Reading	4821.00	feet
Elevation Drill Floor	3118.00	feet	Depth Driller	4870.00	feet
Elevation Ground Level	3109.00	feet	Depth Logger	4867.00	feet



Weatherford®

MICRORESISTIVITY LOG