



SUPERIOR
Hays,
Kansas

MICRO LOG

Company VINCENT OIL CORP.		Company VINCENT OIL CORP.	
Well LIX #2-4		Well LIX #2-4	
Field		Field	
County FORD		County FORD	
State KANSAS		State KANSAS	
Location: 690' FSL & 90' FEL		API # : 15-057-20815-0000	
SEC 4 TWP 26S RGE 24W		DIL	
Permanent Datum	GROUND LEVEL	Elevation	2520
Log Measured From	KELLY BUSHING 12' A.G.L.	K.B. 2532	
Drilling Measured From	KELLY BUSHING	D.F. 2530	
		G.L. 2520	
Date 6/27/12			
Run Number ONE			
Depth Driller 4957			
Depth Logger 4960			
Bottom Logged Interval 4958			
Top Log Interval 4050			
Casing Driller 8 5/8" @ 296			
Casing Logger 295			
Bit Size 7 7/8			
Type Fluid in Hole CHEMICAL MUD	CHLORIDES 3,900 PPM		
Density / Viscosity 9.2/48			
pH / Fluid Loss 9.07/6			
Source of Sample FLOWLINE			
Rm @ Meas. Temp 0.90 @ 83F			
Rmf @ Meas. Temp 0.68 @ 83F			
Rmc @ Meas. Temp 1.08 @ 83F			
Source of Rmf / Rmc MEASURED			
Rm @ BHT 0.60 @ 125F			
Time Circulation Stopped 15 HOURS			
Time Logger on Bottom			
Maximum Recorded Temperature 125F			
Equipment Number 680			
Location HAYS, KS.			
Recorded By JEFF GRONEMEG			
Witnessed By KEN LeBLANC			


<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
WRIGHT, KS - 2 MILES NORTH ON HWY 283 TO HORSESHOE RD
2 MILES WEST - NORTH INTO

Charted by:		Depth in Feet scaled 1:2.15				
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
		TBHV				
		0 (ft3)				
		10				

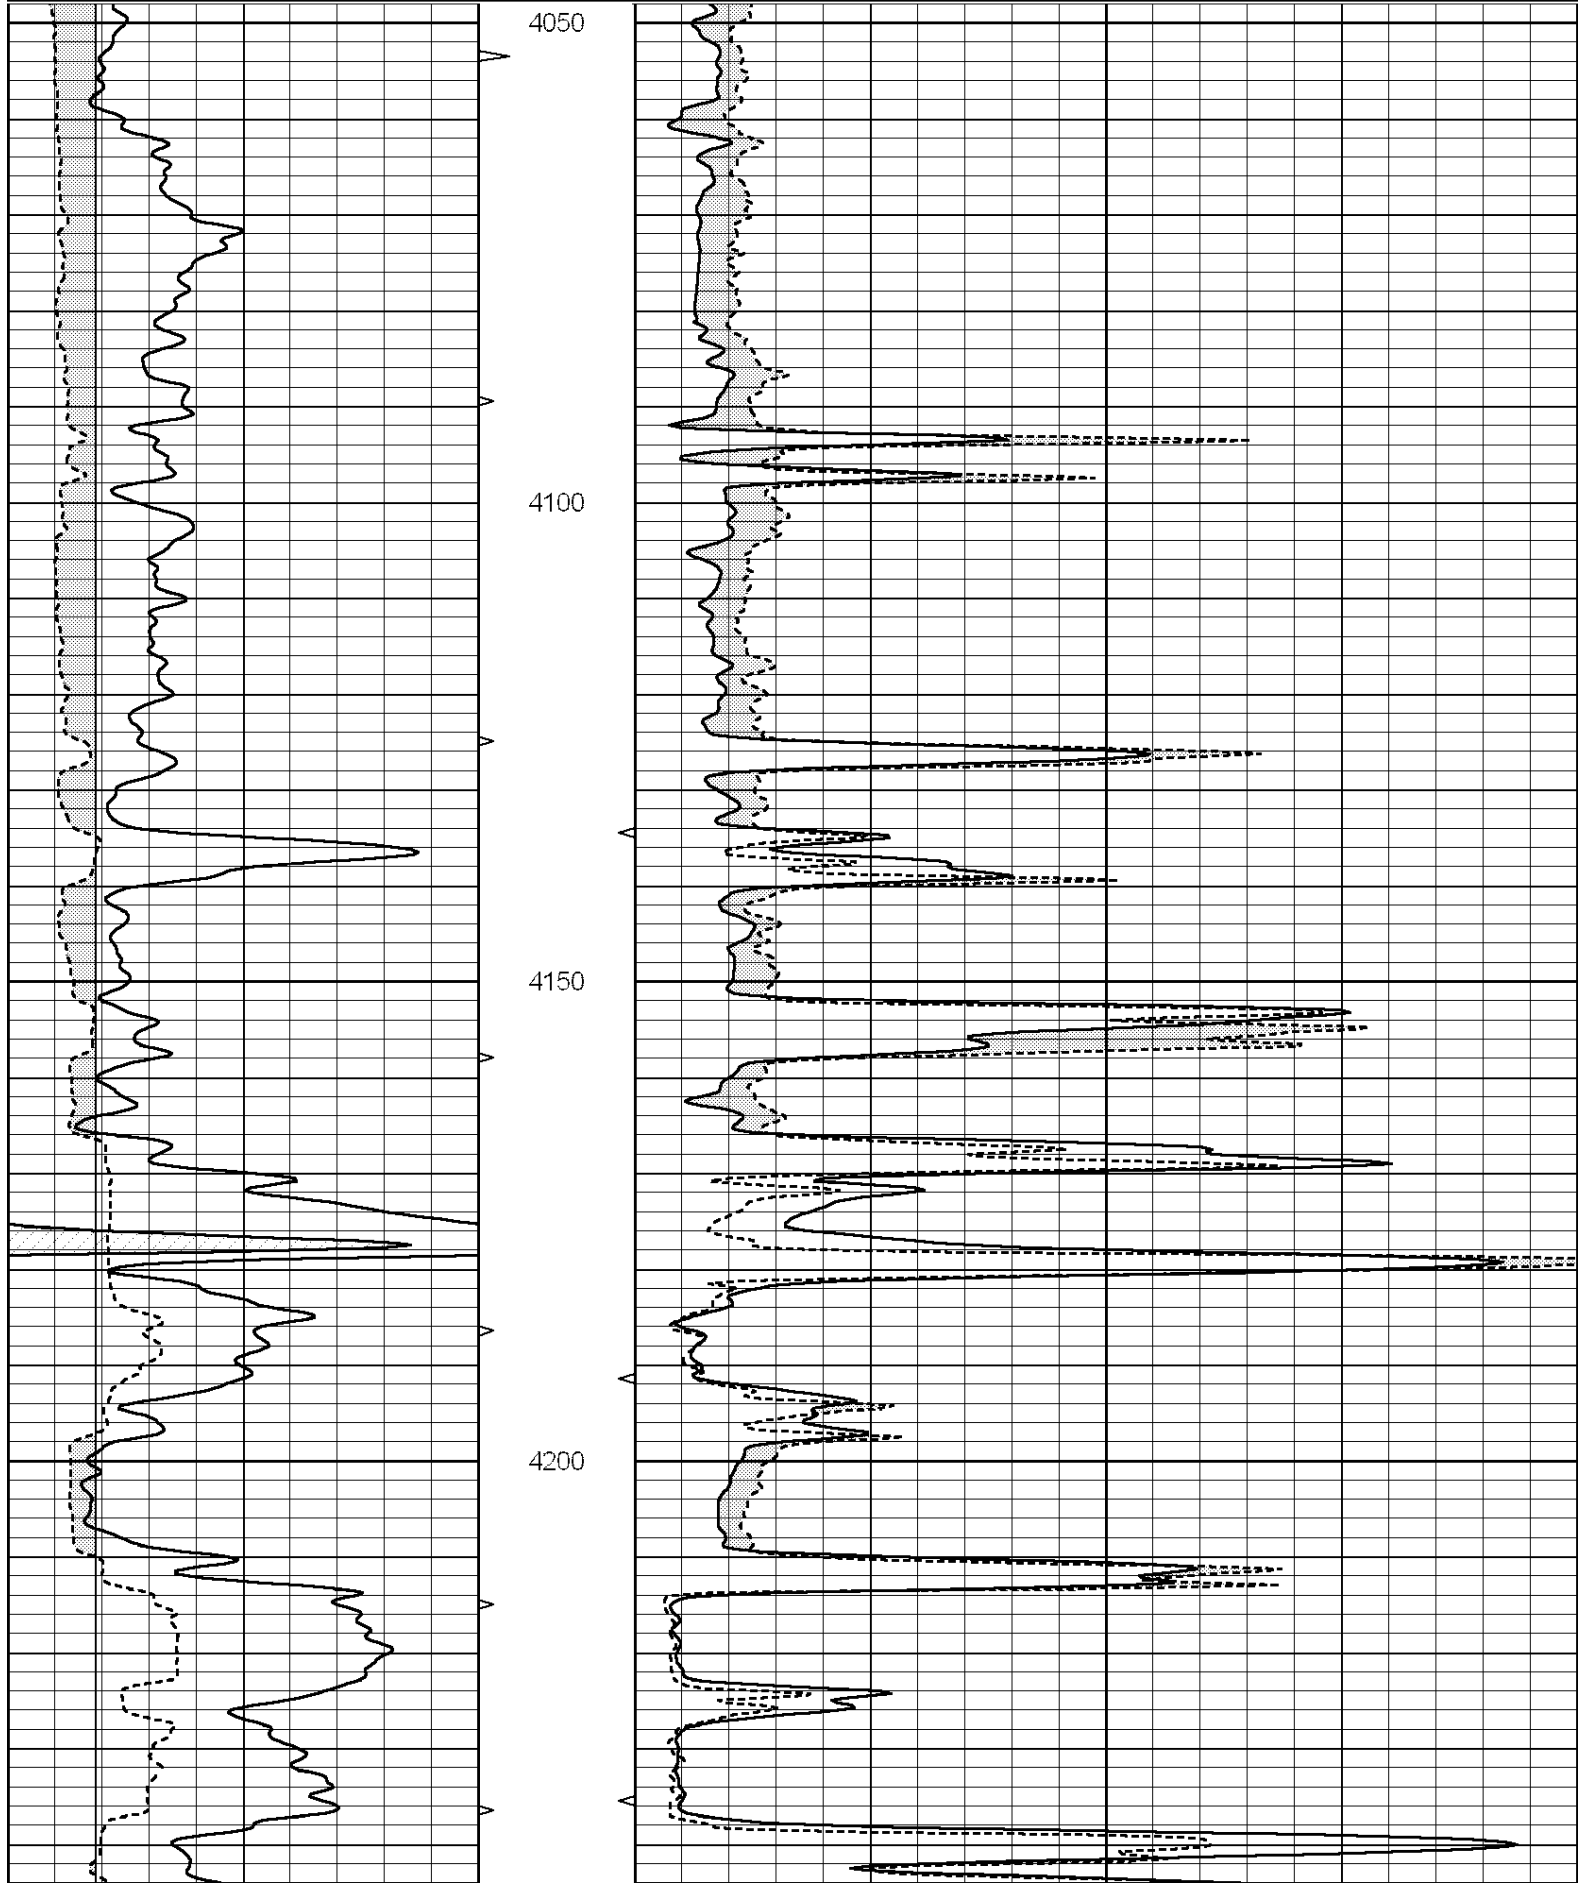

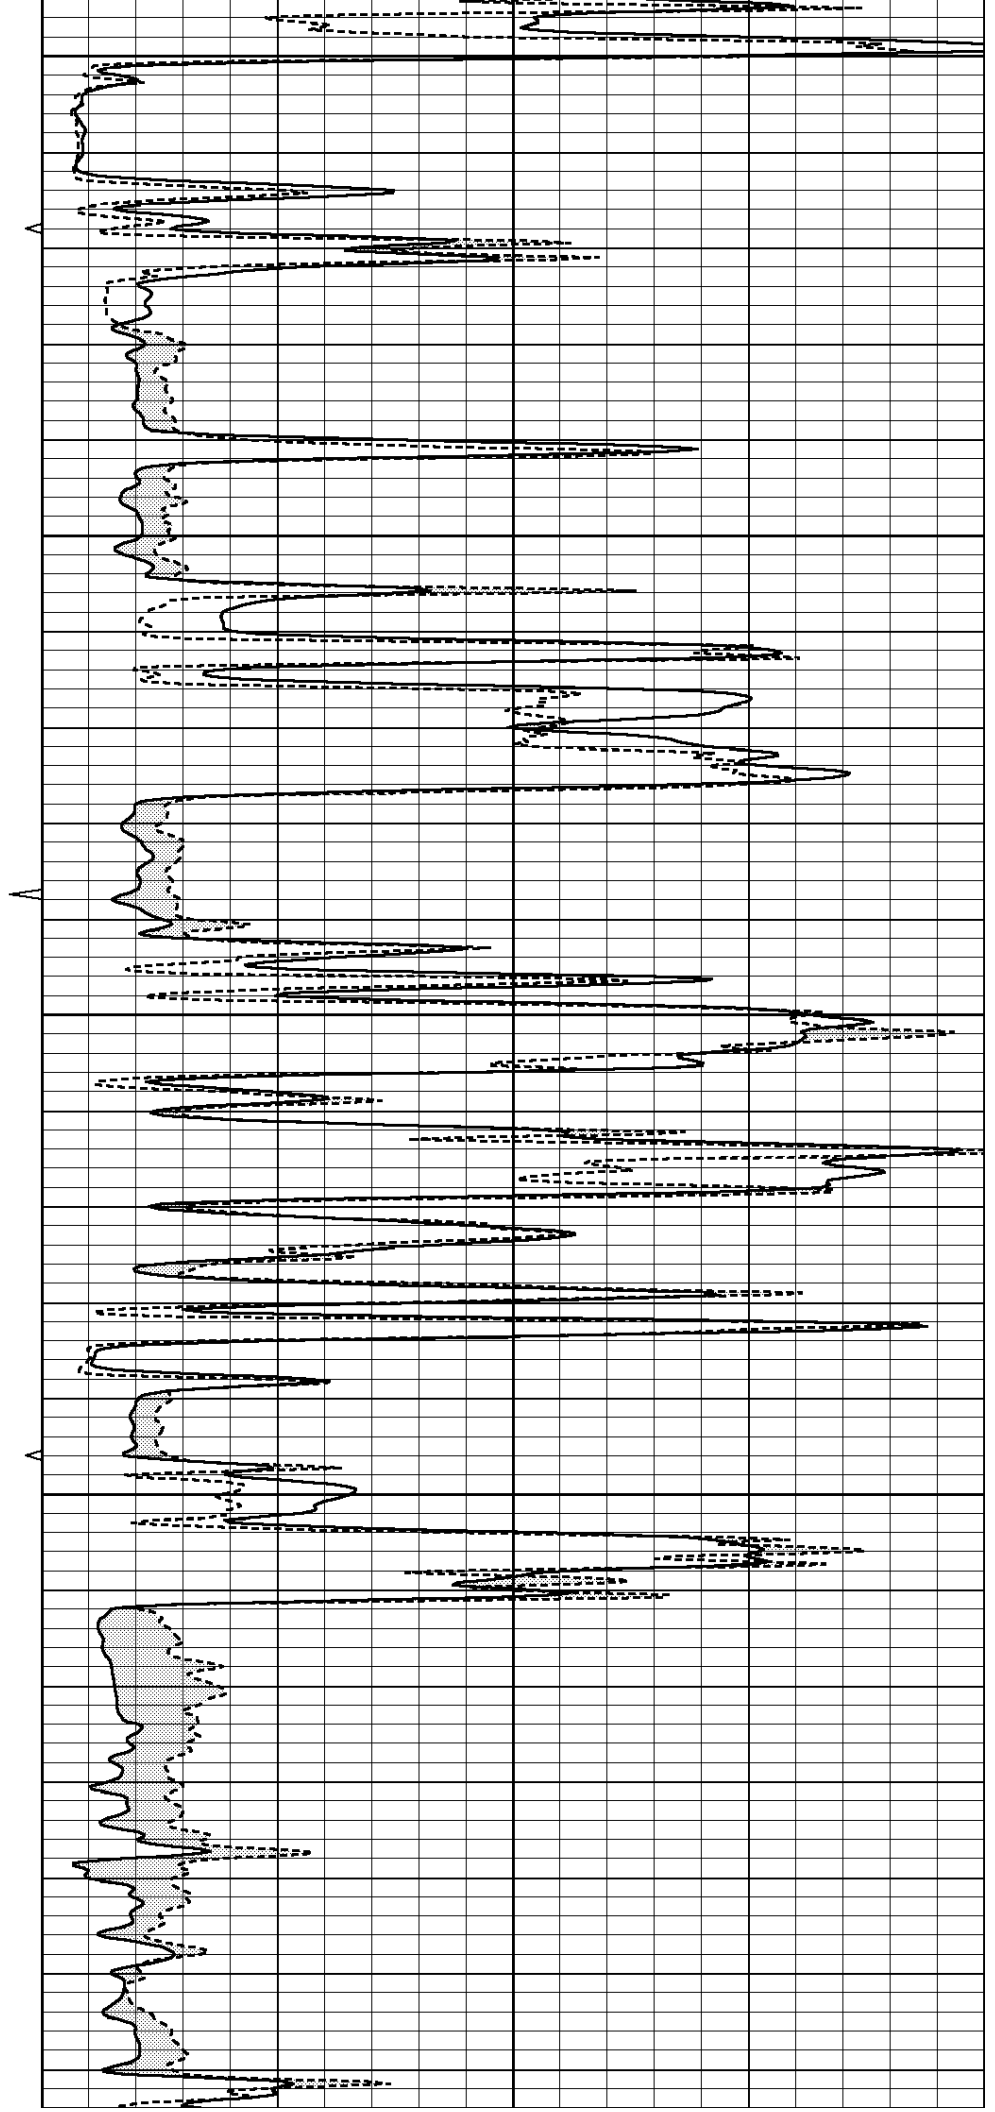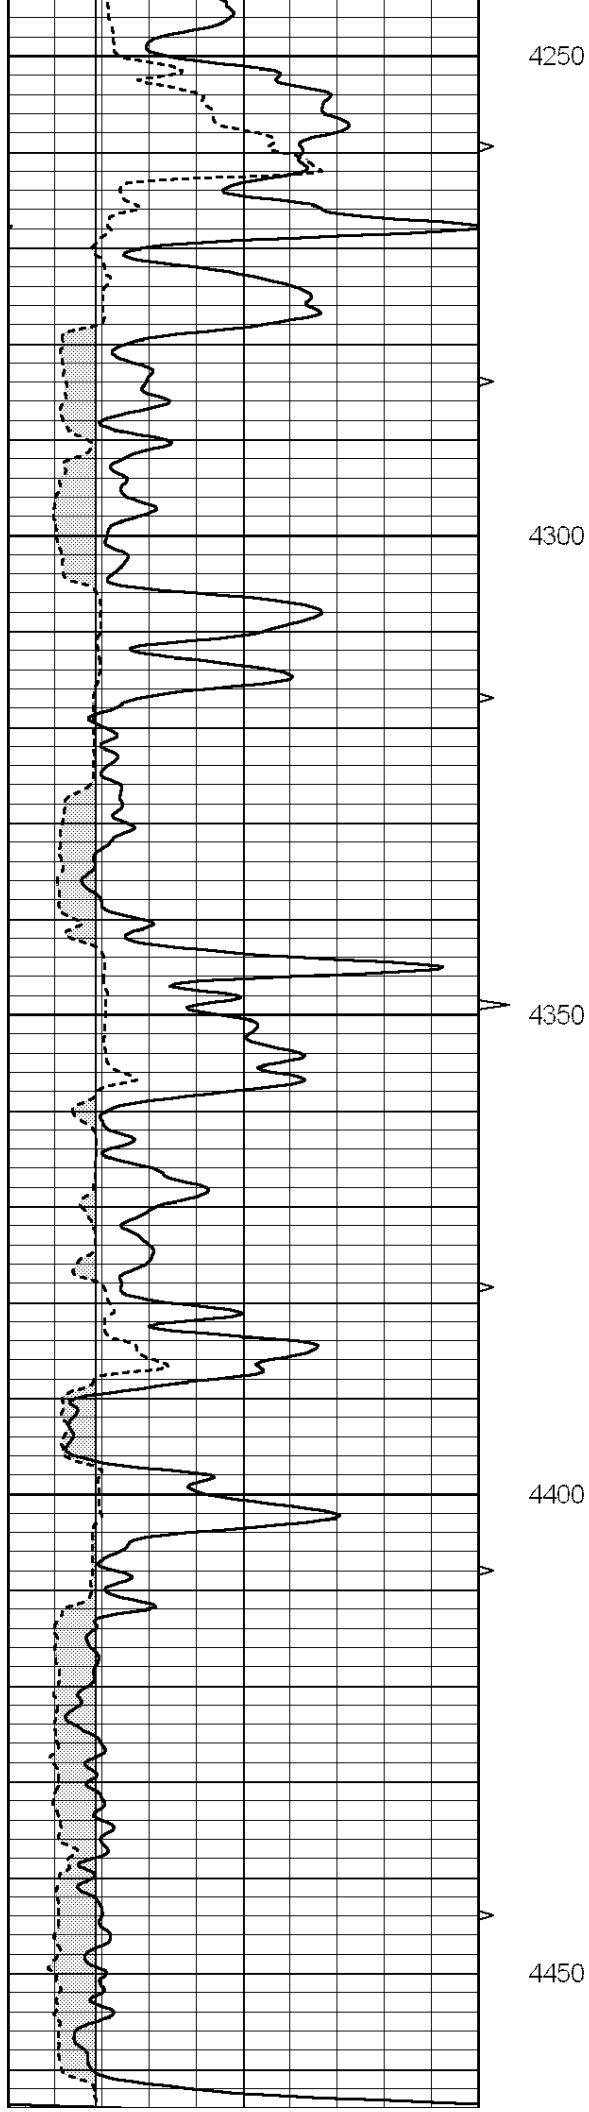

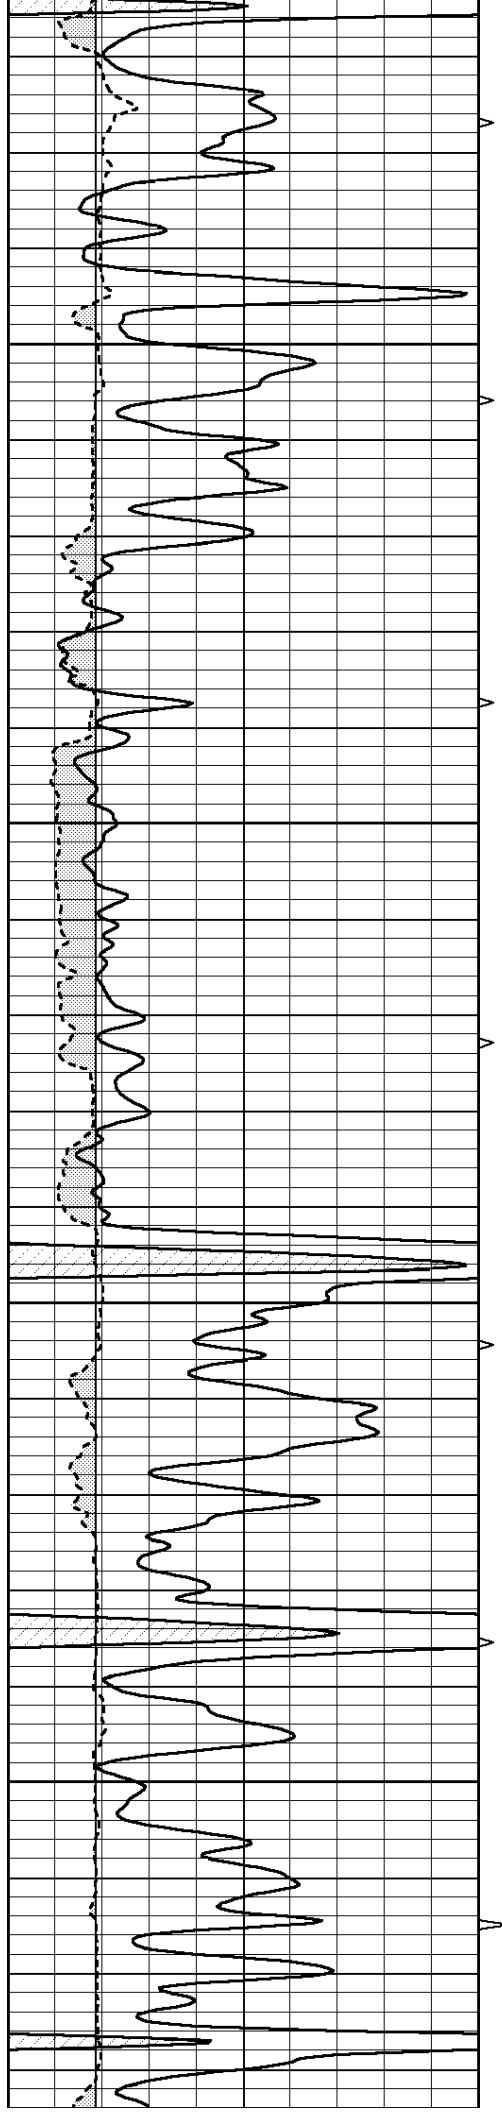



4500

4550

4600

4650

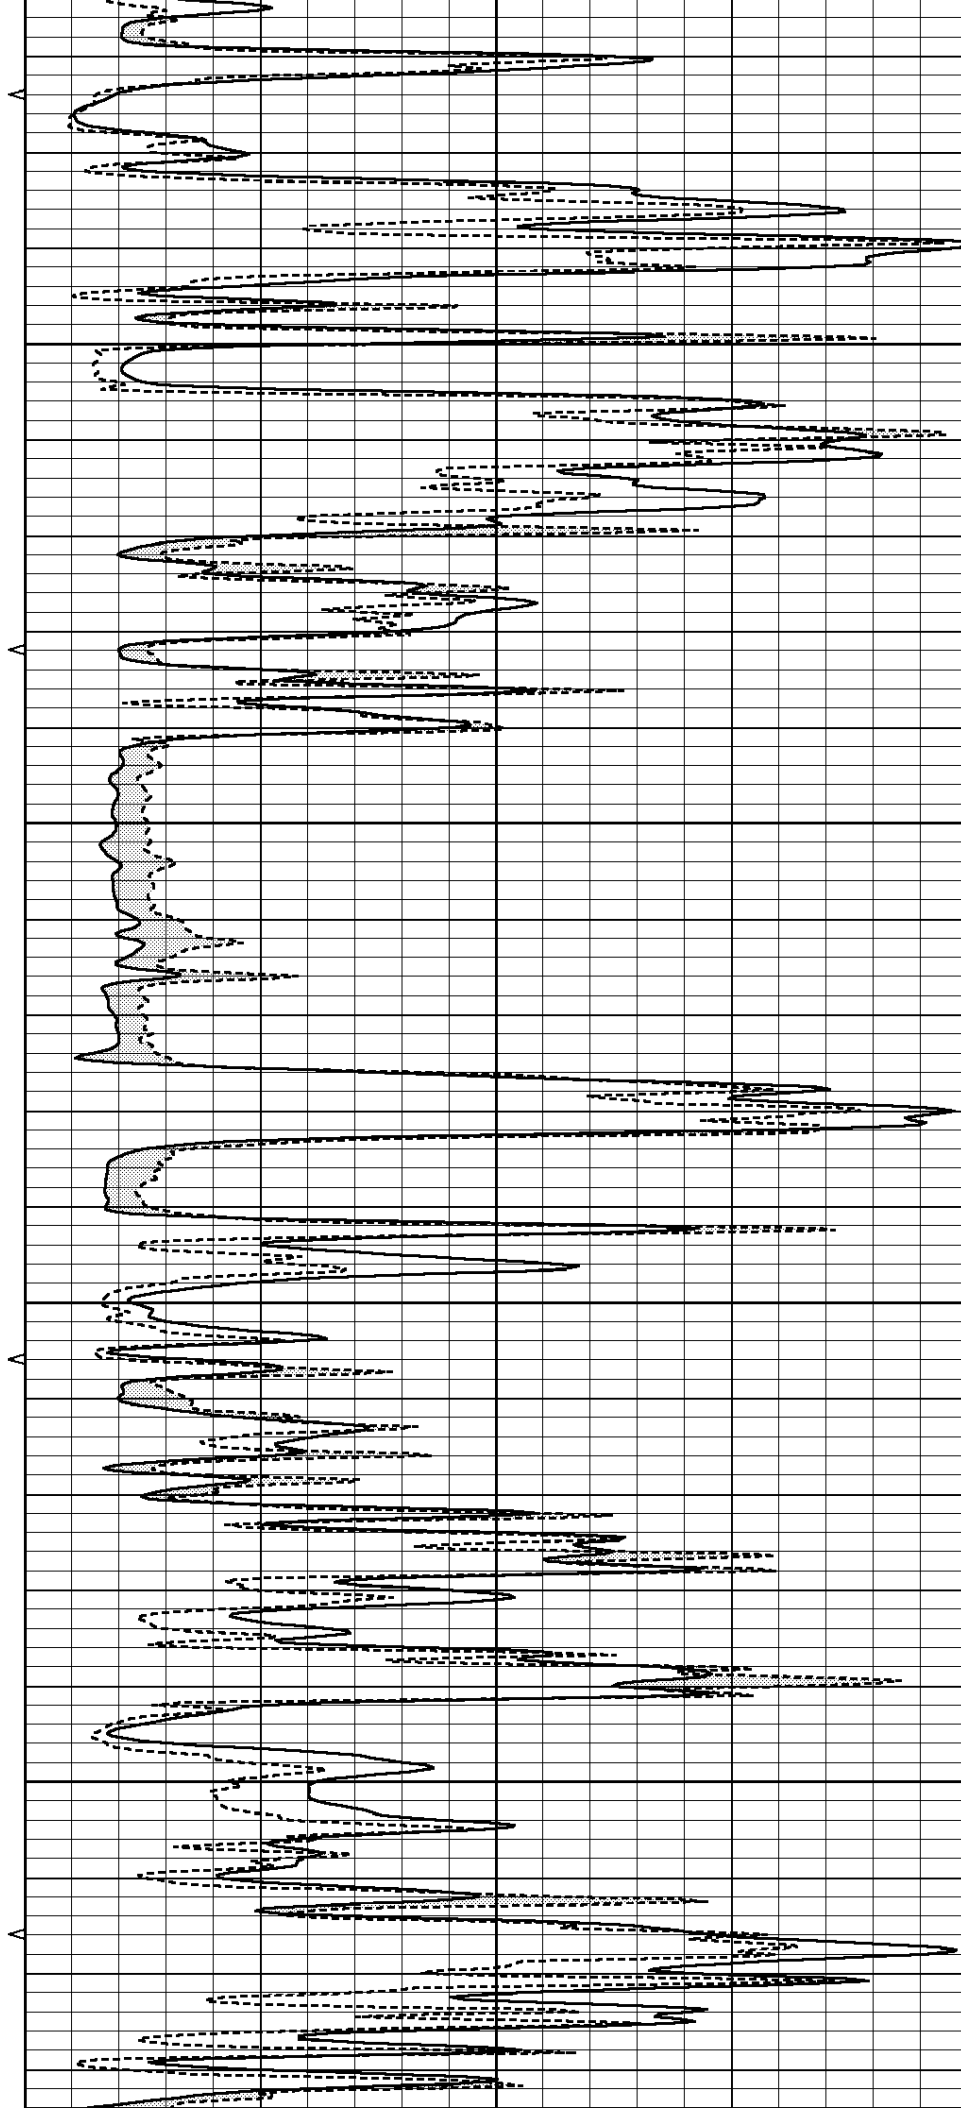

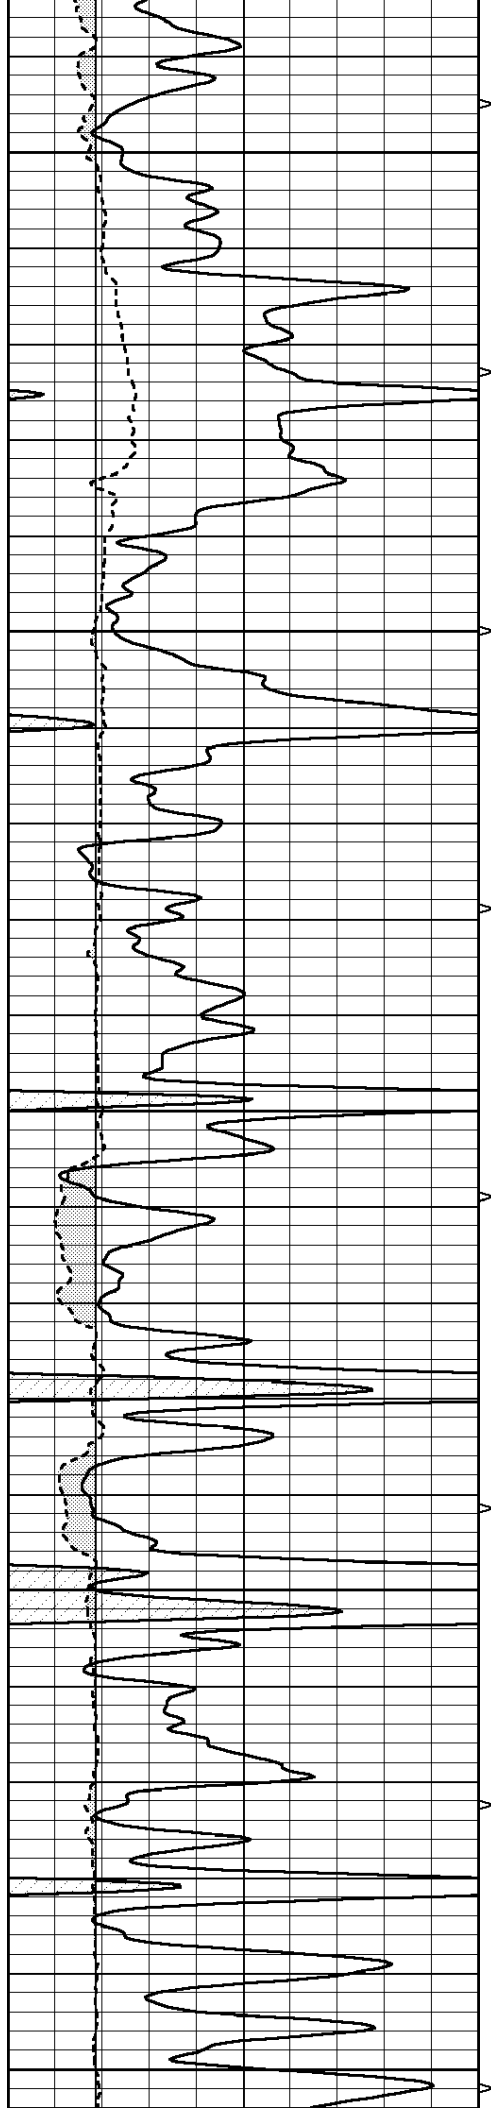

4700


4750


4800

4850

4900

ΔR_{HIV}

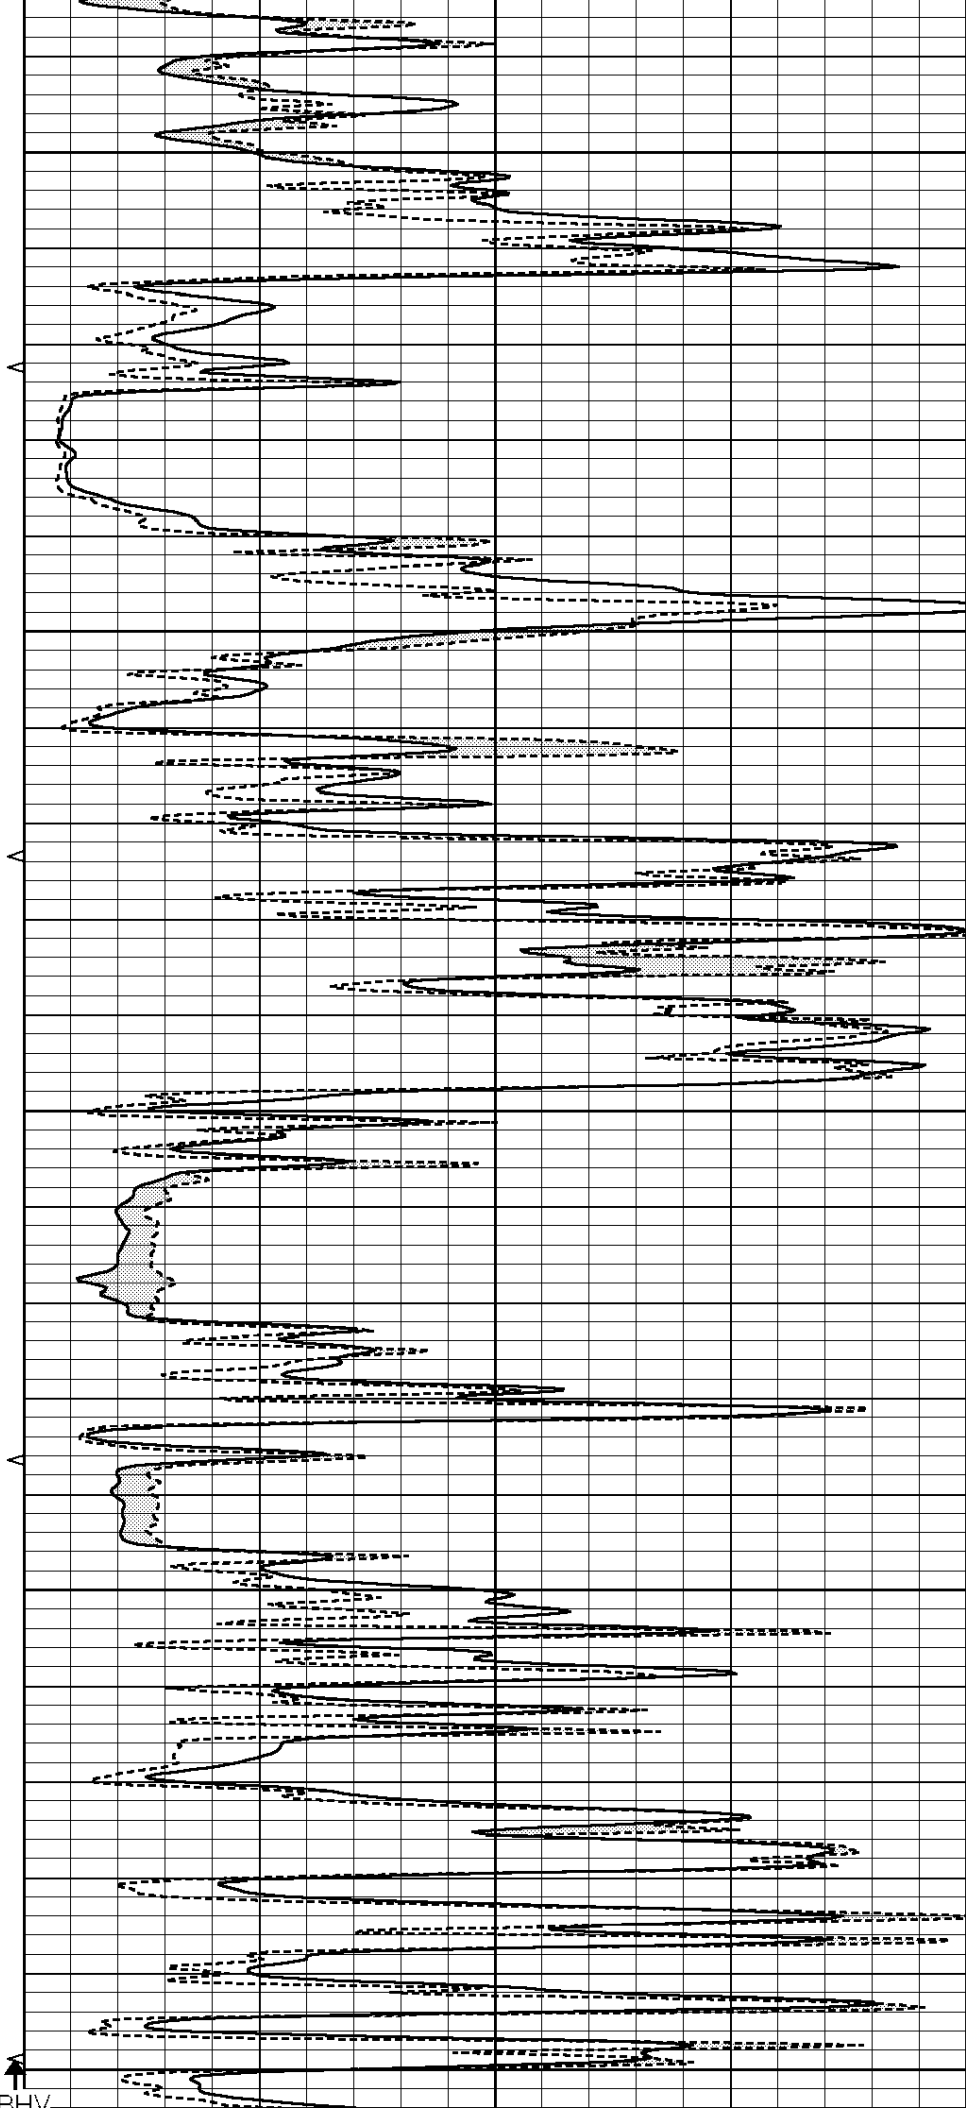

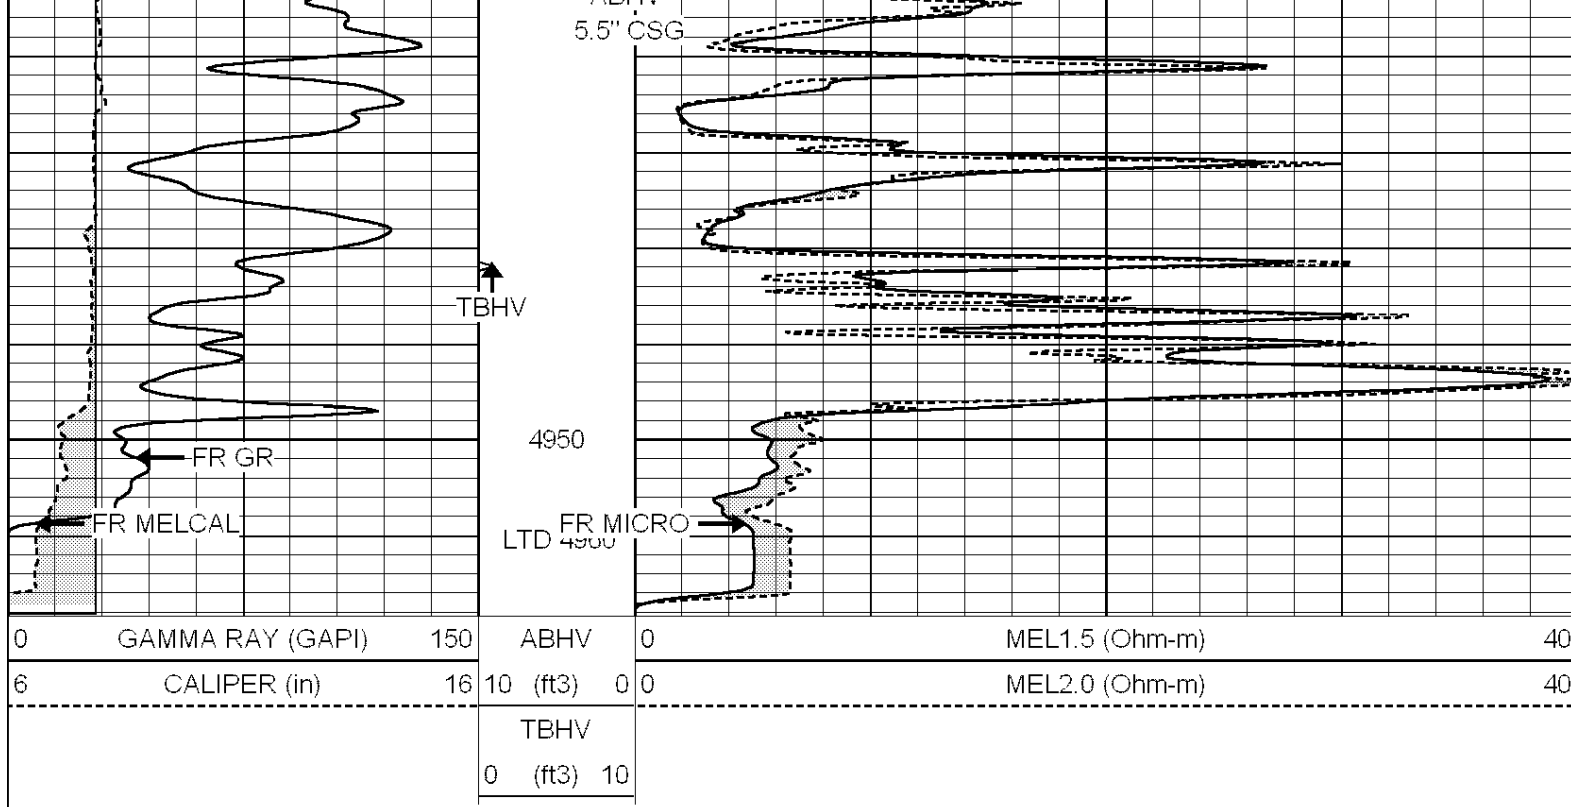



SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 009453pe.db
 Dataset Pathname: pass1.2
 Presentation Format: _micro
 Dataset Creation: Wed Jun 27 12:48:36 2012 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

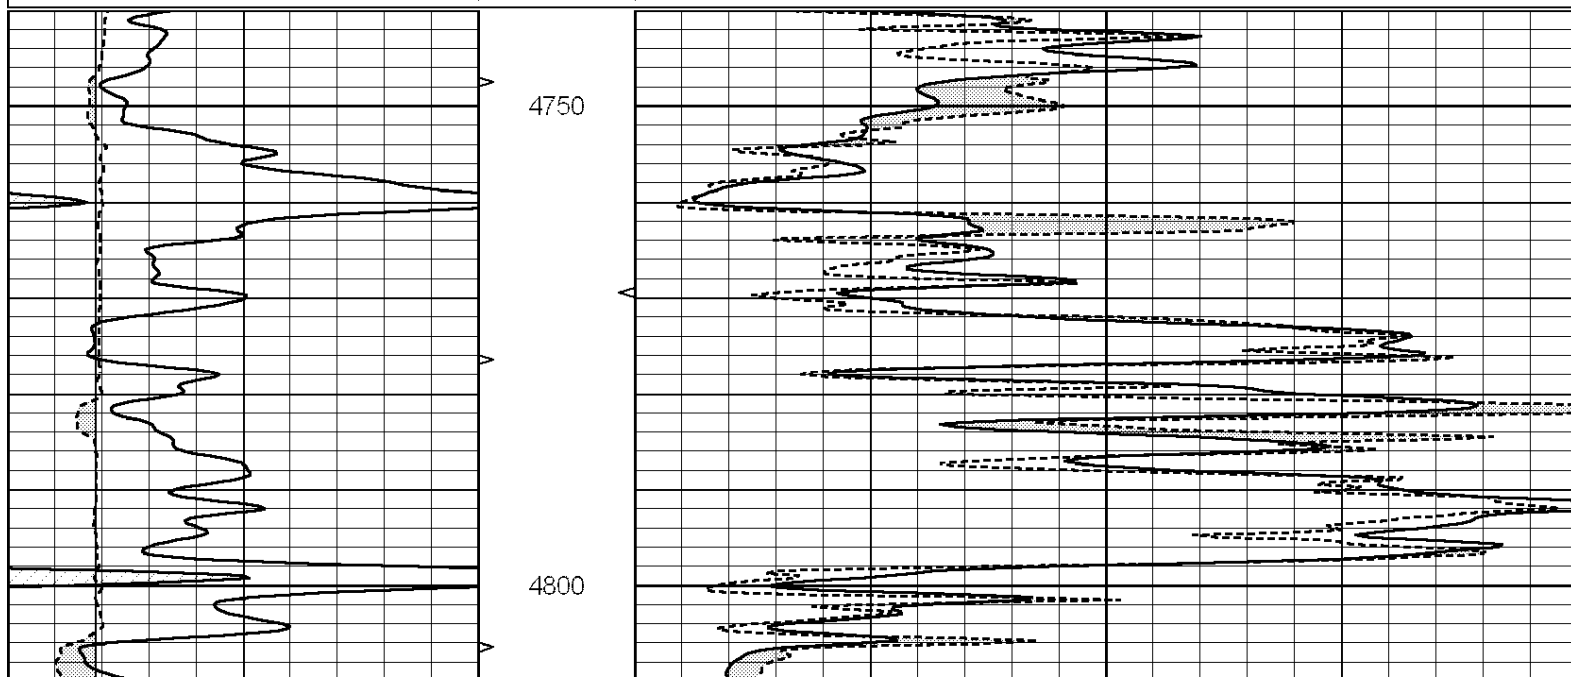

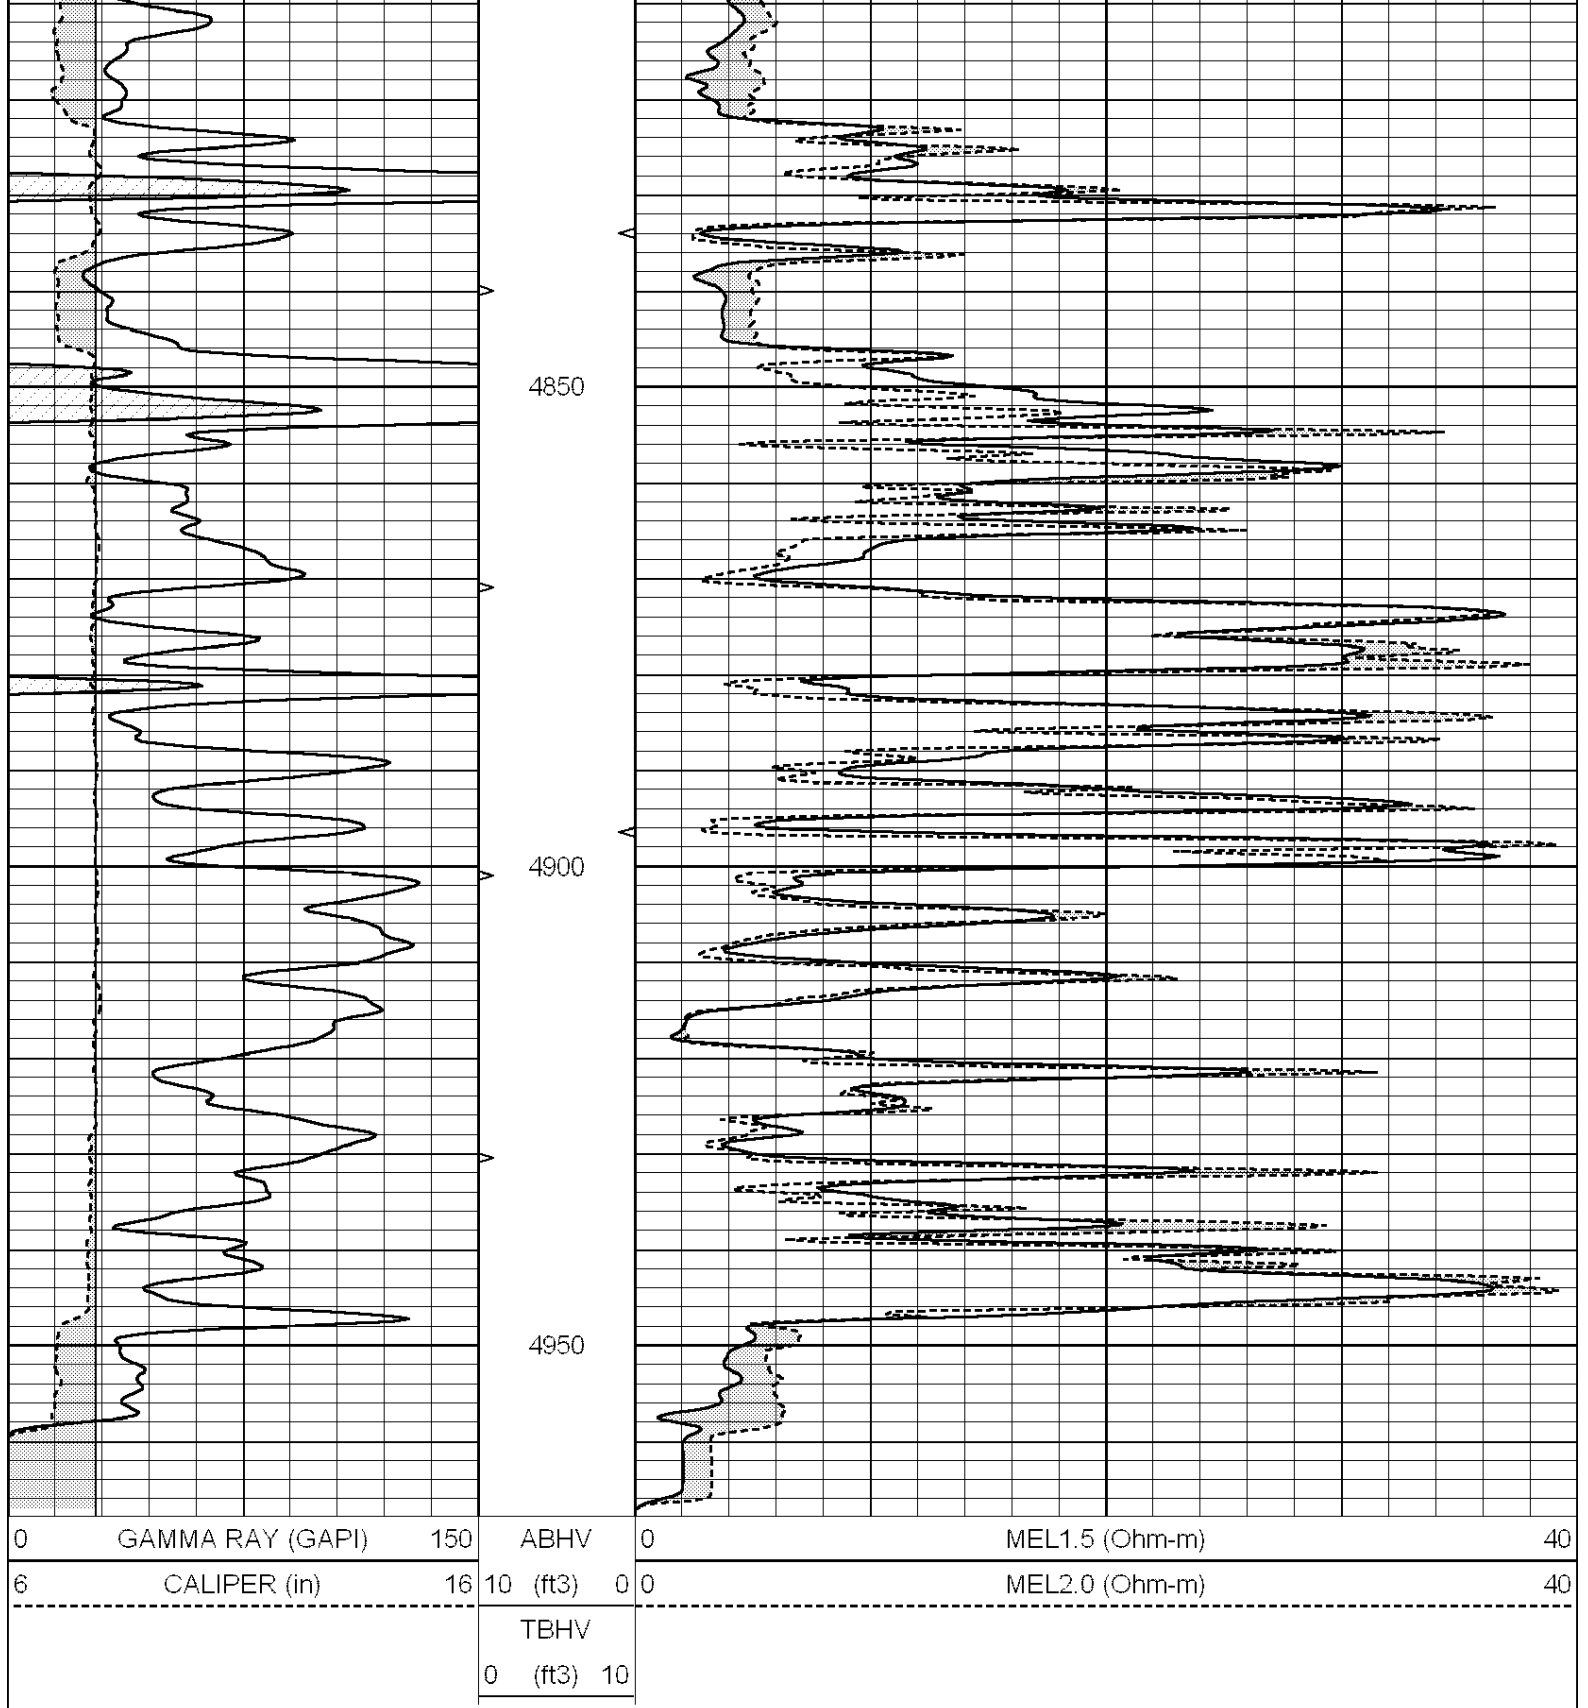

Calibration Report

Database File: 009453pe.db
Dataset Pathname: pass2.5
Dataset Creation: Wed Jun 27 11:39:00 2012

MICRO Calibration Report

Serial Number: MICRO6
Tool Model: PROBE
Performed: Wed May 23 05:16:50 2012

Caliper Calibration:	Gain=6.253	Offset=-1.308
References	Low Cal 5.800	High Cal 13.000
Readings	1.178	2.330
1.5" Calibration:	Gain=30.075	Offset=0.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.196
2" Calibration:	Gain=30.041	Offset=0.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.006	0.913
Gamma Ray Calibration Report		
Serial Number:	#8	
Tool Model:	OPEN	
Performed:	Mon Jun 13 16:56:43 2011	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	175.0	cps
Sensitivity:	0.8371	GAPI/cps