

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-067-20397-00-00
Spot: SWSWSWNE Sec/Twnshp/Rge: 18-27S-35W
2340 feet from N Section Line, 2490 feet from E Section Line
Lease Name: FORT A Well #: 2
County: GRANT Total Vertical Depth: 3070 feet

Operator License No.: 5447
Op Name: OXY USA, INC.
Address: 5 E. GREENWAY PLZ PO BOX 27570
HOUSTON, TX 77227

CIBP Size: feet: 2800 WITH 2 SX CMT
PROD Size: 4.5 feet: 3069 WITH 225 SX CMT
SURF Size: 8.625 feet: 809 WITH 375 SX CMT

#9978

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/23/2005 1:30 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 2800' WITH 2 SX CMT. PLUG AT 1900' WITH 15 SX CMT. PLUG AT 830' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK
Date/Time Plugging Completed: 05/24/2005 11:00 AM

WitnessType: COMPLETE (100%)
KCC Agent: JIM HOLLAND

Actual Plugging Report:

CIBP @ 2800' WITH 2 SX CMT ON TOP. 1ST PLUG PUMP 14 BBL MUD SPACER TO 1900' & PUMP 15 SX CMT. 2ND PLUG PULL OUT OF HOLE TO 830'. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40' & PUMP 10 SX CMT TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
2912	2920		
2888	2898		
2871	2884		
2858	2866		
1956			TOC

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1314' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

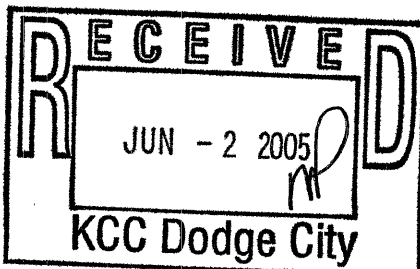

Signed Jim Holland PART II
(TECHNICIAN)

INVOICED
DATE 6-10-05
TEL NO 2005061706

RECEIVED
JUN 10 2005
KCC WICHITA

Form CR 23