

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-067-20375-00-00
Spot: NWNWSE Sec/Twnshp/Rge: 20-27S-35W
2340 feet from S Section Line, 2490 feet from E Section Line
Lease Name: ENGLISH C Well #: 2
County: GRANT Total Vertical Depth: 3090 feet

Operator License No.: 5447
Op Name: OXY USA, INC.
Address: 5 E. GREENWAY PLZ PO BOX 27570
HOUSTON, TX 77227

CIBP Size: feet: 2830 WITH 2 SX CMT
PROD Size: 4.5 feet: 3089 WITH 225 SX CMT
SURF Size: 8.625 feet: 808 WITH 375 SX CMT

1004³

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/20/2005 9:30 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: JOHN Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 2830' WITH 2 SX CMT. PLUG AT 1900' WITH 15 SX CMT. PLUG AT 825' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/20/2005 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

SET CIBP @ 2830' WITH 2 SX CMT ON TOP. 1ST PLUG PUMP MUD SPACER TO 1900' & PUMP 15 SX CMT. 2ND PLUG PULL OUT OF HOLE TO 830'. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE WITH MUD & PUMP 10 SX CMT TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
2942	2952		
2918	2930		
2910	2915		
2902	2908		
2887	2892		

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1240' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

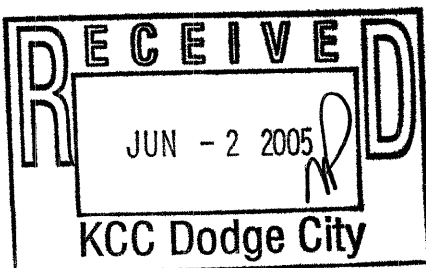

Signed

Jim Holland PRTT
(TECHNICIAN)

INVOICED

RECEIVED

DATE 6-10-05

JUN 10 2005

WFL. NO. 2005061706

KCC WICHITA

Form (6/2/3)