
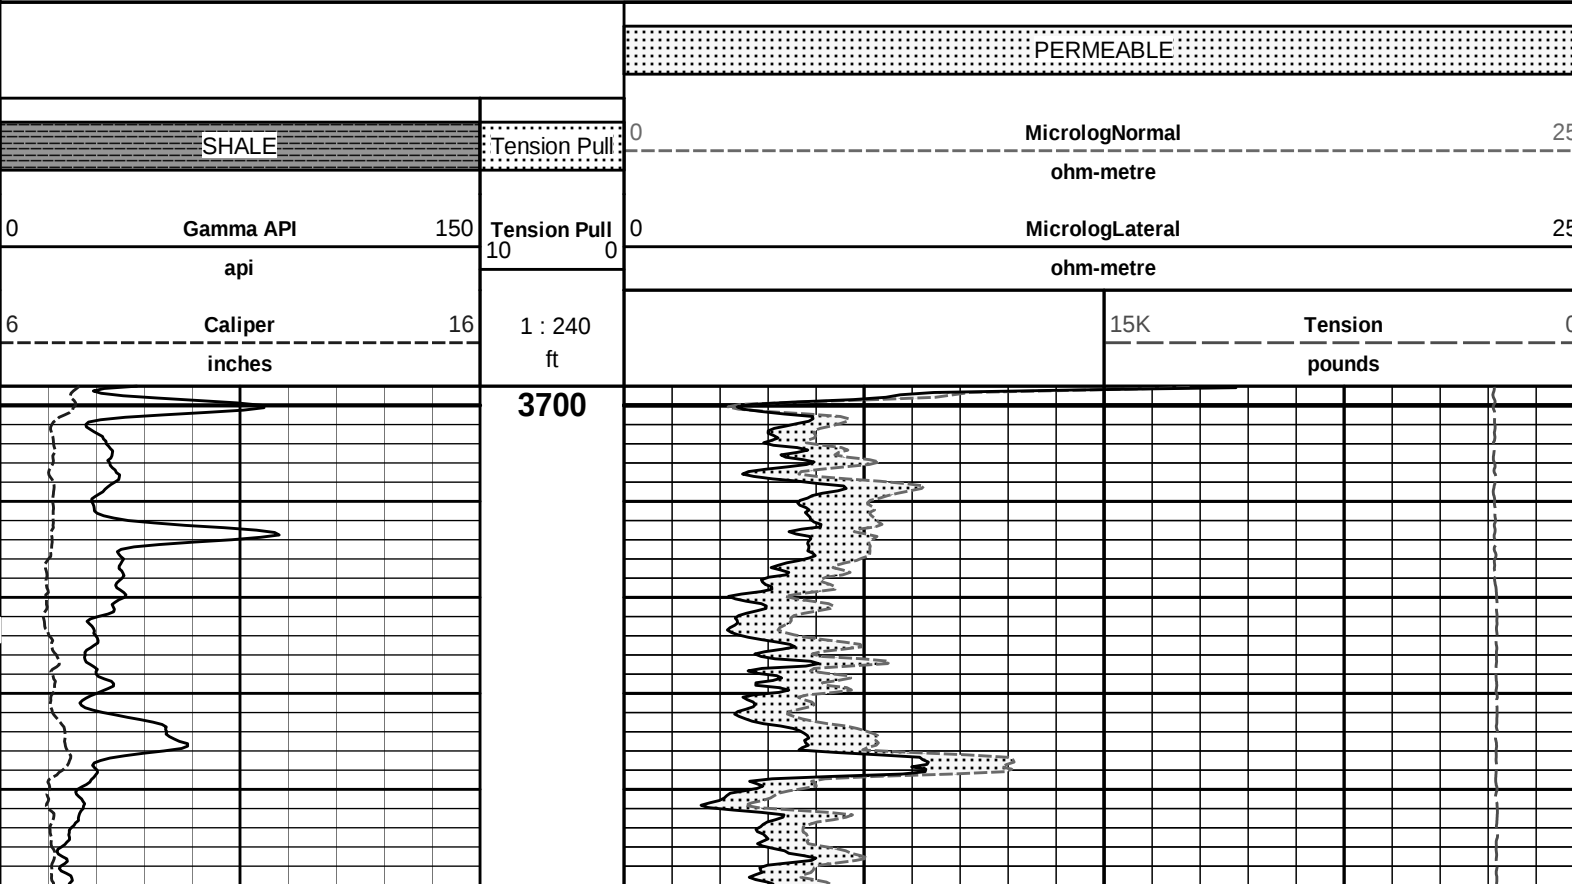


HALLIBURTON										MICRO LOG				
COMPANY					COMPANY					OXY USA INC				
WELL					WELL					SMU #318				
FIELD					FIELD					SMU				
COUNTY					COUNTY					FINNEY				
STATE					STATE					KANSAS				
Permanent Datum					GL					Elev. 2942.0 ft				
Log measured from					KB					D.F. 2951.0 ft				
Drilling measured from					KB					G.L. 2942.0 ft				
Date					17-Jul-12									
Run No.					ONE									
Depth - Driller					4891.00 ft									
Depth - Logger					4883.0 ft									
Bottom - Logged Interval					4839.0 ft									
Top - Logged Interval					3700.0 ft									
Casing - Driller					8.625 in @ 1823.0 ft					@				
Casing - Logger					1818.0 ft									
Bit Size					7.875 in					@				
Type Fluid in Hole					WATER BASED MUD									
Density					9.6 ppq					50.00 s/qt				
PH					9.60 pH					8.0 cpm				
Source of Sample					FLOWLINE									
Rm @ Meas. Temperature					0.390 ohmm @ 75.00 degF					@				
Rmf @ Meas. Temperature					0.33 ohmm @ 75.00 degF					@				
Rmc @ Meas. Temperature					0.460 ohmm @ 75.00 degF					@				
Source Rmf					Rmc					MEASURED				
Rm @ BHT					0.24 ohmm @ 125.0 degF					@				
Time Since Circulation					6.0 hr									
Time on Bottom					17-Jul-12 19:05									
Max. Rec. Temperature					125.0 degF @ 4883.0 ft					@				
Equipment					Location					10782954				
Recorded By					T. HYDE									
Witnessed By					J. KNEESE									

Fold here


Service Ticket No.: 9670805						API Serial No.: 15-055-22161						PGM Version: WL INSITE R3.6.0 (Build 3)															
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE												RESISTIVITY SCALE CHANGES															
Date		Sample No.										Type Log		Depth		Scale Up Hole				Scale Down Hole							
Depth-Driller																											
Type Fluid in Hole																											
Density		Viscosity																									
Ph		Fluid Loss																									
Source of Sample												RESISTIVITY EQUIPMENT DATA															
Rm @ Meas. Temp				@				@				Run No.		Tool Type & No.		Pad Type		Tool Pos.		Other							
Rmf @ Meas. Temp.				@				@				ONE		MICRO		RUBBER		ADJ.		N/A							
Rmc @ Meas. Temp.				@				@						I066_M85803													
Source Rmf		Rmc												P45													
Rm @ BHT				@				@																			
Rmf @ BHT				@				@																			
Rmc @ BHT				@				@																			
EQUIPMENT DATA																											
GAMMA						ACOUSTIC						DENSITY						NEUTRON									
Run No.		ONE				Run No.						Run No.						Run No.									
Serial No.		10811258				Serial No.						Serial No.						Serial No.									
Model No.		GTET				Model No.						Model No.						Model No.									
Diameter		3.625"				No. of Cent.						Diameter						Diameter									
Detector Model No.		T-102				Spacing						Log Type						Log Type									
Type		SCINT										Source Type						Source Type									
Length		8"				LSA [Y/N]						Serial No.						Serial No.									
Distance to Source		10'				FWDA [Y/N]						Strength						Strength									


[illegible]

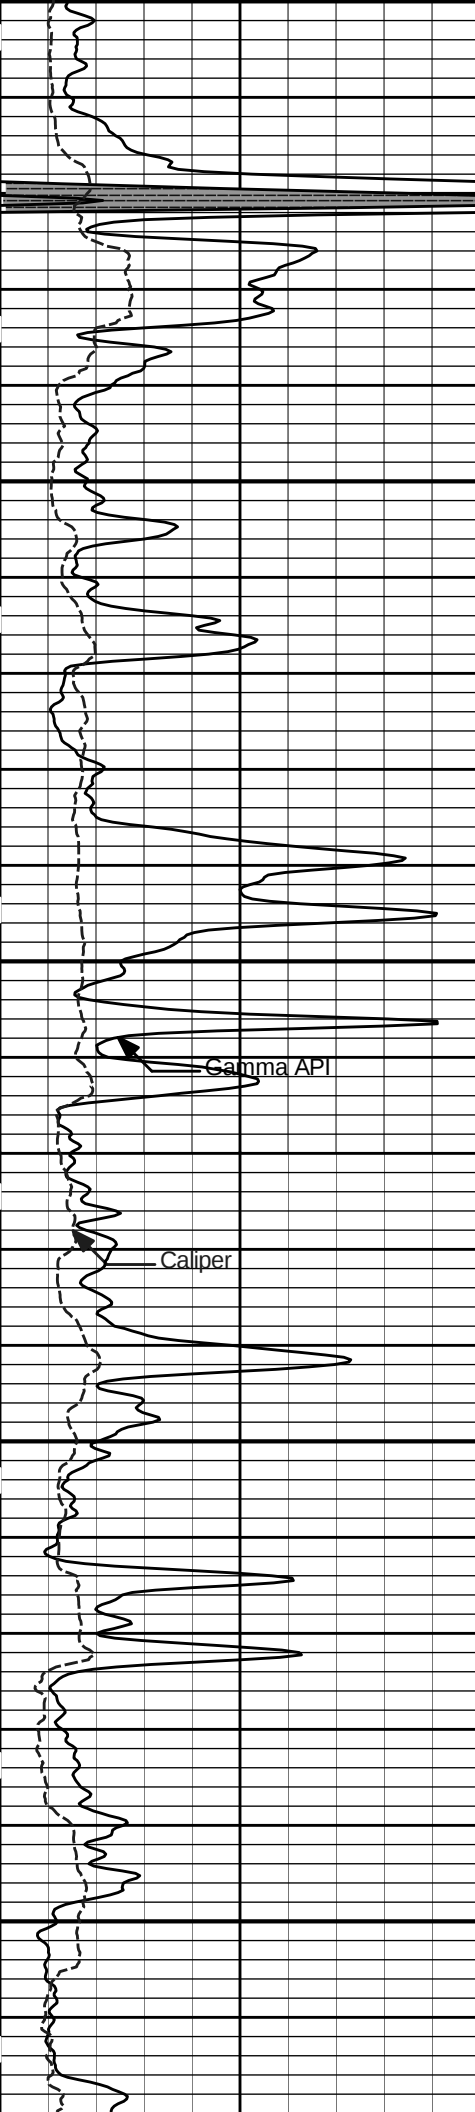

3800

3900

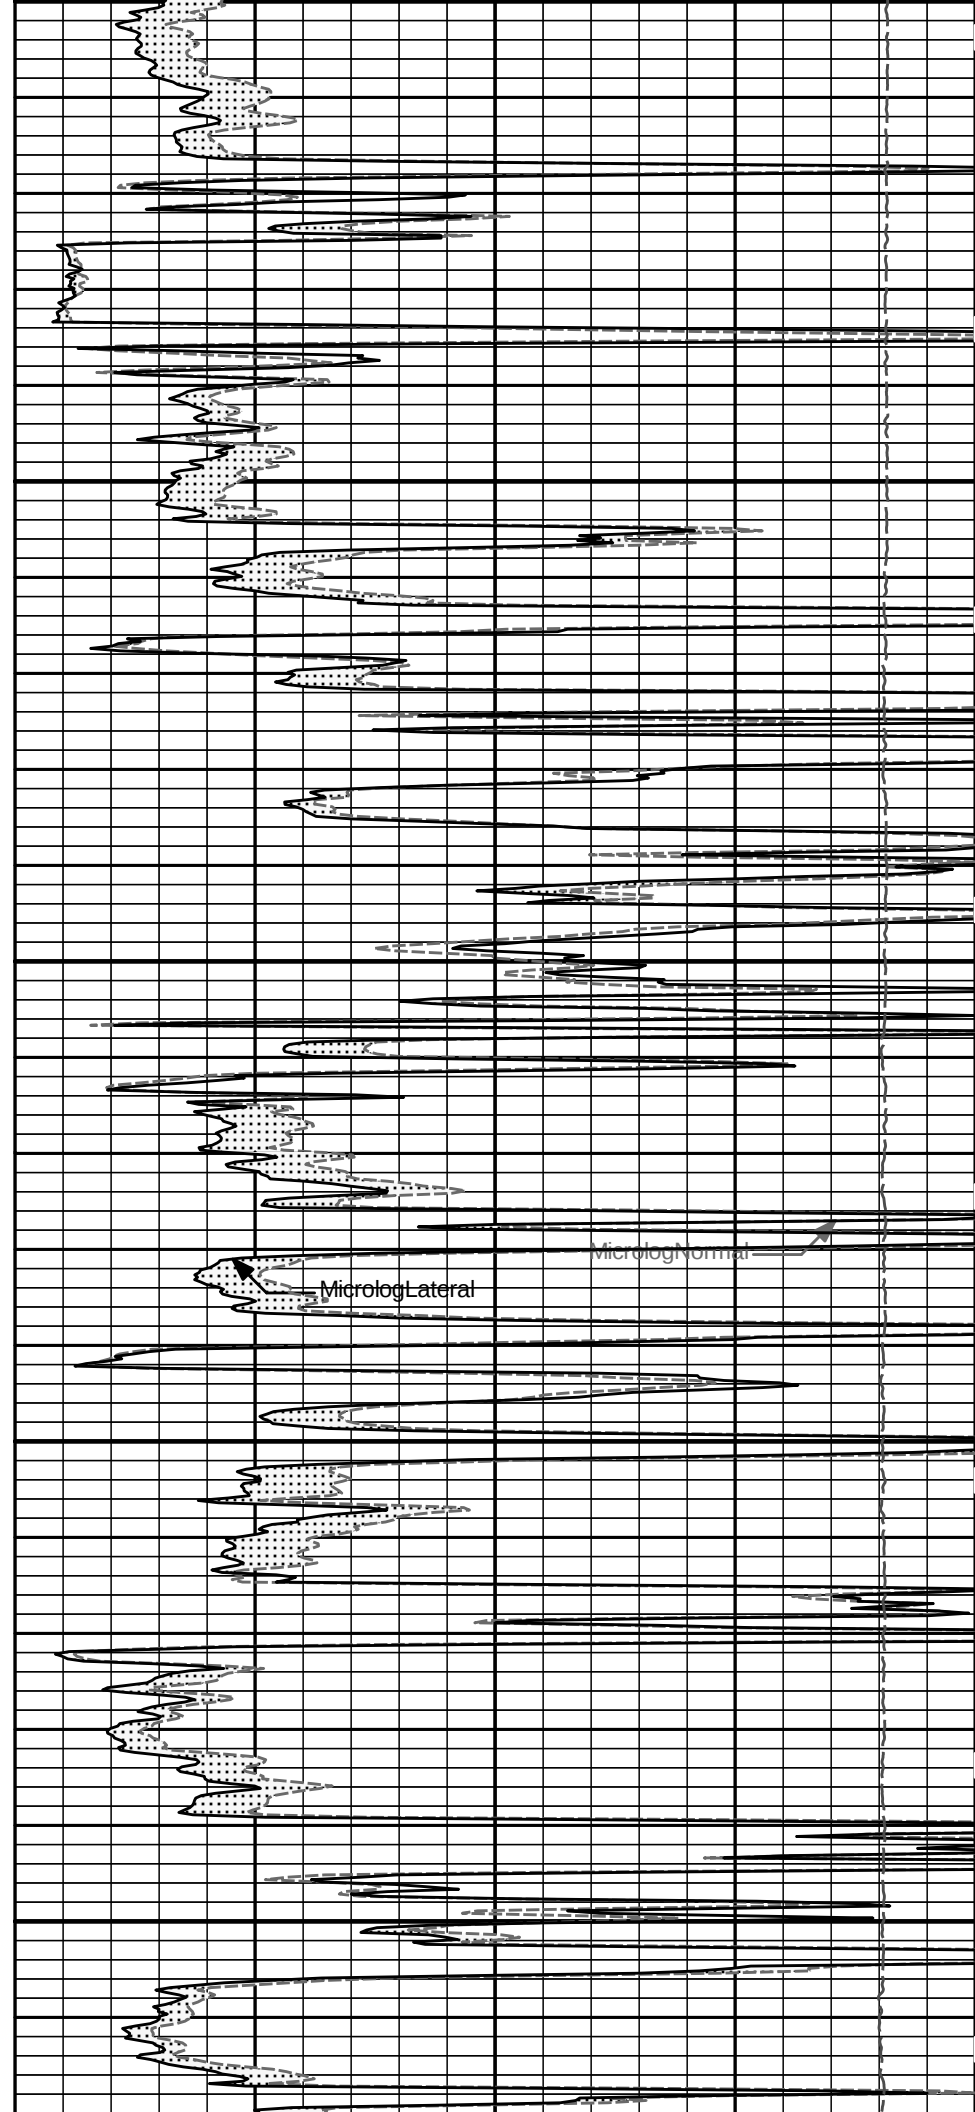

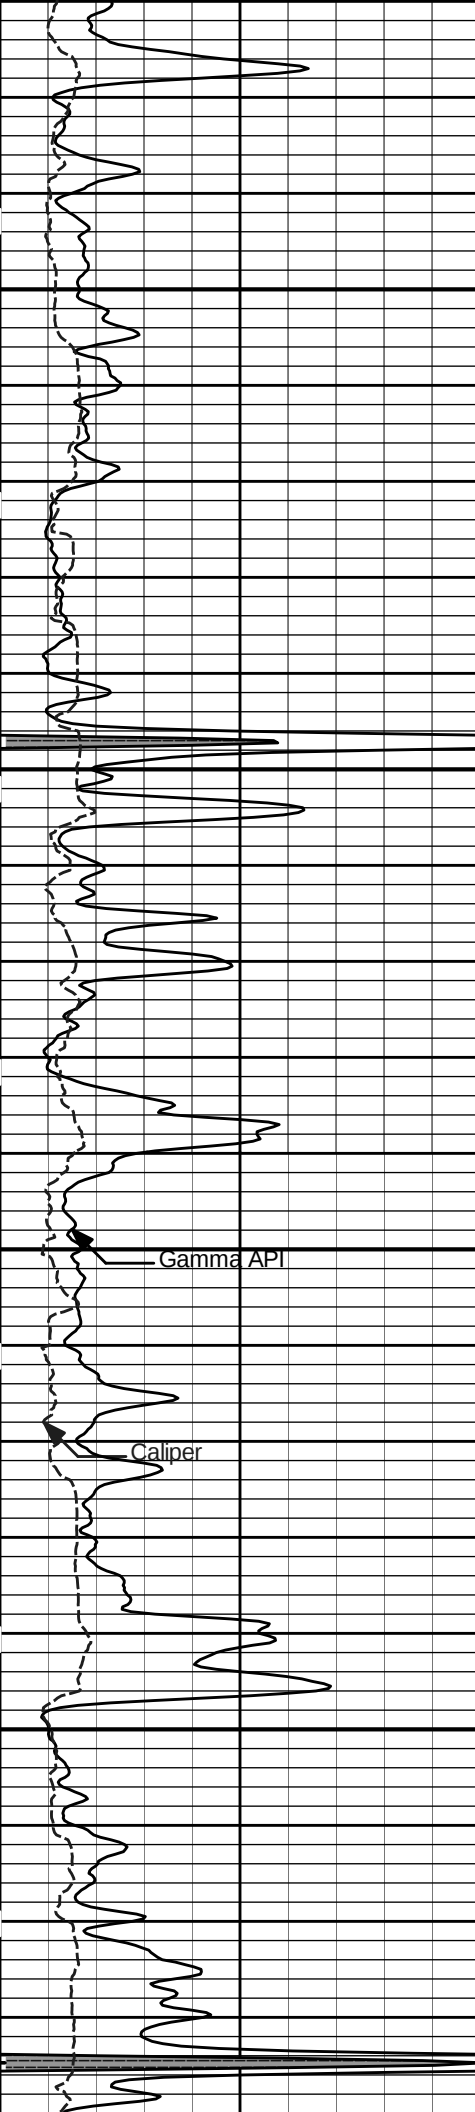


4000

4100


Gamma API

Caliper

Microlog-ateral

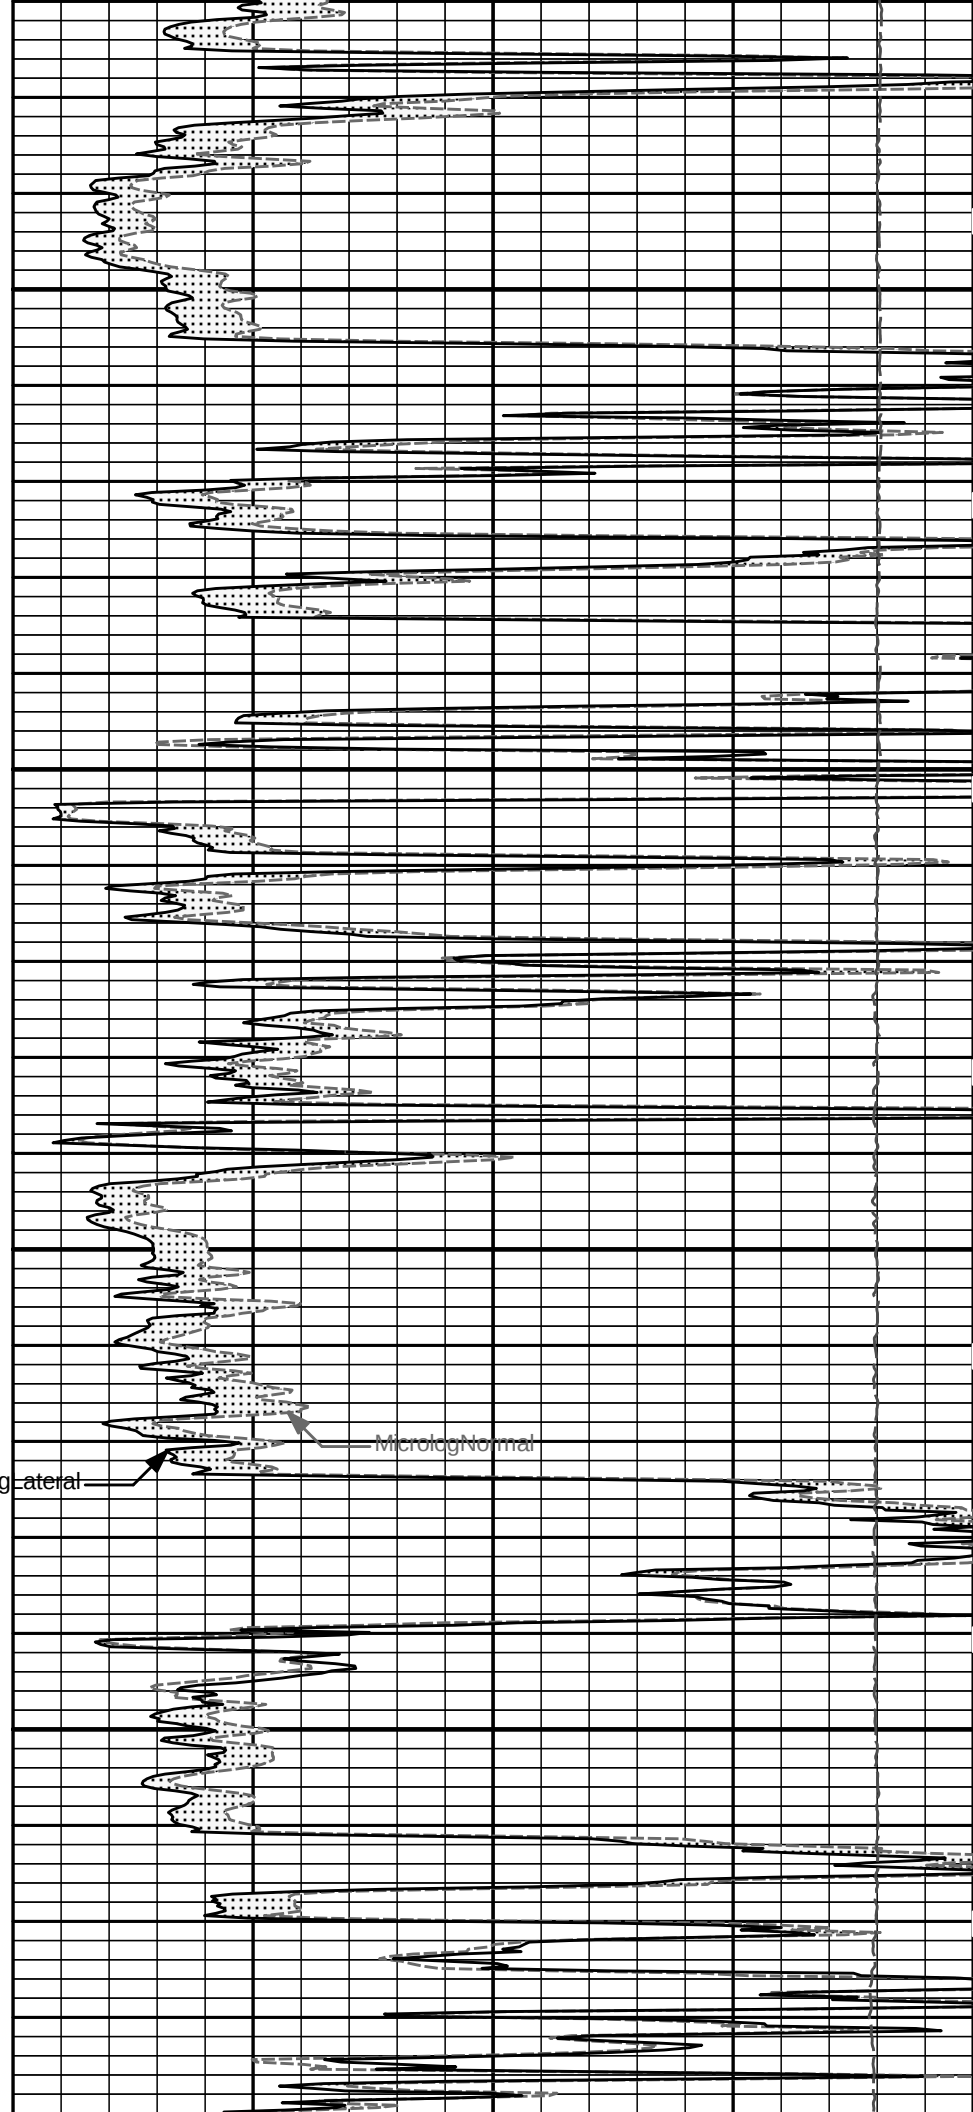

MicrologNormal

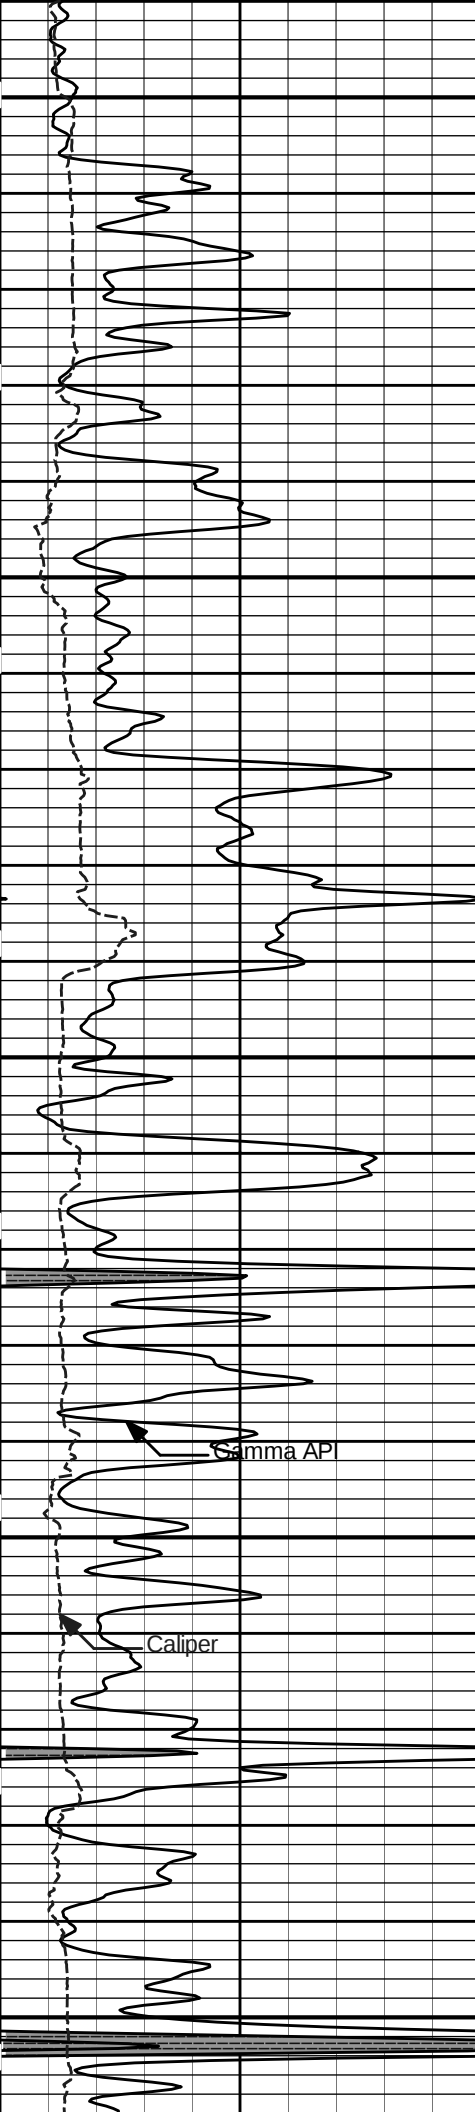

4200

4300


4400

Gamma API

Caliper


Microlog Normal

Microlog Lateral

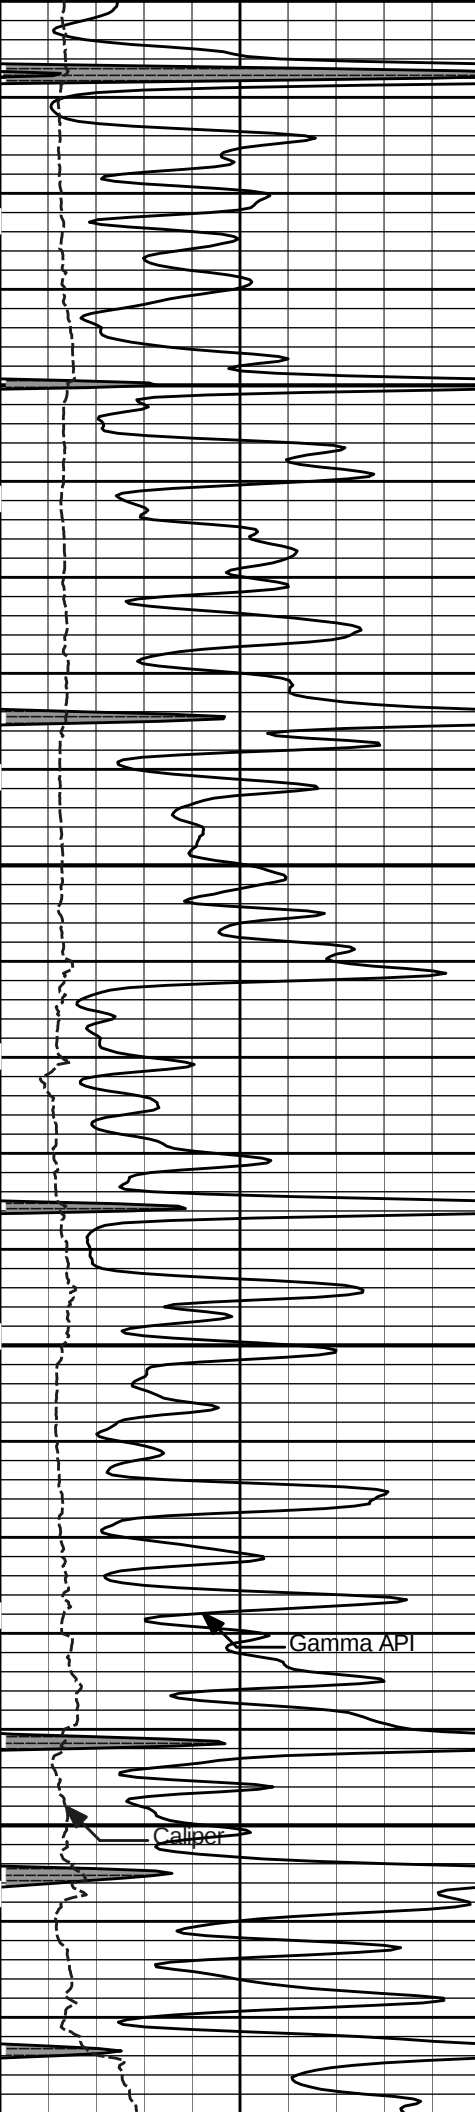

4500

4600

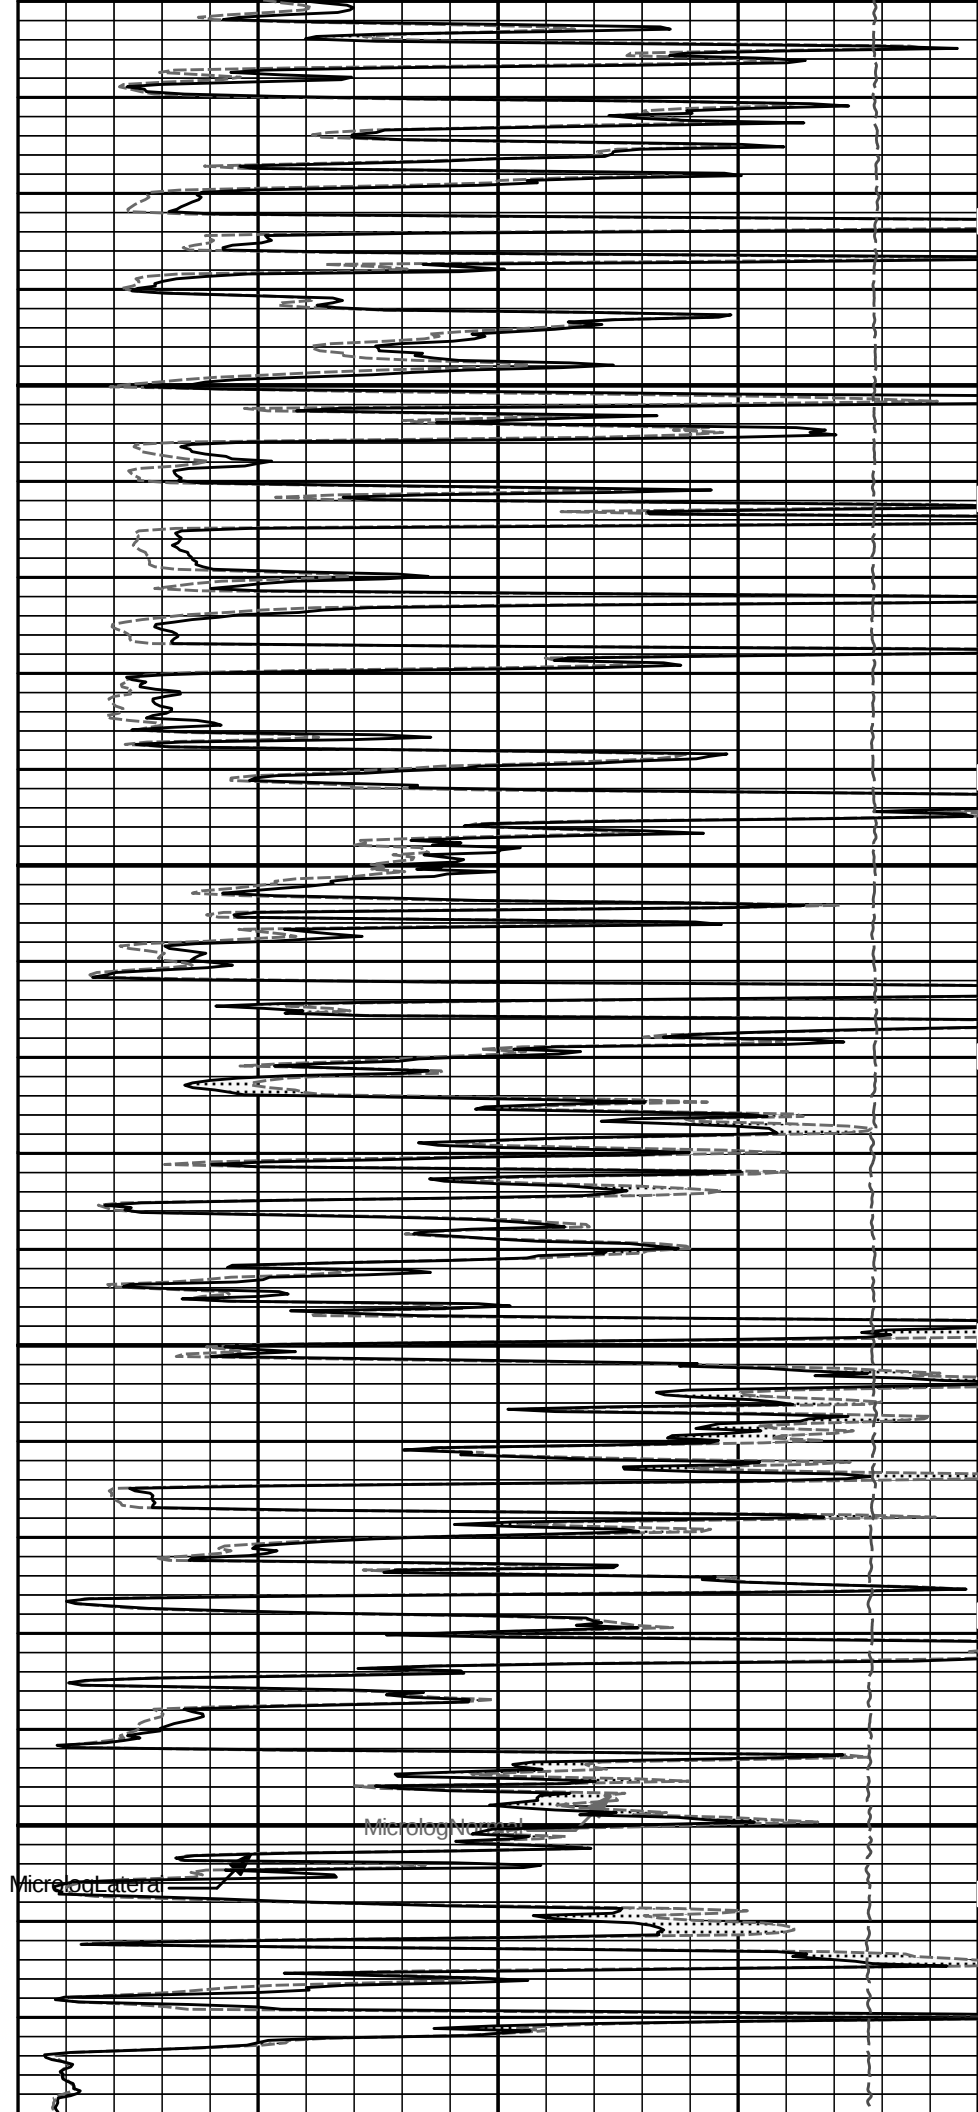




4700

4800


FRGamma API

FRCaliper

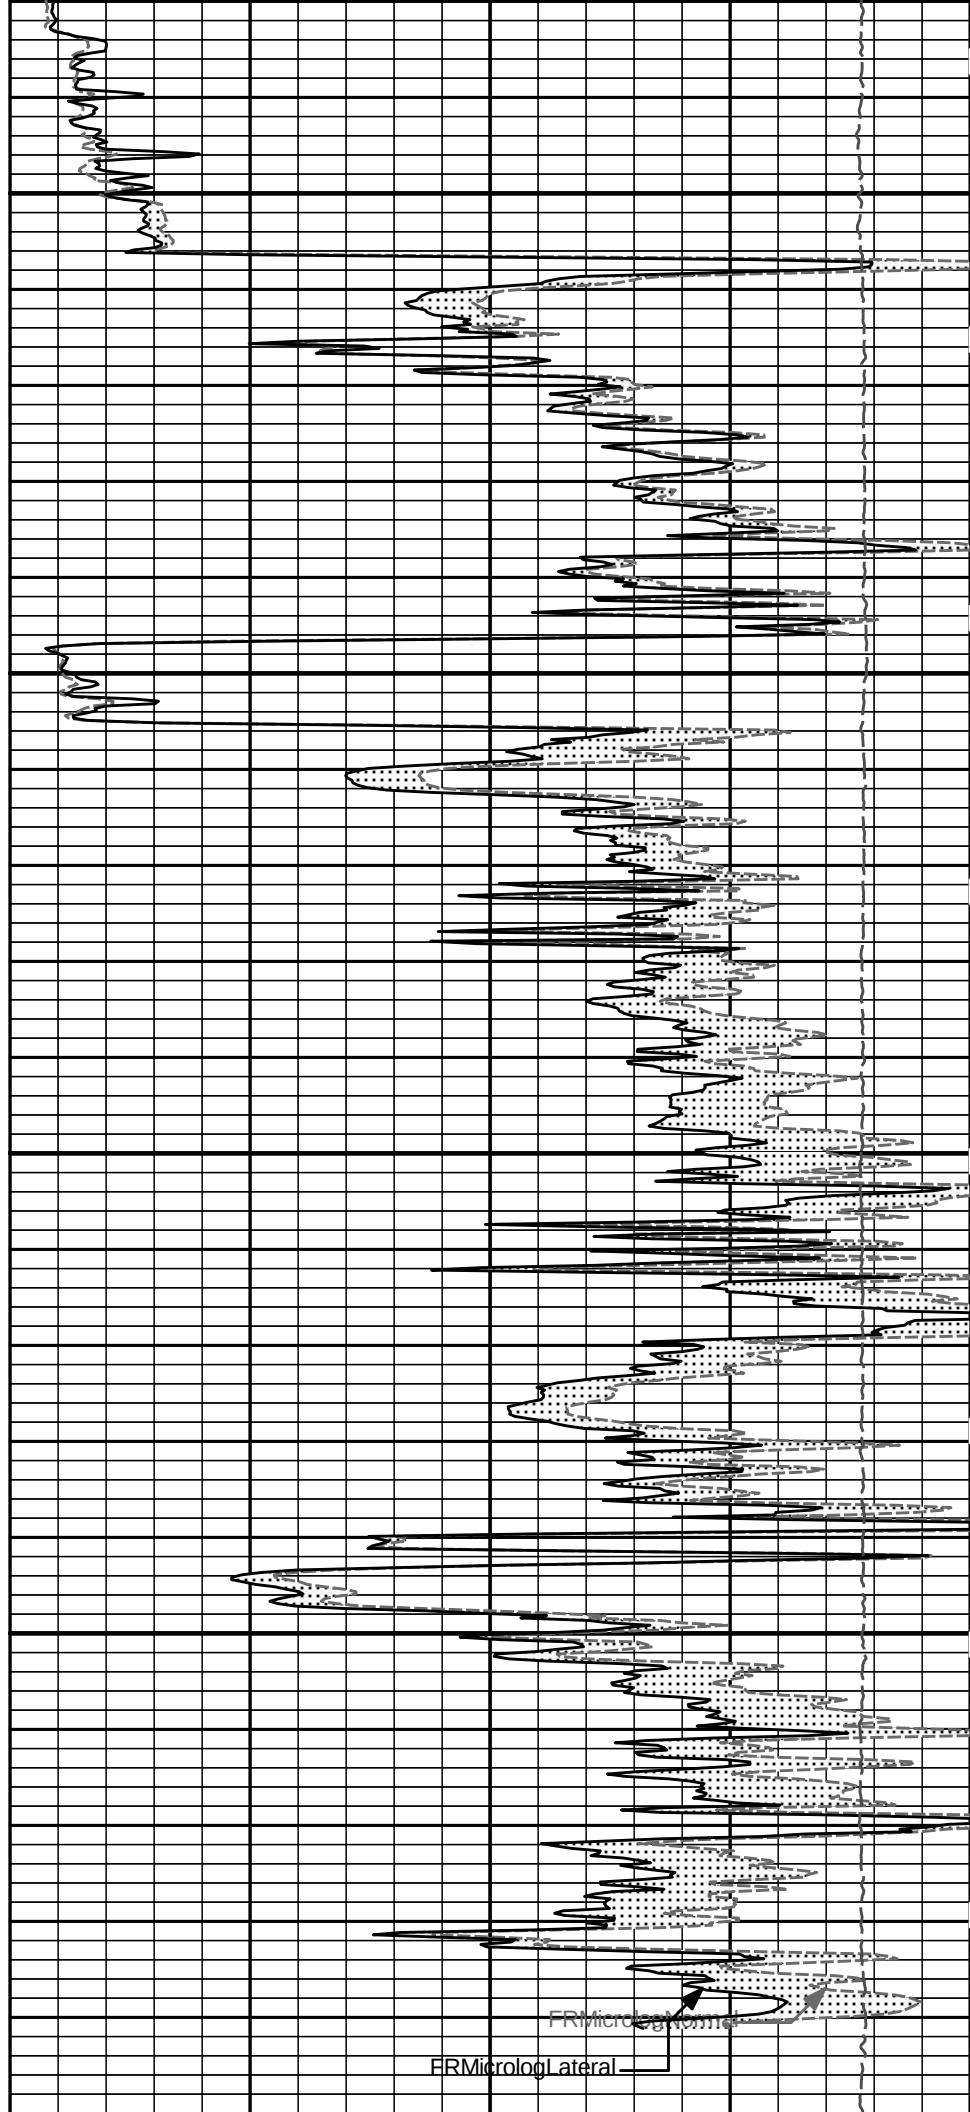

FRMicrologNormal

FRMicrologLateral

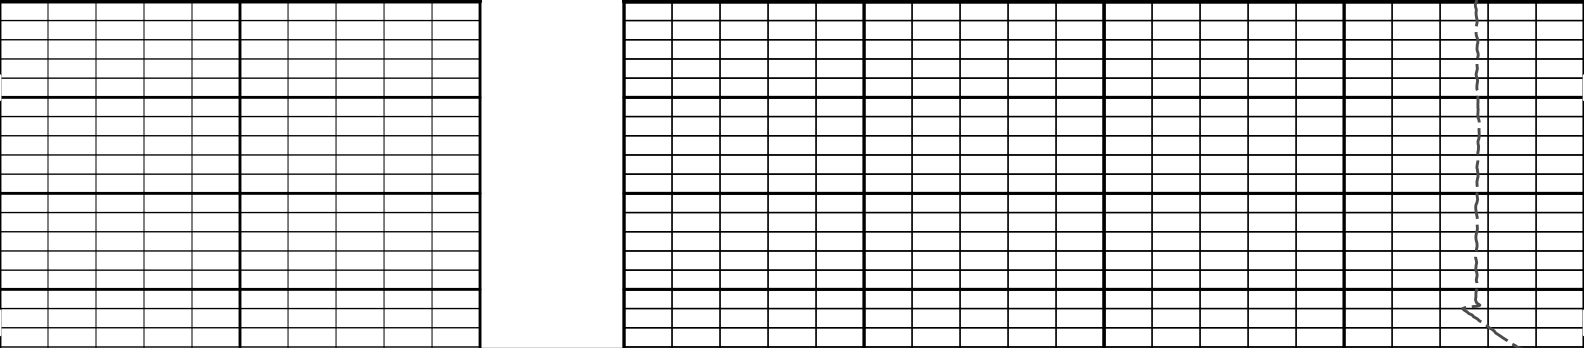

6	Caliper	16	1 : 240	15K	Tension	0
	inches		ft		pounds	
0	Gamma API	150	Tension Pull	0	MicrologLateral	25
	api		10	0	ohm-metre	
	SHALE		Tension Pull	0	MicrologNormal	25
					ohm-metre	
					PERMEABLE	

HALLIBURTON


Plot Time: 17-Jul-12 20:37:02
Plot Range: 3698 ft to 4886.25 ft
Data: SMU_318\Well Based\DAQ-0001-007\
Plot File: \\-LOCAL-ISMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CH\MICRO\Microlog_IQ_5_main_lib

5 INCH MAIN LOG

HALLIBURTON

Plot Time: 17-Jul-12 20:37:03
Plot Range: 4530 ft to 4886.25 ft
Data: SMU_318\Well Based\DAQ-0001-006\
Plot File: \\-LOCAL-ISMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CH\MICRO\Microlog_IQ_5_rep_lib


REPEAT SECTION

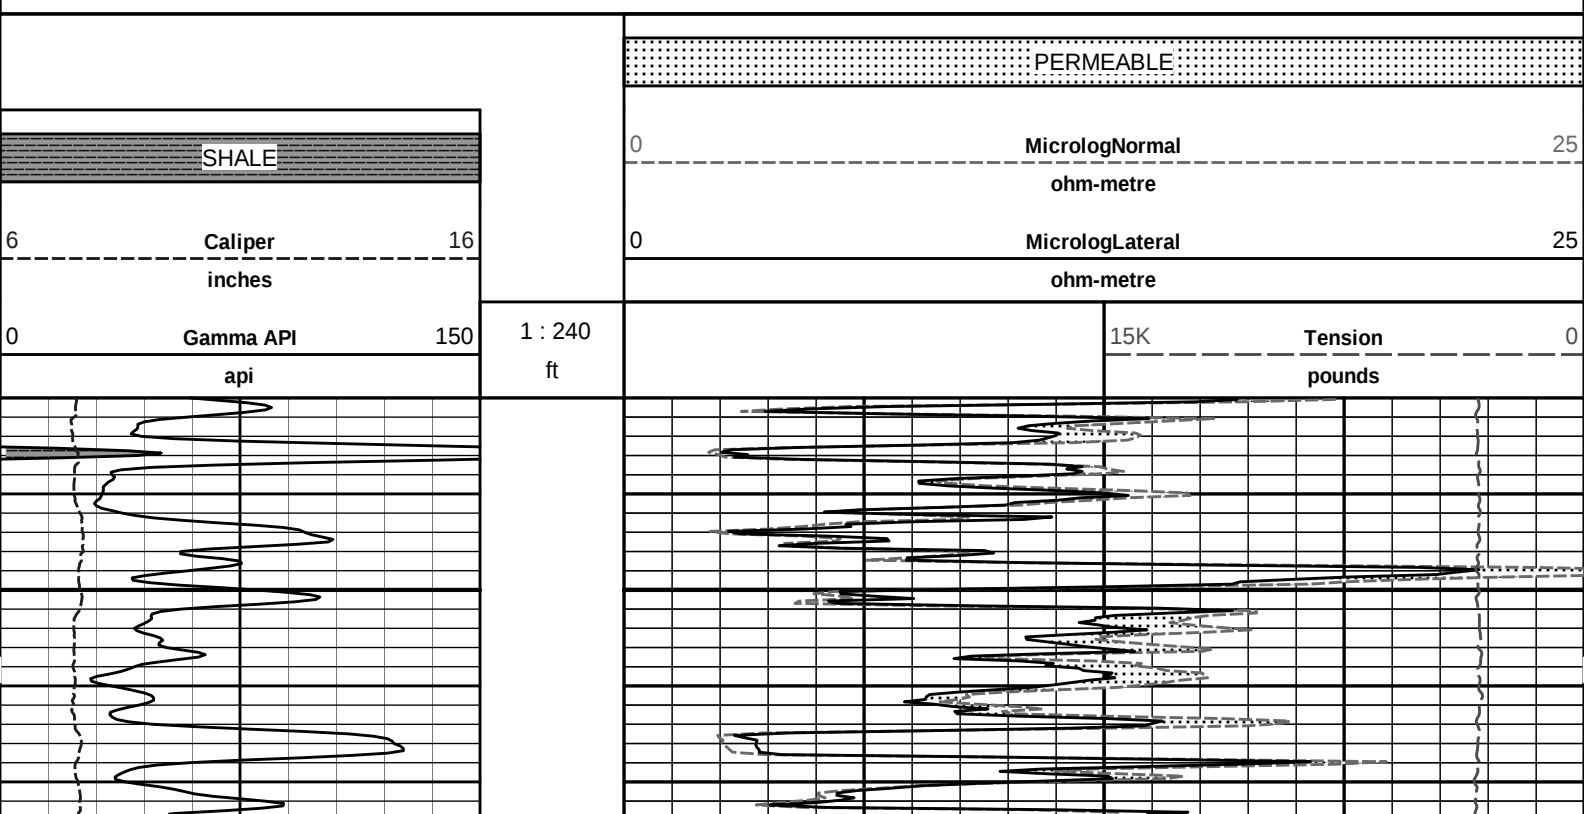




4600

4700

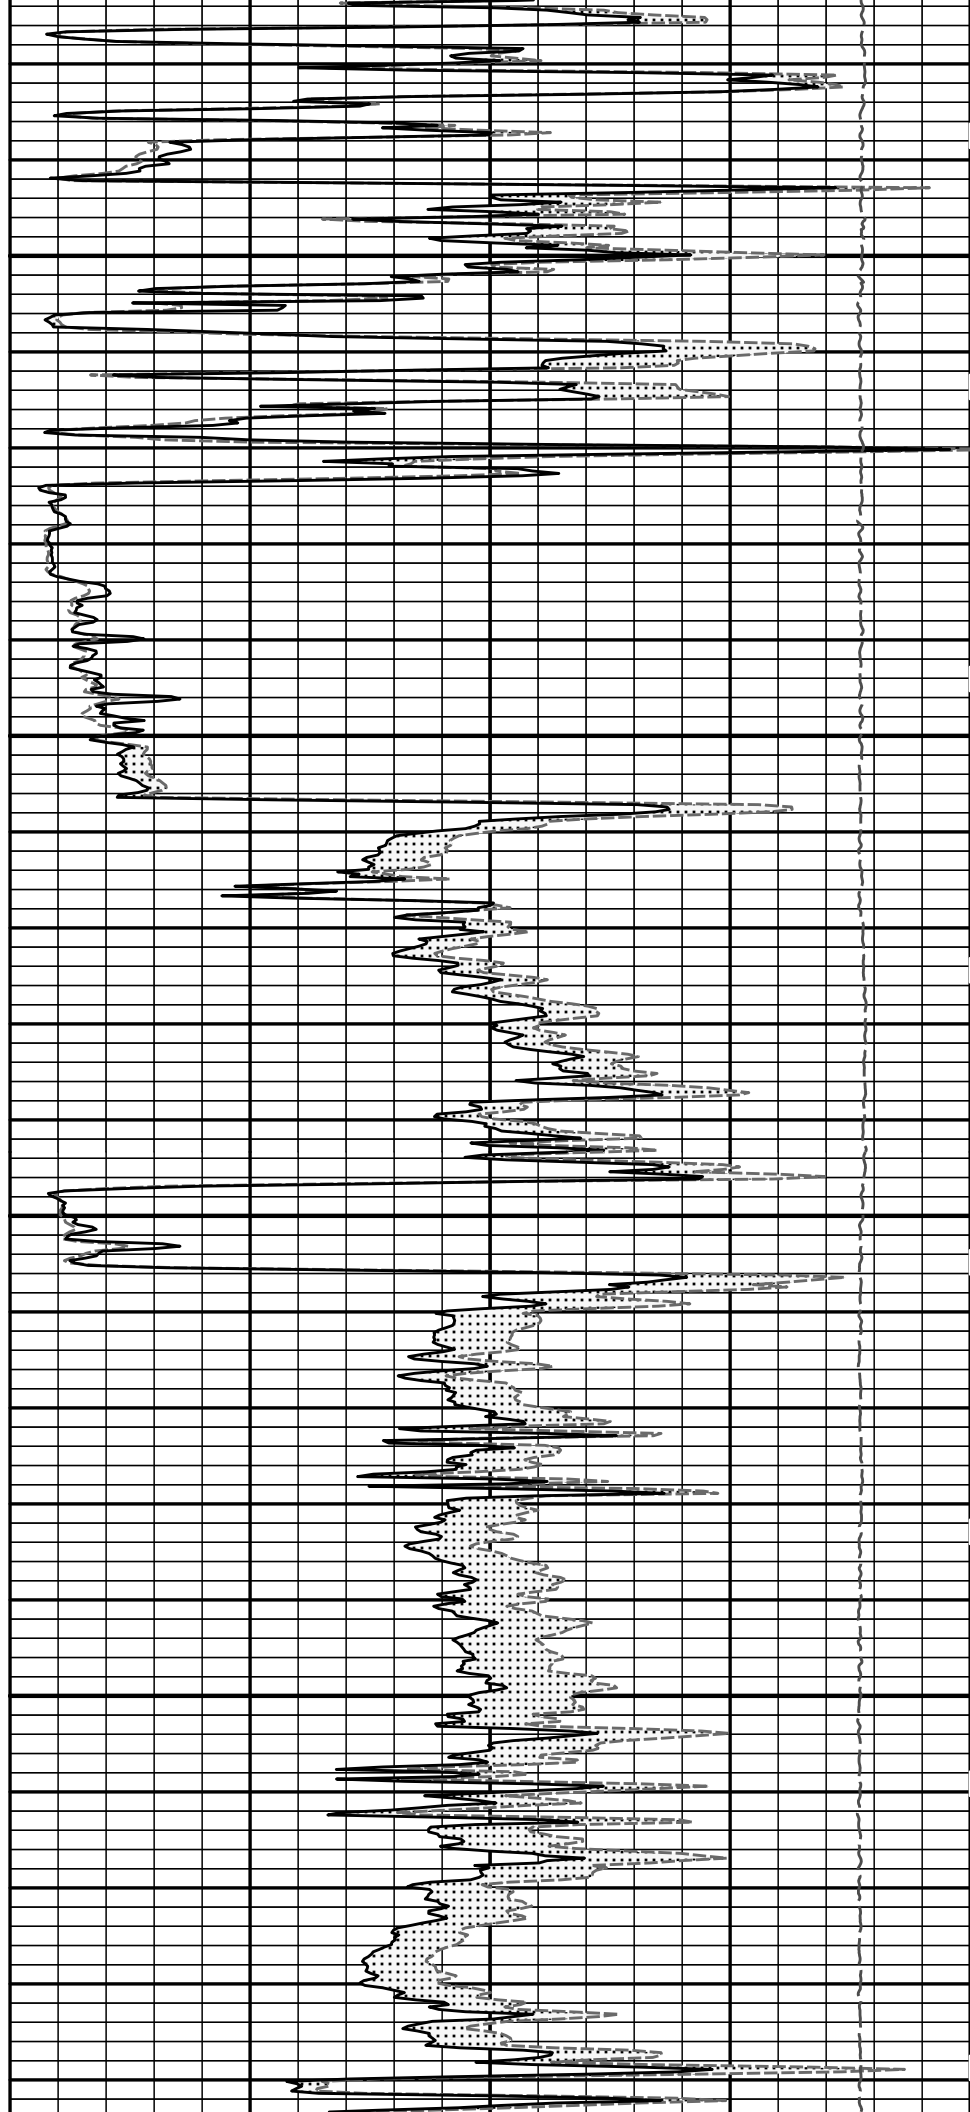

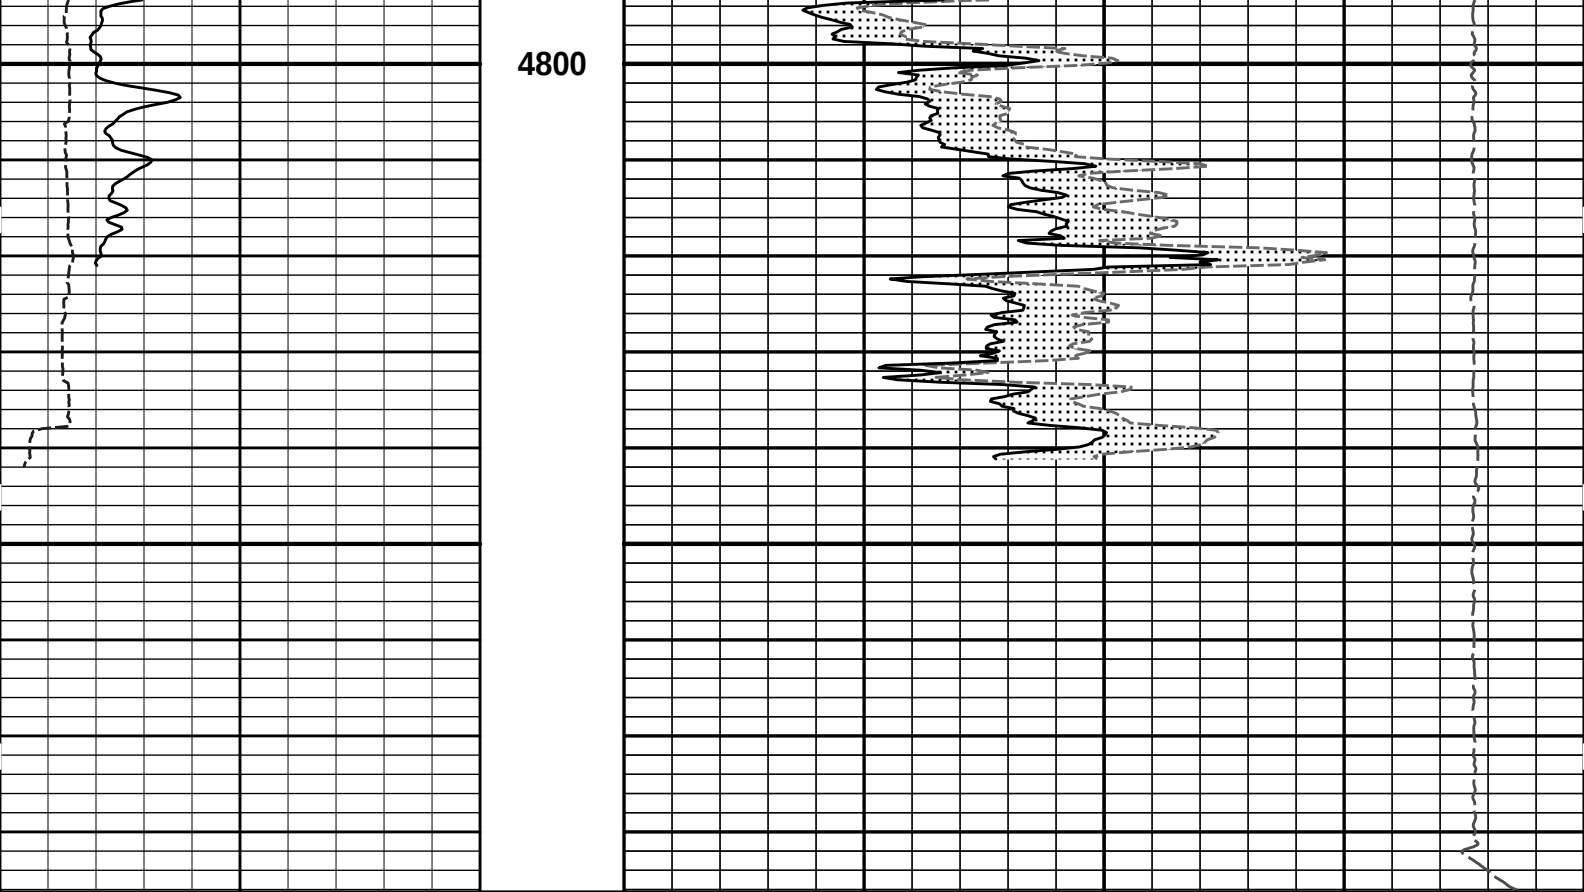

0	Gamma API	150	1 : 240		15K	Tension	0
	api		ft			pounds	
6	Caliper	16		0	MicrologLateral		25
	inches				ohm-metre		
	SHALE			0	MicrologNormal		25
					ohm-metre		
					PERMEABLE		

HALLIBURTON


Plot Time: 17-Jul-12 20:37:04
Plot Range: 4530 ft to 4886.25 ft
Data: SMU_318\Well Based\DAQ-0001-006\
Plot File: \\-LOCAL-ISMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CH\MICRO\Microlog_IQ_5_rep_lib


REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length	
Cable Head- PROT01 30.00 lbs		Ø 3.625 in →			1.92 ft	75.95 ft	
							74.03 ft
SP Sub-11441709 60.00 lbs		Ø 3.625 in →		← SP @ 72.26 ft	3.74 ft	70.30 ft	

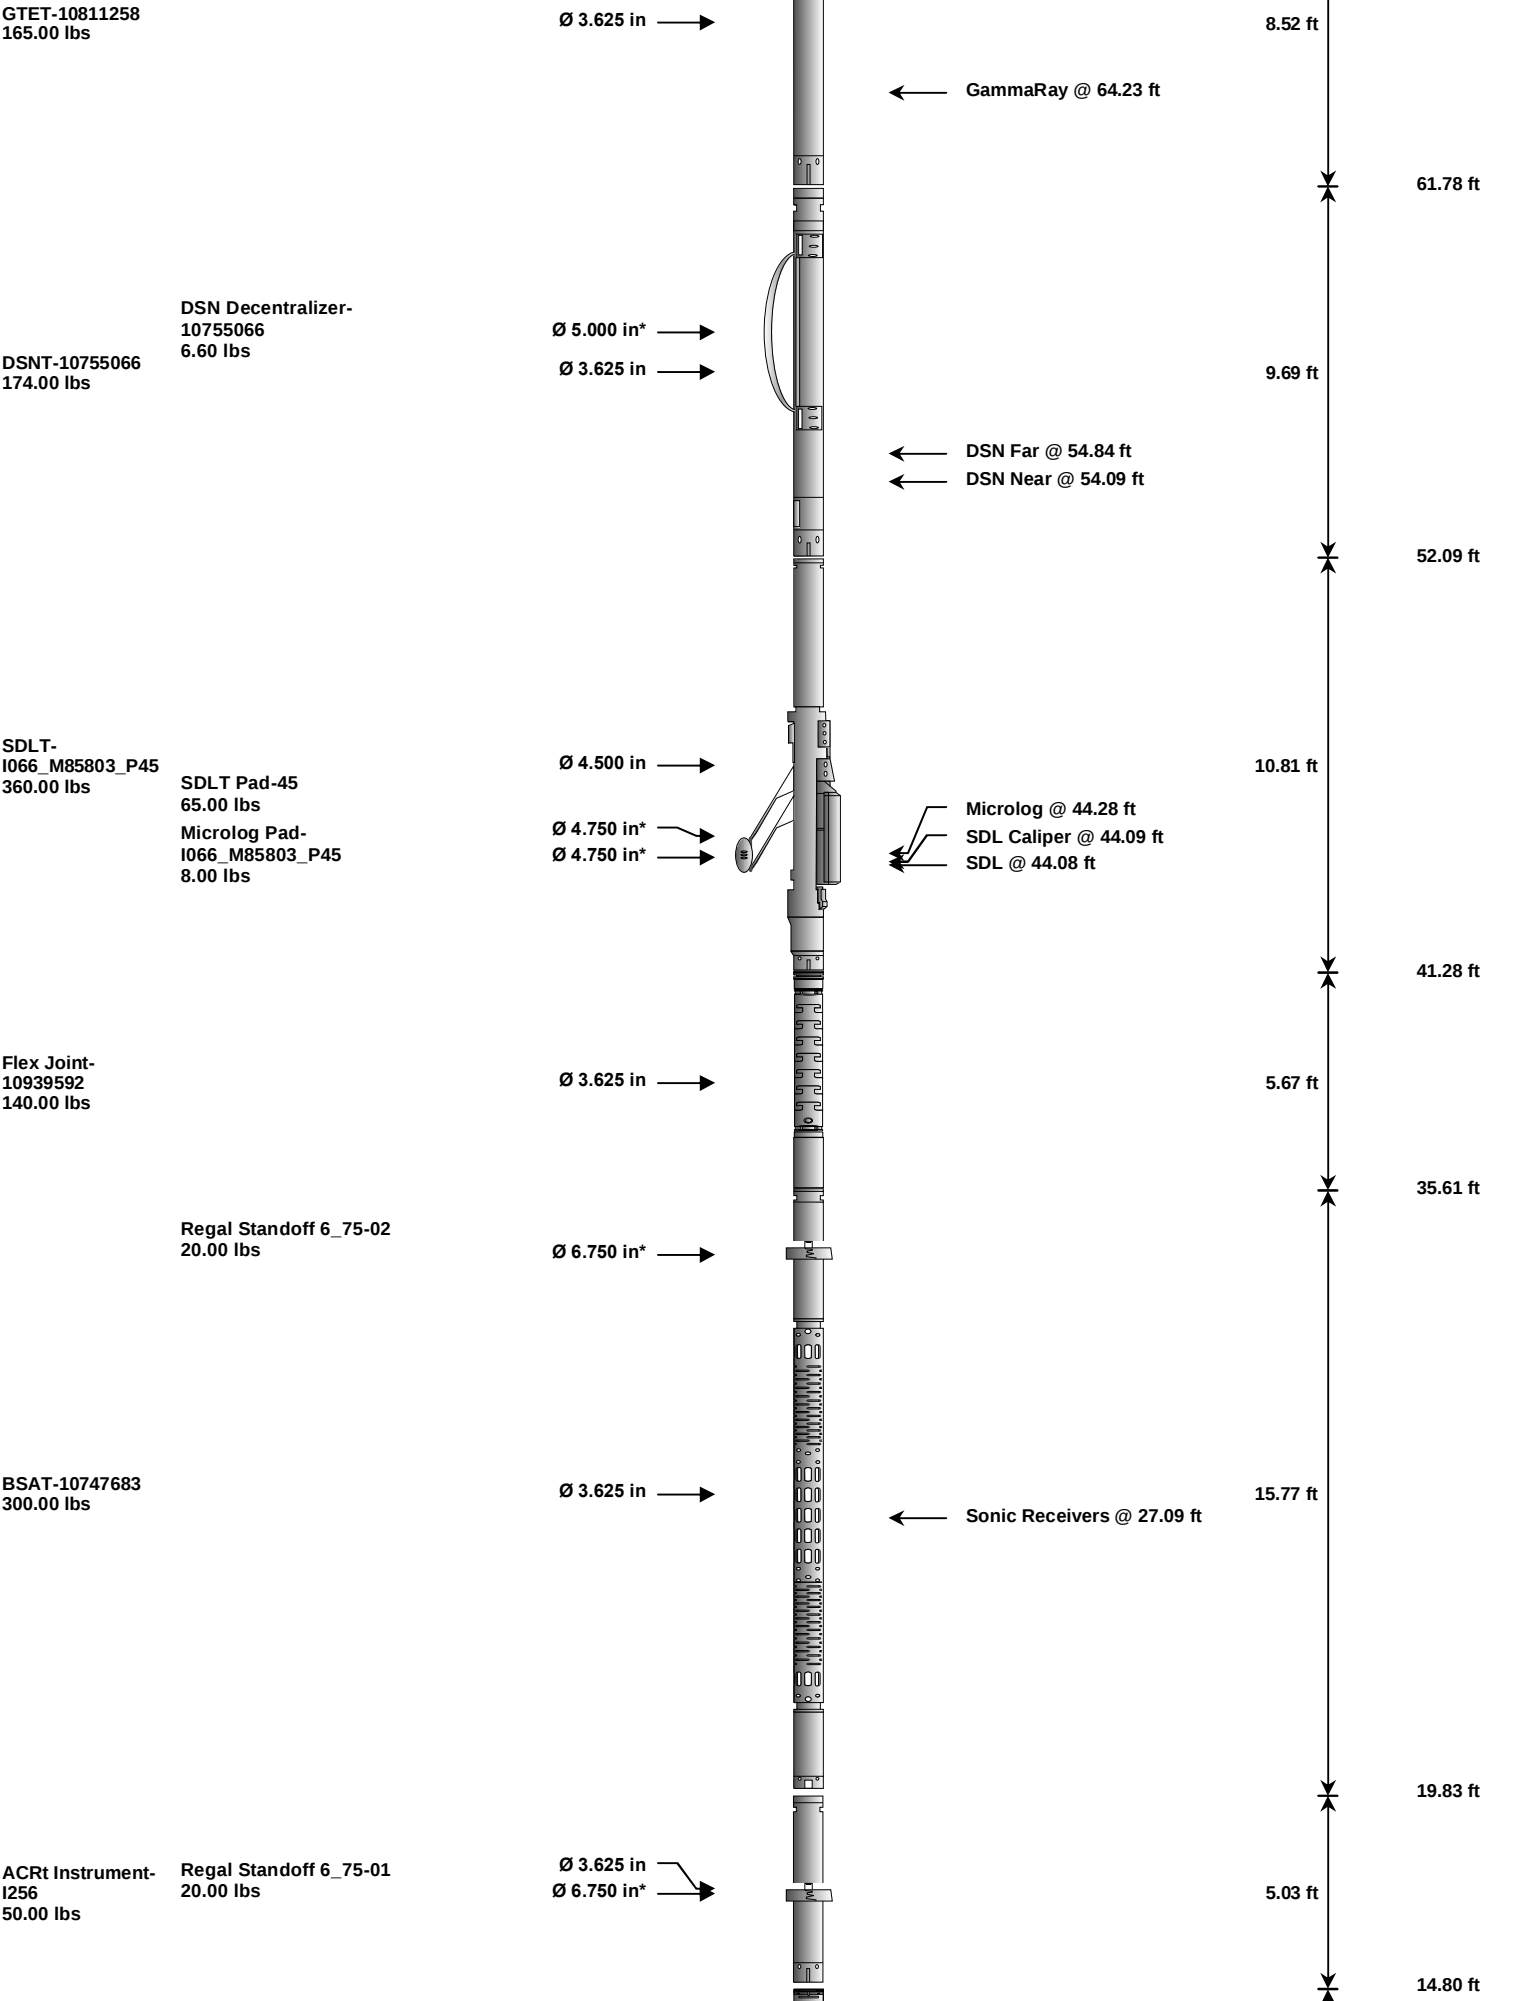

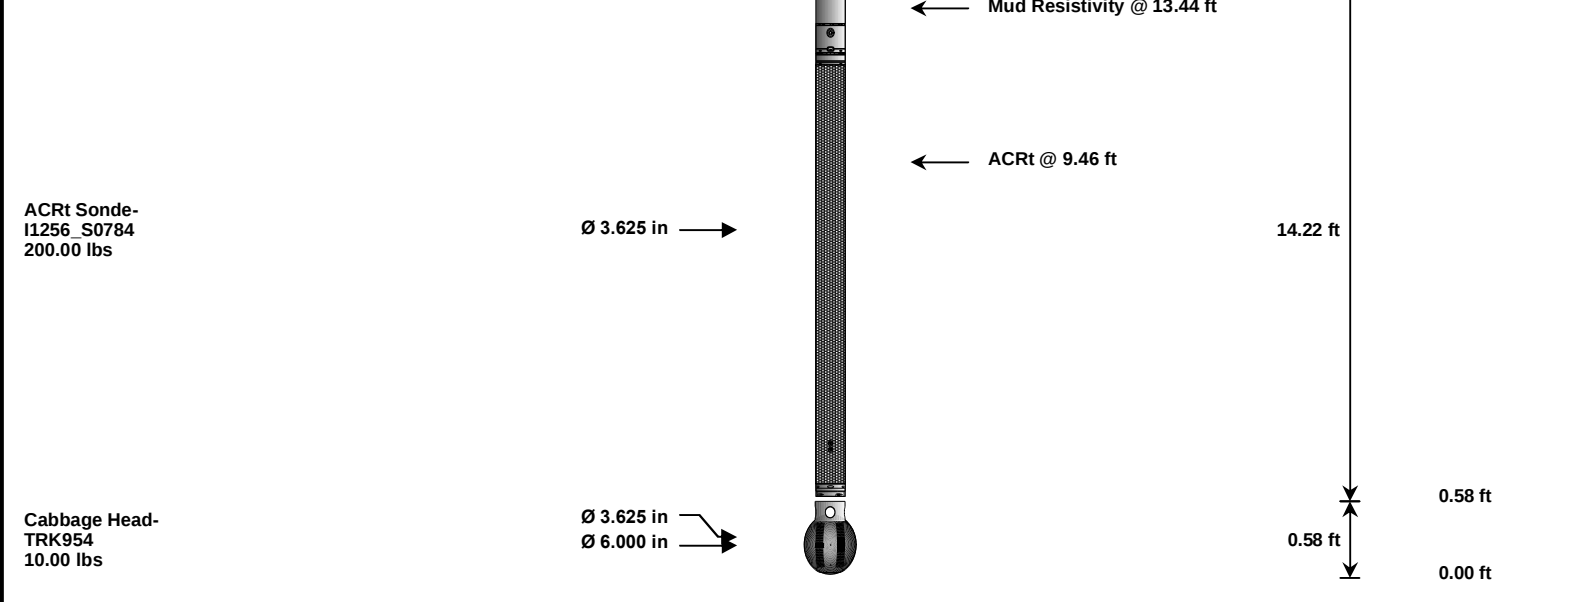

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH	Standard OH Cable Head		PROT01	30.00	1.92	74.03	300.00
SP	SP Sub		11441709	60.00	3.74	70.30	300.00
GTET	Gamma Telemetry Tool		10811258	165.00	8.52	61.78	60.00
DSNT	Dual Spaced Neutron		10755066	174.00	9.69	52.09	60.00
DCNT	DSN Decentralizer		10755066	6.60	5.13	* 55.42	300.00
SDLT	Spectral Density Tool		I066_M85803_P45	360.00	10.81	41.28	60.00
MICP	Microlog Pad		I066_M85803_P45	8.00	1.00	* 43.78	60.00
SDLP	Density Insite Pad		45	65.00	2.55	* 43.49	60.00
FLEX	Flex Joint		10939592	140.00	5.67	35.61	300.00
BSAT	Borehole Sonic Array Tool		10747683	300.00	15.77	19.83	60.00
RSOF	Regal Standoff 6.75in		02	20.00	0.52	* 33.69	300.00
ACRt	Array Compensated True Resistivity Instrument Section		I256	50.00	5.03	14.80	300.00
RSOF	Regal Standoff 6.75in		01	20.00	0.52	* 17.02	300.00
ACRt	Array Compensated True Resistivity Sonde Section		I1256_S0784	200.00	14.22	0.58	300.00
CBHD	Cabbage Head		TRK954	10.00	0.58	0.00	300.00
Total				1,608.60	75.95		
							* Not included in Total Length and Length Accumulation.
Data: SMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CH\IDLE							Date: 17-Jul-12 17:49:41

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION			
Tool Name:	GTET - 10811258	Reference Calibration Date:	29-Jun-12 10:45:01
Engineer:	T. HYDE	Calibration Date:	29-Jun-12 10:47:38
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1
Calibrator Source S/N: TB-185			
Calibrator API Reference:228.00 api			
Equivalent Calibrator API Reference:232.0 api			
Measurement	Measured	Calibrated	Units
Background	46.1	47.6	api
Background + Calibrator	270.8	279.6	api
Calibrator	224.7	232.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION			
Tool Name:	GTET - 10811258	Reference Calibration Date:	29-Jun-12 10:47:38

Engineer: T. HYDE		Calibration Date: 17-Jul-12 17:34:29			
Software Version: WL INSITE R3.6.0 (Build 3)		Calibration Version: 1			
Calibrator Source S/N: TB-185					
Calibrator API Reference:228.00 api					
Equivalent Calibrator API Reference:232.0 api					
Field Verification		Shop	Field	Units	
Background		47.6	64.0	api	
Background + Calibrator		279.6	297.2	api	
Calibrator		232.0	233.2	api	
Shop		Field	Difference	Tolerance	
232.0		233.2	-1.2	+/- 9.00	

MICRO LOG SHOP CALIBRATION					
Tool Name: Microlog Pad - I066_M85803_P45		Reference Calibration Date: 07-Jul-12 13:36:00			
Engineer: T. HYDE		Calibration Date: 07-Jul-12 13:56:31			
Software Version: WL INSITE R3.6.0 (Build 3)		Calibration Version: 1			
Host Tool Name: DSNT - 10755066					

	CALIBRATION COEFFICIENT SUMMARY					
	Measurement	Micro Log Normal		Micro Log Lateral		Units
		Measured	Calibrated	Measured	Calibrated	
	Tool Zero	0.00	-0.01	0.00	-0.00	ohmm
	Calibration Point #1	0.01	0.00	0.00	0.00	ohmm
	Calibration Point #2	18.59	20.00	20.02	20.00	ohmm
Internal Reference	18.48	19.88	20.02	20.00	ohmm	
	Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units
	Tool Zero	0.28		-0.03		V
	Calibration Point #1	3.37		-0.01		V
	Calibration Point #2	5337.49		6906.54		V
	Internal Reference	5306.40		6908.08		V

MICRO LOG FIELD CHECK					
Tool Name: Microlog Pad - I066_M85803_P45		Reference Calibration Date: 07-Jul-12 13:56:31			
Engineer: T. HYDE		Calibration Date: 17-Jul-12 17:35:47			
Software Version: WL INSITE R3.6.0 (Build 3)		Calibration Version: 1			

	Measurement	Micro Log Normal		Micro Log Lateral		Units
		Shop	Field	Shop	Field	
	Tool Zero	-0.01	-0.01	-0.00	0.00	
	Internal Reference	19.88	19.87	20.00	20.00	ohmm
	Summary					
	Signal	Shop	Field	Difference	Tolerance	
	Microlog Normal	19.88	19.87	0.01	+/- 0.80	
	Microlog Lateral	20.00	20.00	0.00	+/- 0.80	

CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-10811258						
Gamma Ray Calibrator	232.0	233.2	-----	-1.2	+/- 9.00	api

Gamma Ray Calibrator	202.0	200.2		1.2	7.500	api
Microlog Pad-I066_M85803_P45						
MicroLog Normal	19.88	19.87	-----	0.01	+/-0.80	ohmm
MicroLog Lateral	20.00	20.00	-----	0.00	+/-0.80	ohmm

Data: SMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CHIDLE	Date: 17-Jul-12 18:31:33
---	--------------------------

HALLIBURTON

PARAMETERS REPORT

Depth (ft))	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.600	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	4891.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DSNO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTP	Temperature Correction Type	None	
	DSNT	DPRS	DSN Pressure Correction Type	None	
	DSNT	SHCO	View More Correction Options	No	

DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
BOTTOM				
Data: SMU_31810001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CHIDLE			Date: 17-Jul-12 18:33:00	

HALLIBURTON				
INPUTS, DELAYS AND FILTERS TABLE				
Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
SP Sub				
PLTC	Plot Control Mask	72.25	NO	
SP	Spontaneous Potential	72.25	BLK	1.250
SPR	Raw Spontaneous Potential	72.25	NO	
SPO	Spontaneous Potential Offset	72.25	NO	
GTET				
TPUL	Tension Pull	64.23	NO	
GR	Natural Gamma Ray API	64.23	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	64.23	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	64.23	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				

DSN T				
TPUL	Tension Pull	53.99	NO	
RNDS	Near Detector Telemetry Counts	54.09	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.84	TRI	0.583
DNTT	DSN Tool Temperature	54.09	NO	
DSNS	DSN Tool Status	53.99	NO	
ERND	Near Detector Telemetry Counts EVR	54.09	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.84	BLK	0.000
ENTM	DSN Tool Temperature EVR	54.09	NO	
SDLT				
TPUL	Tension Pull	44.09	NO	
PCAL	Pad Caliper	44.09	TRI	0.250
ACAL	Arm Caliper	44.09	TRI	0.250
BSAT				
TPUL	Tension Pull	27.09	NO	
STAT	Status	27.09	NO	
DLYT	Delay Time	27.09	NO	
SI	Sample Interval	27.09	NO	
TXRX	Raw Telemetry 10 Receivers	27.09	NO	
FRMC	Tool Frame Count	27.09	NO	
GMOD	Gain processing mode	19.83	NO	
ACRt Sonde				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000

F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	

SDLT Pad				
TPUL	Tension Pull	44.08	NO	
NAB	Near Above	43.90	BLK	0.920
NHI	Near Cesium High	43.90	BLK	0.920
NLO	Near Cesium Low	43.90	BLK	0.920
NVA	Near Valley	43.90	BLK	0.920
NBA	Near Barite	43.90	BLK	0.920
NDE	Near Density	43.90	BLK	0.920
NPK	Near Peak	43.90	BLK	0.920
NLI	Near Lithology	43.90	BLK	0.920
NBAU	Near Barite Unfiltered	43.90	BLK	0.250
NLIU	Near Lithology Unfiltered	43.90	BLK	0.250
FAB	Far Above	44.26	BLK	0.250
FHI	Far Cesium High	44.26	BLK	0.250
FLO	Far Cesium Low	44.26	BLK	0.250
FVA	Far Valley	44.26	BLK	0.250
FBA	Far Barite	44.26	BLK	0.250
FDE	Far Density	44.26	BLK	0.250
FPK	Far Peak	44.26	BLK	0.250
FLI	Far Lithology	44.26	BLK	0.250
PTMP	Pad Temperature	44.09	BLK	0.920
NHV	Near Detector High Voltage	43.49	NO	
FHV	Far Detector High Voltage	43.49	NO	
ITMP	Instrument Temperature	43.49	NO	
DDHV	Detector High Voltage	43.49	NO	

Microlog Pad				
TPUL	Tension Pull	44.28	NO	
MINV	Microlog Lateral	44.28	BLK	0.750
MNOR	Microlog Normal	44.28	BLK	0.750

Data: SMU_318\0001 SP-GTET-DSNT-SDLT-BSAT-ACRT-CHIDLE Date: 17-Jul-12 18:33:17

WELL	SMU #318		
FIELD	SMU		
COUNTY	FINNEY	STATE	KANSAS
HALLIBURTON		MICRO LOG	