


WELL PLUGGING RECORD

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 211 No. Broadway Wichita, Kansas

Graham County, Sec. 17 Twp. 7S Rge. (E) 22 (W) Location as "NE/CNW%SW%" or footage from lines C E/2 E/2 SW/4 Lease Owner Chief Drilling Co., Inc. Lease Name WORCHESTER Well No. 1 Office Address Box 797 - Great Bend, Kansas Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed 10/14/19 65 Application for plugging filed 10/14/19 65 Application for plugging approved 10/14/19 65 Plugging commenced 10/14/19 65 Plugging completed 10/14/19 65 Reason for abandonment of well or producing formation Dry Hole

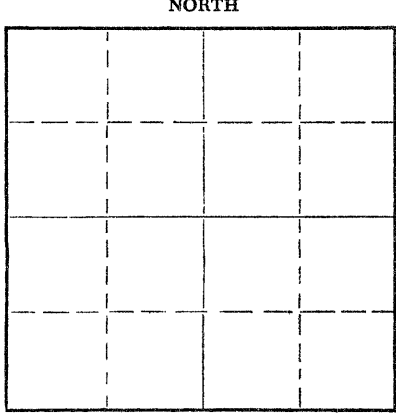

If a producing well is abandoned, date of last production 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols - Moreland, Kansas Producing formation Depth to top Bottom Total Depth of Well 3762 Feet Show depth and thickness of all water, oil and gas formations.

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: 0, 225', 8-5/8", 225, None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Wooden plug set @ 540' Mixed 20 sacks cement through drill pipe Wooden plug set @ 210' Mixed 20 sacks cement through drill pipe Hulls & wooden plug set @ 40' Mixed 10 sacks cement through drill pipe

RECEIVED STATE CORPORATION COMMISSION OCT 19 1965 OCT 19 1965 CONSERVATION DIVISION Wichita, Kansas

Name of Plugging Contractor Chief Drilling Co., Inc. Address Box 797 - Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss. V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. Richard Hoover CHIEF DRILLING CO., INC. Box 797 - Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 15th day of October, 19 65

My commission expires Jan. 26, 1967 Carmen R. Cook, Notary Public.

15-065-30147-00-00

RECEIVED  
STATE CORPORATION COMMISSION

OCT 19, 1965  
OCT 19 1965

WELL LOG

Chief Drilling Co., Inc.  
Box 797  
Great Bend, Kansas

WORCHESTER #1  
C E/2 E/2 SW/4  
Sec. 17-7S-22W  
Graham County, Kansas

CONSERVATION DIVISION  
Wichita, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 10-6-65  
Completed: 10-14-65

Casing Record: 8-5/8" @ 225' w/200 sacks Pozmix (60-40) & 2% Gel.

DRY & ABANDONED

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
			2328 Gr.
Sand	0	100	2330 D.F.
Sand & Shale	100	1785	2333 K.B.
Shale	1785	1937	
Anhydrite	1937	1970	
Shale	1970	2750	
Shale & Lime	2750	3162	
Lime	3162	3518	
Lime & Shale	3518	3557	
Lime	3557	3762	
Total Depth	3762		

<u>FORMATION TOPS</u>	
Anhydrite	1935 + 398
Fort Riley	2535 - 202
Topeka	3321 - 988
Heebner	3518 - 1185
Toronto	3541 - 1208
Lansing	3557 - 1224
Base Kansas City	3756 - 1423
Total Depth	3762 - 1429

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C E/2 E/2 SW/4 of Section 17-7S-22W, Graham County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover  
V. Richard Hoover, President

Subscribed and sworn to before me this 15th day of October, 1965.

Carmen R. Cook  
Carmen R. Cook, Notary Public

My commission expires: Jan. 26, 1967.