



**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company	DOWNING - NELSON OIL CO. INC.		
Well	STALNAKER "B" #1-14		
Field	WILDCAT		
County	TREGO	State	KANSAS
Location:	AP1 # : 15-195-22847-0000		Other Services CDL/CNL MEL/SONIC
Well	STALNAKER "B" #1-14		
Field	WILDCAT		
County	TREGO	State	KANSAS
Permanent Datum	GROUND LEVEL	Elevation	2218
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 14 TWP 14S RGE 21W			
Date	2/27/13		
Run Number	ONE		
Depth Driller	4079		
Depth Logger	4081		
Bottom Logged Interval	4079		
Top Log Interval	00		
Casing Driller	8 5/8"@218'		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,000 PPM	
Density / Viscosity	9.0/46		
pH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.540@83F		
Rmf @ Meas. Temp	.405@83F		
Rmc @ Meas. Temp	.648@83F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.383@117F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:45 A.M.		
Maximum Recorded Temperature	117F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	RON NELSON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS

ELLIS, KS. S. ON BLKTOP TO "VICTORIA RD." (LAKE RD.) W. TO "RD. 390", 2S. PAST "S" CURVE, E. INTO

Database File:

010417ddn.db

Dataset Pathname:

pass3.11

Presentation Format:

dil2


Dataset Creation:


Wed Feb 27 10:59:52 2013

Charted by:

Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			-----		
			1000	CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

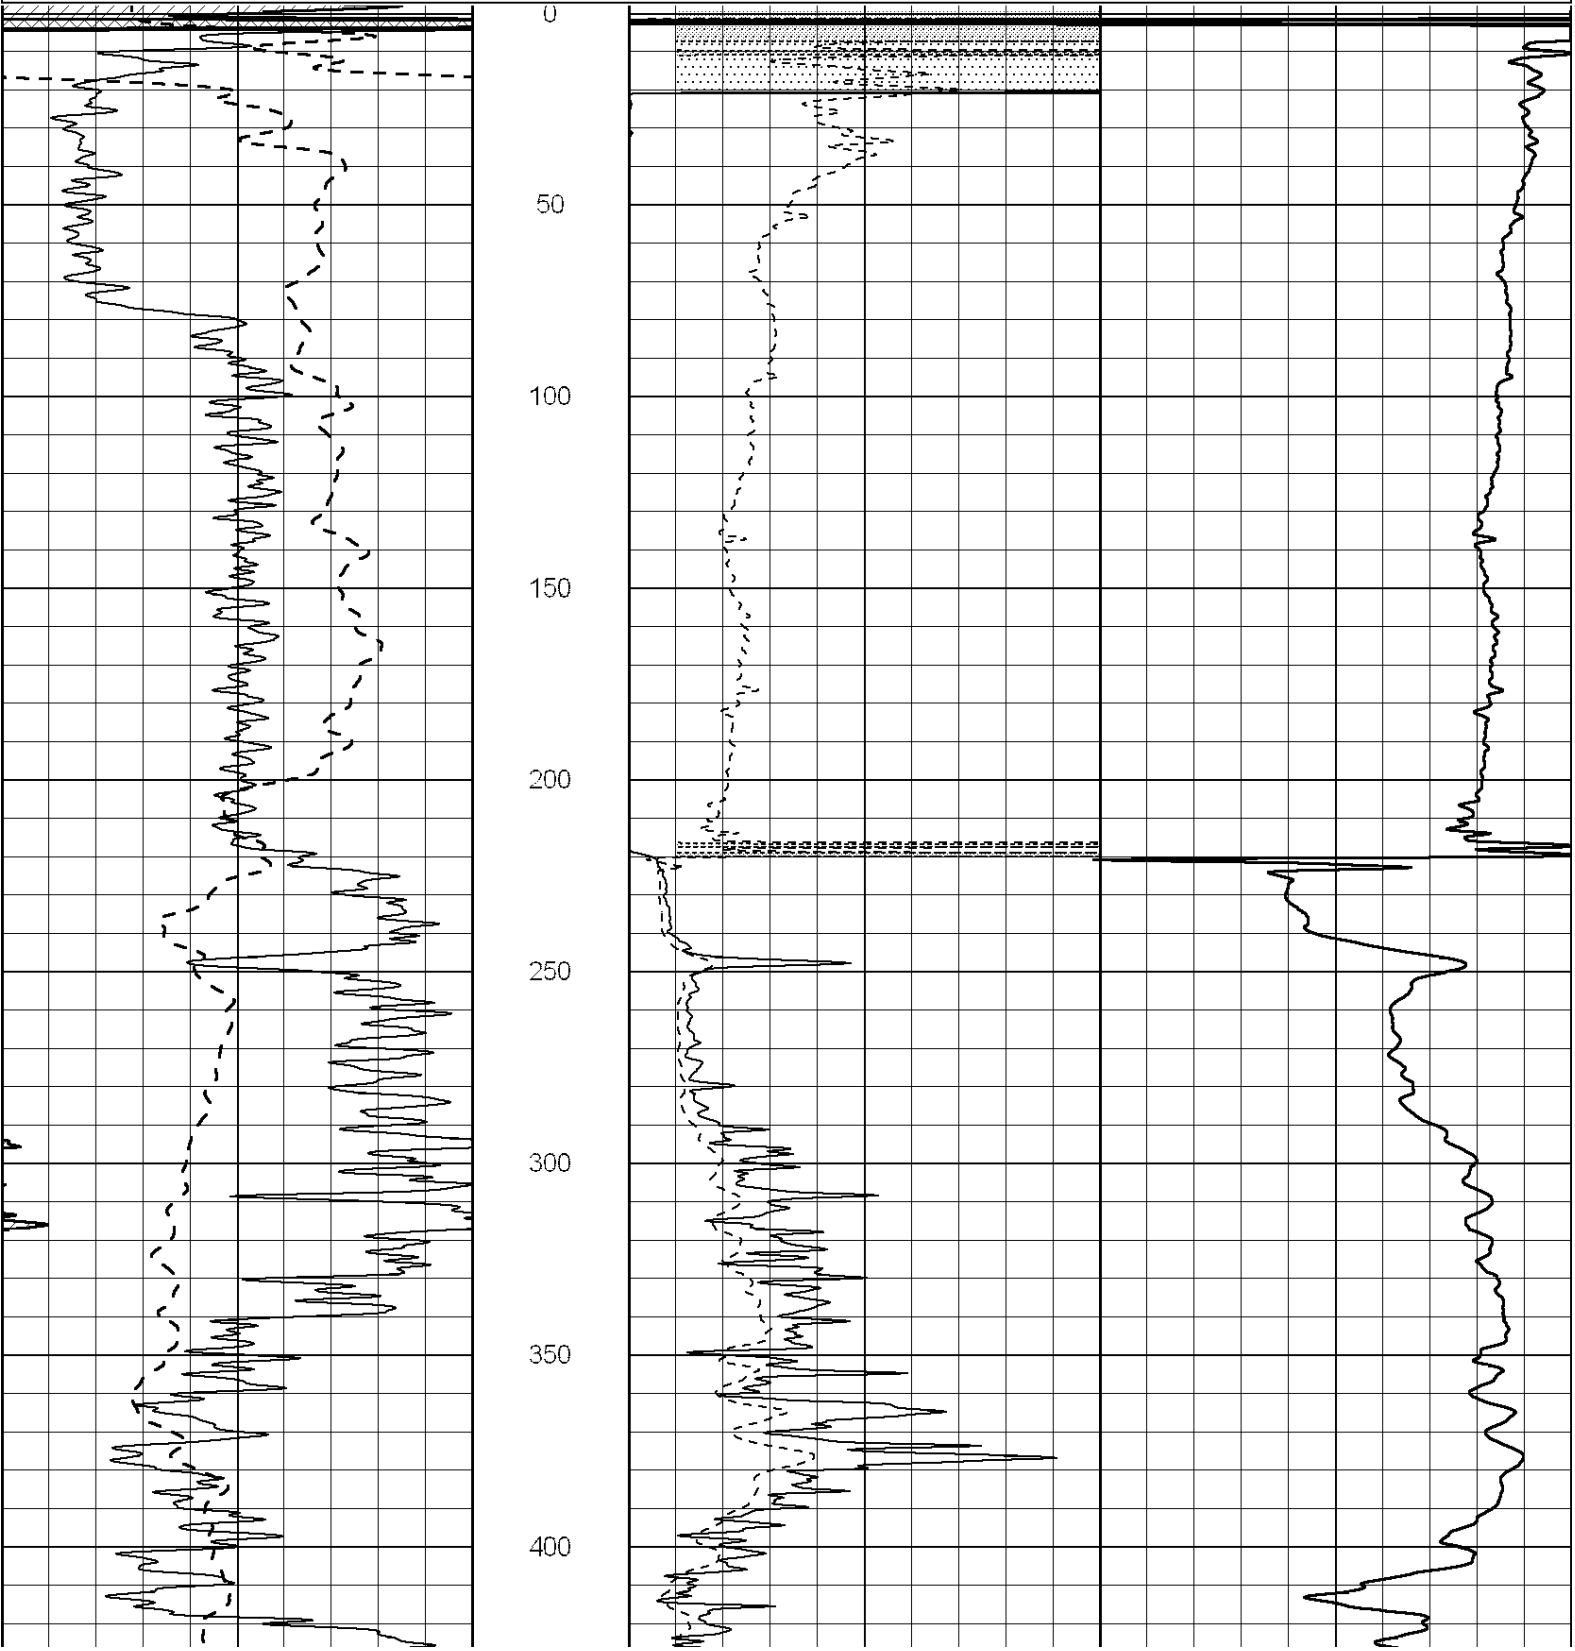

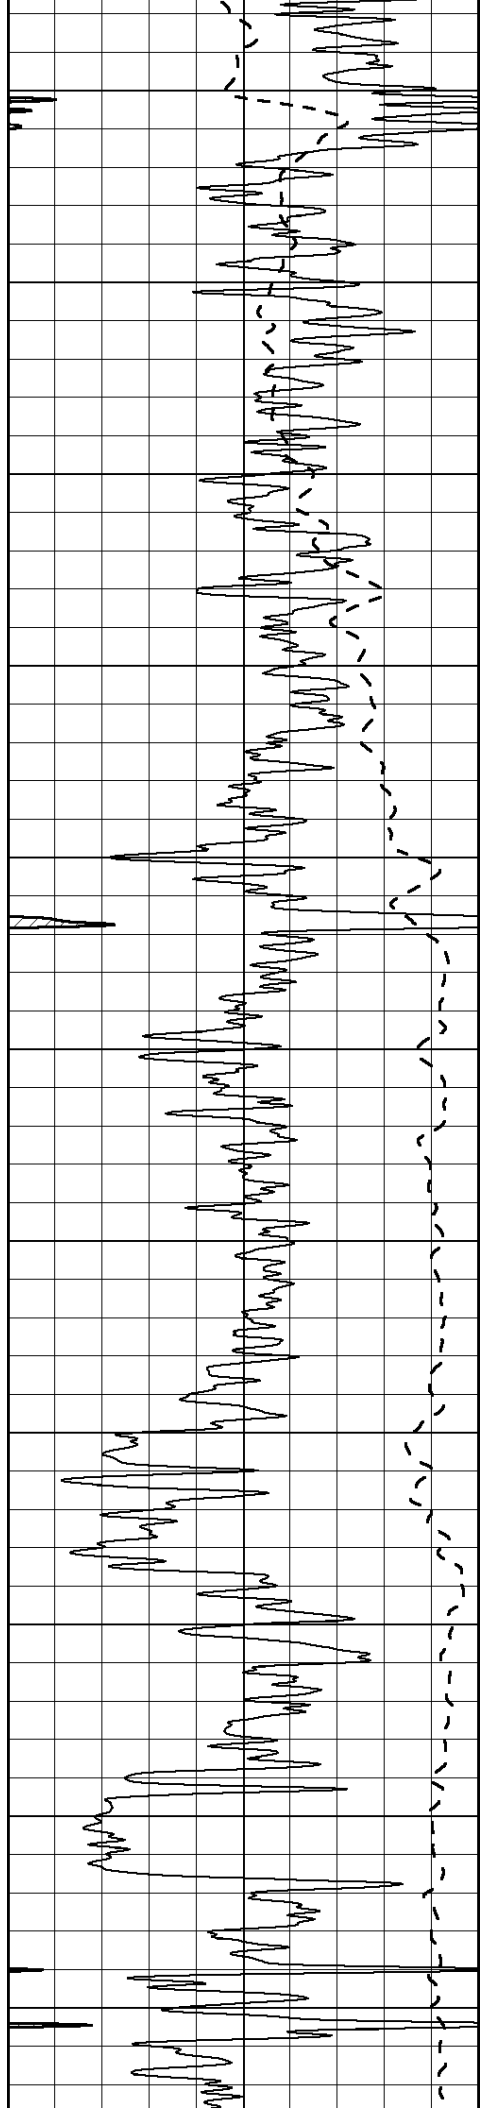

450

500

550

600

650

700


750


800

850

900

950

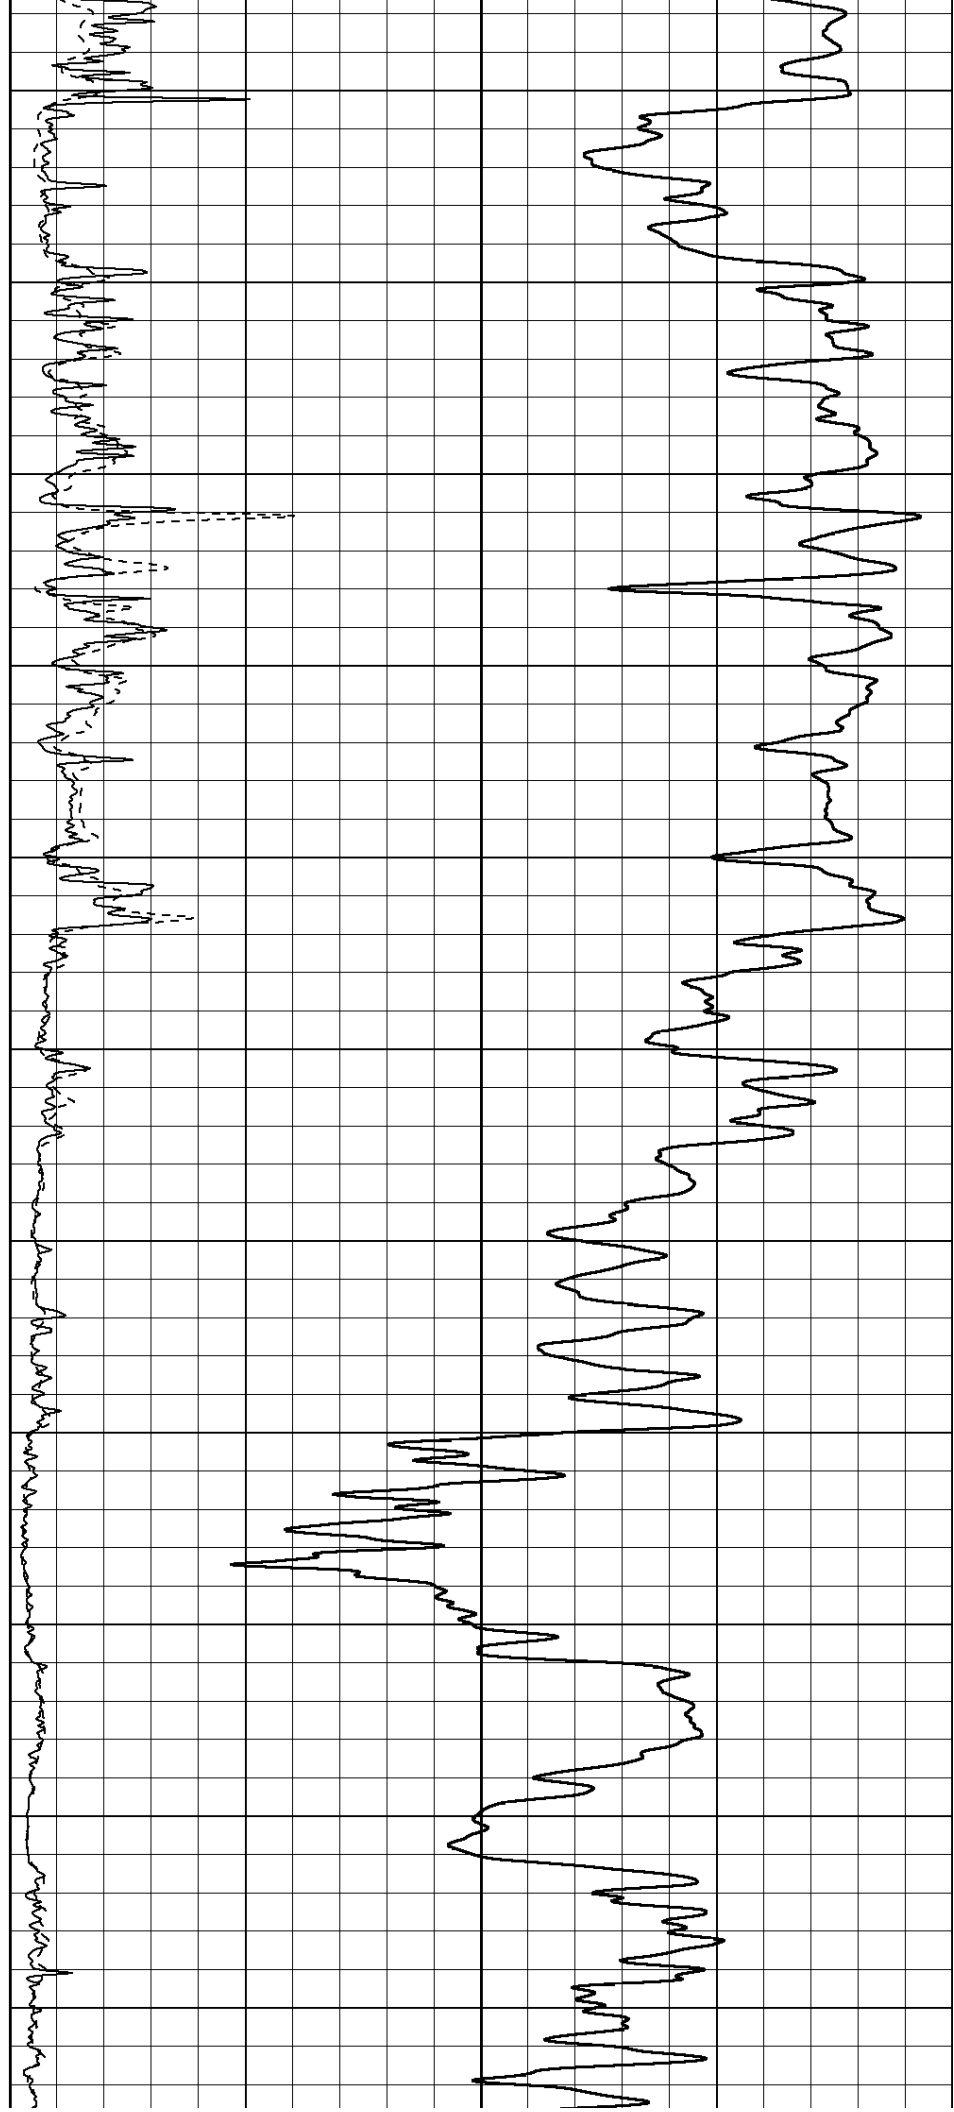

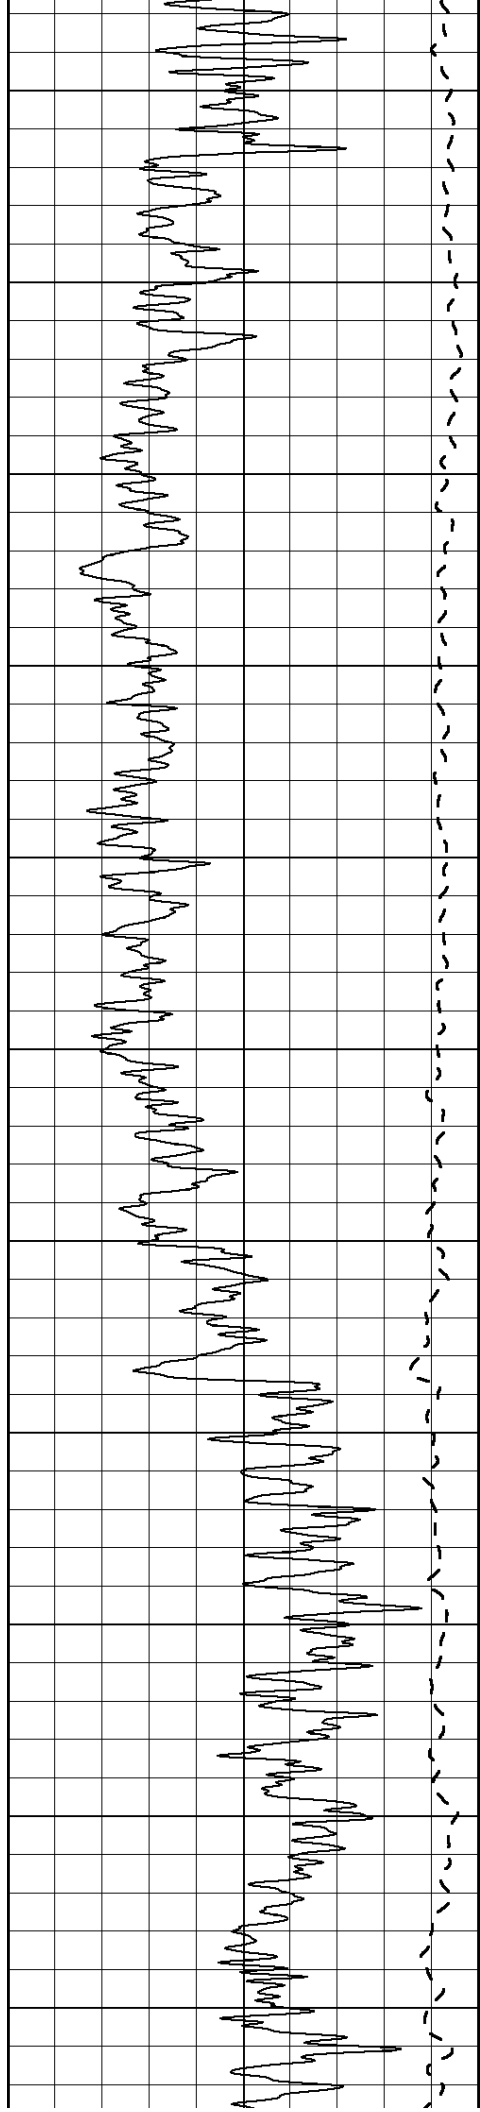

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

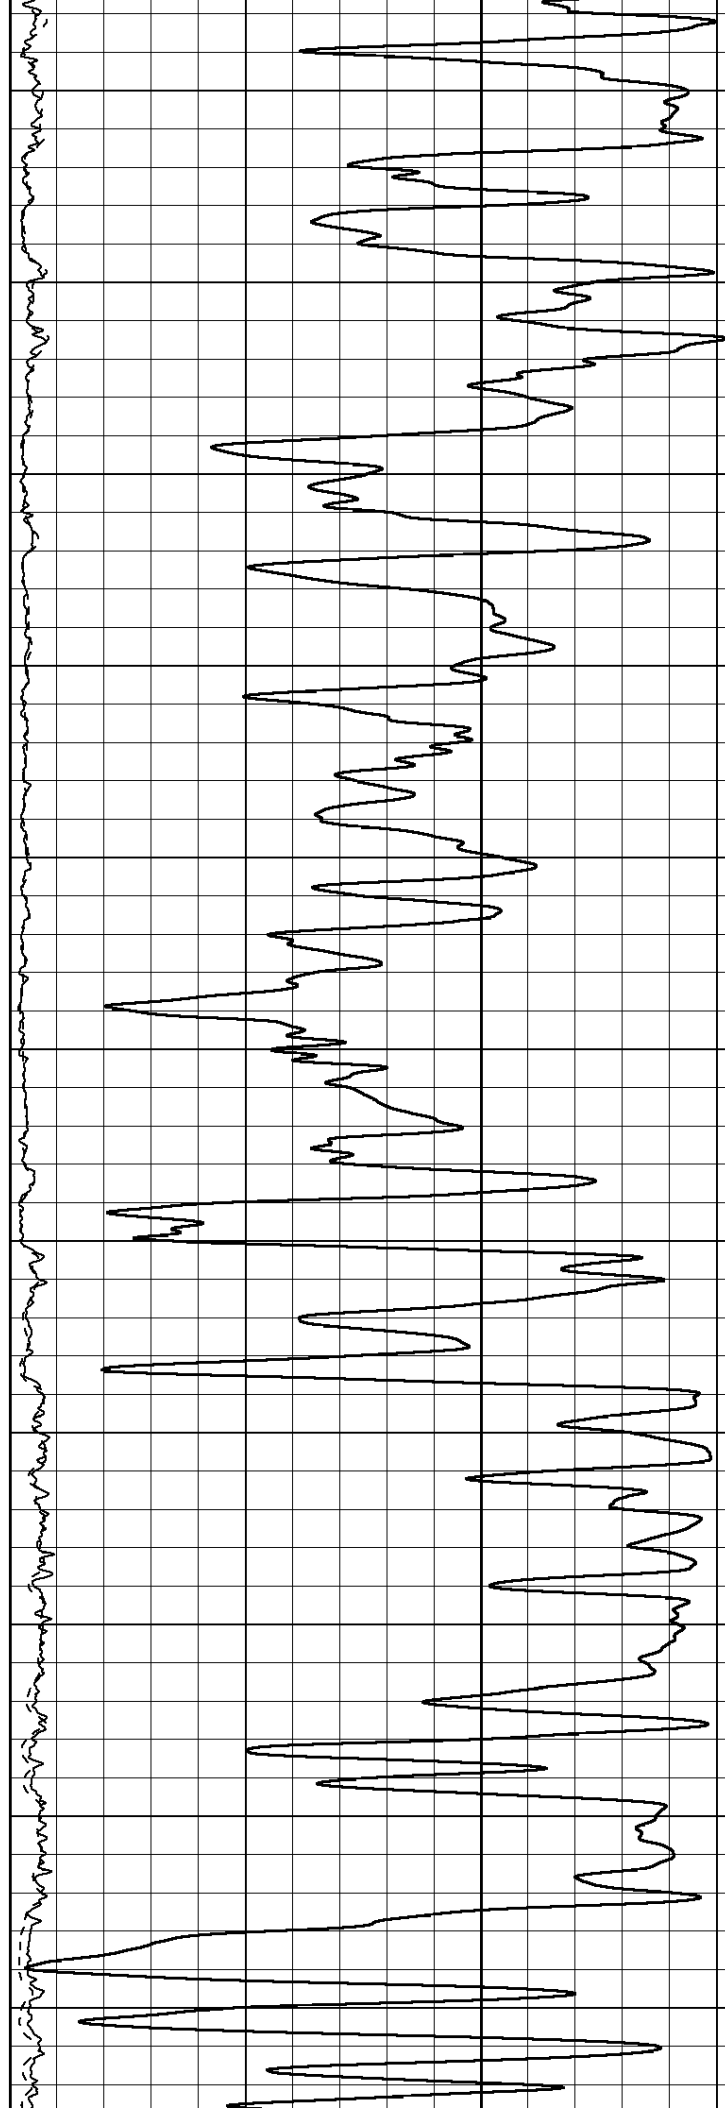

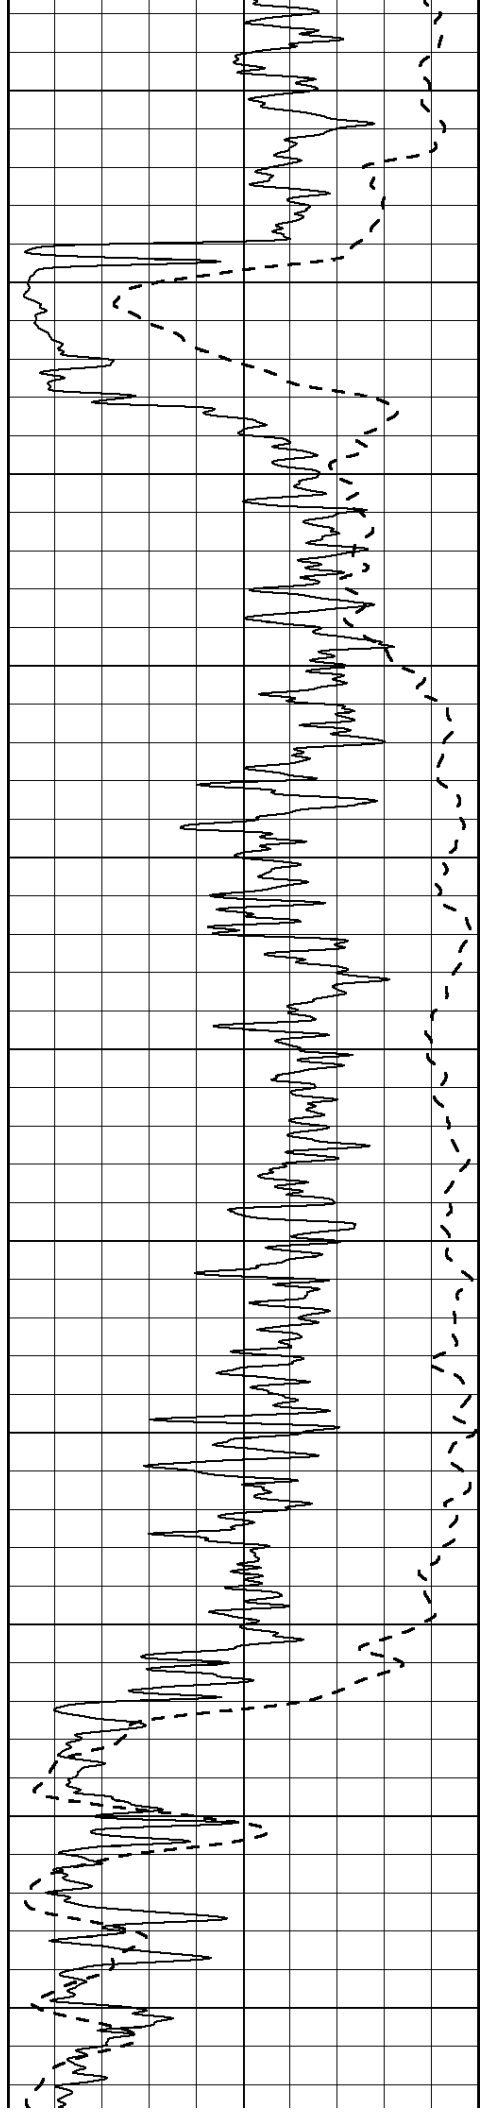

1550

1600

1650

1700

1750

1800


1850



1900


1950

2000

2050

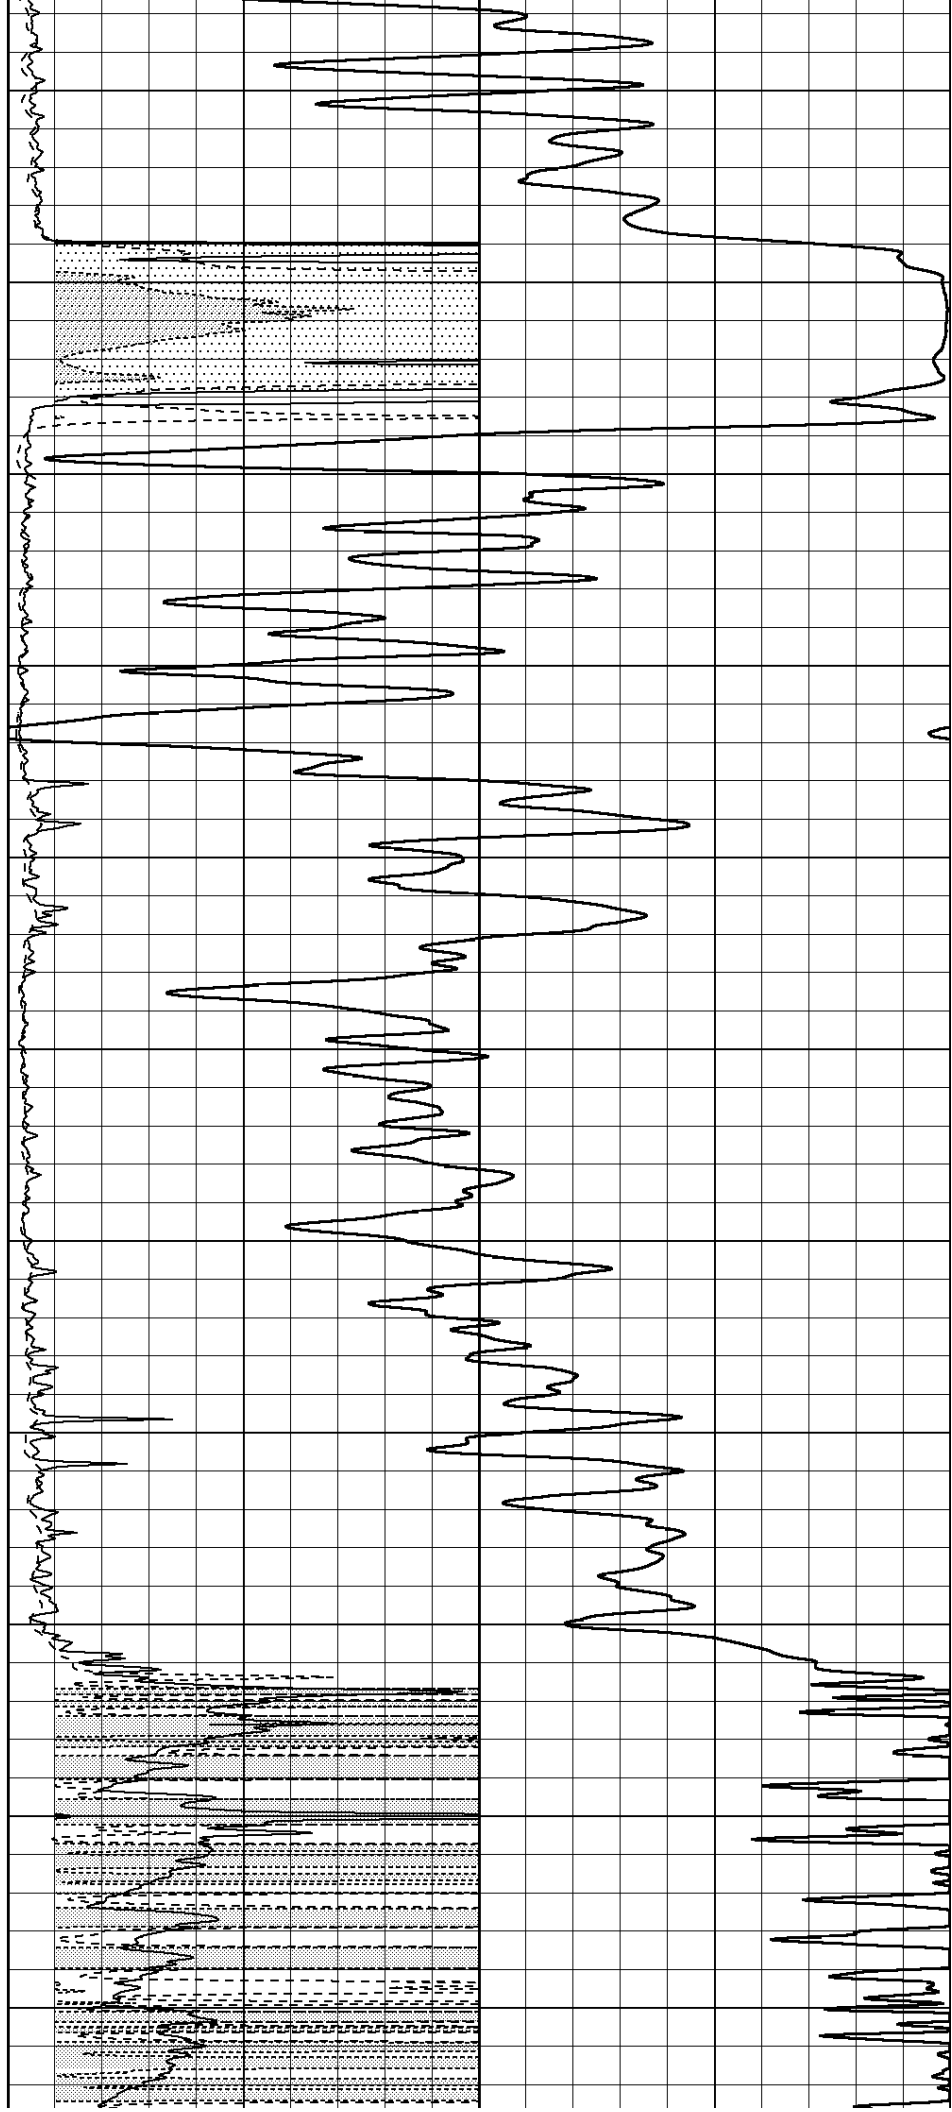

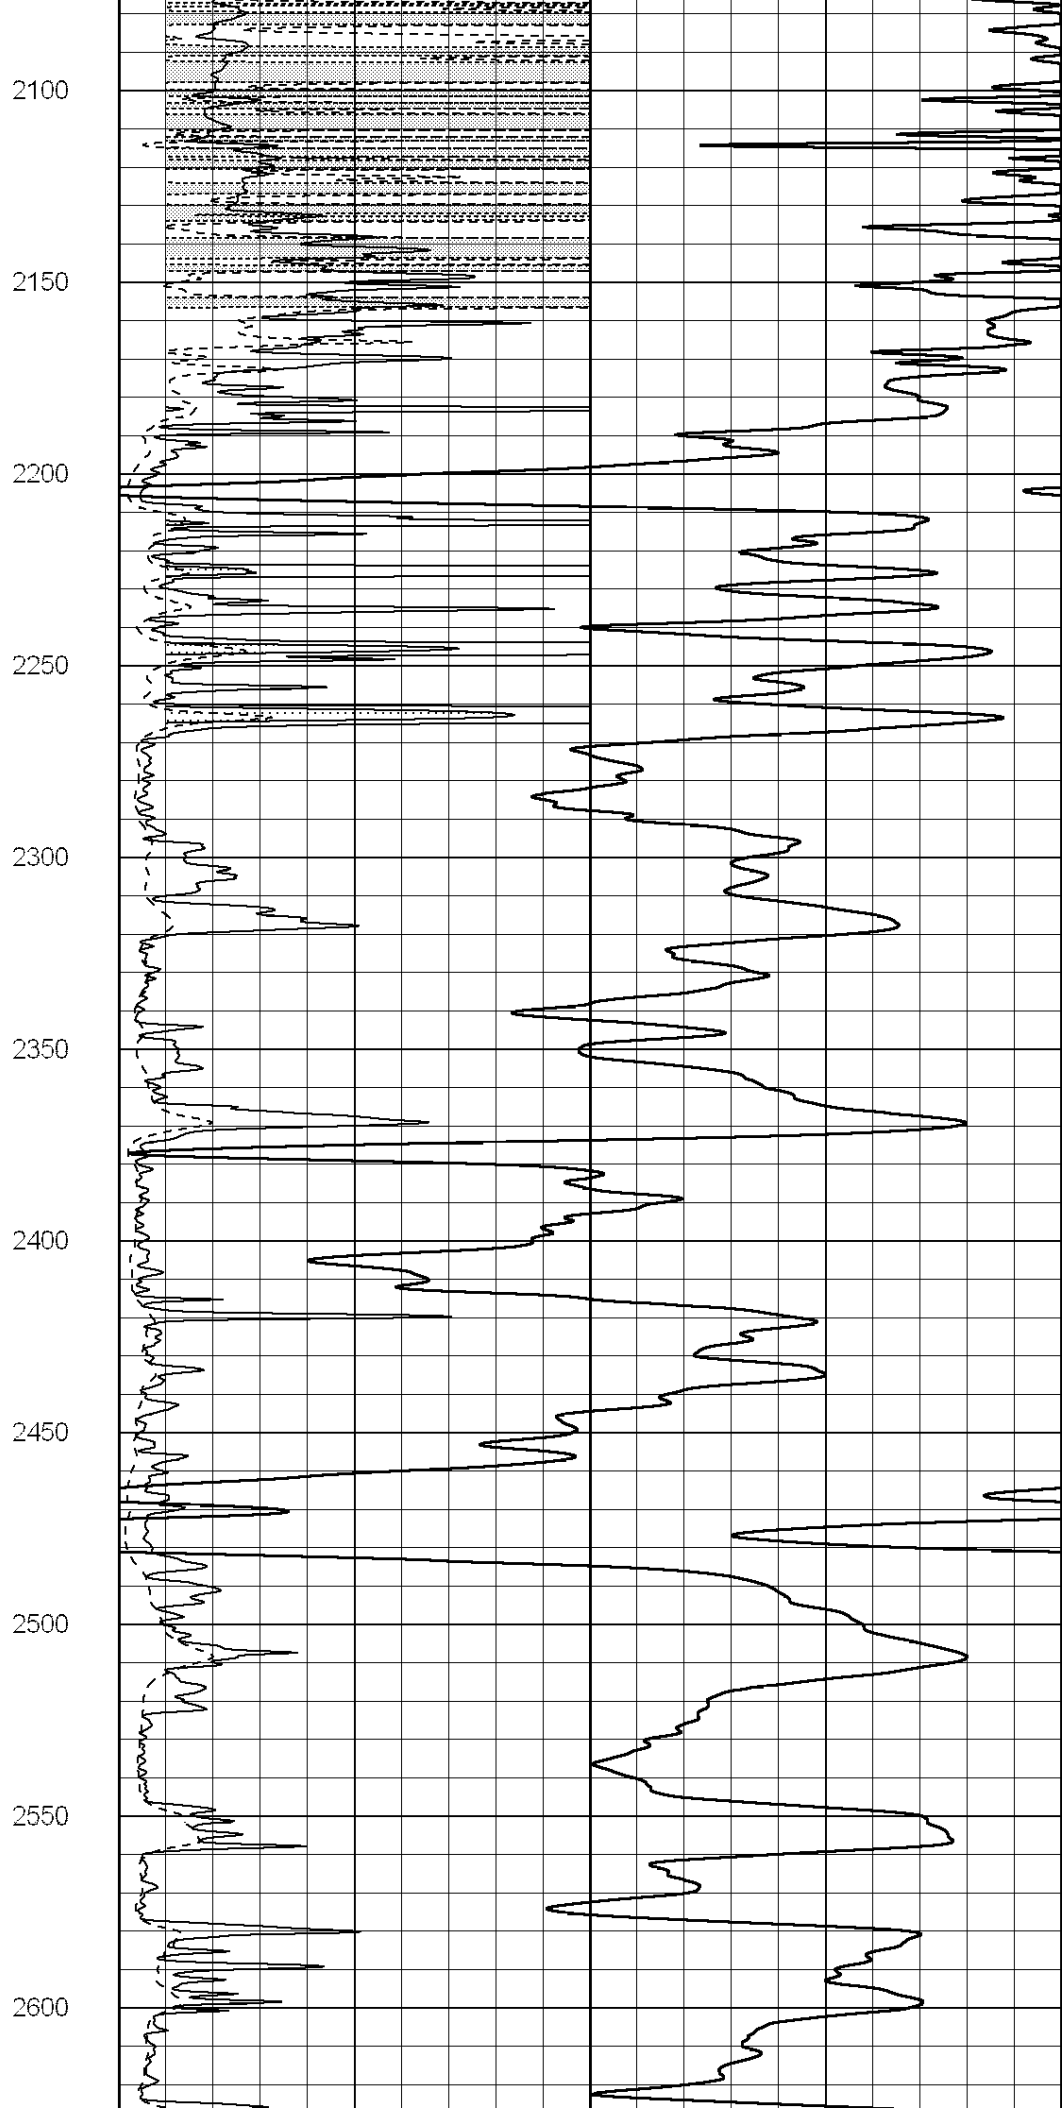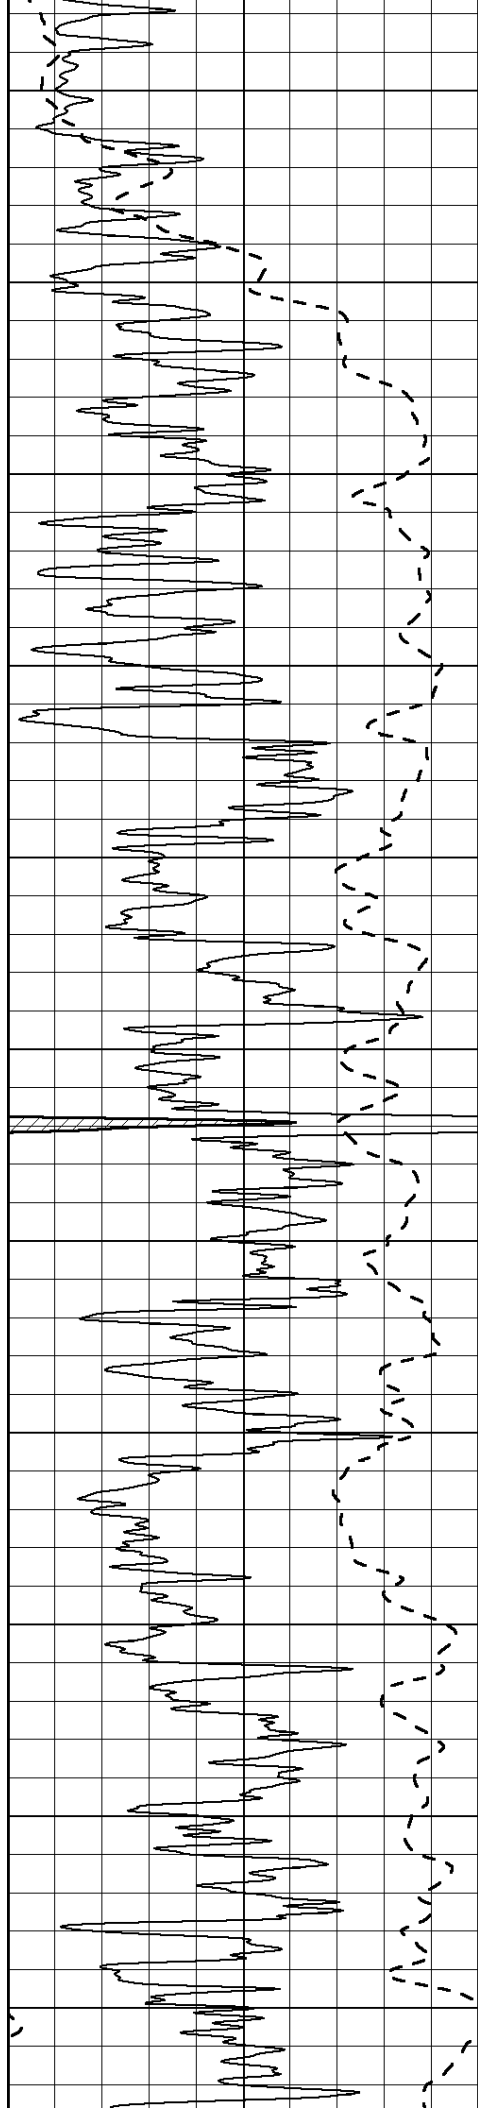

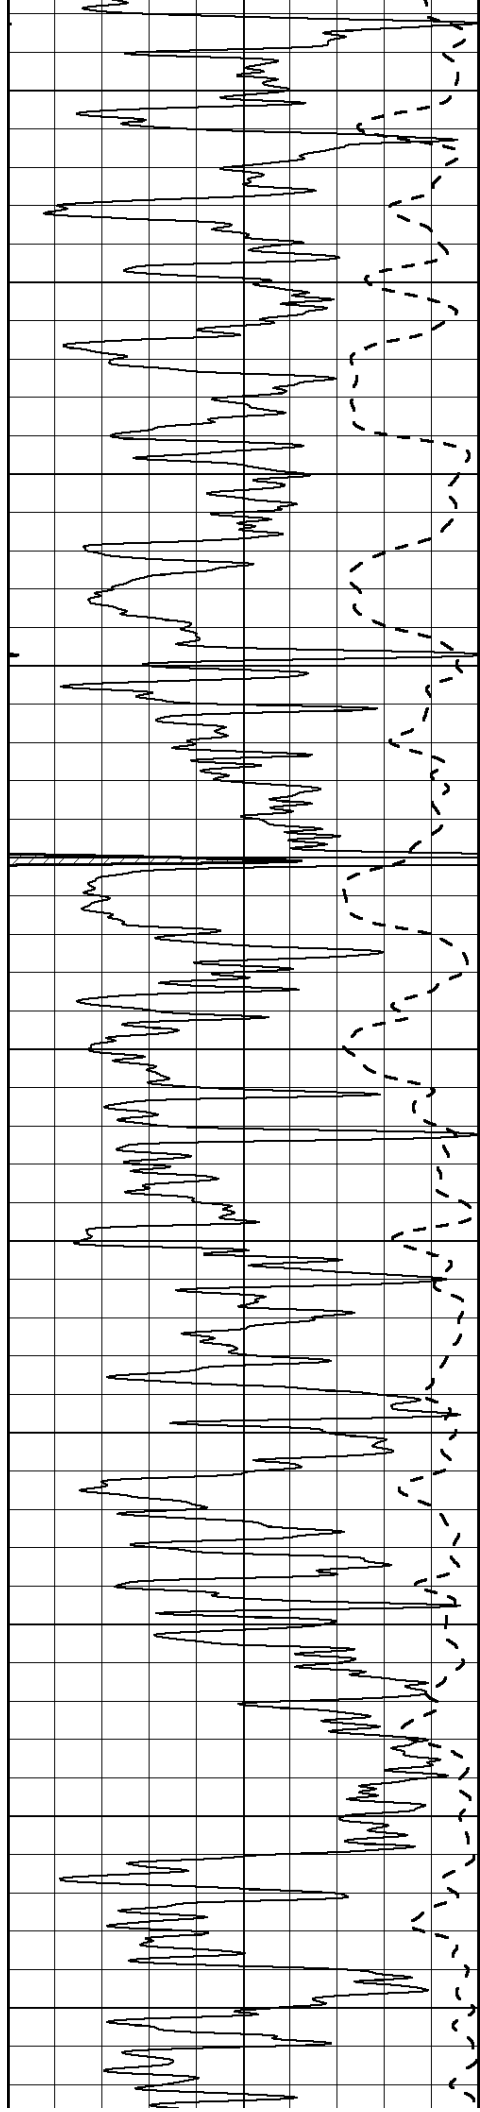

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

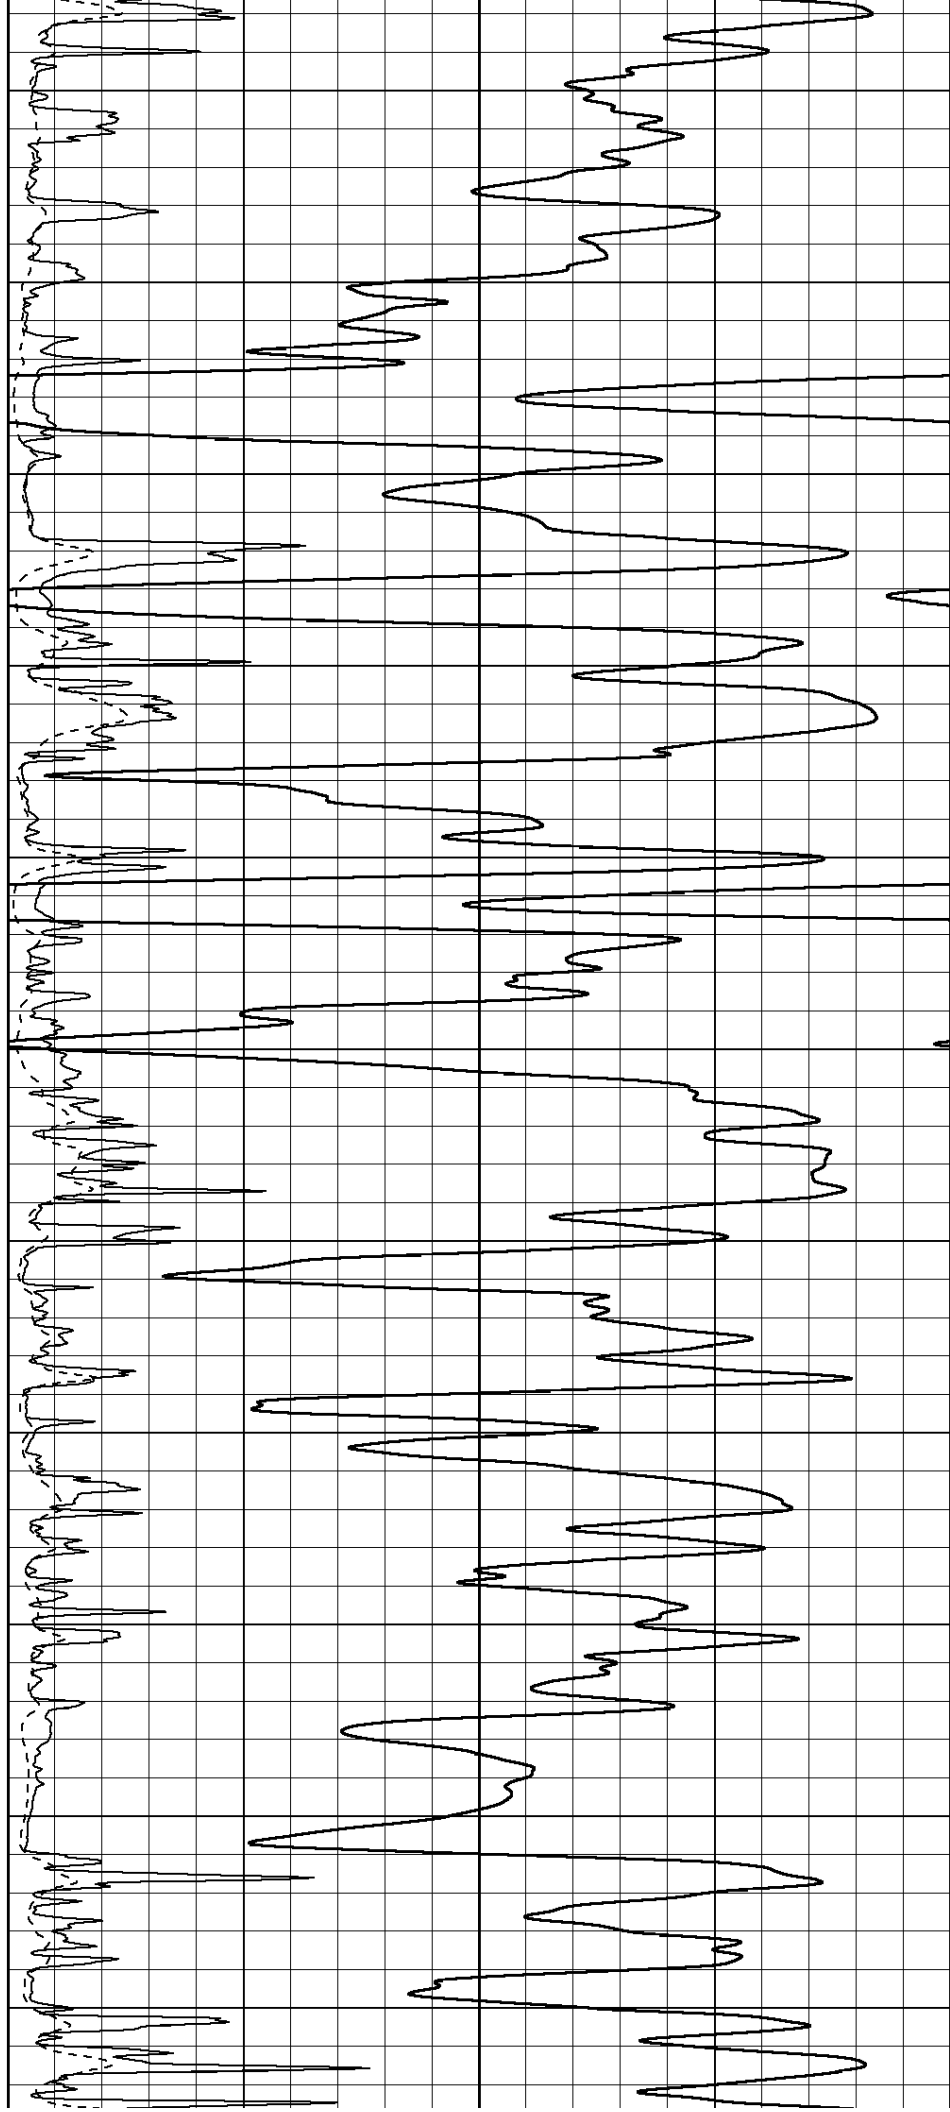

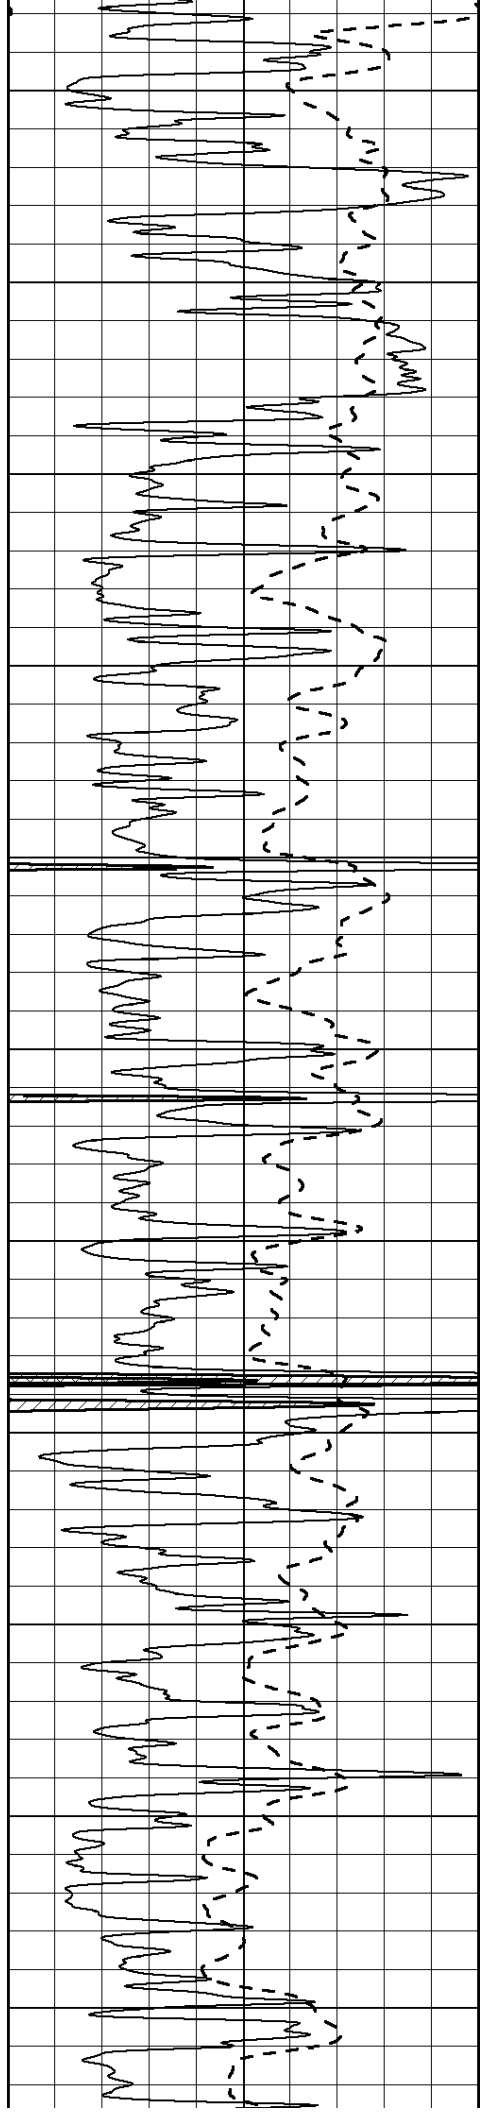

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

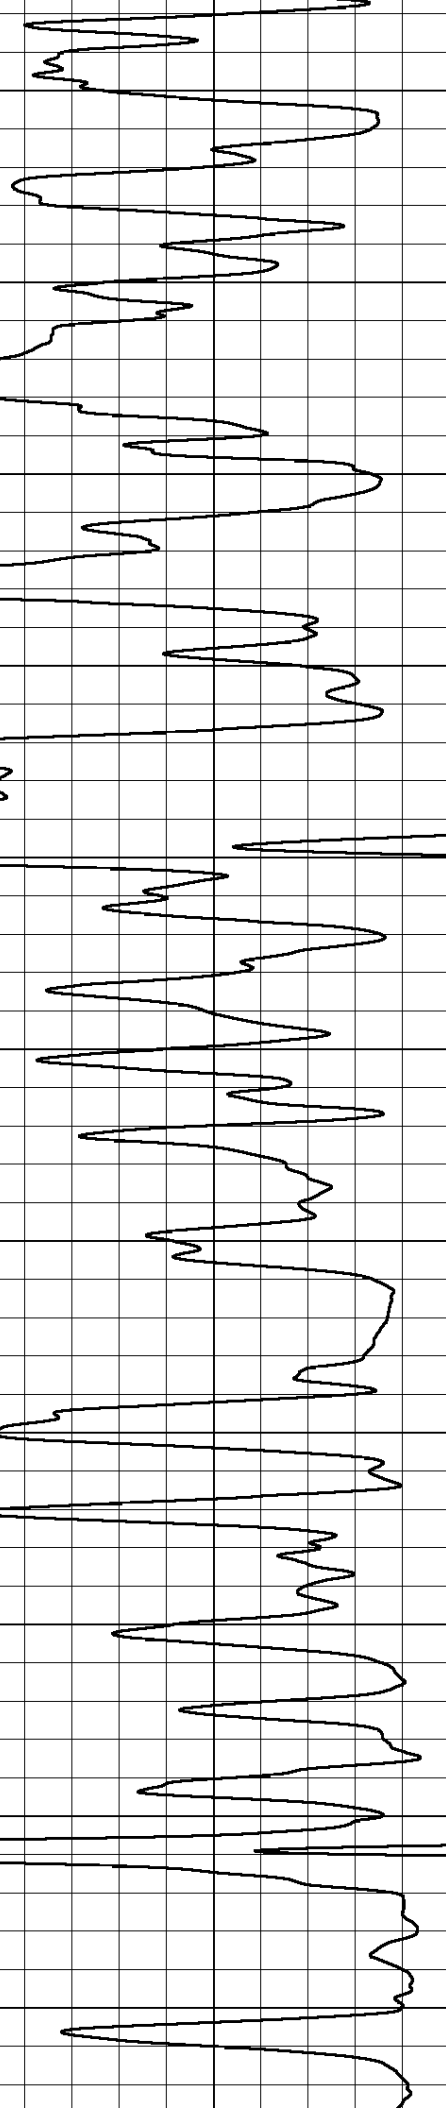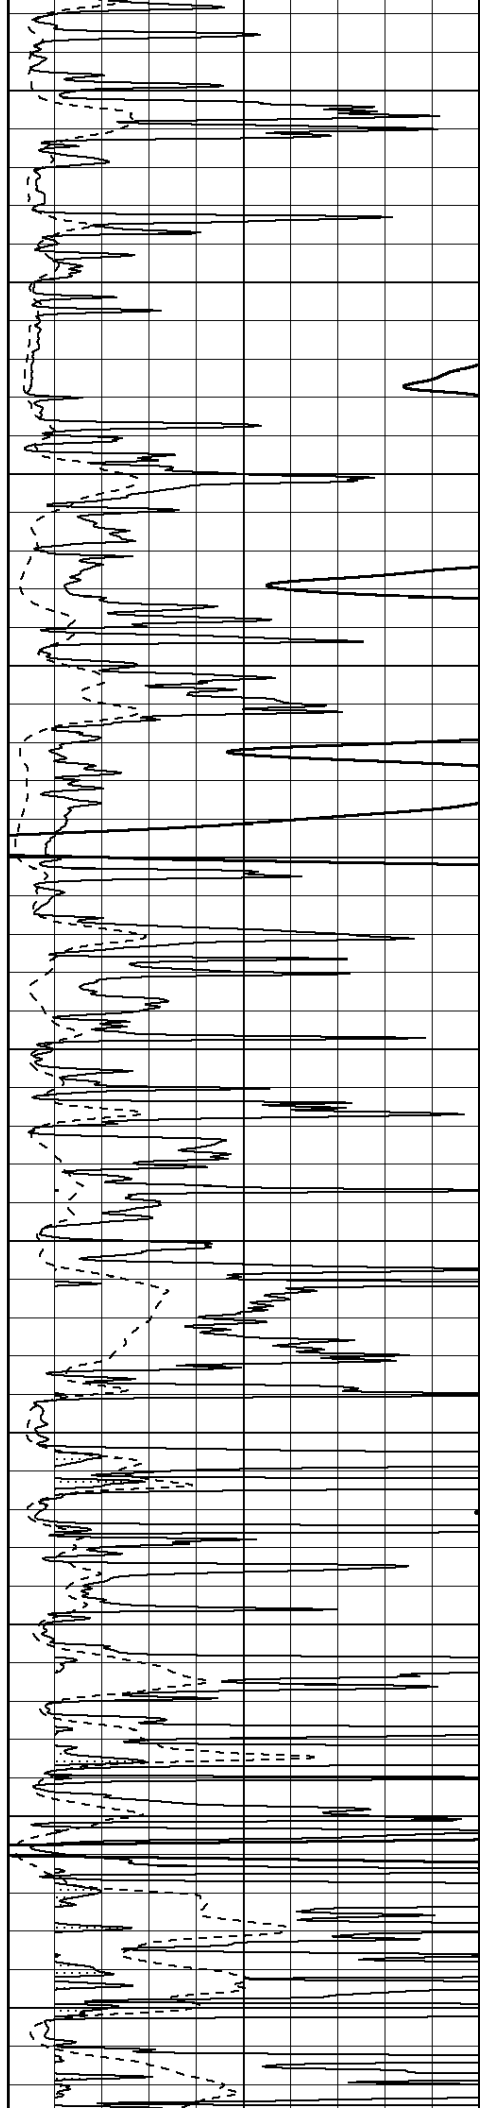

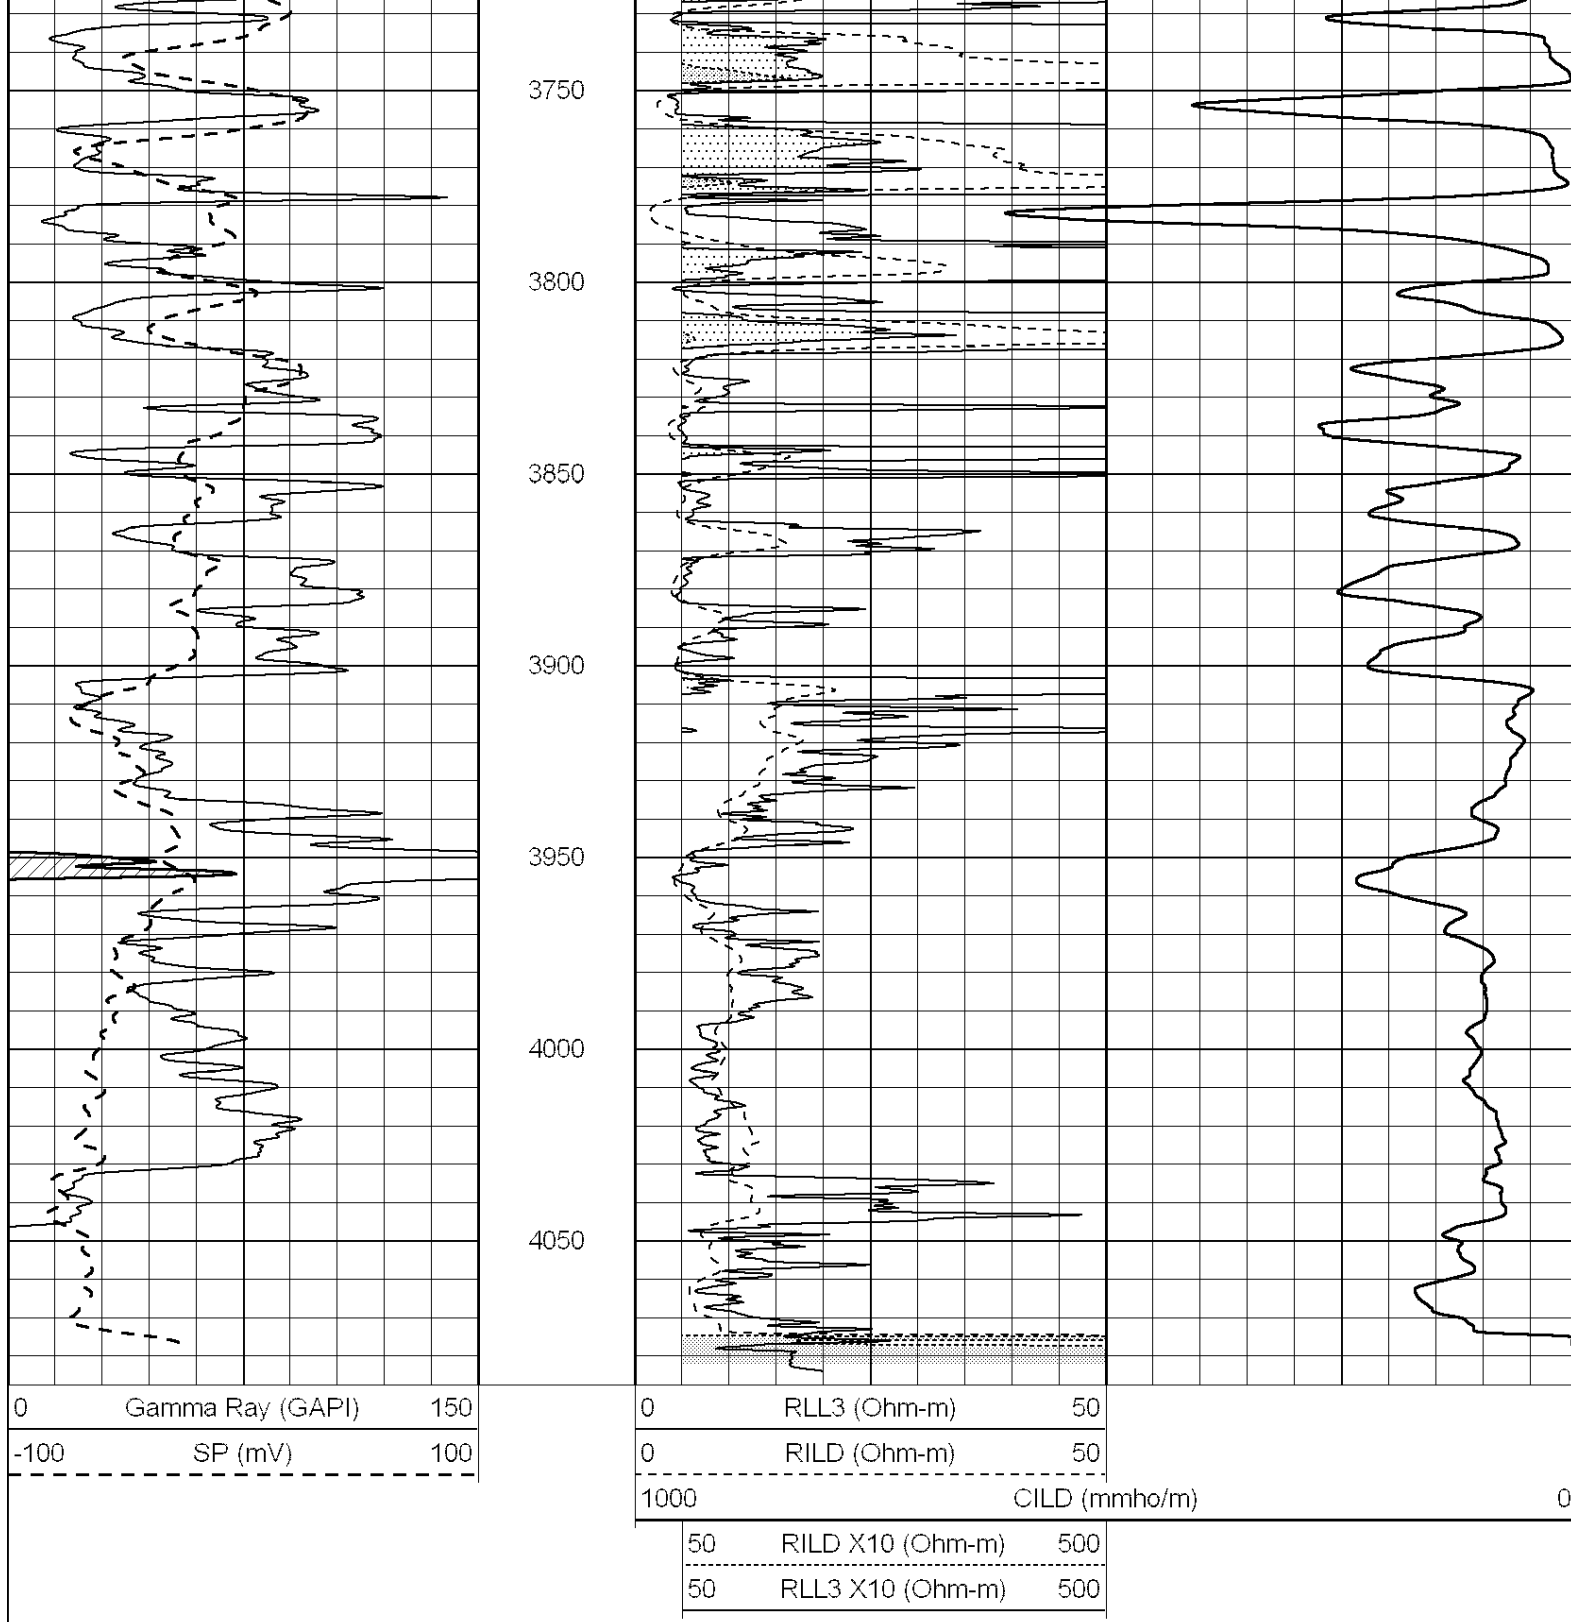


ANHYDRITE

Database File: 010417ddn.db
Dataset Pathname: pass3.12
Presentation Format: _dil
Dataset Creation: Wed Feb 27 11:00:44 2013
Charted by: Depth in Feet scaled 1:240



-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

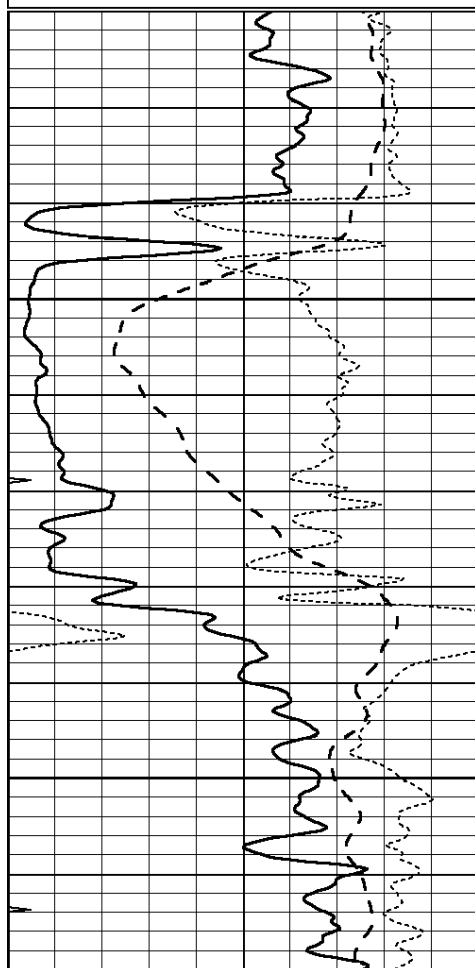

1600

1650

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

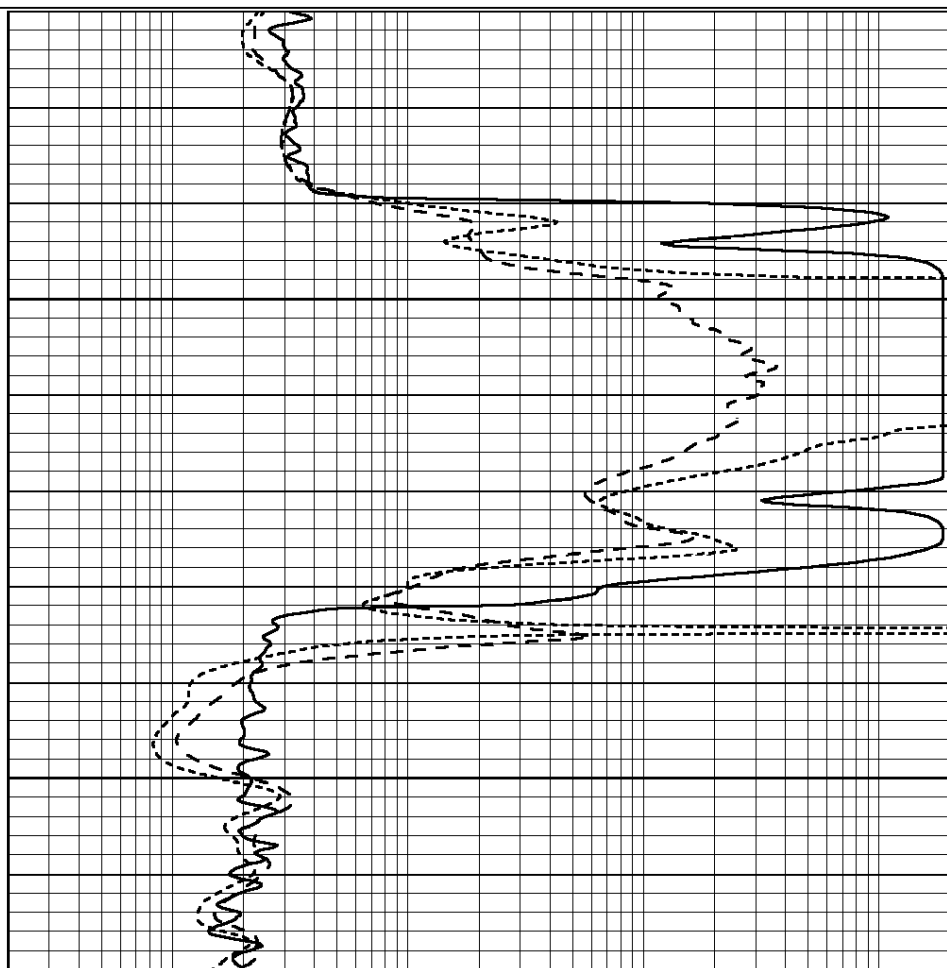

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File: 010417ddn.db
 Dataset Pathname: pass3.11
 Presentation Format: _dil
 Dataset Creation: Wed Feb 27 10:59:52 2013
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



3200



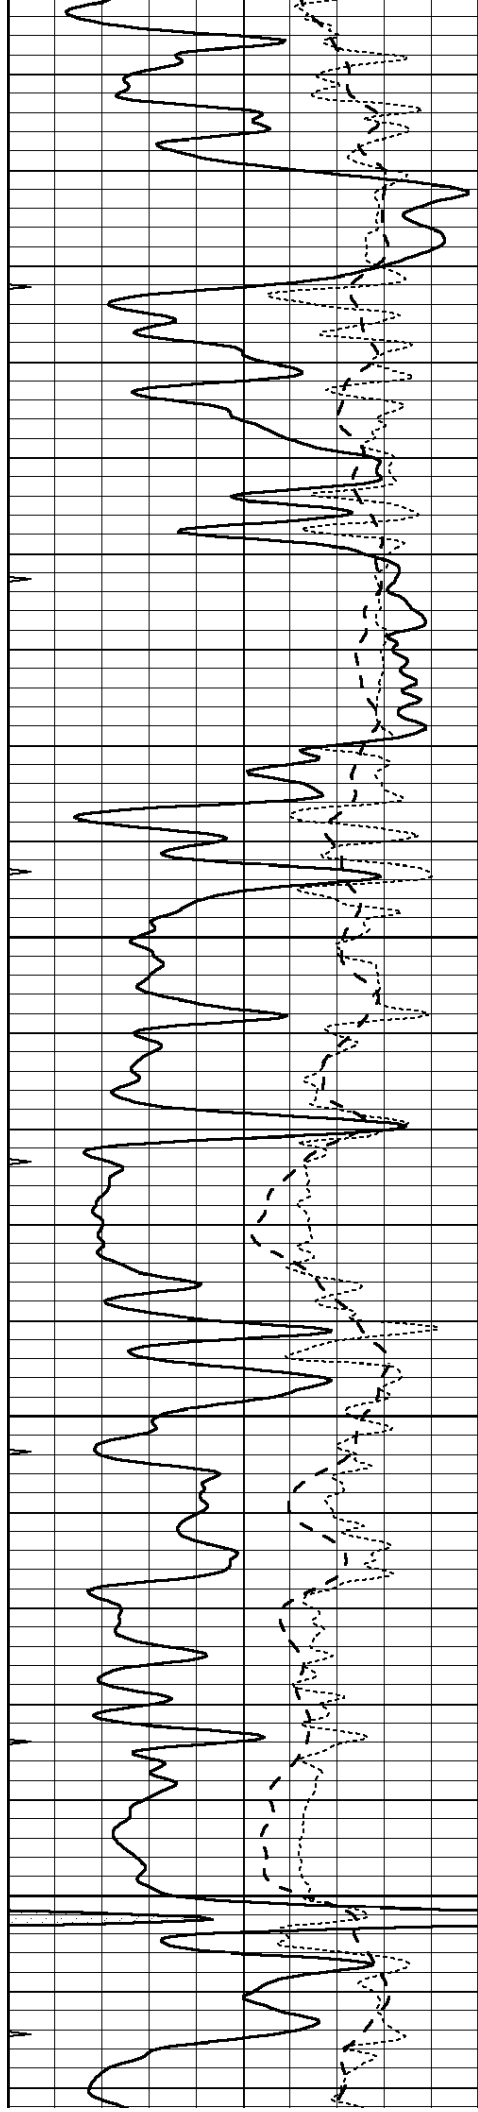



3250

3300

3350

3400

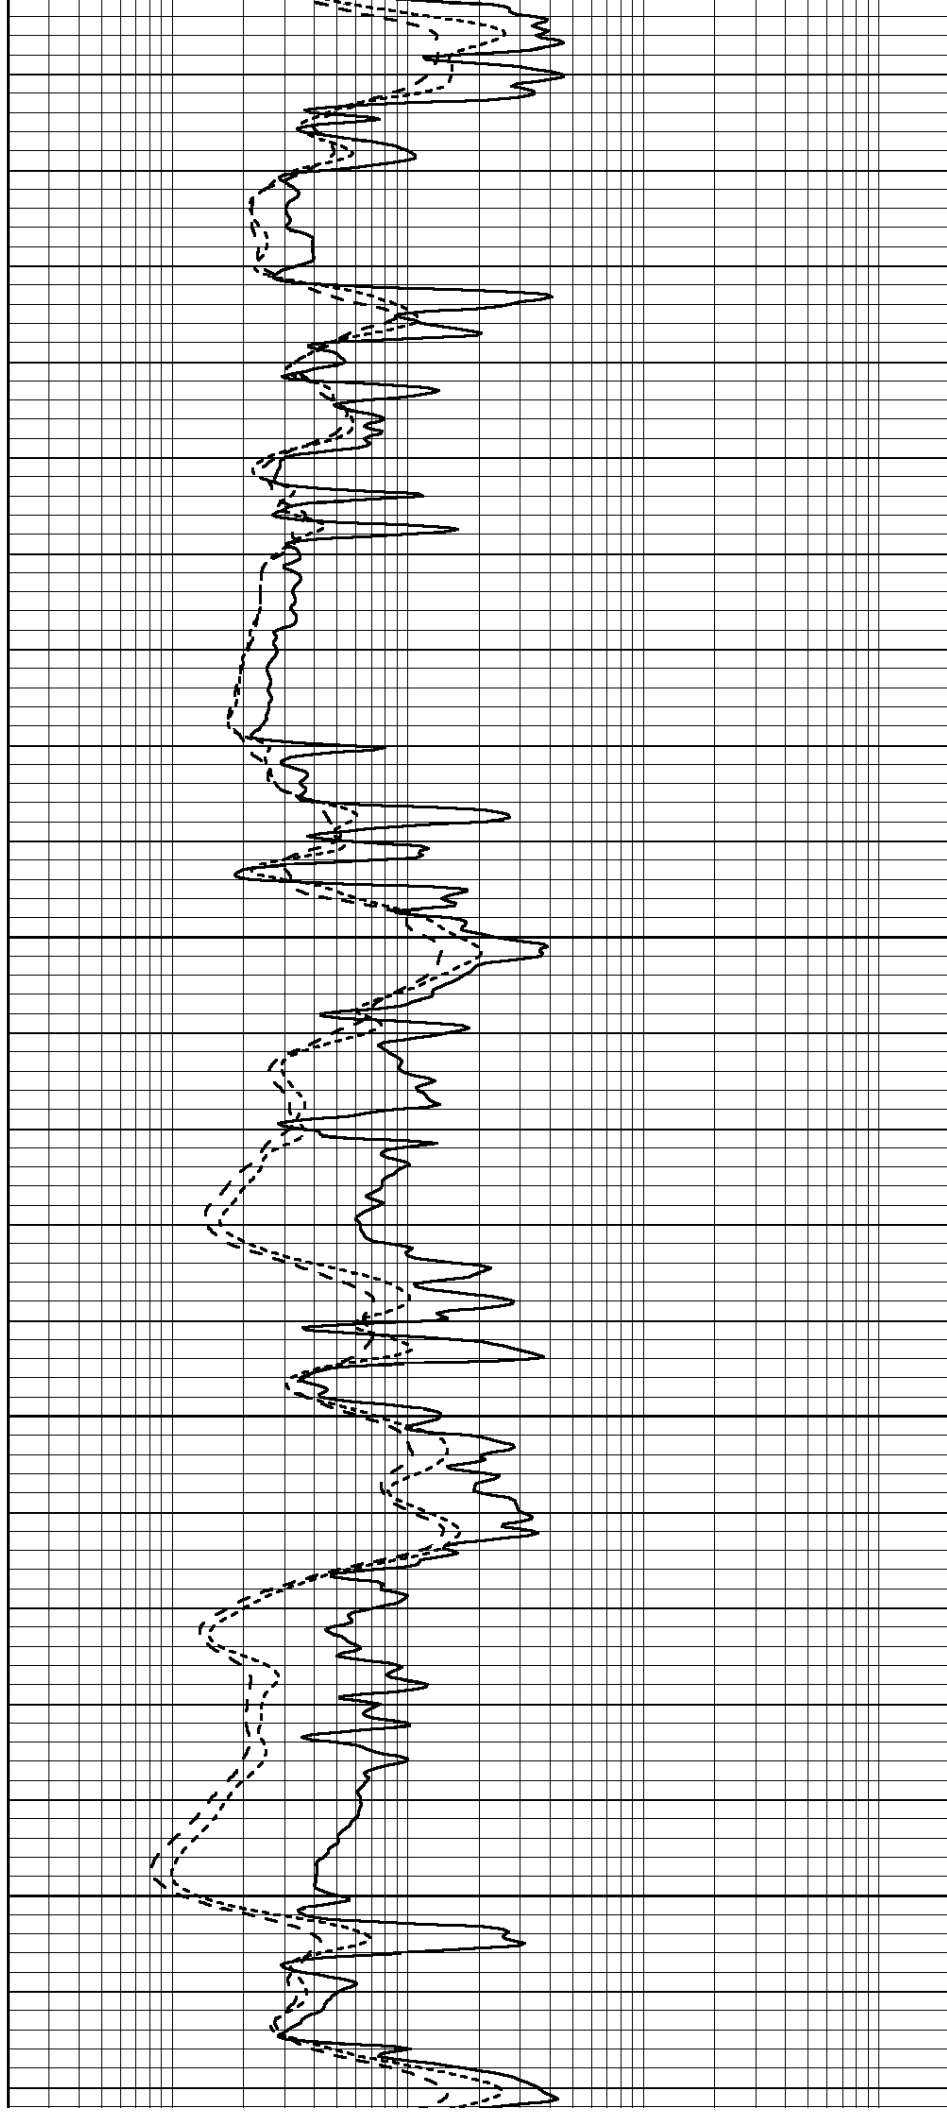

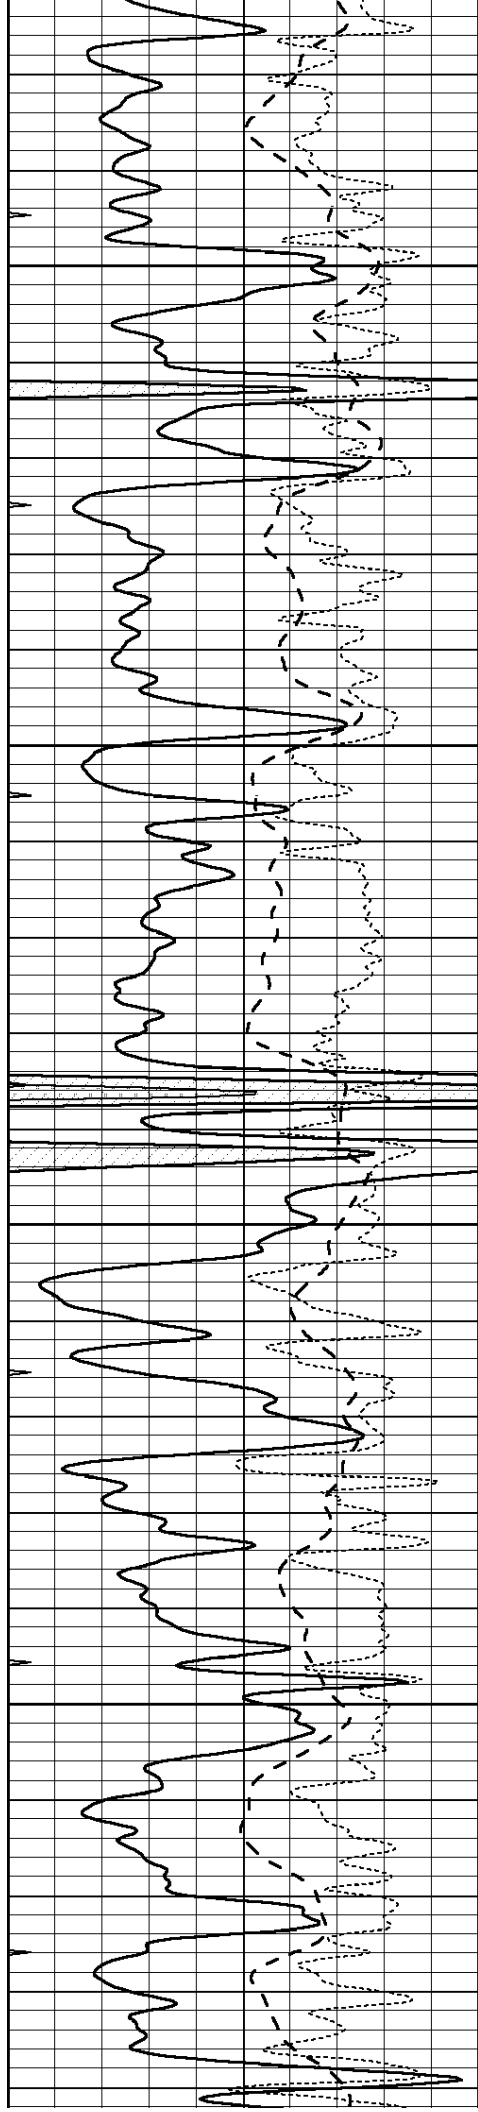



3450

3500

3550

3600

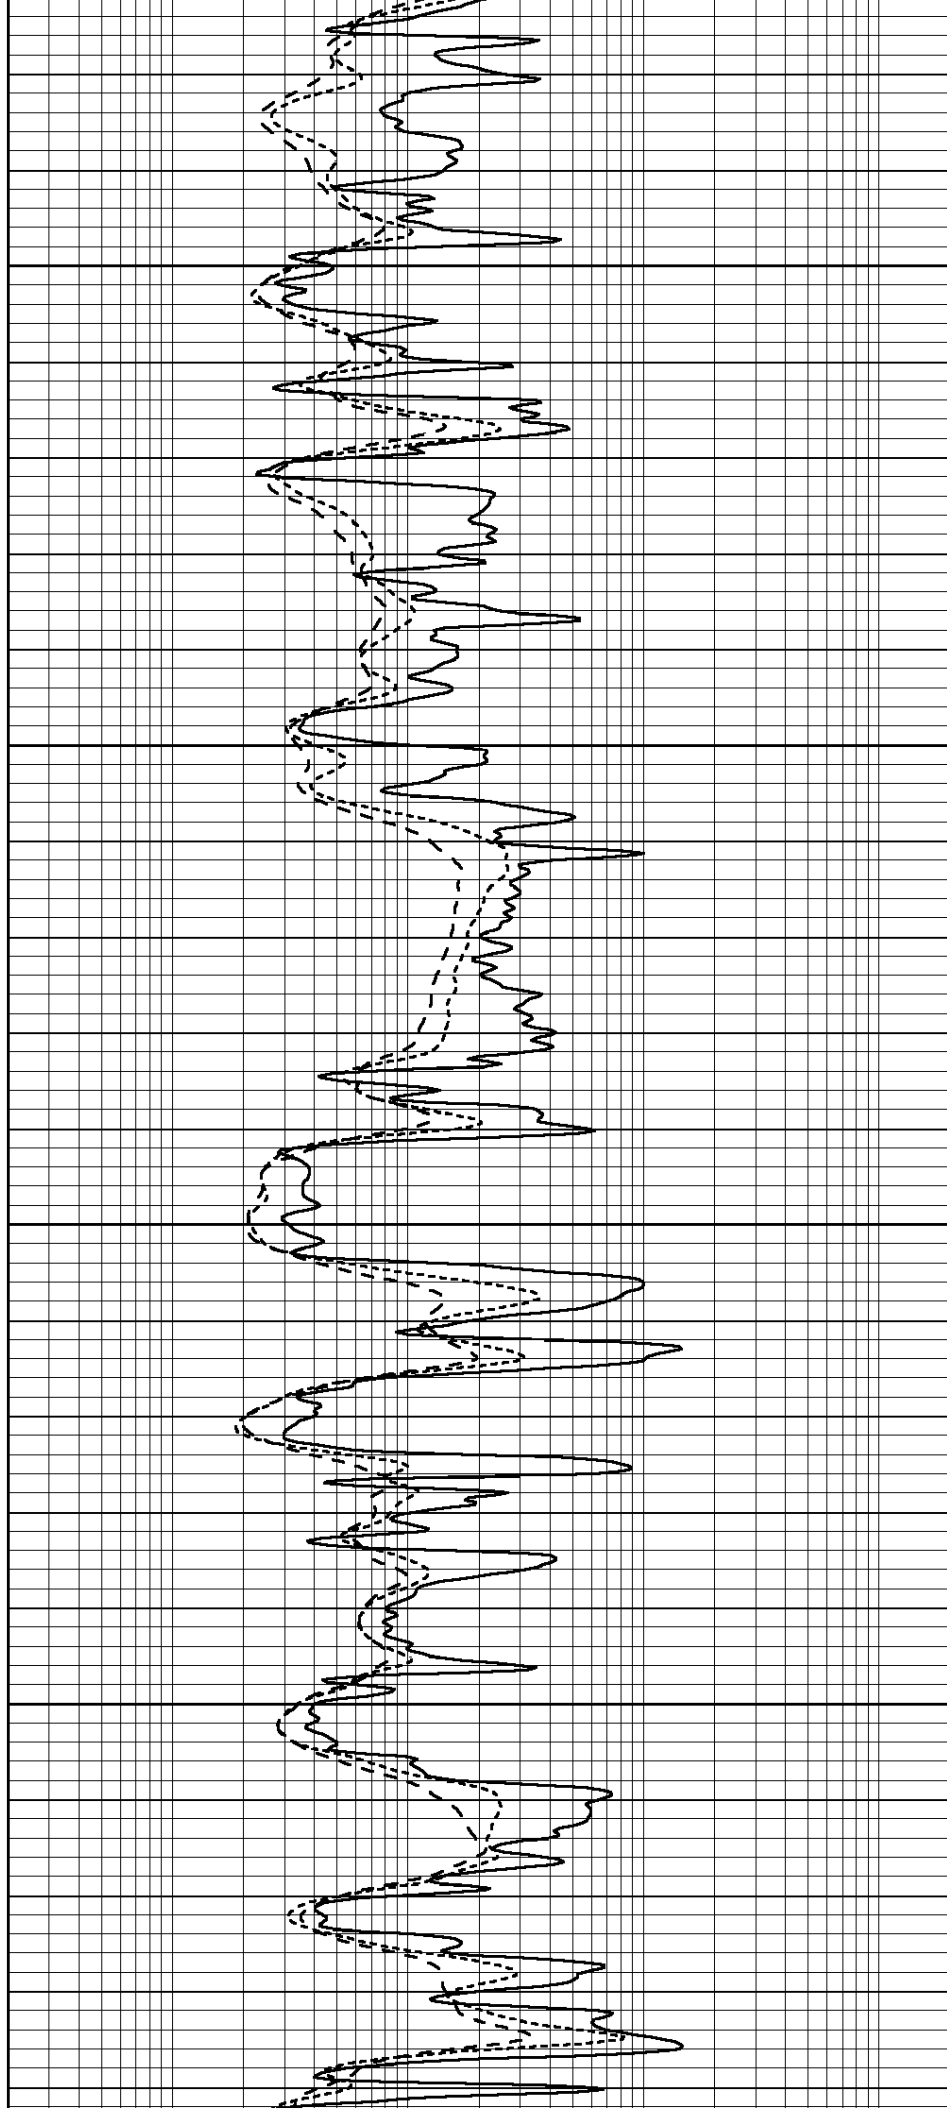

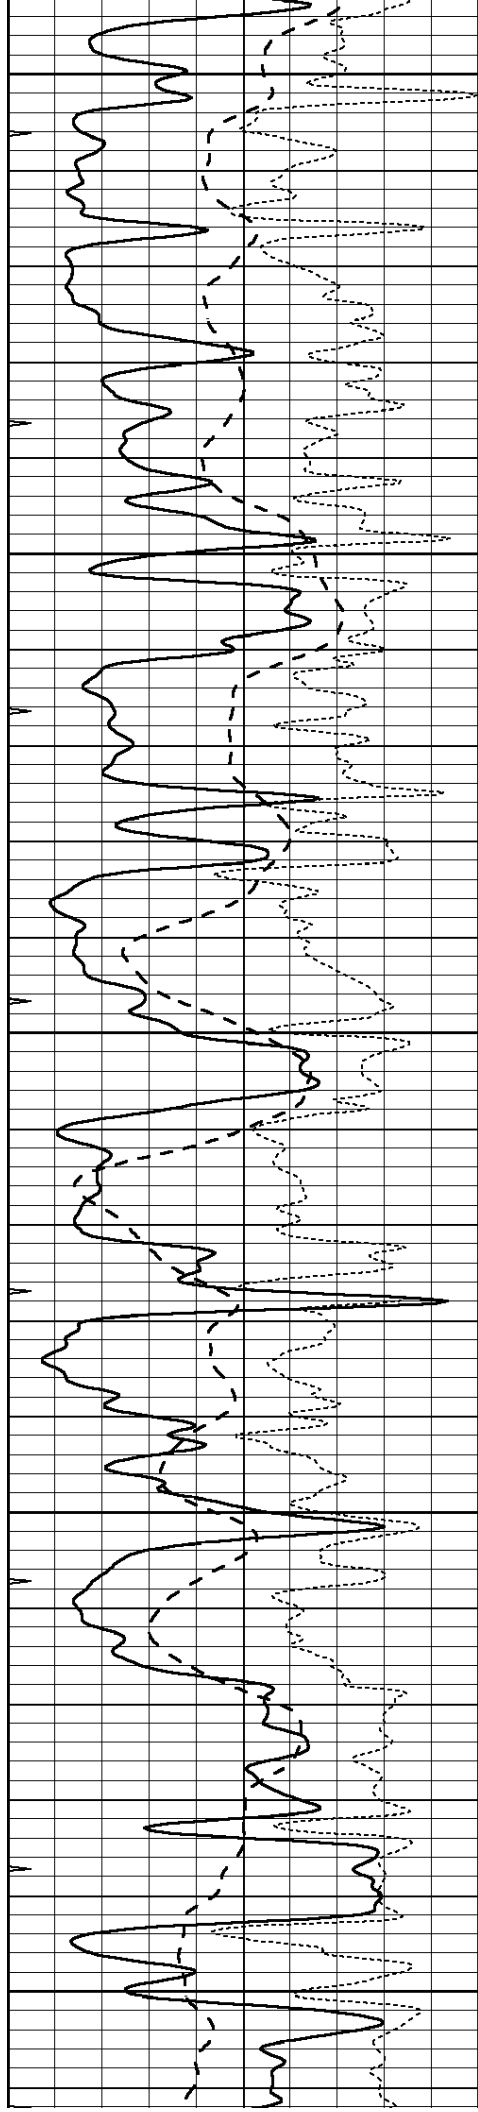


3650

3700

3750

3800

3850

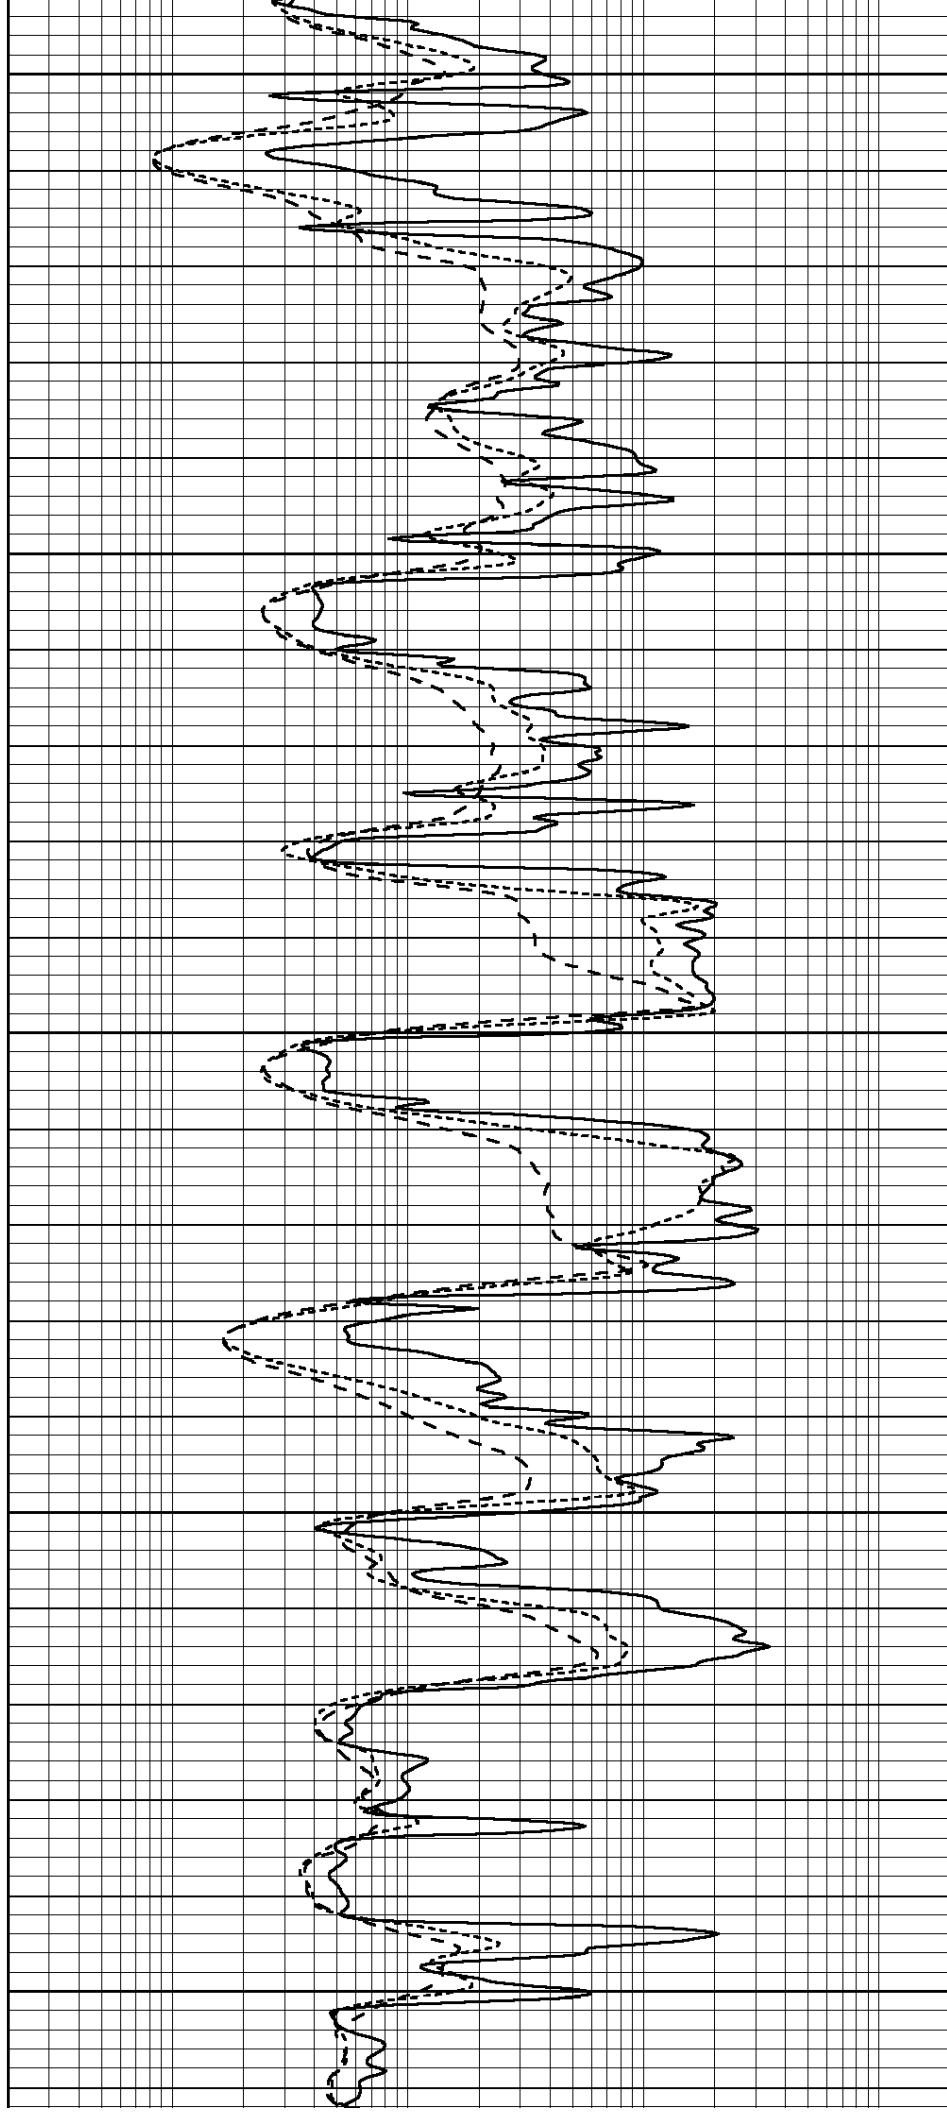




3900

3950

4000

4050

LTD 4081

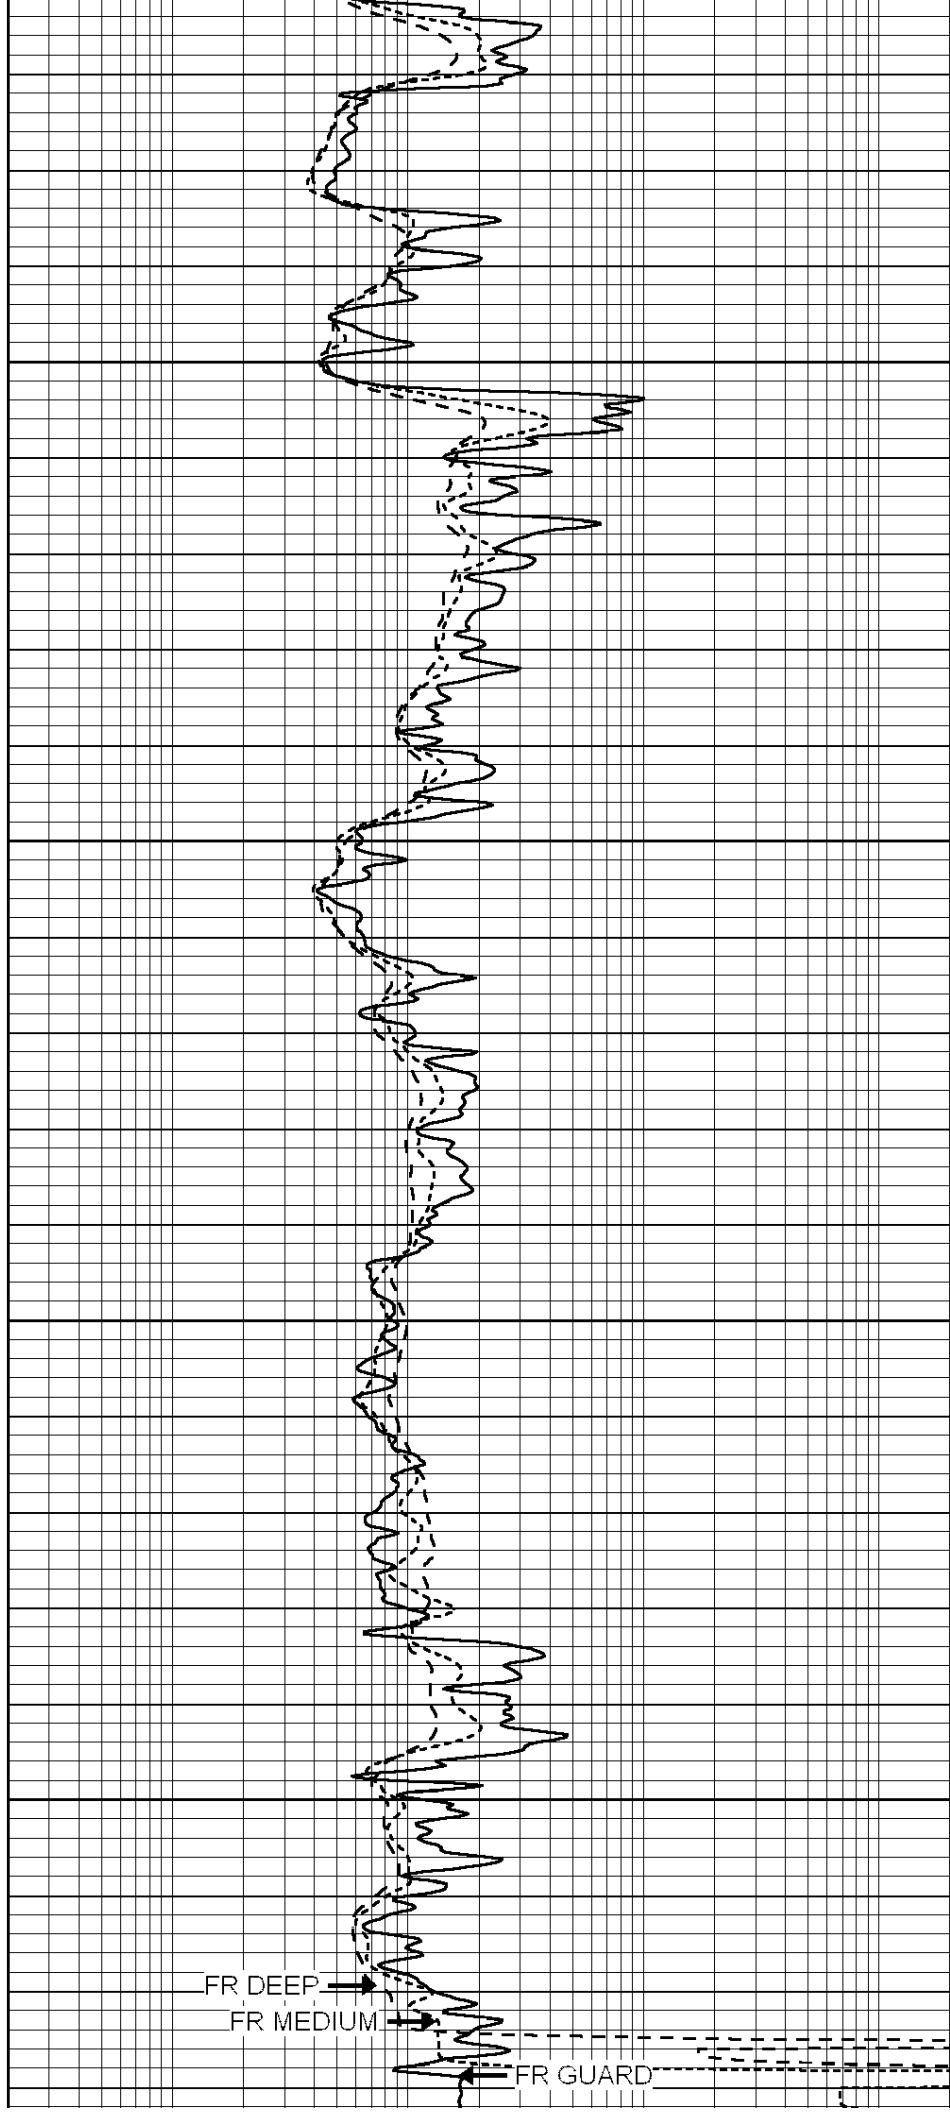

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




**COMPLETION
& PRODUCTION
SERVICES CO.**

REPEAT SECTION

Database File: 010417ddn.db
Dataset Pathname: pass2.11
Presentation Format: _dil
Dataset Creation: Wed Feb 27 11:26:33 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

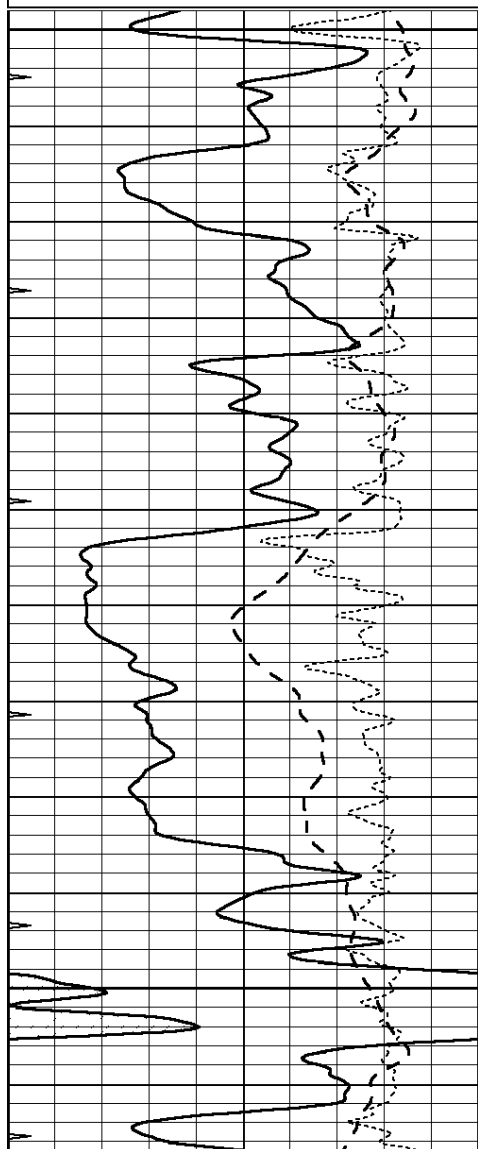


3850

3900

3950

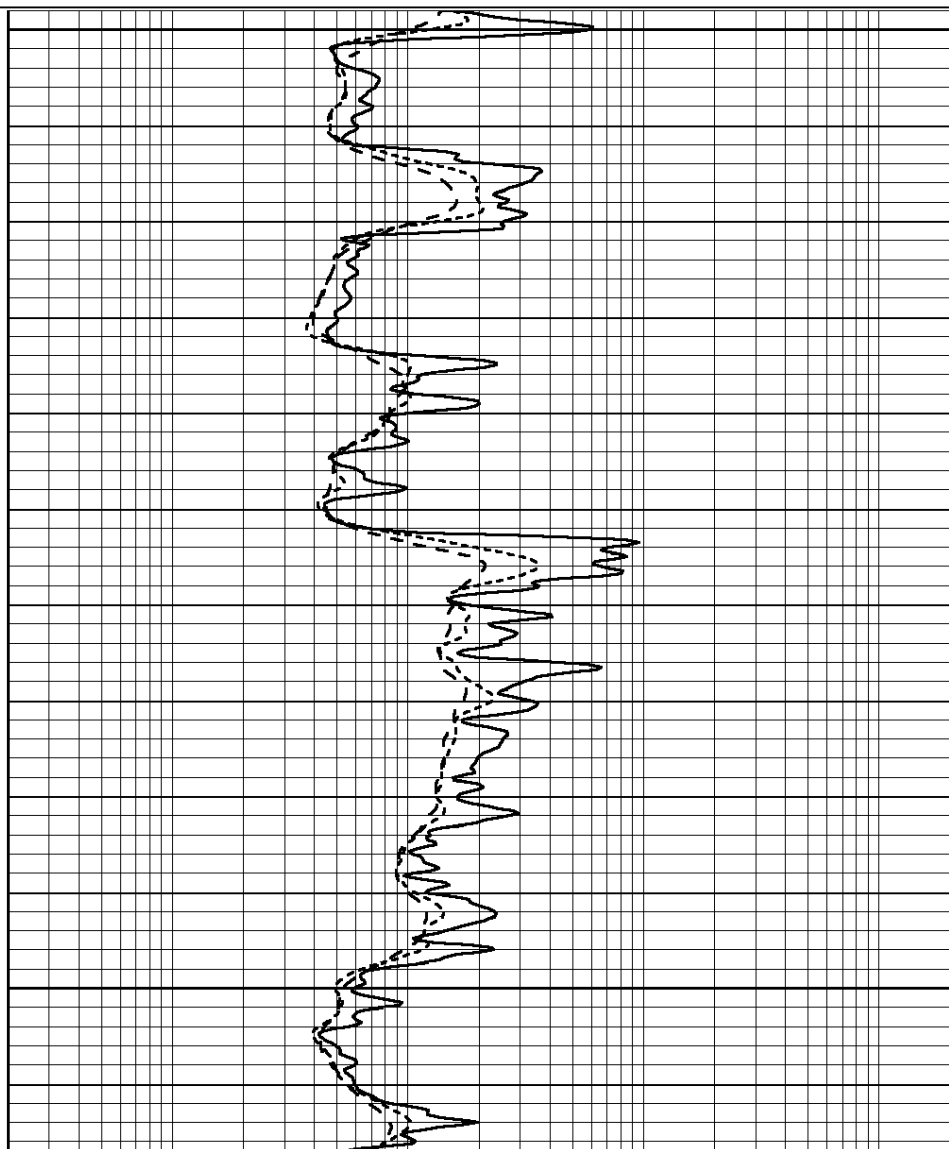


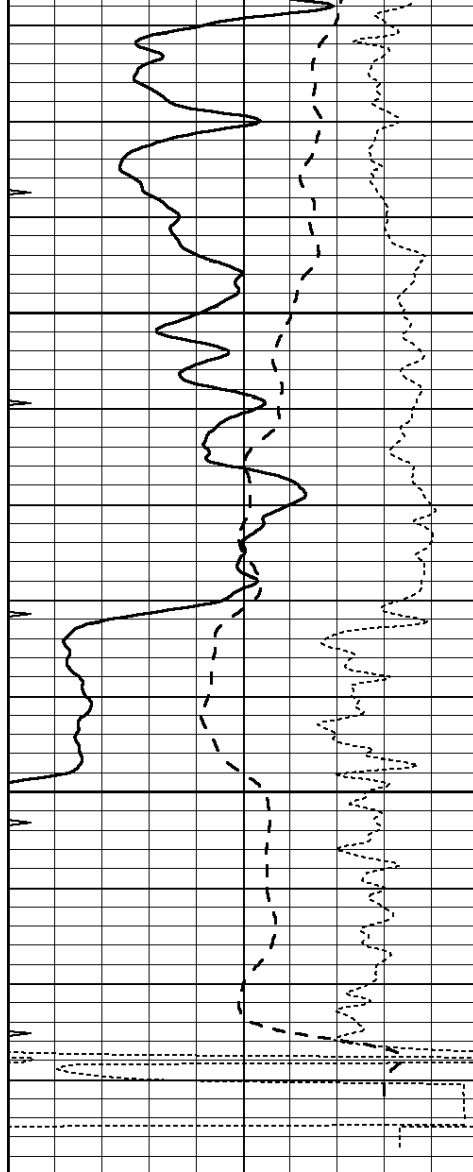

4000

4050

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

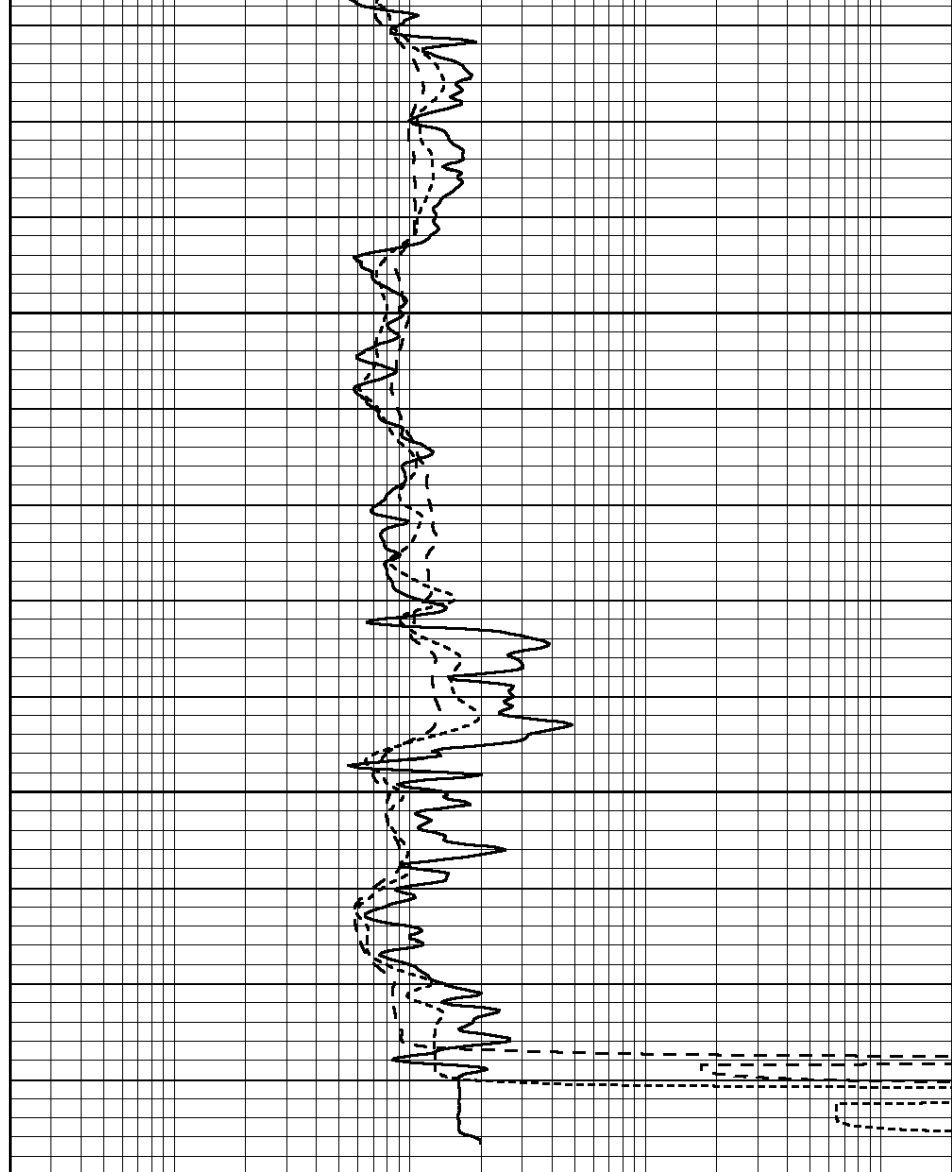

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 010417ddn.db
 Dataset Pathname: pass3.11
 Dataset Creation: Wed Feb 27 10:59:52 2013

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
 Surface Cal Performed: Sun Feb 24 07:56:45 2013
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	-7.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-21.000
Internal:	Zero	Cal		Zero	Cal		m	b

Intermittent	Zero	Cal		Zero	Cal			
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 003N			Model: PRB					

Master Calibration					Performed Tue Sep 08 14:14:44 2009			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	2042.6	12312.8	4225.8	13758.4				cps
Window 2	1855.8	10134.7	3624.2	11113.1				cps
Window 3	1639.4	6760.2	2716.3	7260.3				cps
Window 4	466.4	469.2	466.1	476.5				cps
Long Space	0.0	8278.9	1768.4	9257.4				cps
Short Space	2.2	2377.3	1544.1	2574.2				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio			: 0.549	
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept			: -18.8	

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sun Feb 17 02:24:26 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3500	GAPI/cps