NABORS COMPLETION & PRODUCTION SERVICES CO.

COMPENSATED DENSITY/NEUTRON LOG

Company	CORAL PRODUCTION CORPORATION
Well	KEENAN #36-1
Field	CURTIS
County	STAFFORD
State	KANSAS

Company CORAL PRODUCTION CORPORATION
Well KEENAN #36-1
Field CURTIS
County STAFFORD State KANSAS
Location: API # : 15-185-23770-0000
S/2 NE NW
900' FNL & 2050' FWL
SEC 36 TWP 21S RGE 14W
Permanent Datum GROUND LEVEL Elevation 1927
Log Measured From KELLY BUSHING 10' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services: DIL/MEL

Elevation: K.B. 1937, D.F. 1935, G.L. 1927

Date	10/30/12		
Run Number	ONE		
Depth Driller	3788		
Depth Logger	3782		
Bottom Logged Interval	3758		
Top Log Interval	2900		
Casing Driller	8 5/8" @ 895'		
Casing Logger	892'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.5/45	CHLORIDES 4000 PPM	
pH / Fluid Loss	8.5/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.65 @ 73F		
Rmf @ Meas. Temp	.48 @ 73F		
Rmc @ Meas. Temp	.78 @ 73F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.41 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	TIM LAUER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
RADIUM, KS. - 4 MILES EAST TO RD. 40TH - 2 N. - 1/2 E. - S. & W. INTO


NABORS COMPLETION & PRODUCTION SERVICES CO.


MAIN SECTION


SERVICES CO.


Database File: 009988ddn.db
Dataset Pathname: pass3.1
Presentation Format: _den_neu
Dataset Creation: Tue Oct 30 14:04:08 2012 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI) 150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in) 16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK 20	BVTX		-0.25 CORRECTION (g/cc) 0.25	
		0 (ft3) 10			

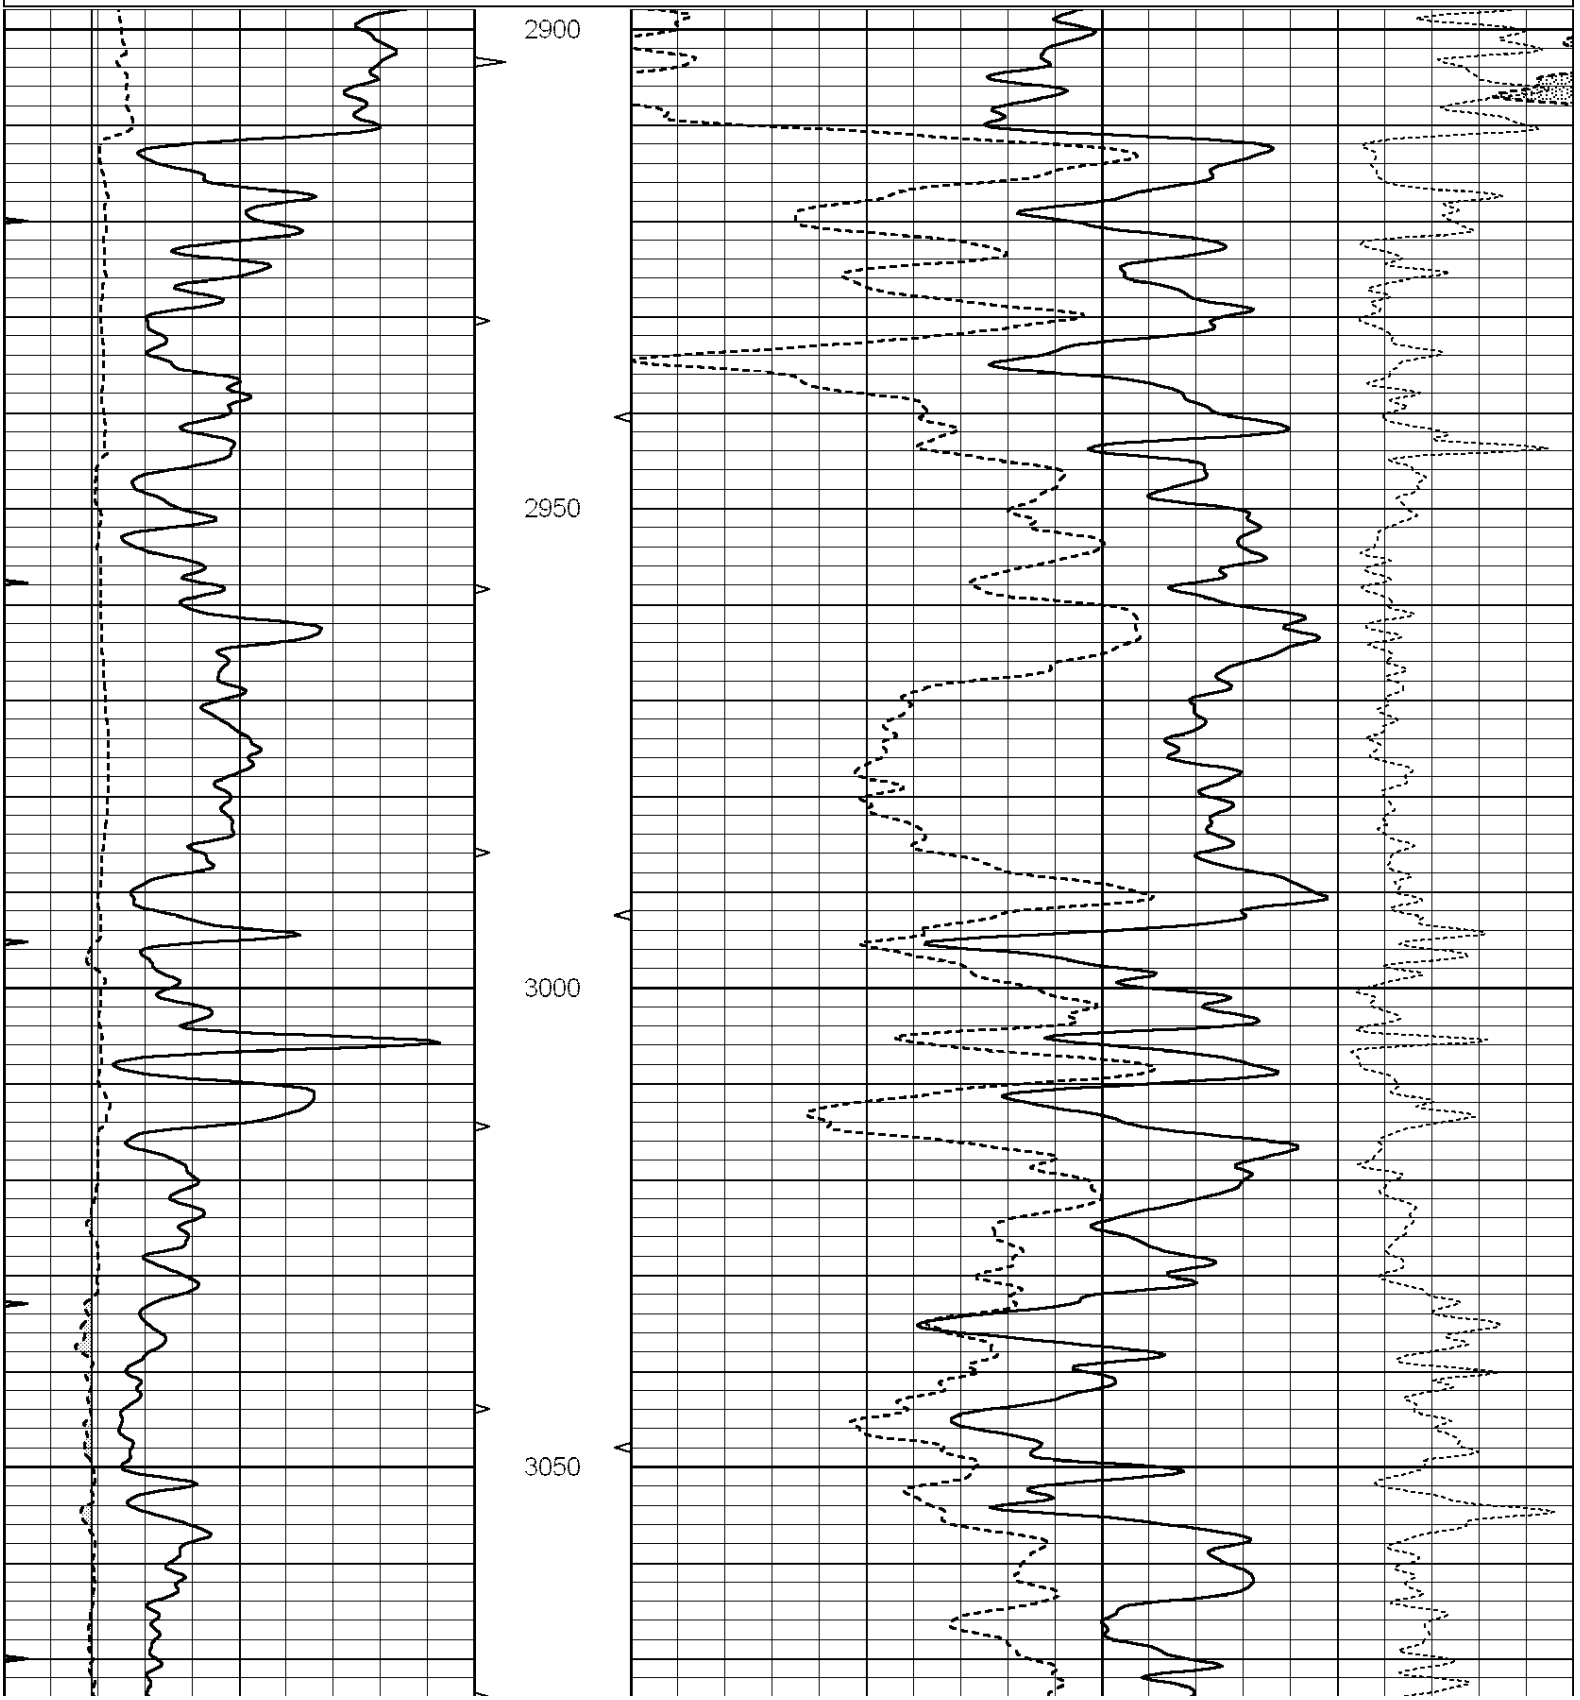

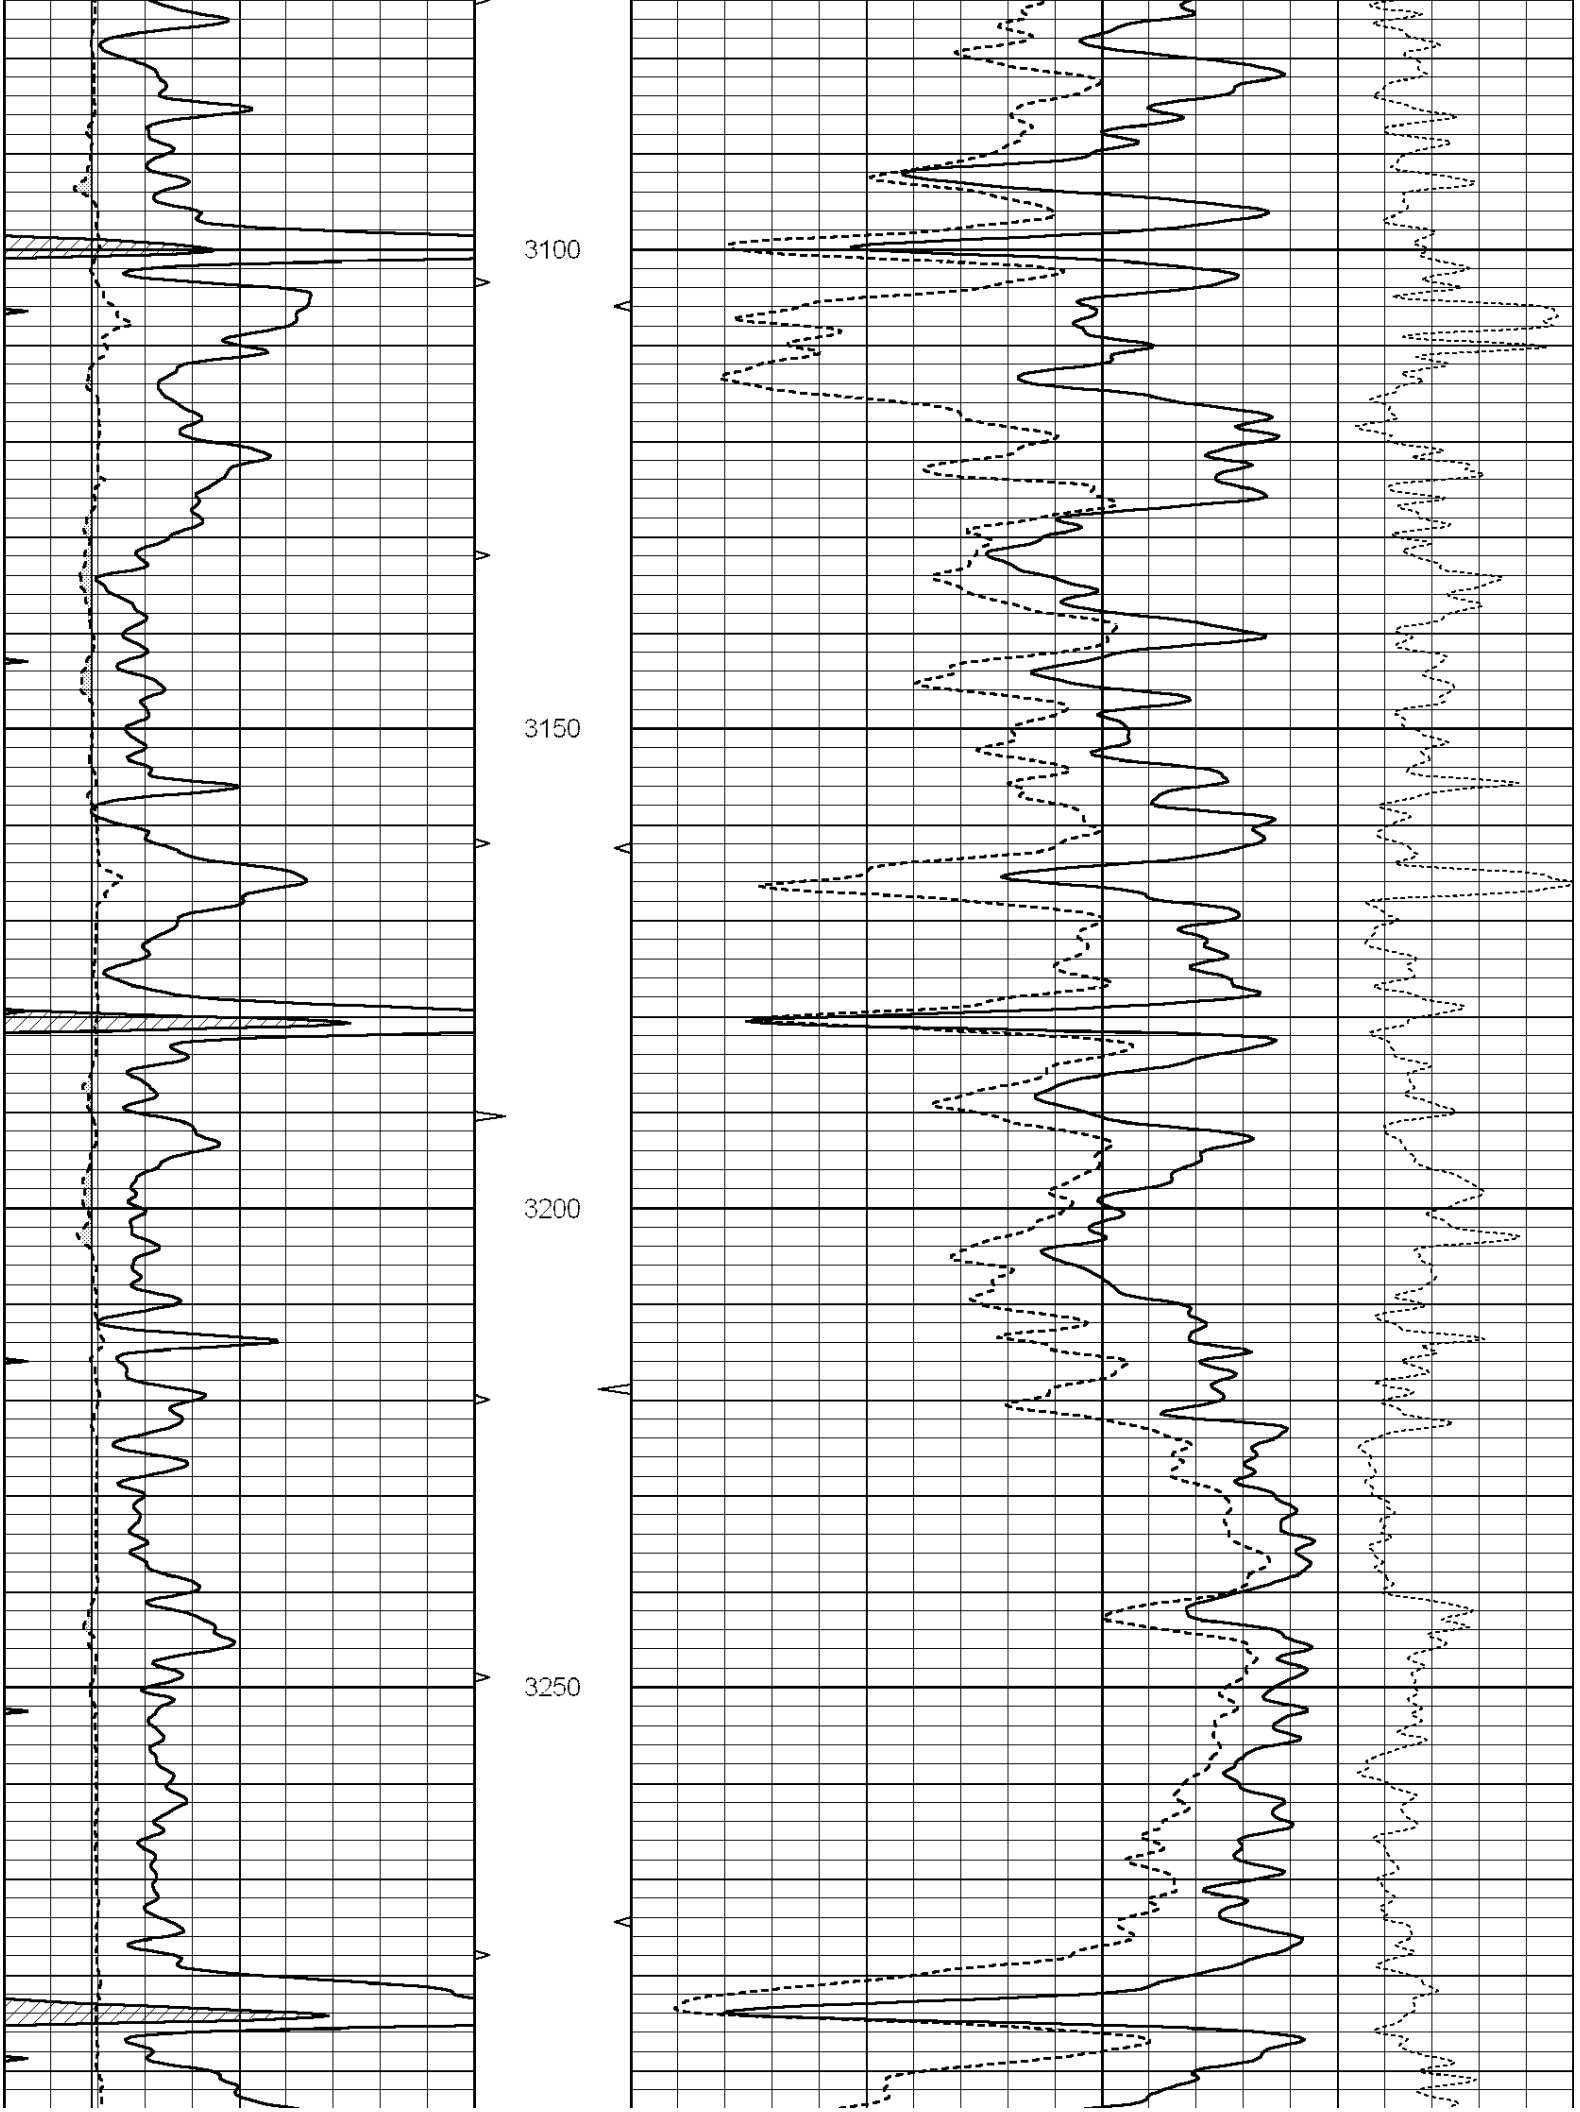
3100
3150
3200
3250

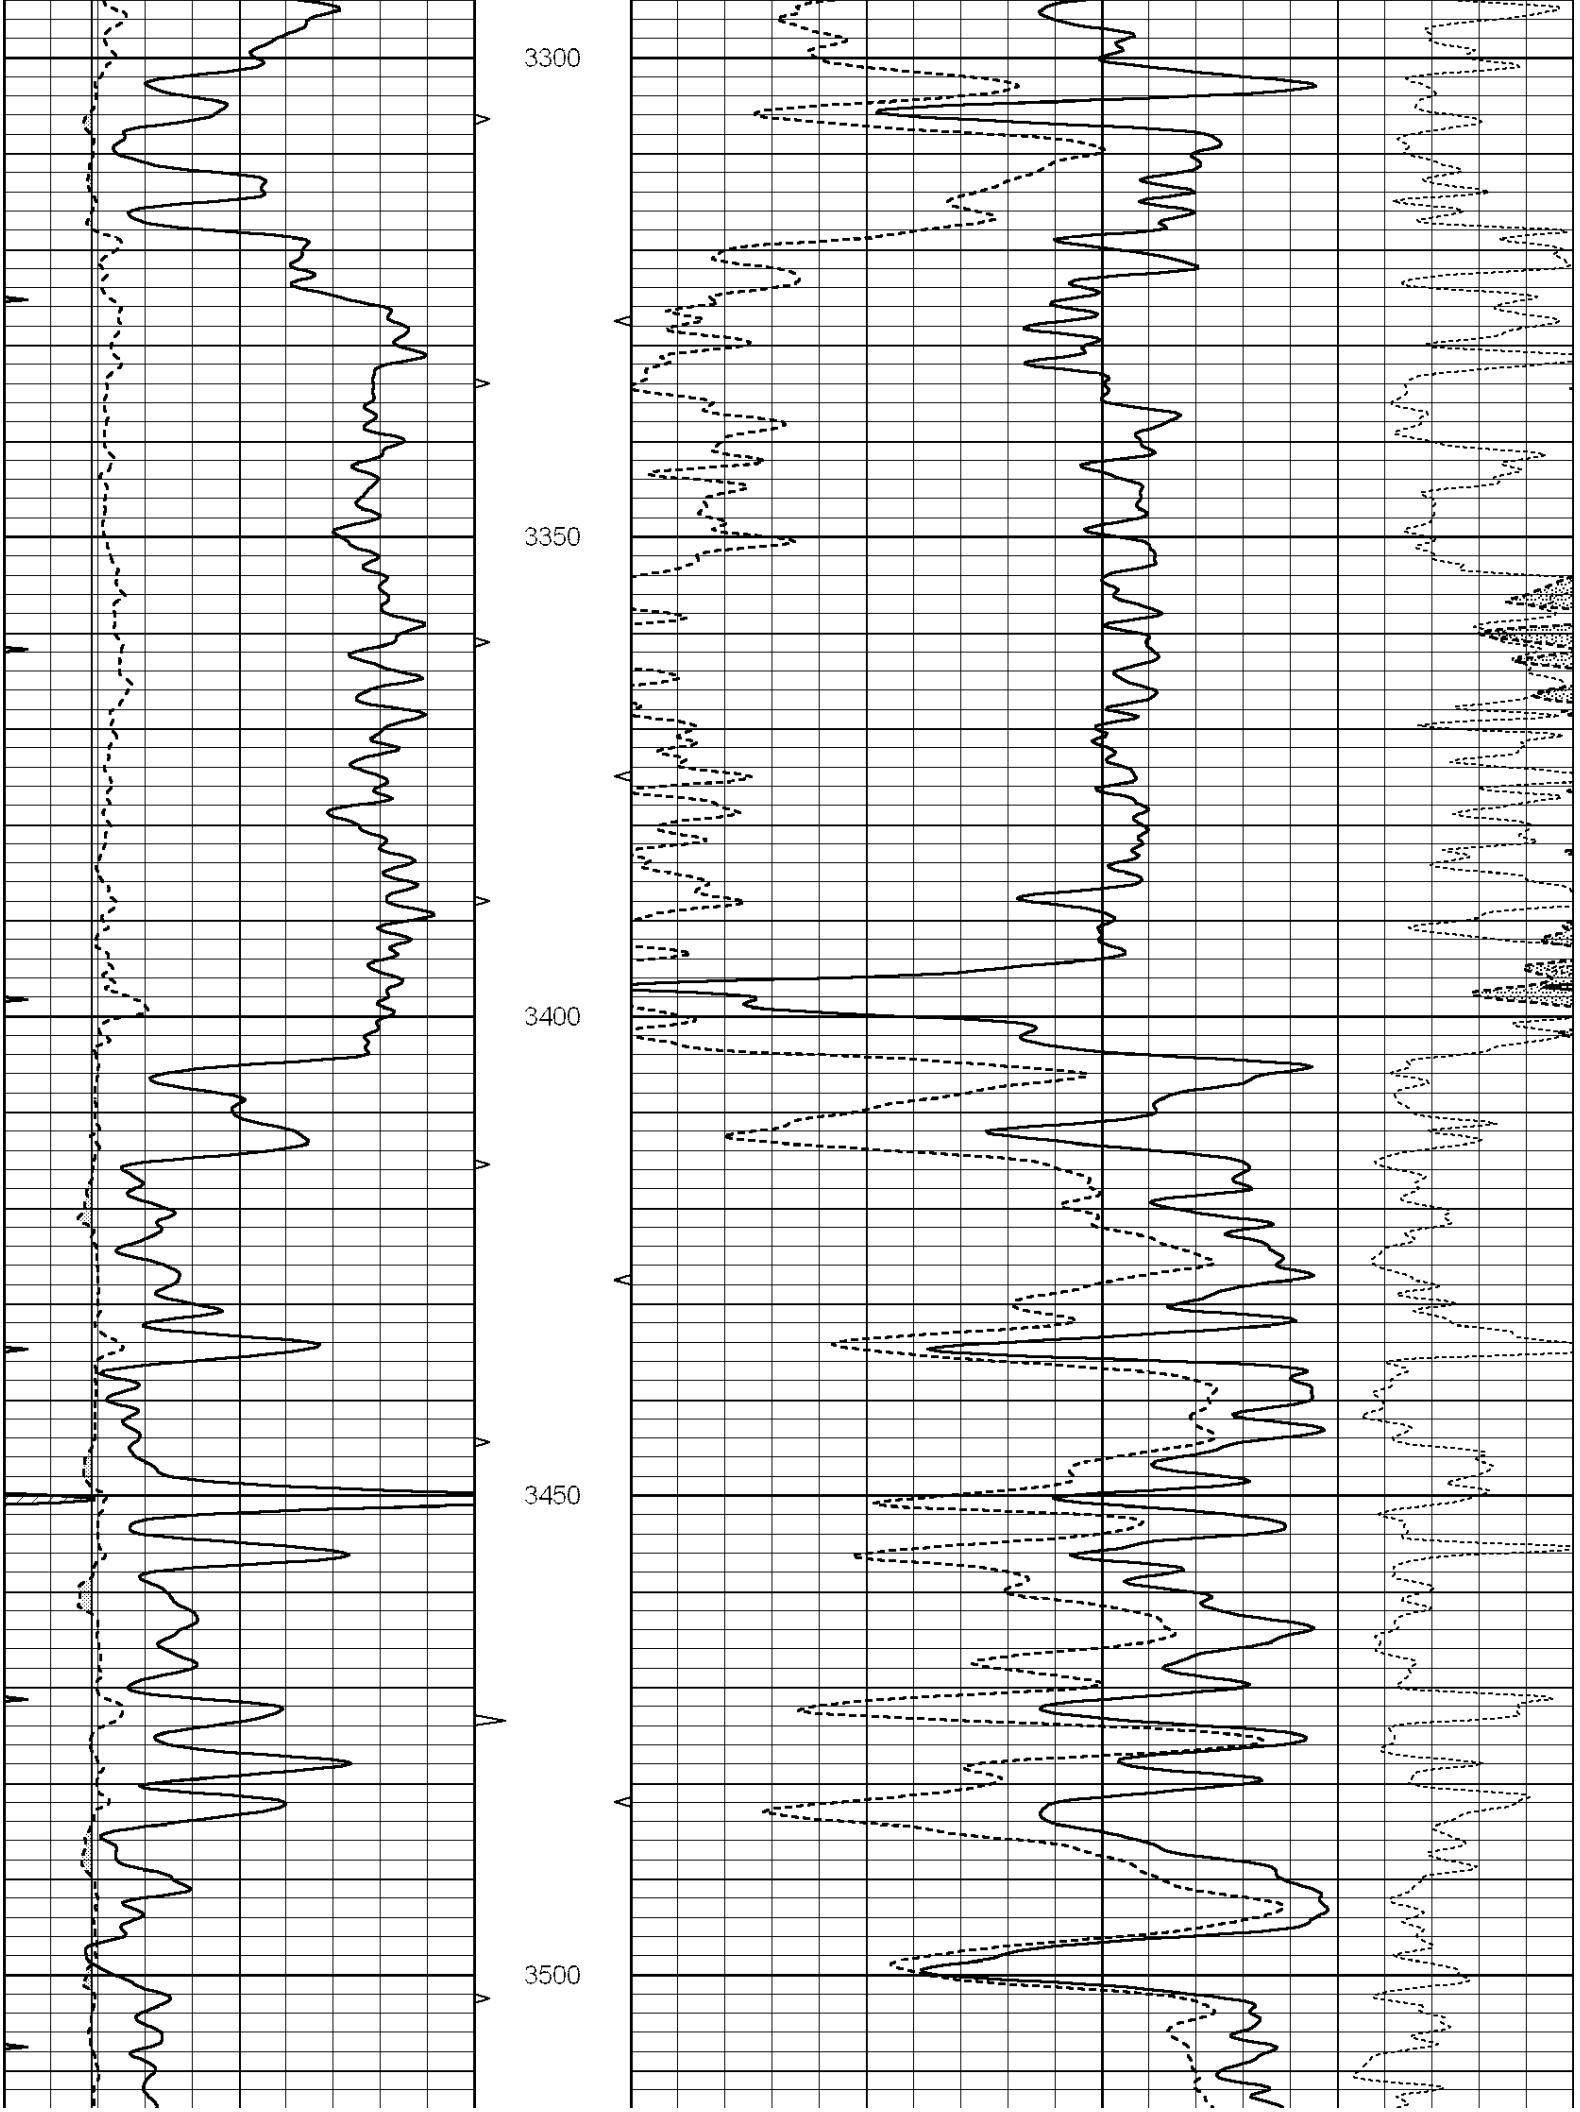
3300
3350
3400
3450
3500

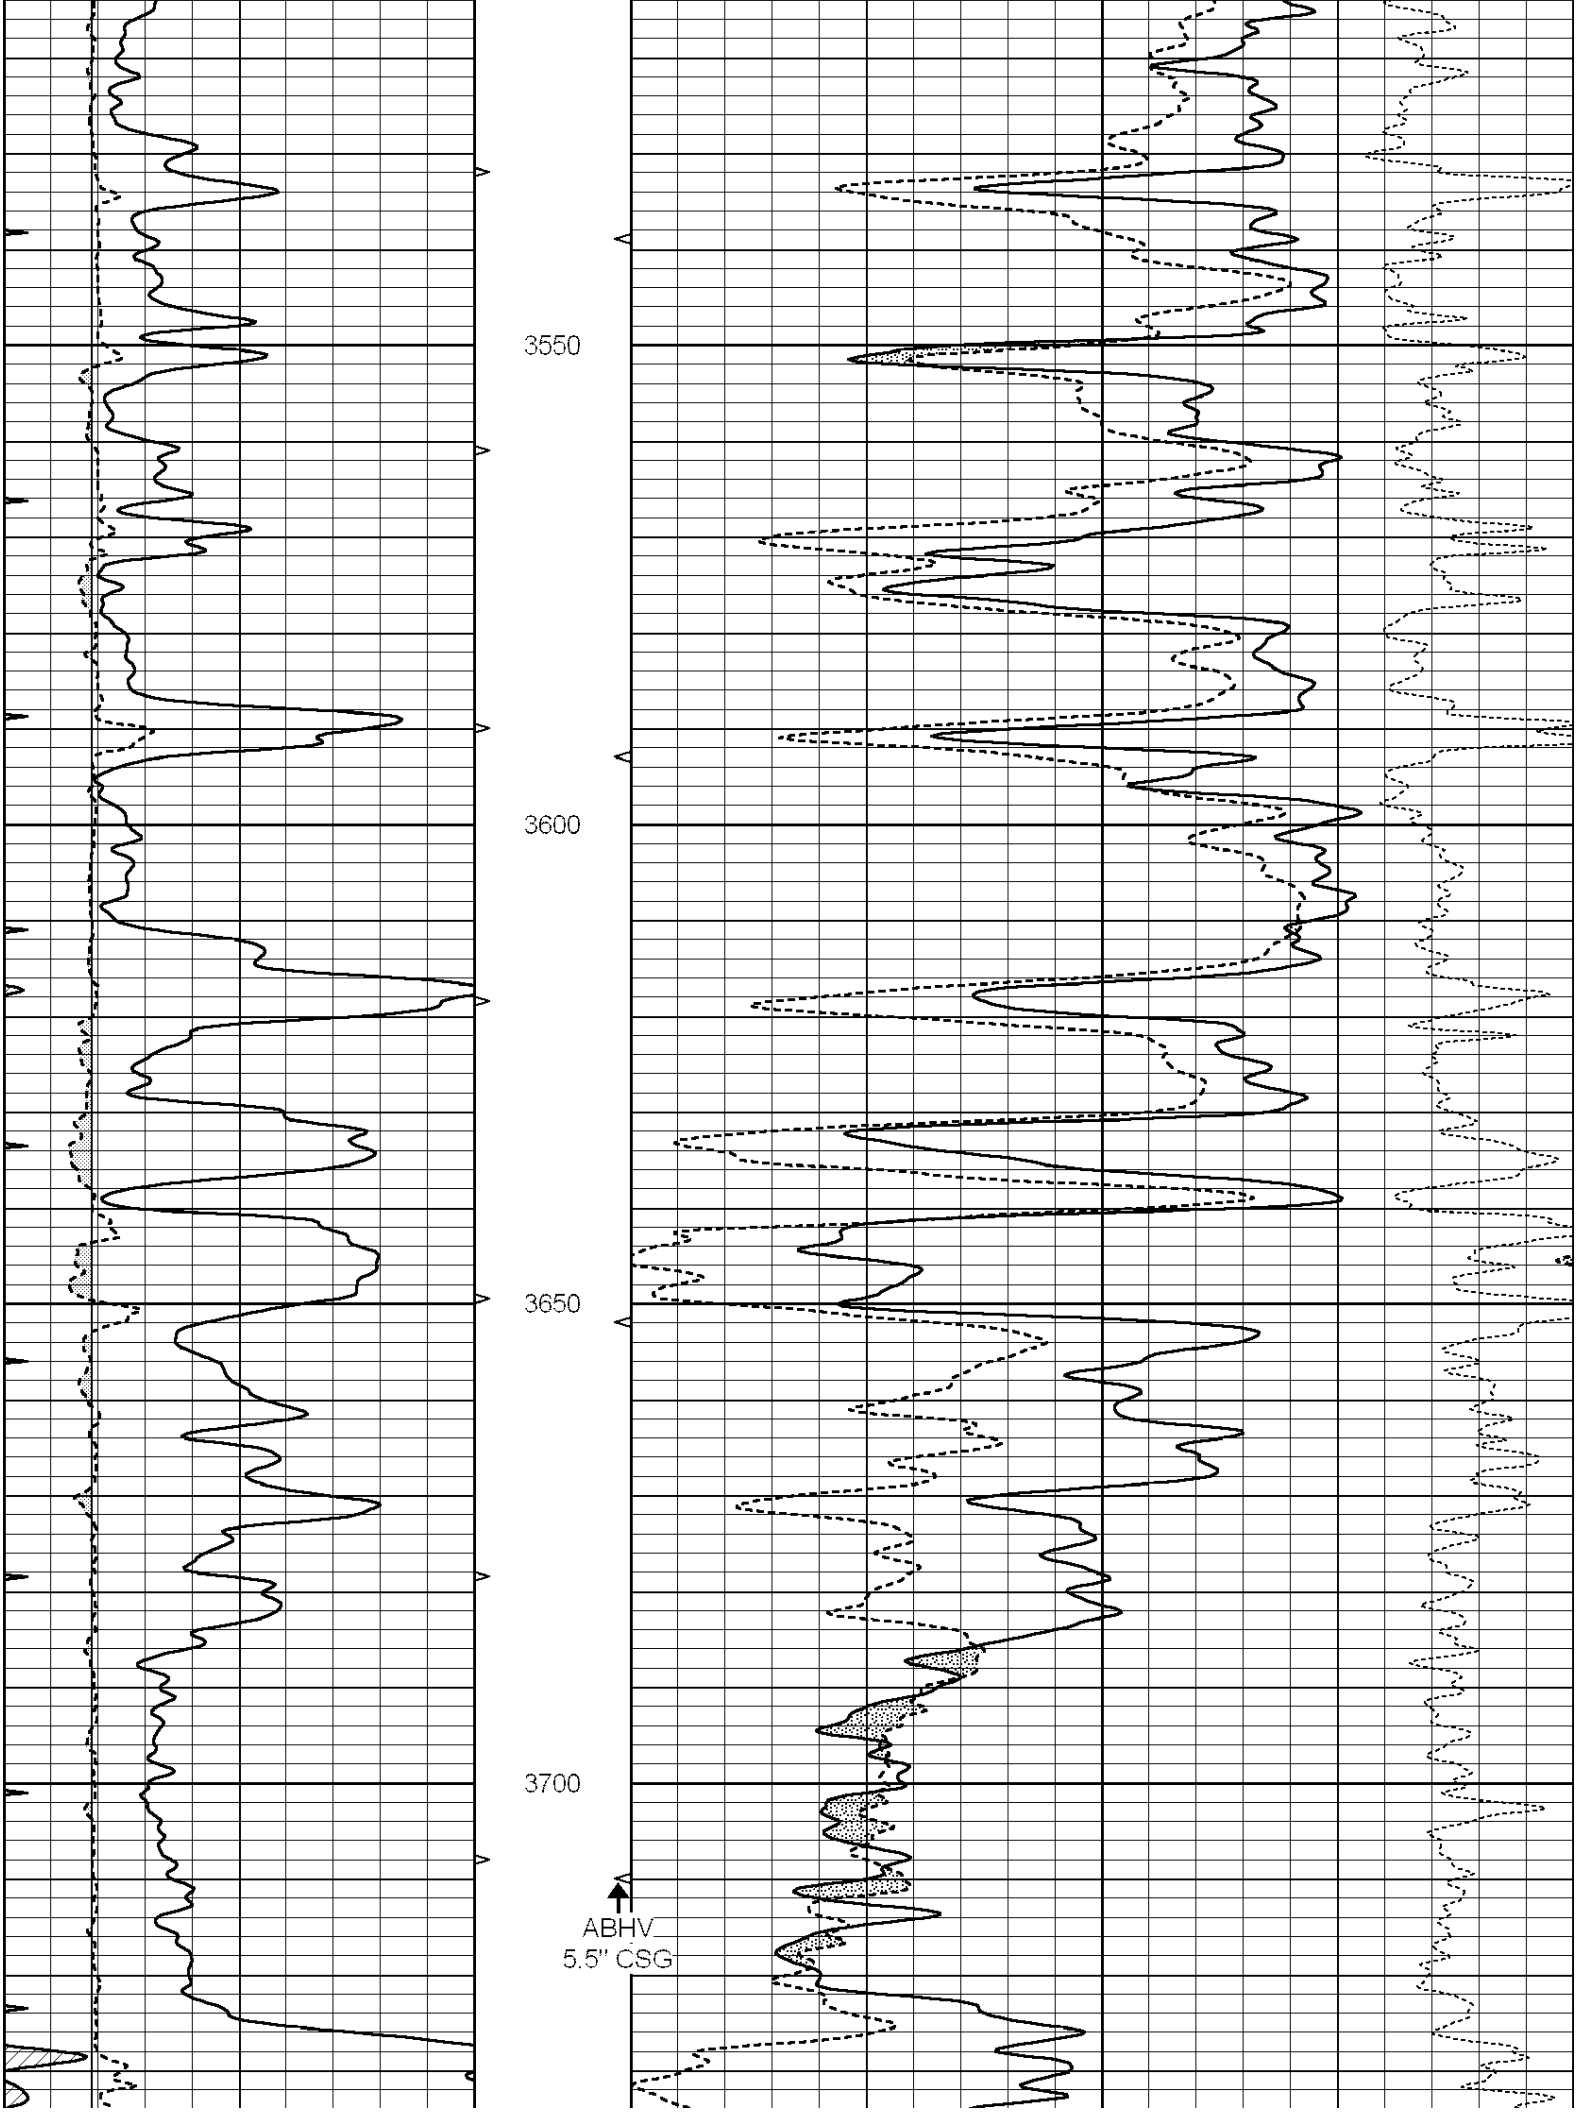
3550
3600
3650
3700
ABHV
5.5" CSG

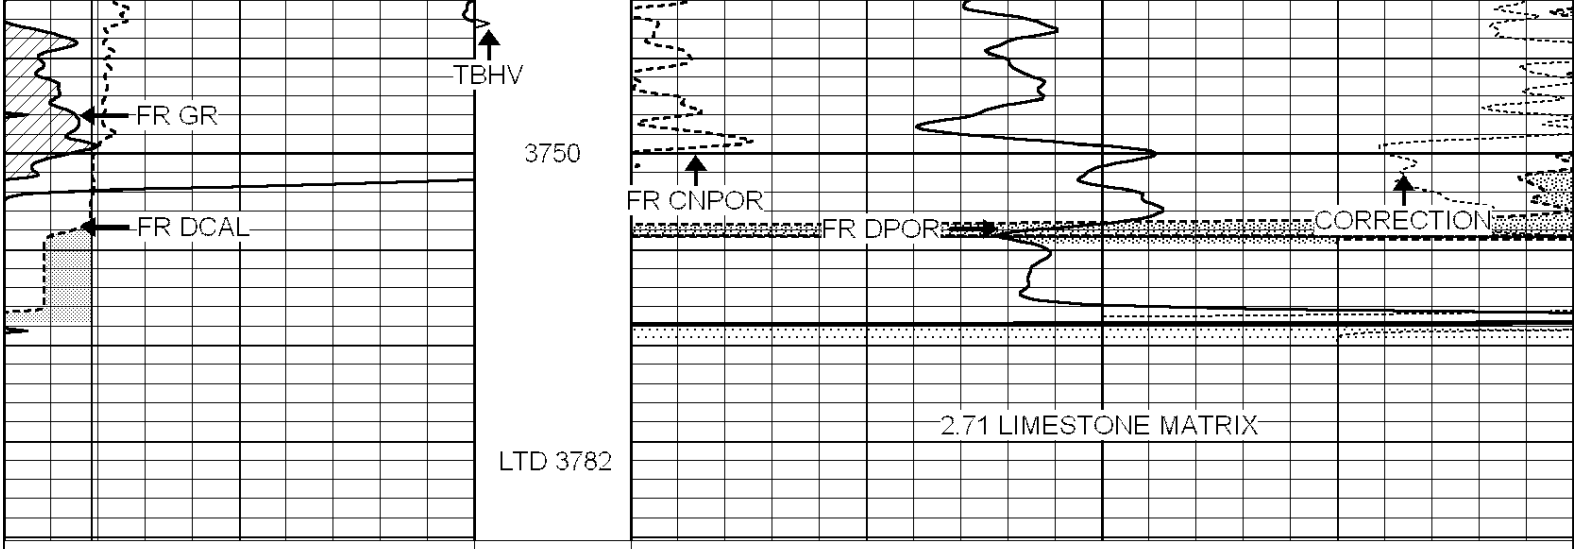


0	GAMMA RAY (GAPI) 150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in) 16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK 20	BVTX		-0.25 CORRECTION (g/cc)	0.25
		0 (ft3) 10			


NABORS
COMPLETION & PRODUCTION SERVICES CO.

REPEAT SECTION

Database File: 009988ddn.db
Dataset Pathname: pass2.1
Presentation Format: _den_neu
Dataset Creation: Tue Oct 30 14:03:05 2012 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in) 16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK 20	BVTX		-0.25 CORRECTION (g/cc)	0.25
		0 (ft3) 10			

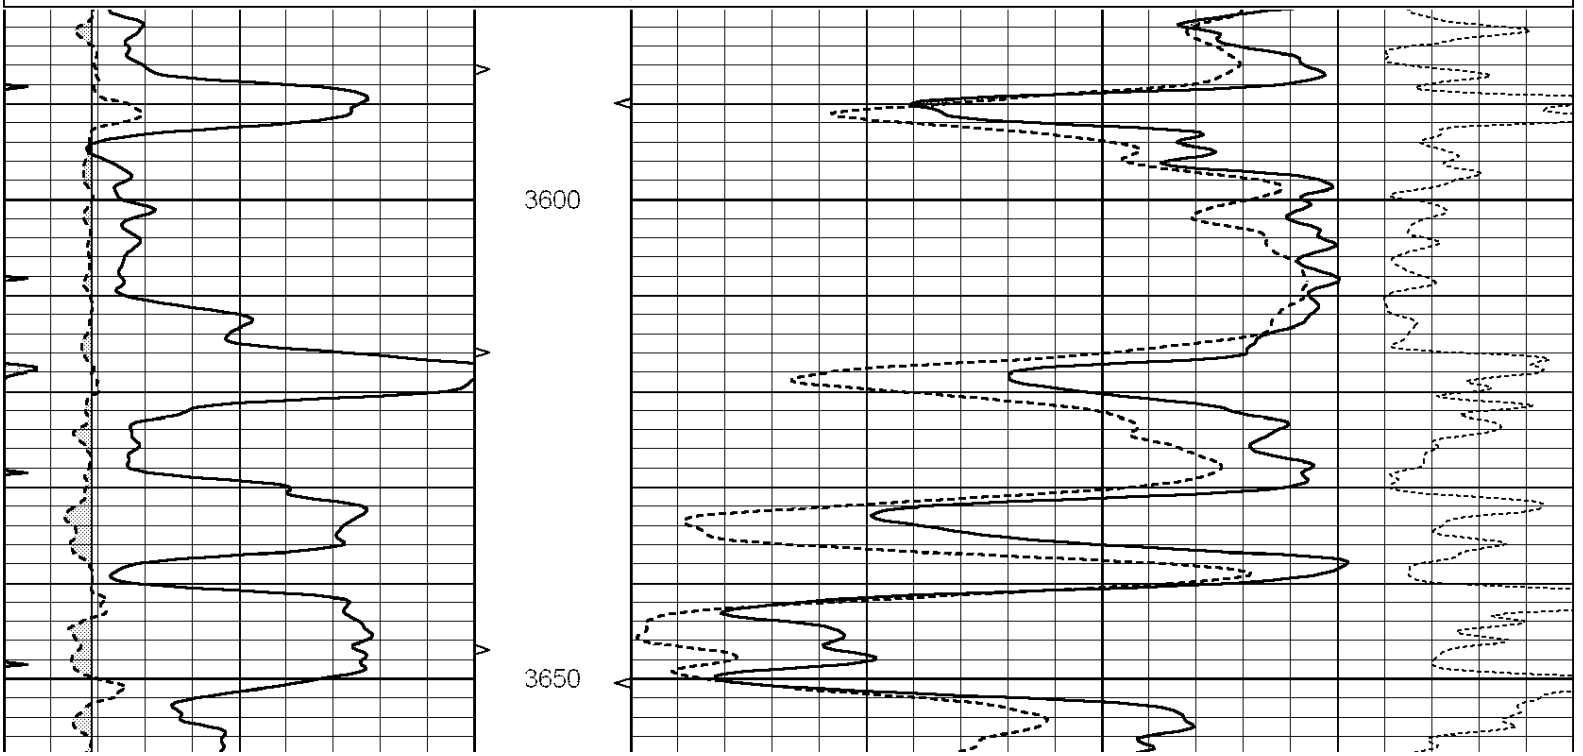

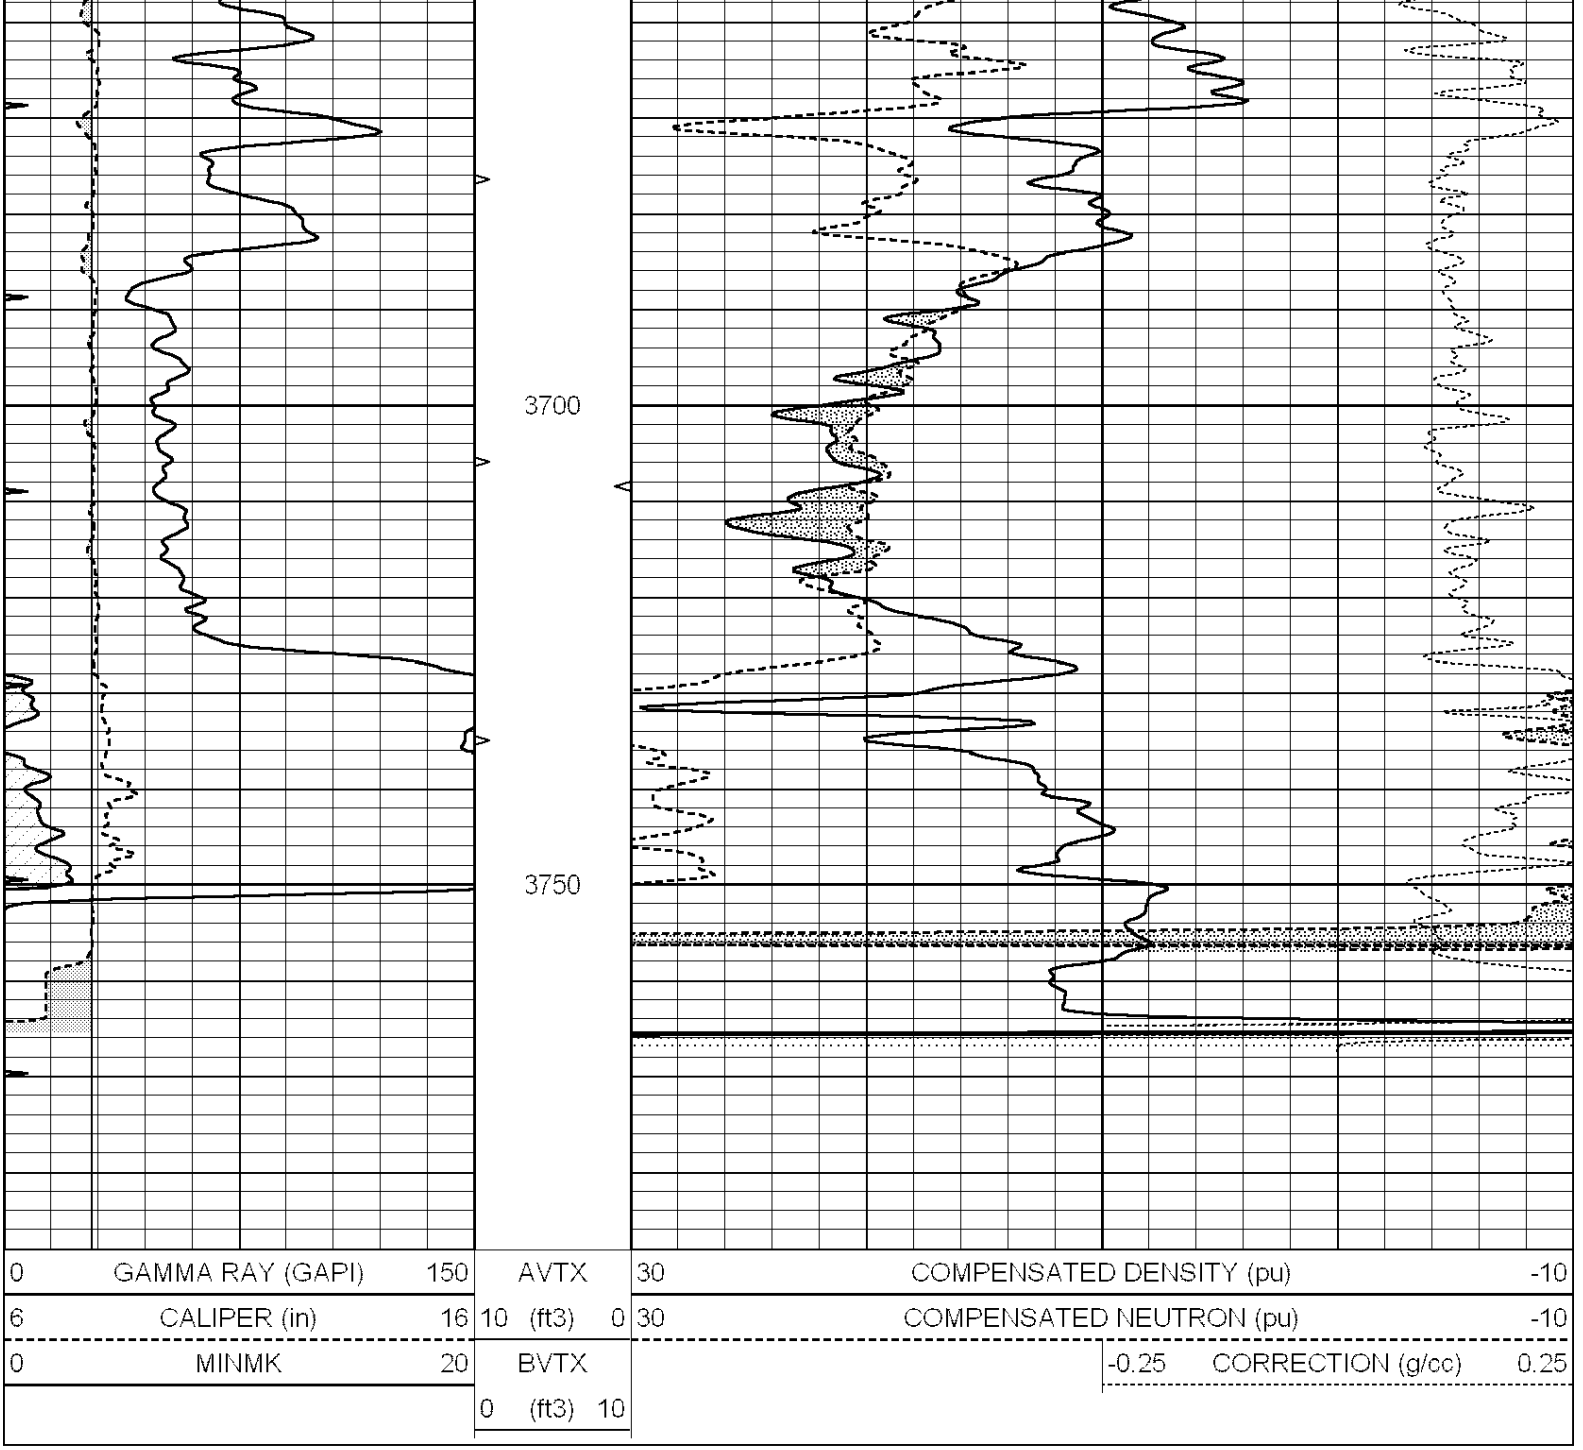

Calibration Report

Database File: 009988ddn.db
Dataset Pathname: pass3.1
Dataset Creation: Tue Oct 30 14:04:08 2012 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model:	PROBE8-DILG
Surface Cal Performed:	Fri Aug 01 06:33:19 2008
Downhole Cal Performed:	Mon Jul 28 11:08:27 2008
After Survey Verification Performed:	Mon Jul 28 11:08:27 2008

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Compensated Density Calibration Report

Serial-Model: GEAR4-GEARHART
Source / Verifier: 143 / 143
Master Calibration Performed: Mon Mar 19 19:07:19 2012

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.710	g/cc	1015.91	497.51	cps
Aluminum	2.600	g/cc	227.67	350.20	cps

Spine Angle = 76.79 Density/Spine Ratio = 0.579

	Size		Reading	
Small Ring	8.00	in	3.21	V
Large Ring	14.00	in	5.46	V

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number: #8
Tool Model: OPEN
Performed: Mon Jun 13 16:56:43 2011

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 175.0 cps

Sensitivity:	0.8371	GAPI/cps