


Charted by:

Depth in Feet scaled 1:240


0	Gamma Ray (GAPI)	150
200	5' Travel Time (usec)	1000

0	3' Amplitude (mV)	100
9	CCL	-1
0	Amplified Amplitude (mV)	20


200	5FT VDL	1000
-----	---------	------

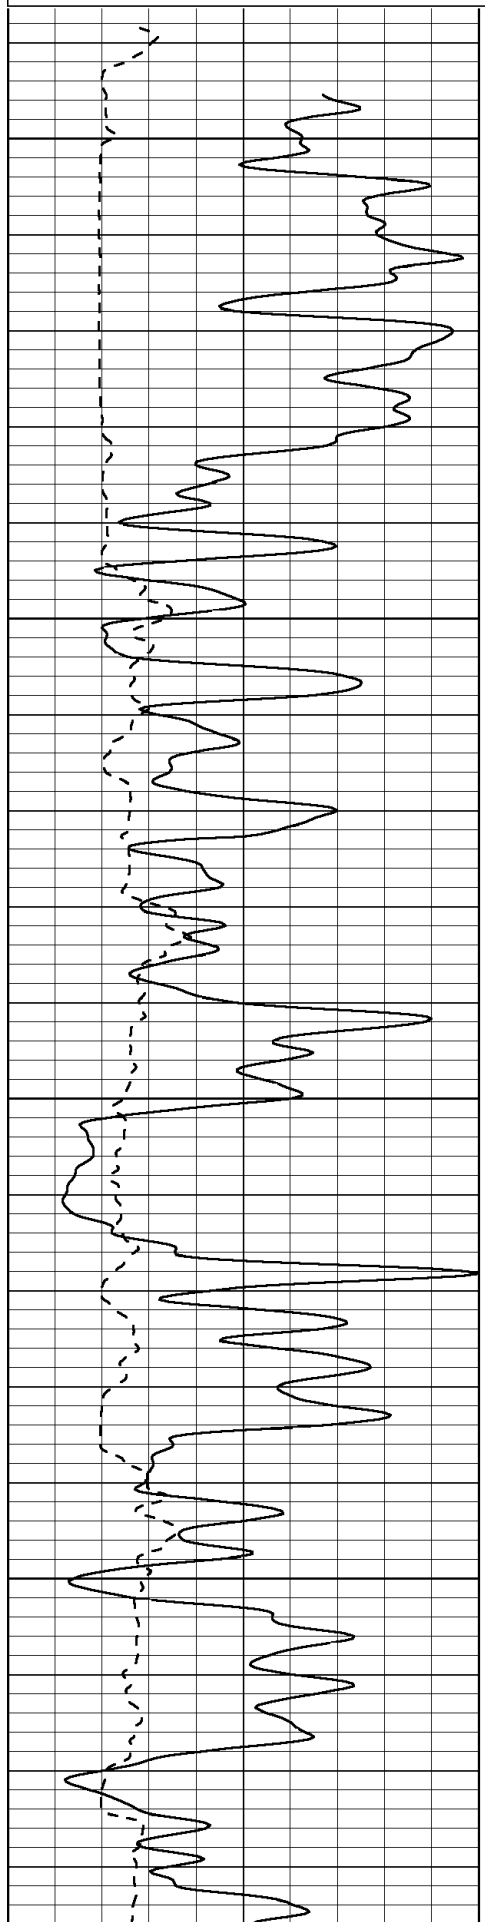


3500
3550
3600
3650

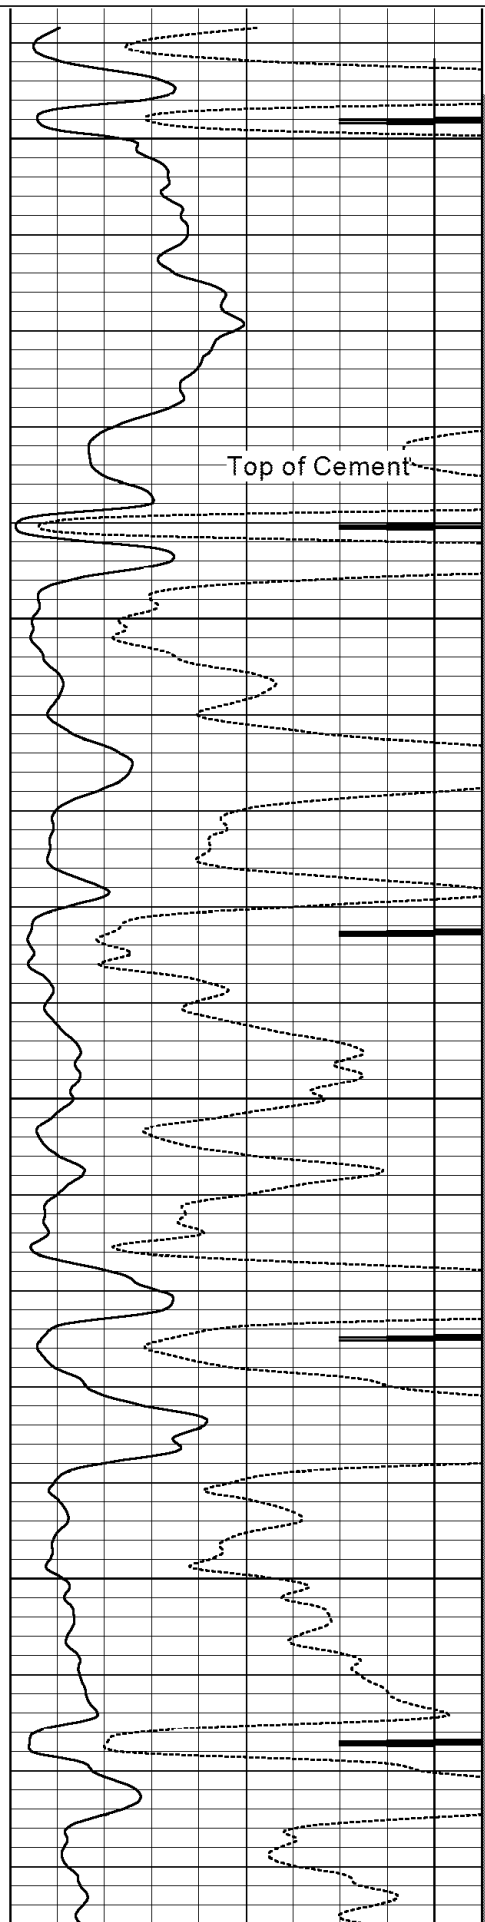

Top of Cement

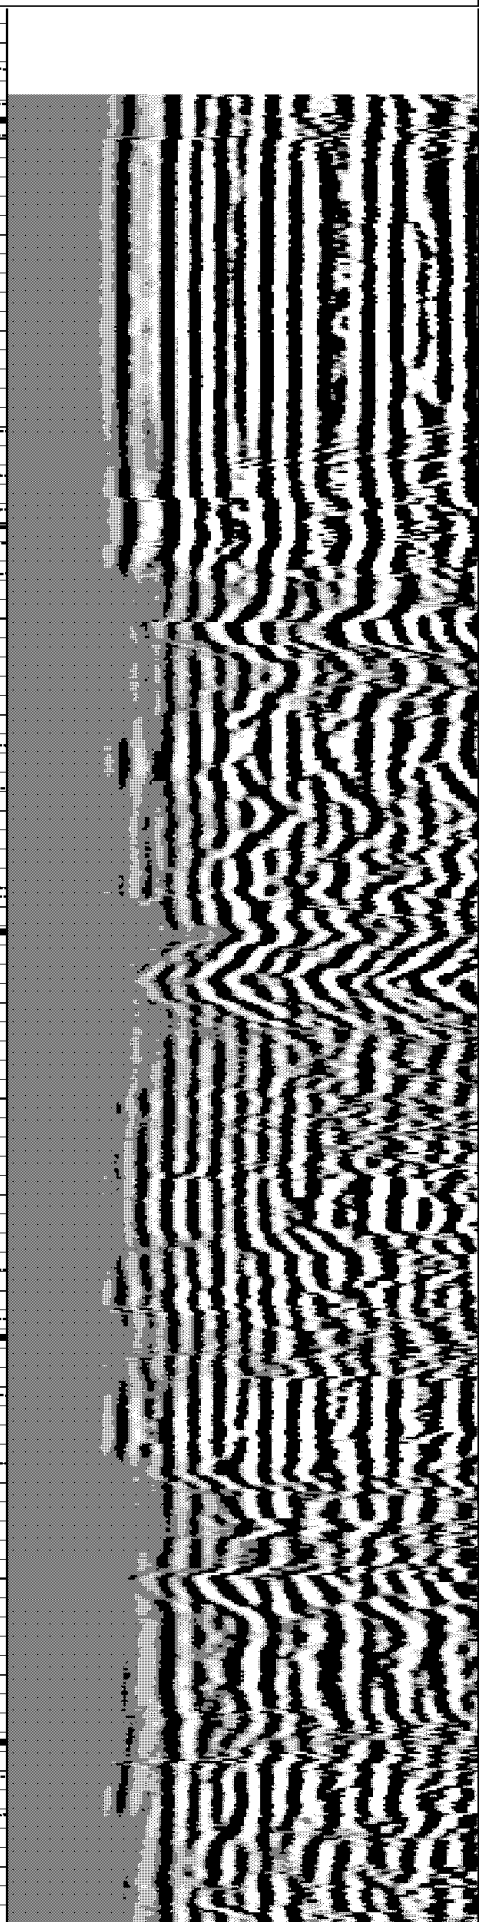

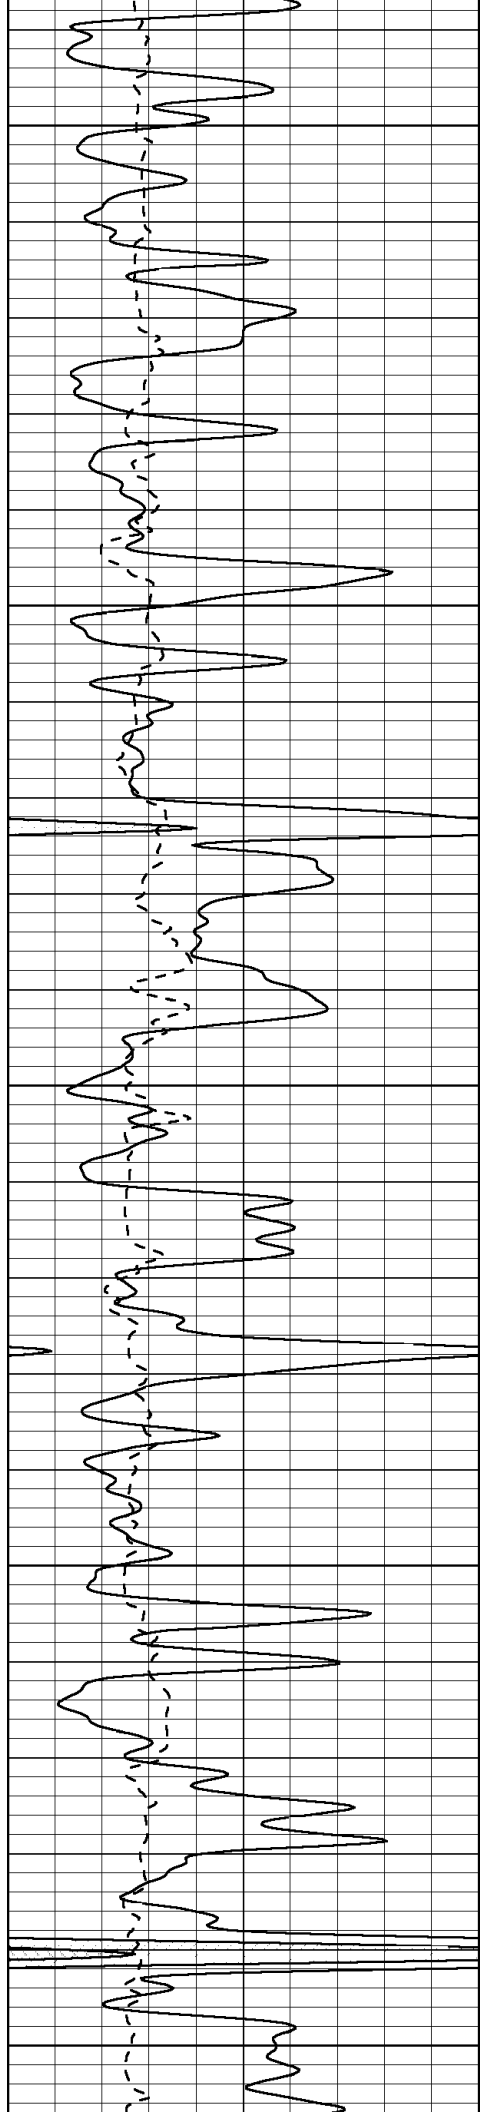



3700


3750

3800

3850

3900

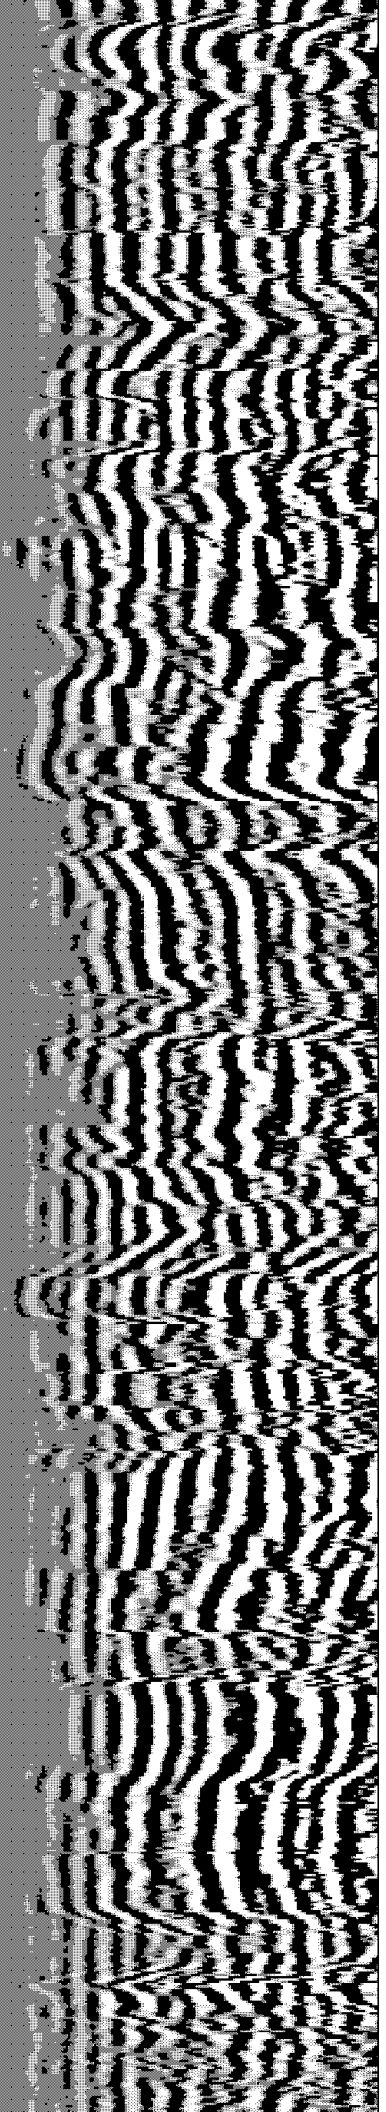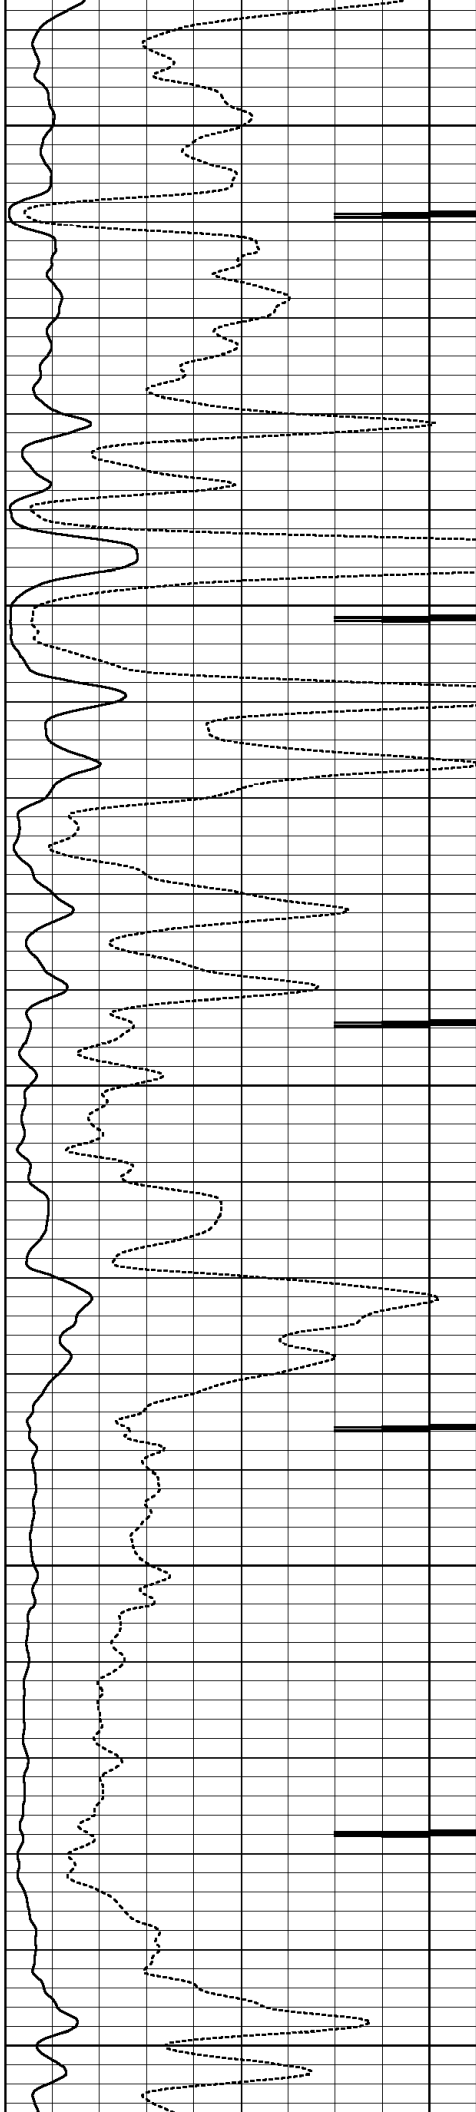


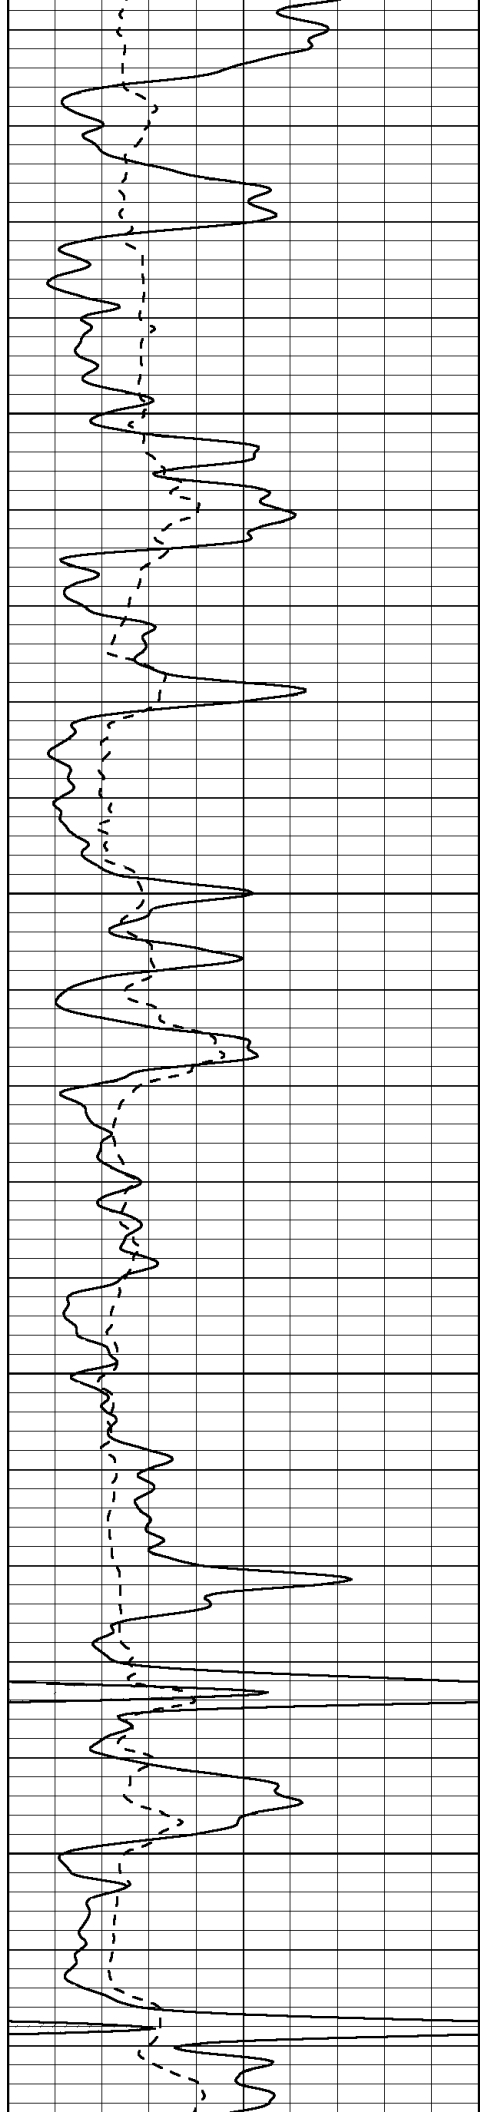



3950

4000

4050

4100

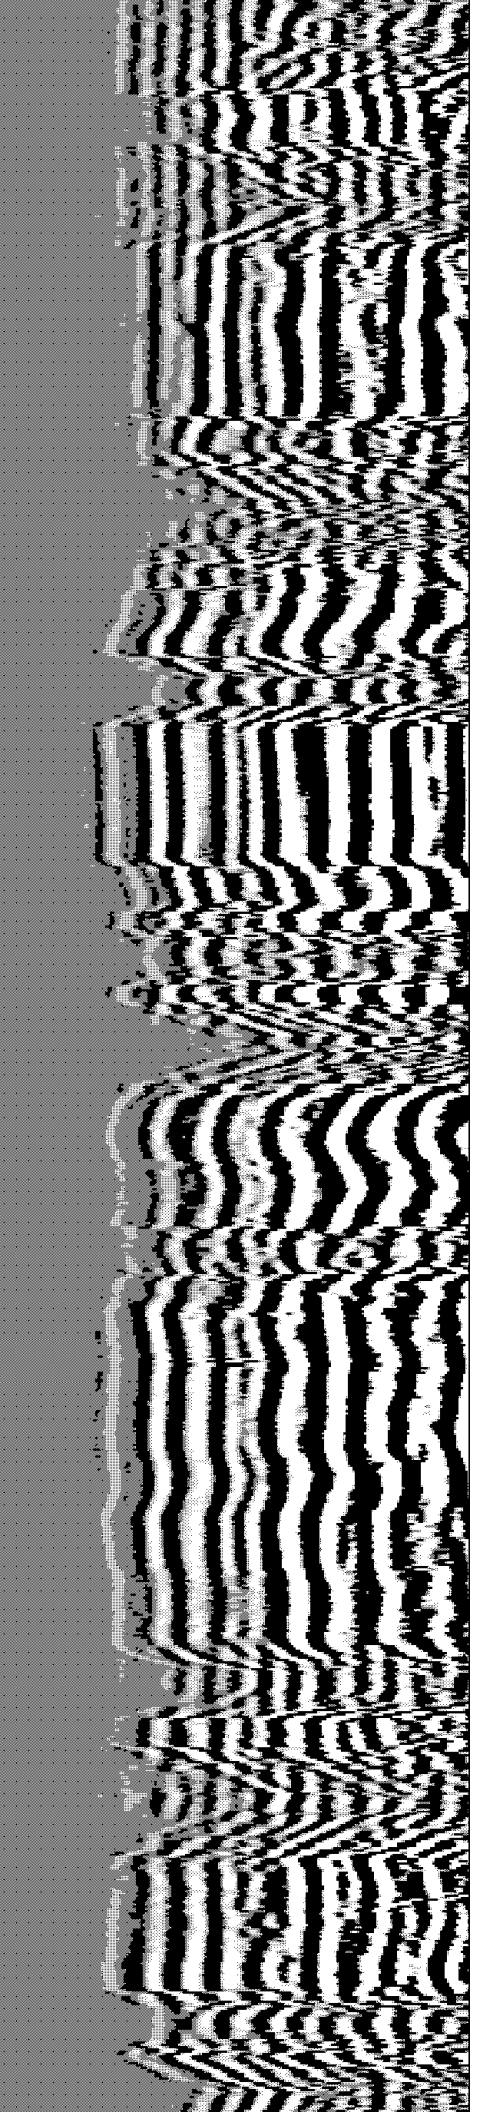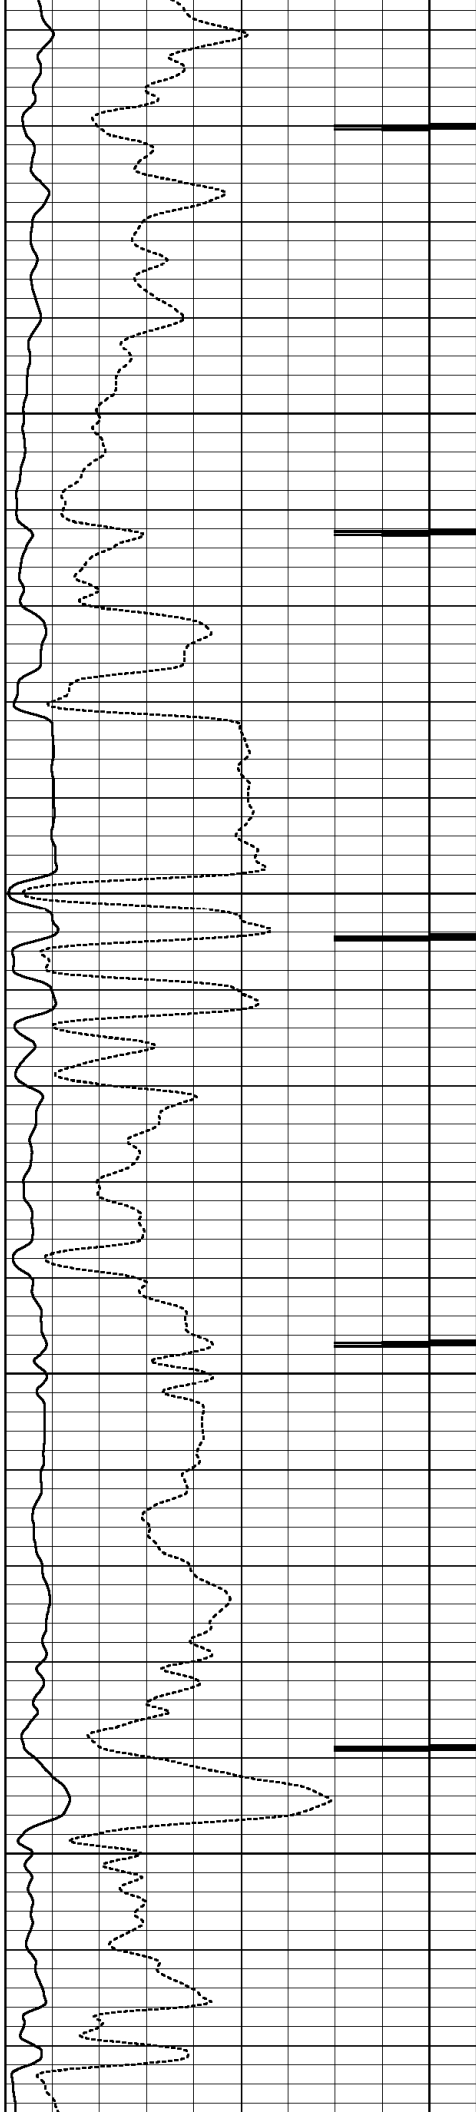


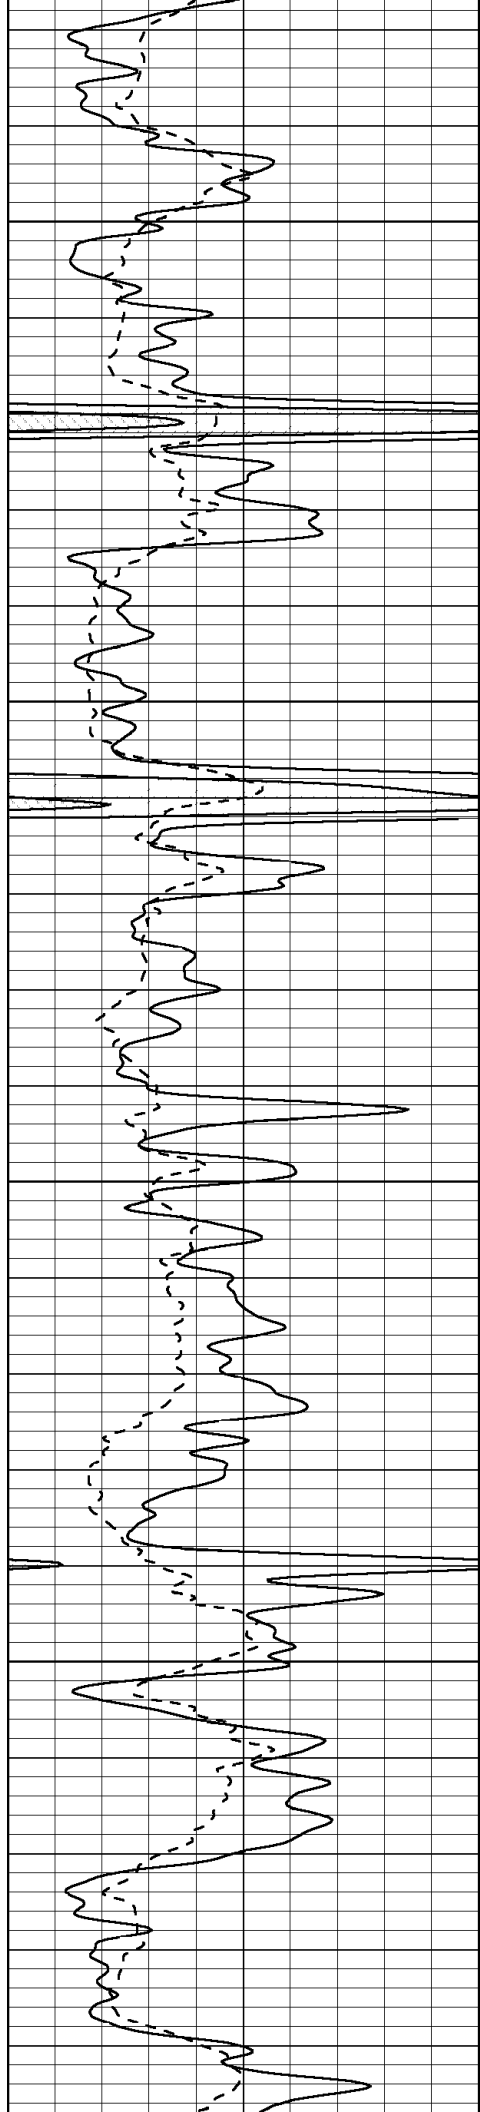



4150

4200

4250

4300

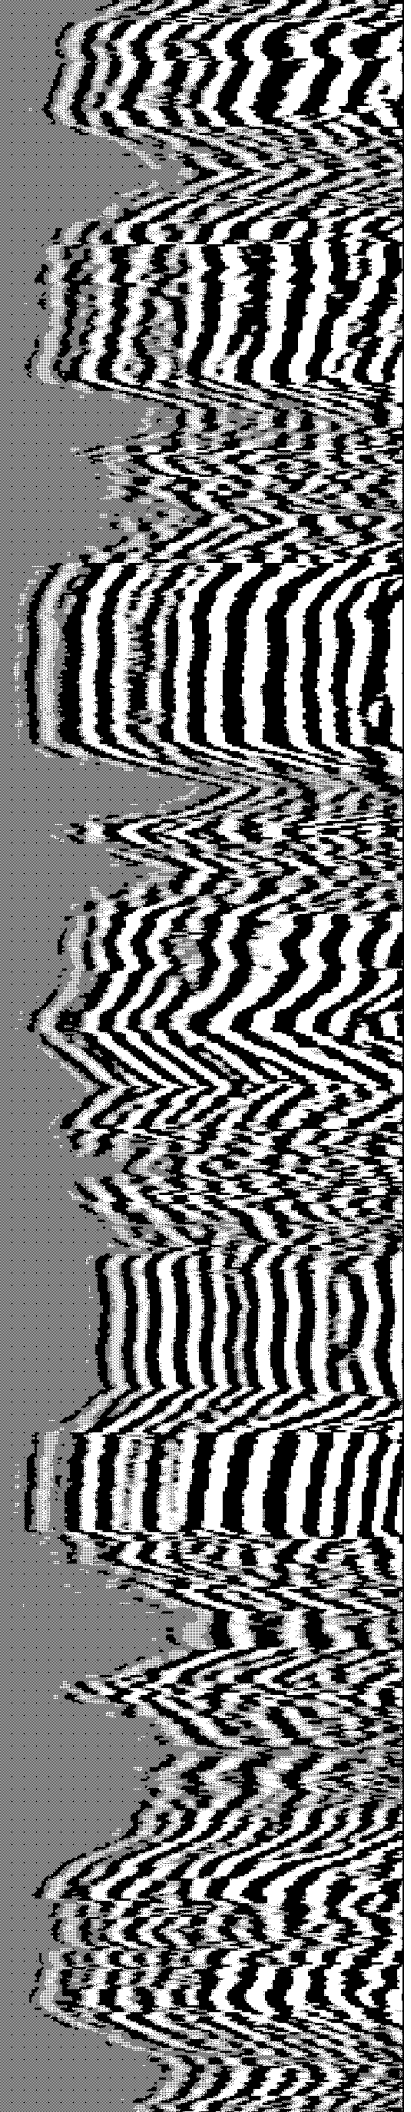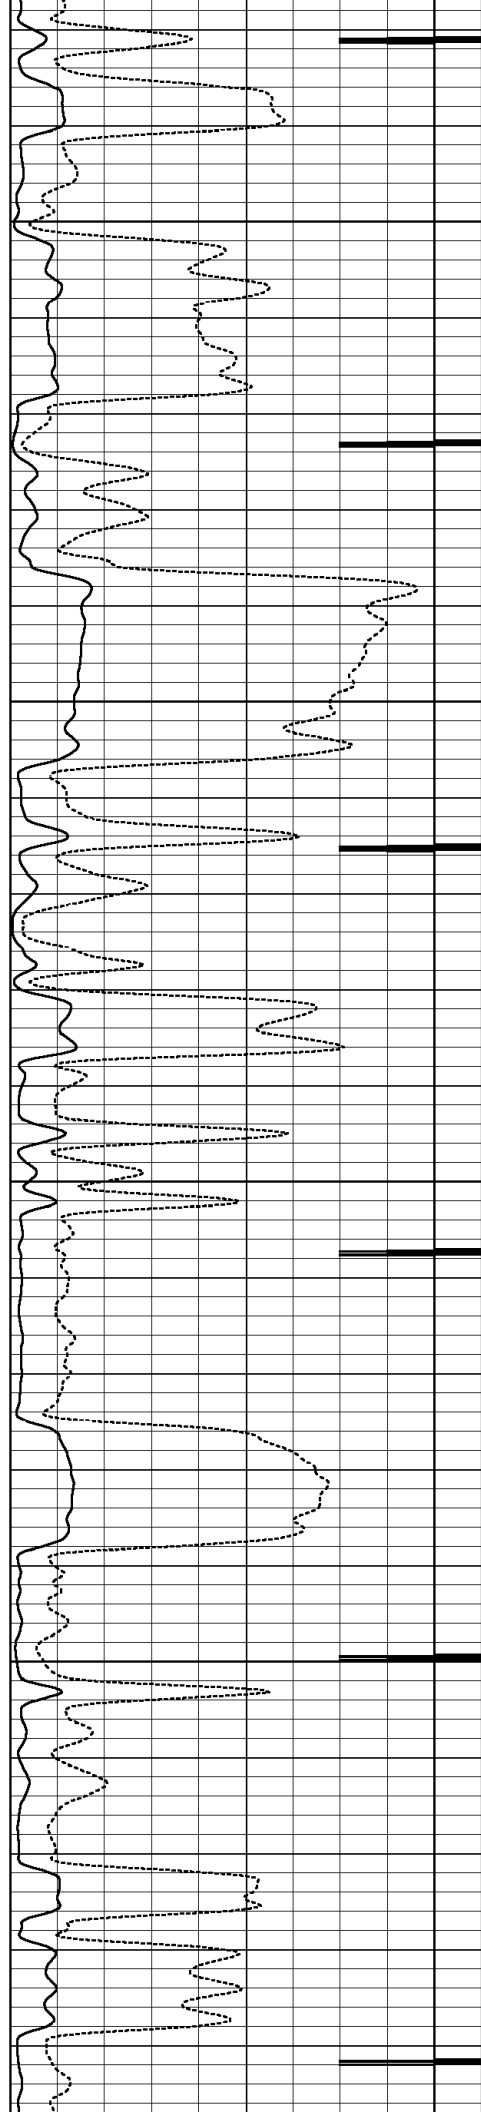

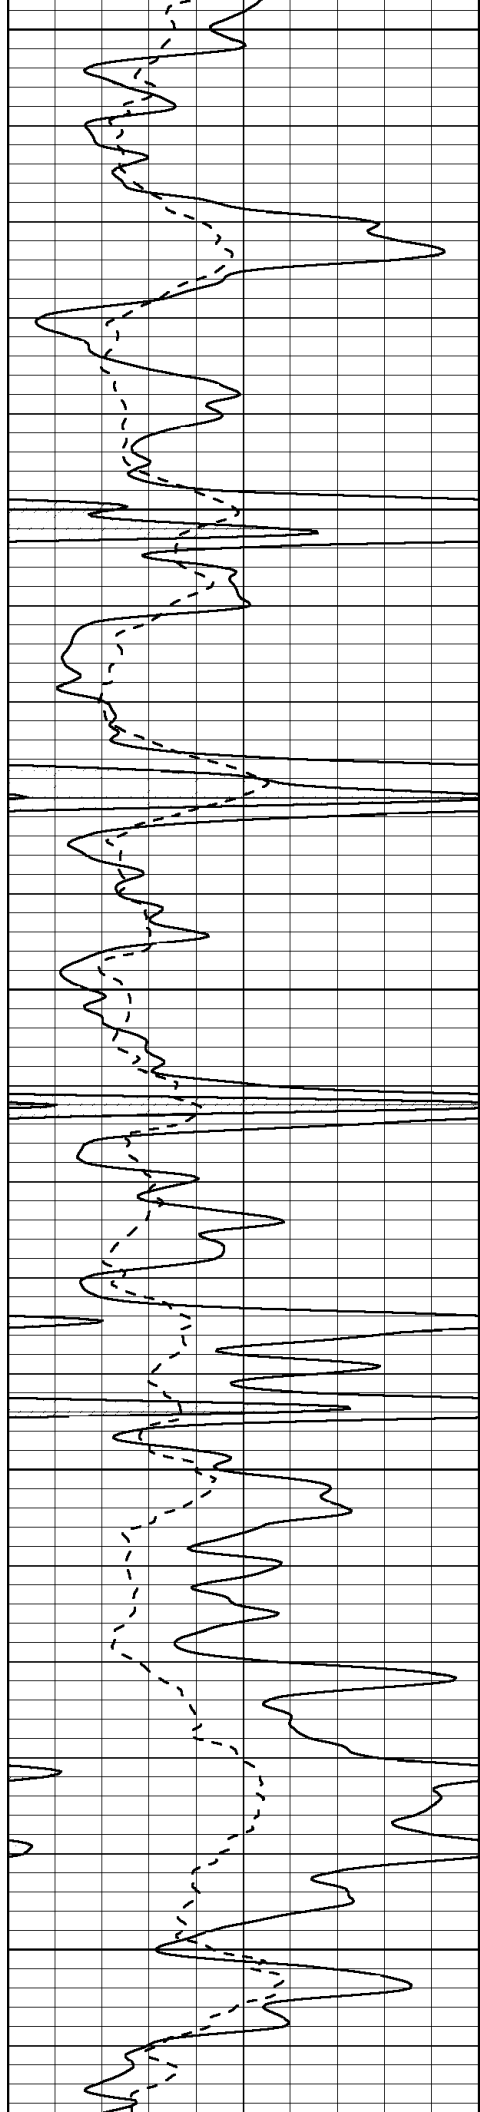


4350

4400


4450


4500

4550

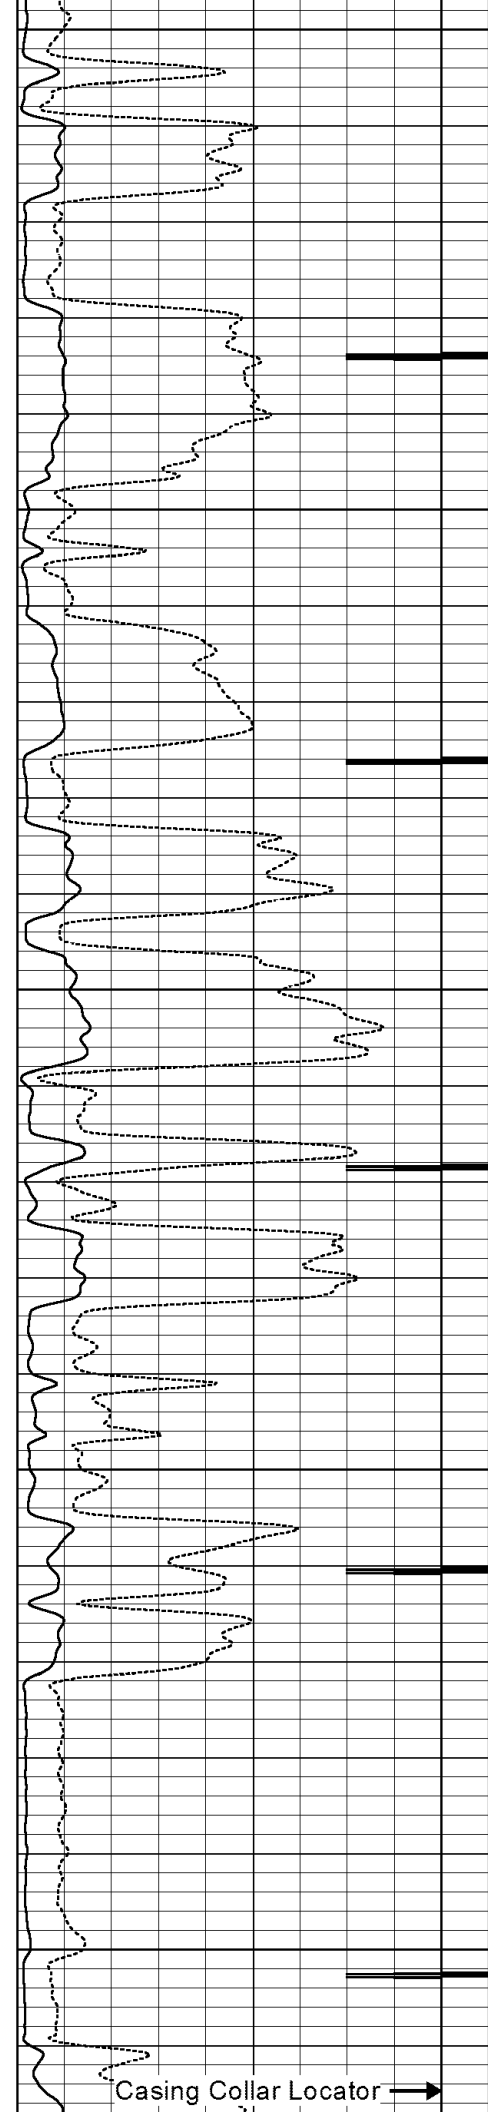


Casing Collar Locator →

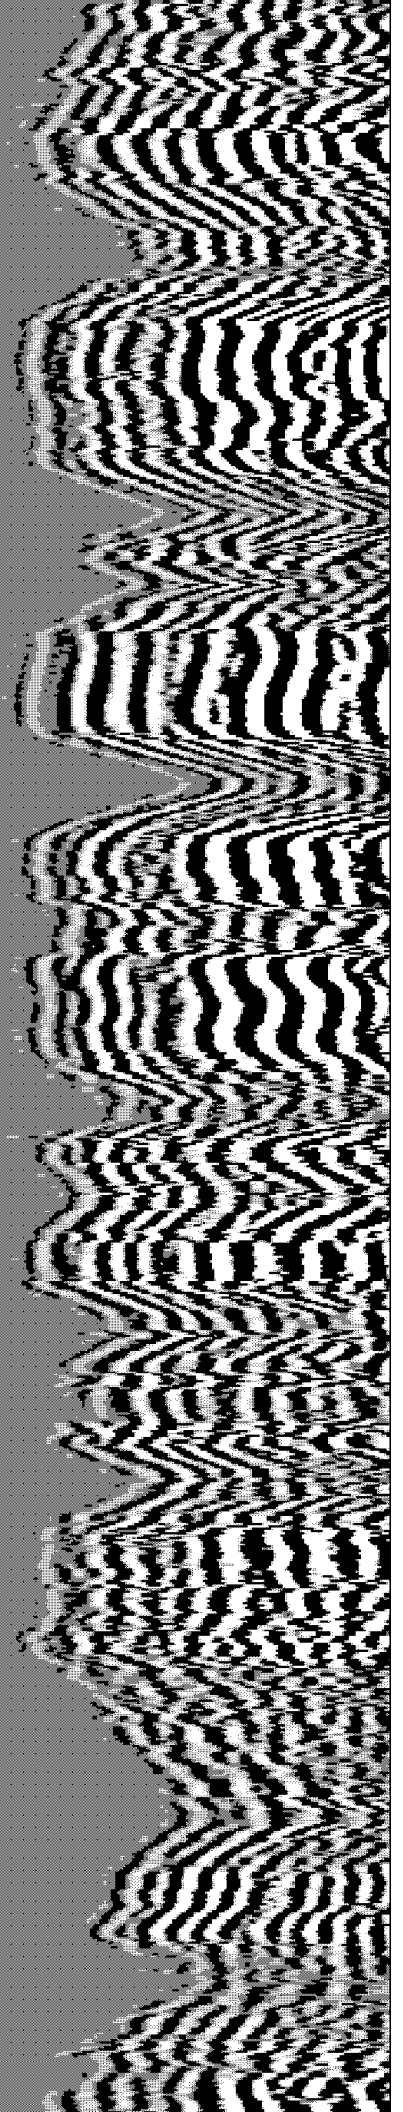


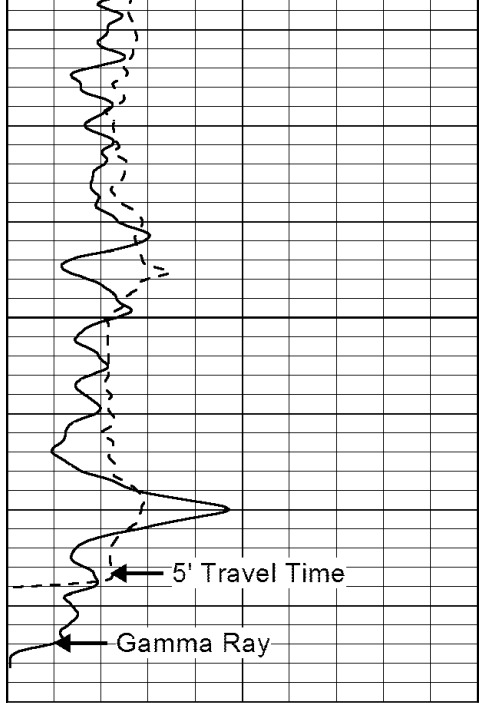

0	Gamma Ray (GAPI)	150
200	5' Travel Time (usec)	1000

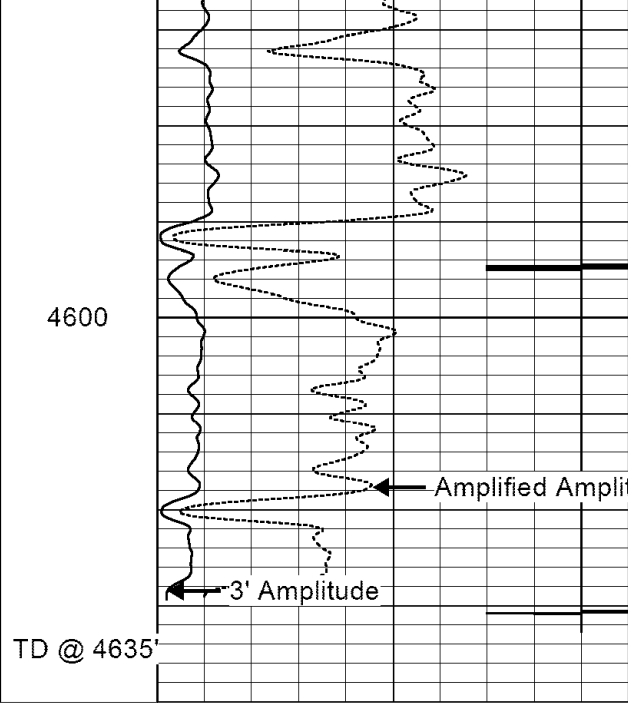

0	3' Amplitude (mV)	100
9	CCL	-1
0	Amplified Amplitude (mV)	20

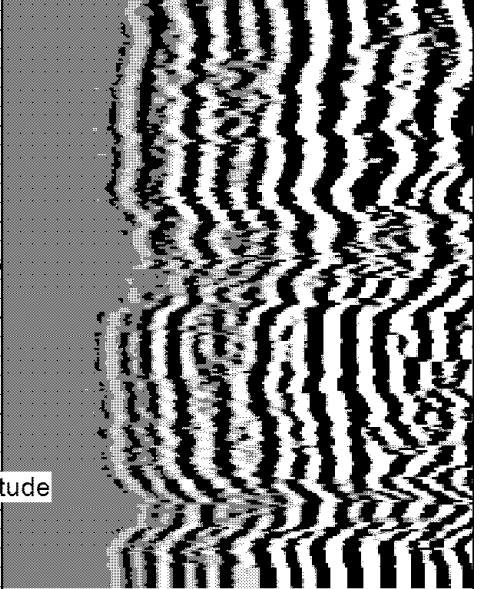

200	5FT VDL	1000
-----	---------	------