


DISTRICT CONSERVATION AGENT'S REPORT

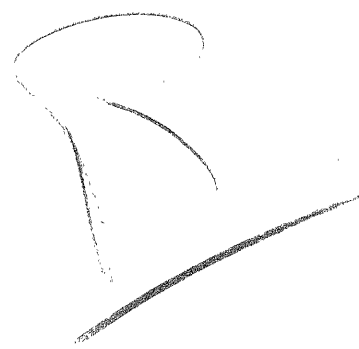

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 15163-00254-0000

LOCATION SW SW SE

SEC. 27 TWP. 7 RGE. 20

Dry Hole x Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease \_\_\_\_\_ Sample \_\_\_\_\_

Operator B & R Drg Co Address Russell, Kans

Field \_\_\_\_\_ County Rooks

Total Depth 3530 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 183' circulated with cement. 5 1/2" at 3340' with 75 sax  
cement behind. Plug was not drilled out. Top perforations  
at 3101' - Filled with mud and chat to 3095', run 5 sax  
cement with dump bailer - Pulled 2200' of 5 1/2" - filled hole with  
heavy mud to 180', set wood plug and 15 sax cement, filled with  
mud to 35', set wood plug, rock bridge and 10 sax cement.

\_\_\_\_\_  
\_\_\_\_\_

2-16-50  
FEB 16 1950  
District Conservation Agent

**PLUGGING**  
FILE SEC 27 T 7 R 20  
BOOK PAGE 139 LINE 5

Date 2-15-50