



**Weatherford**<sup>®</sup>

**CML IMPULSE SHUTTLE  
COMPACT PHOTO DENSITY  
COMPENSATED NEUTRON LOG**

COMPANY **SANDRIDGE ENERGY**  
 WELL **WARREN 3317 1-26H**  
 FIELD **SHIMMER SOUTH**  
 PROVINCE/COUNTY **COMANCHE**  
 COUNTRY/STATE **USA \ KANSAS**  
 LOCATION **S2 S2 SE SE**  
**200' FL & 660' FEL**

SEC **26** TWP **33S** RGE **17W** Other Services **MAIMFE**  
 API Number **15-033-21654** Permit Number  
 Permanent Datum GL, Elevation 1797 feet  
 Log Measured From KB  
 Drilling Measured From KB

Date	23-AUG-2012	Elevations:	KB	1818.00
Run Number	ONE	DF	1818.00	
Depth Driller	9786.00	GL	1797.00	
Depth Logger	9786.00			
First Reading	9711.00			
Last Reading	4700.00			
Casing Driller	5621.00			
Casing Logger	5611.00			
Bit Size	6.125			
Hole Fluid Type	WATER			
Density / Viscosity	8.70 lb/USg	30.00 CP		
PH / Fluid Loss	9.50	60.00 ml/30Min		
Sample Source	FLOWLINE			
Rm @ Measured Temp	0.30 @ 80.0	ohm-m		
Rmf @ Measured Temp	0.24 @ 80.0	ohm-m		
Rmc @ Measured Temp	0.36 @ 80.0	ohm-m		
Source Rmf / Rmc	CALC	CALC		
Rm @ BHT	0.18 @ 138.0	ohm-m		
Time Since Circulation	16 HOUR			
Max Recorded Temp	138.00	deg F		
Equipment Name	COMPACT			
Equipment / Base	18077	OKC		
Recorded By	GUTHMUELLER			
Witnessed By	K GENTRY			
AFE# DC11668	SO#3536733			

### BOREHOLE RECORD

Last Edited: 23-AUG-2012 15:04

Bit Size inches	Depth From feet	Depth To feet
12.250	0.00	754.00
8.750	754.00	5621.00
6.125	5621.00	9786.00

### CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURF	9.625	0.00	754.00	36.00
INTER	7.000	0.00	5621.00	26.00

### REMARKS

TOOLS RAN:SMR-173,SER-189,200V MBS-135,MTI-068,MGS-142,MCL-063, MDN-391, MPD-166,MFE-363, MAI-427 RAN IN COMBINATION

WELL LOGGED USING IMPULSE METHOD OF DEPLOYMENT, AND MEMORY LOGGING SYSTEM

HARDWARE: MAI: MIS-B 0.5" STANDOFF USED ABOVE MAI, ISA 0.5" STANDOFF USED BELOW MAI.

MFE: MIS-B 0.5" STANDOFF USED ABOVE MFE,

MDN: MIS-A DOUBLE BOWSPRING USED ABOVE MDN.

MPD: 4INCH PROFILE PLATE USED, MIS-A SINGLE BOWSPRING USED BELOW MPD

2.71 G/CC DENSITY MATRIX USED TO CALCULATE POROSITY

ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.

ANNULAR VOLUME CALCULATED FOR 4.5 INCH CASING

DRILL PIPE DEPTH DURING DEPLOYMENT: 9667

DRILL PIPE DEPTH DURING DEPLOYMENT: 9637  
 LOGGING TOOL DEPTH AFTER DEPLOYMENT: 9747

SERVICE ORDER # 3536733  
 RIG: LARIAT 19


OPERATOR(S): D TURNER, S WORLEY


HOLE RUGOSITY MAY AFFECT LOG QUALITY.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

**5 INCH MAIN LOG**

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 24-AUG-2012 01:39  
 Filename: C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta Recorded on 24-AUG-2012 00:00  
 System Versions: Processed with 13.02.6600 Plotted with 13.02.6600

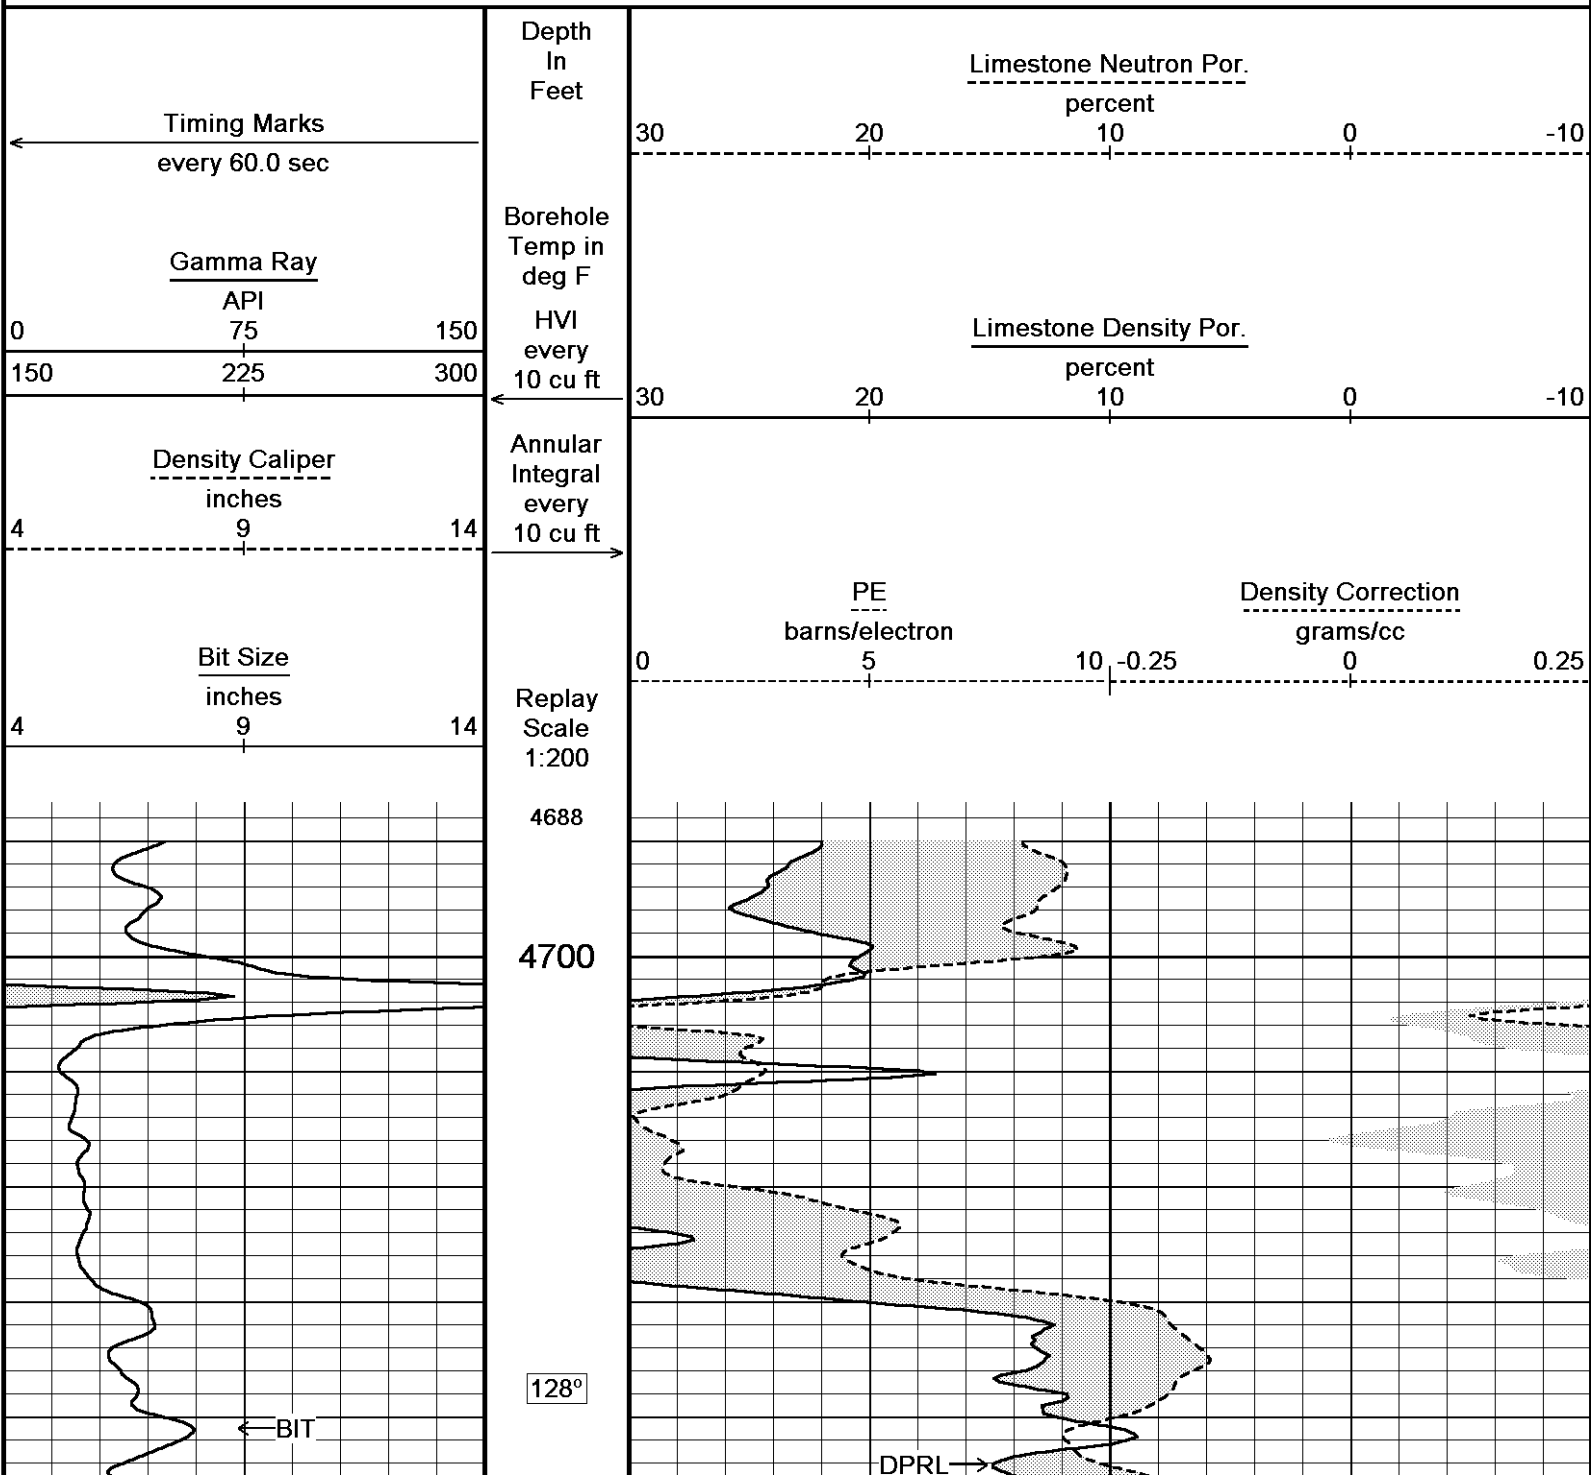

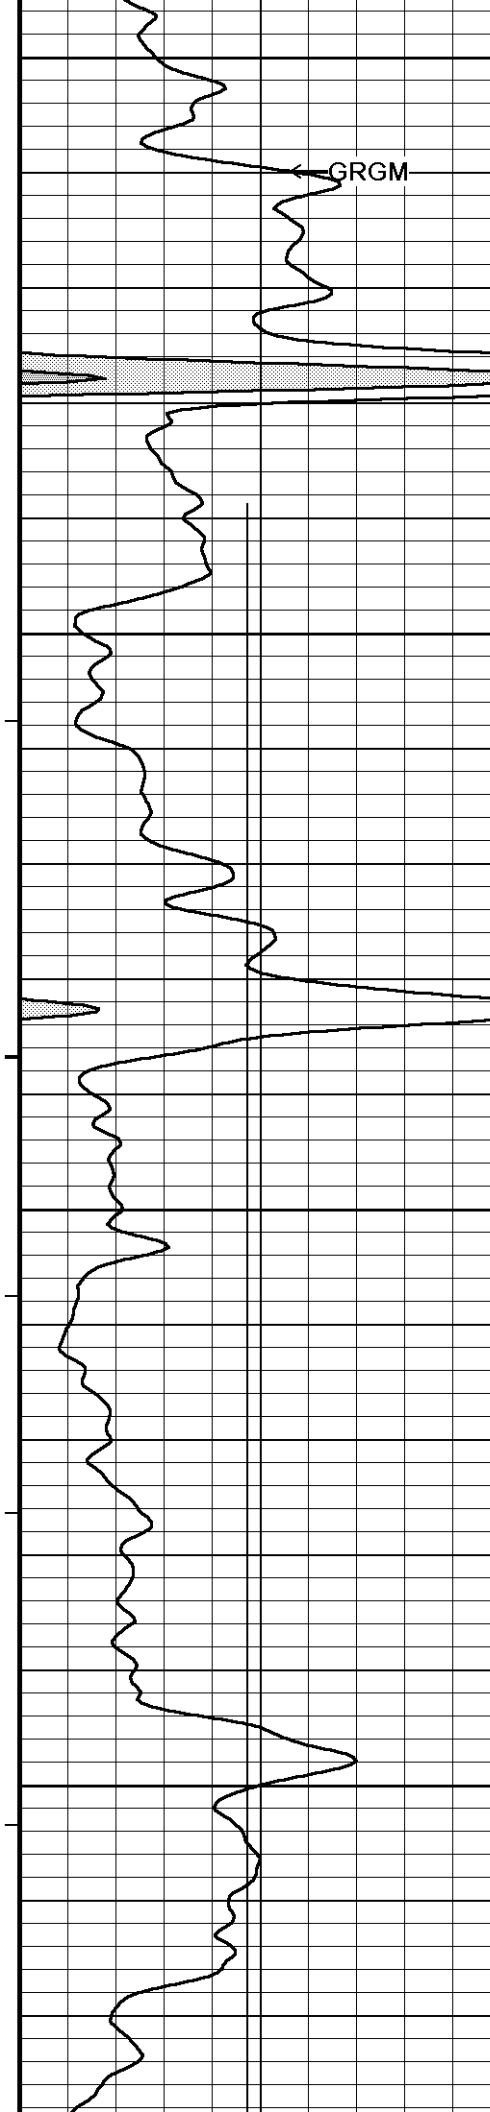

4750

← GRGM

128°


4800

128°



4850


129°

4900

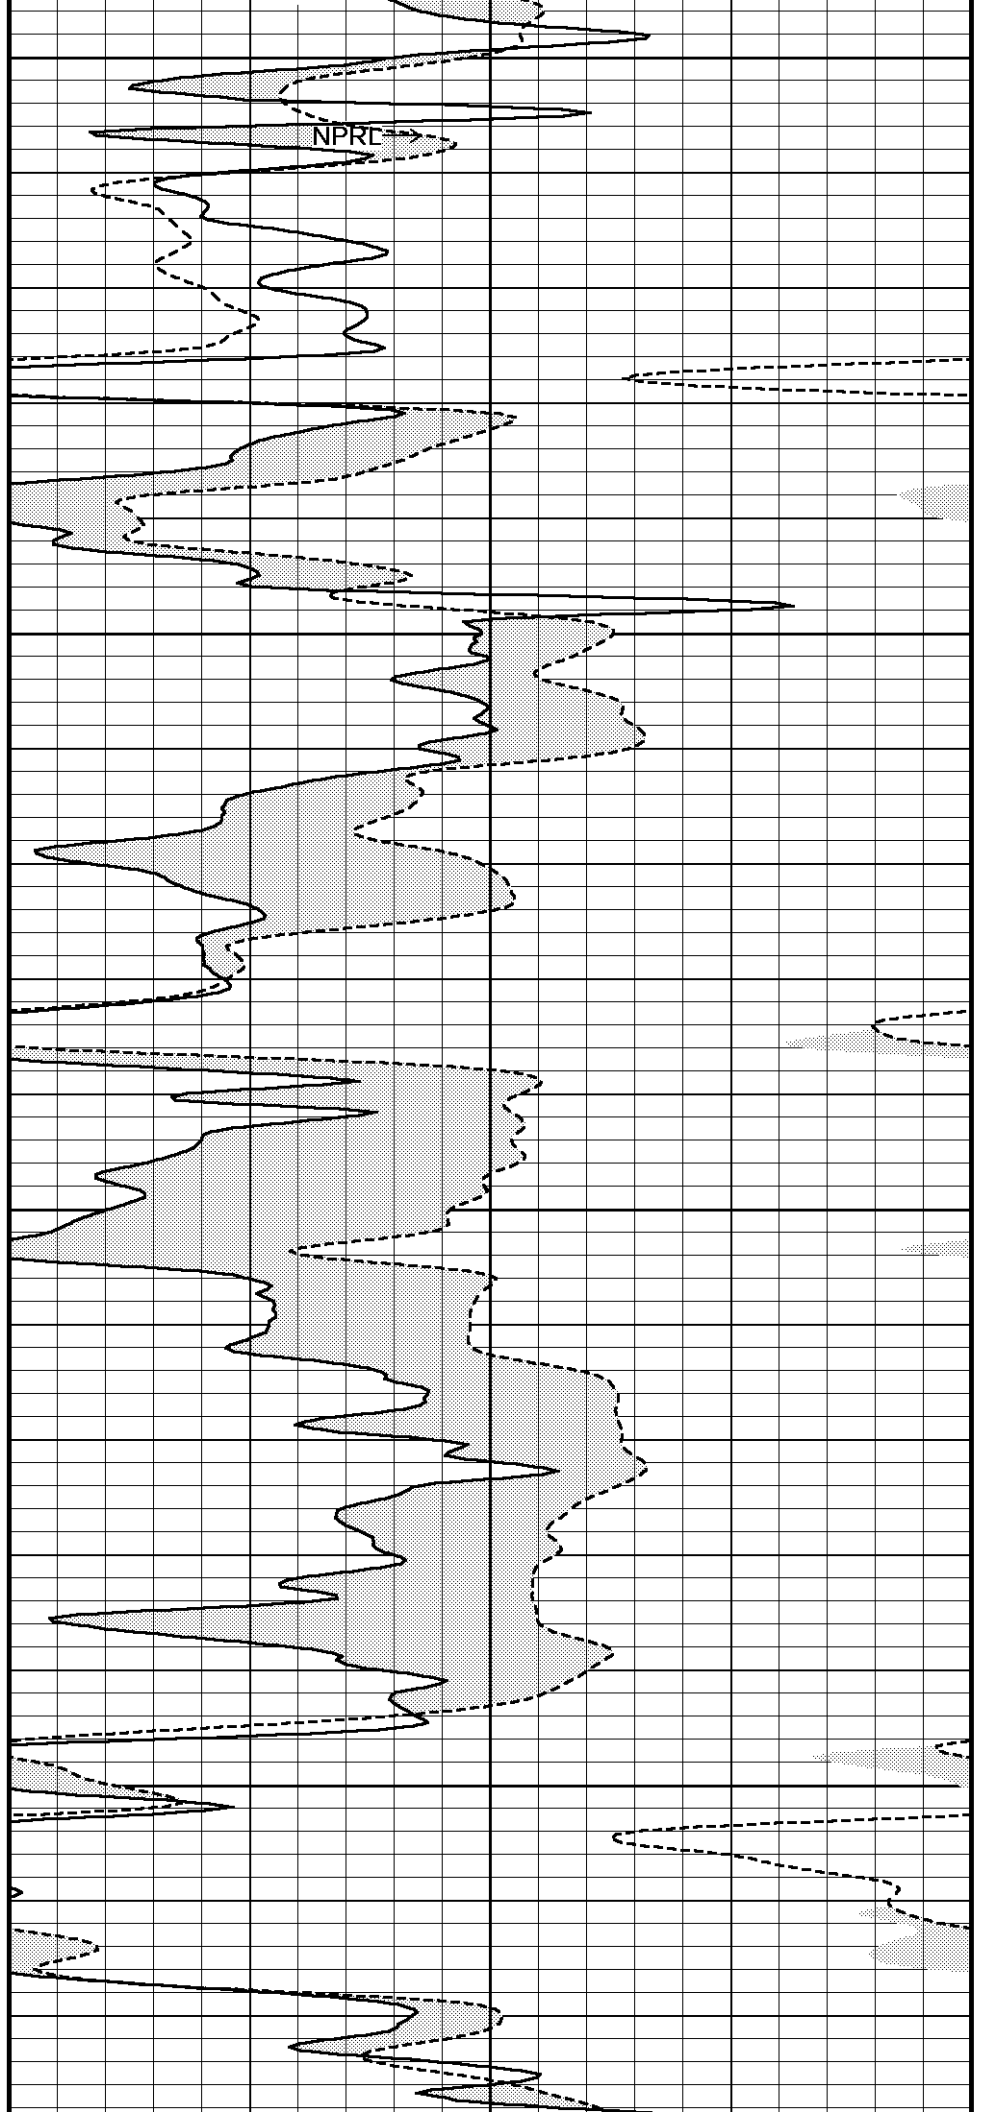

NPRL →

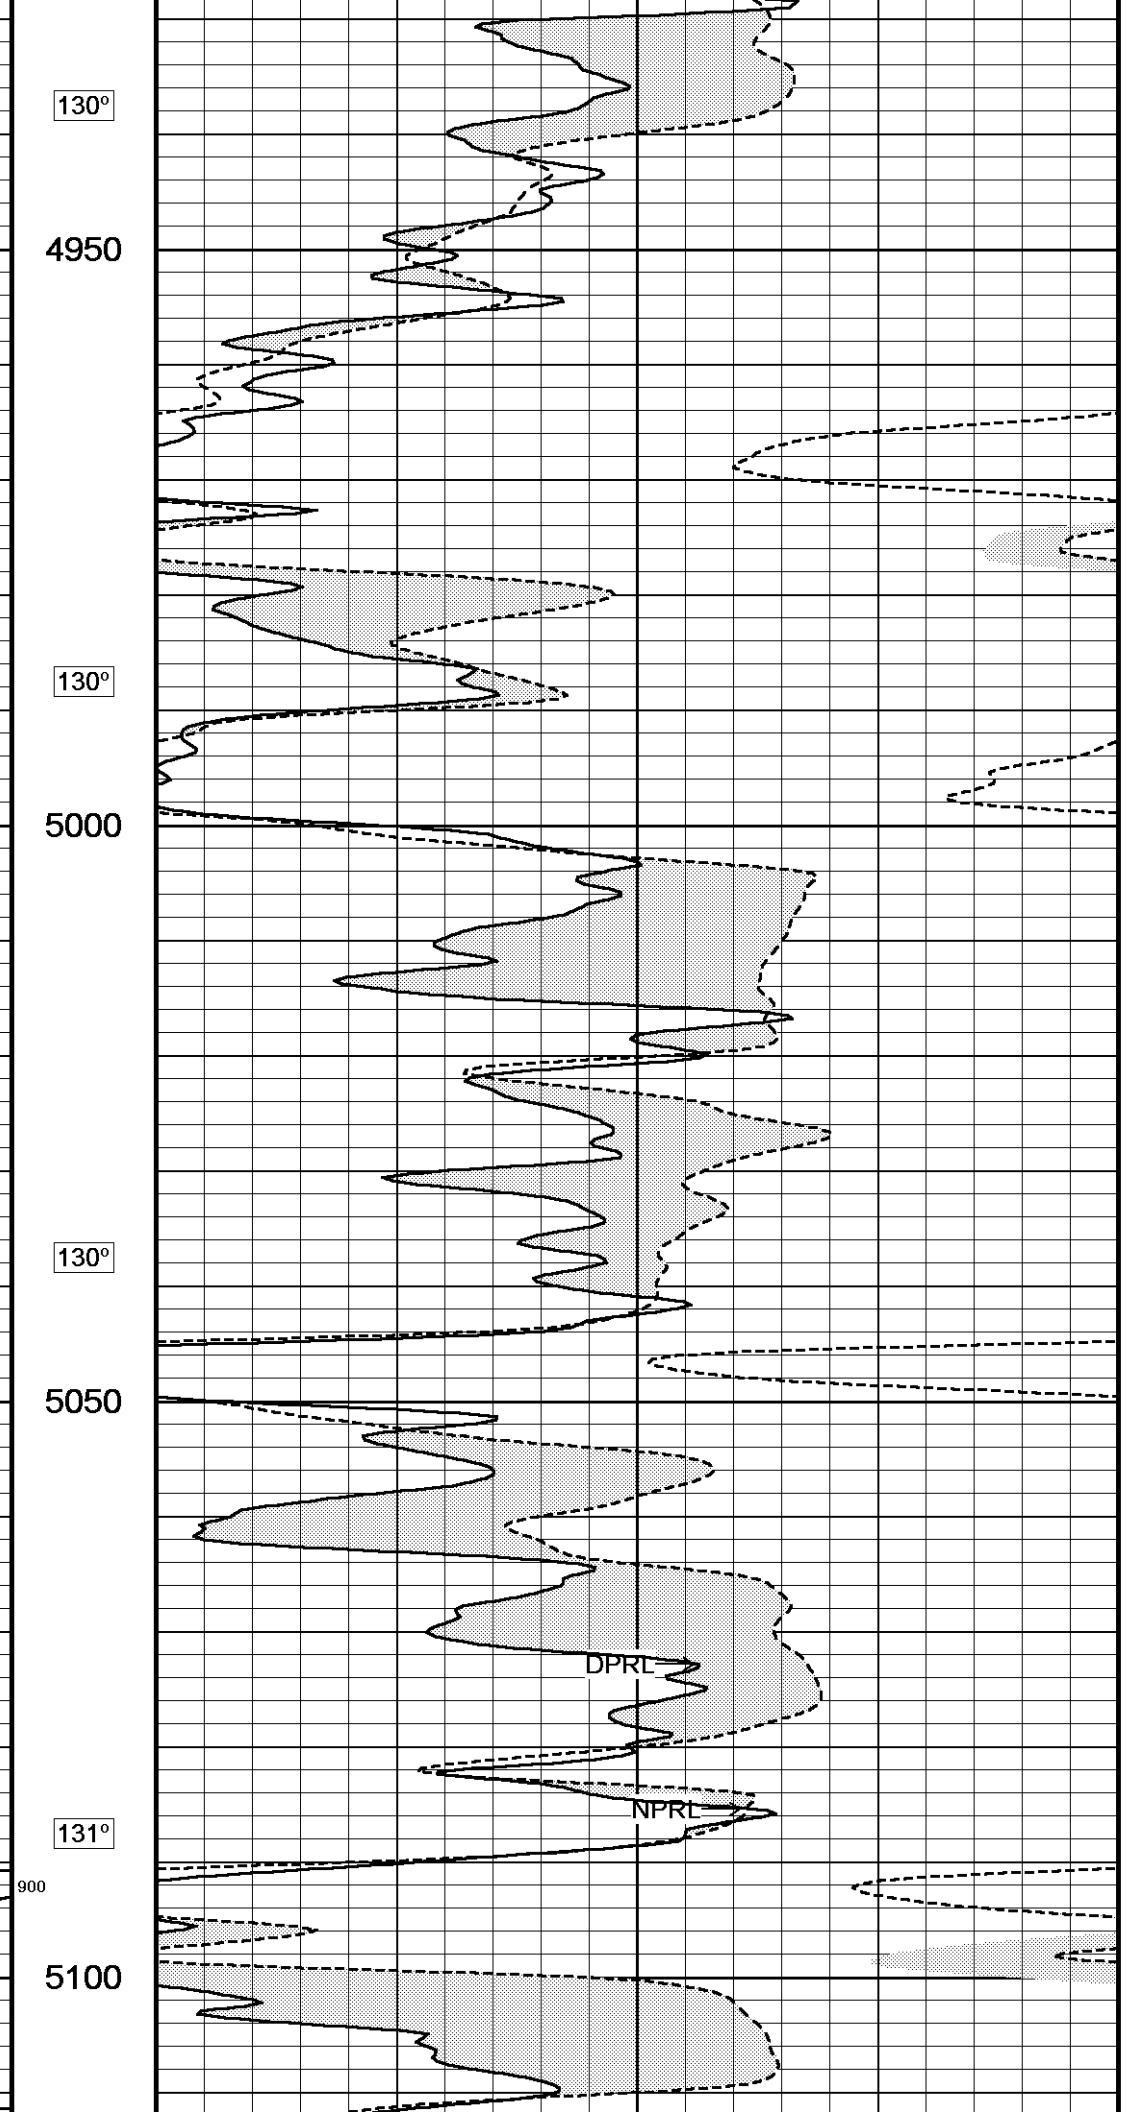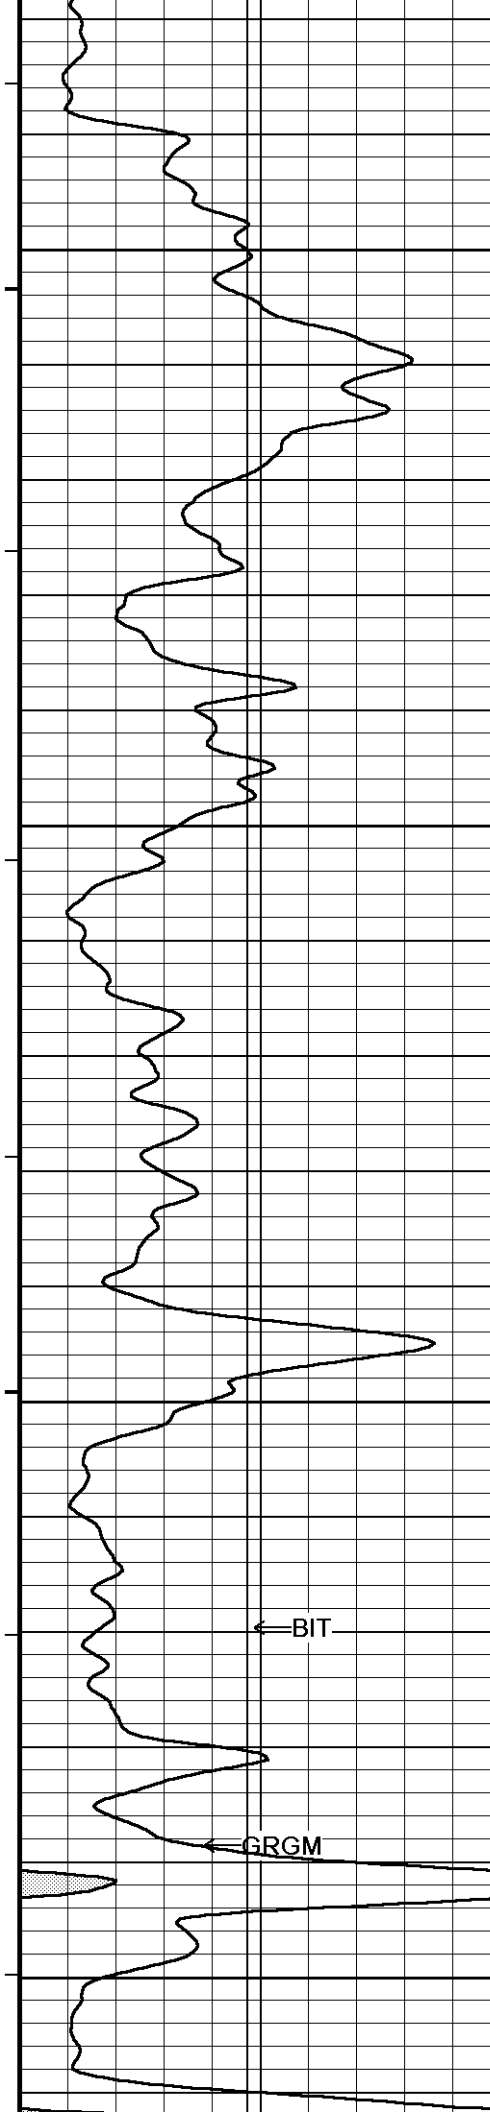

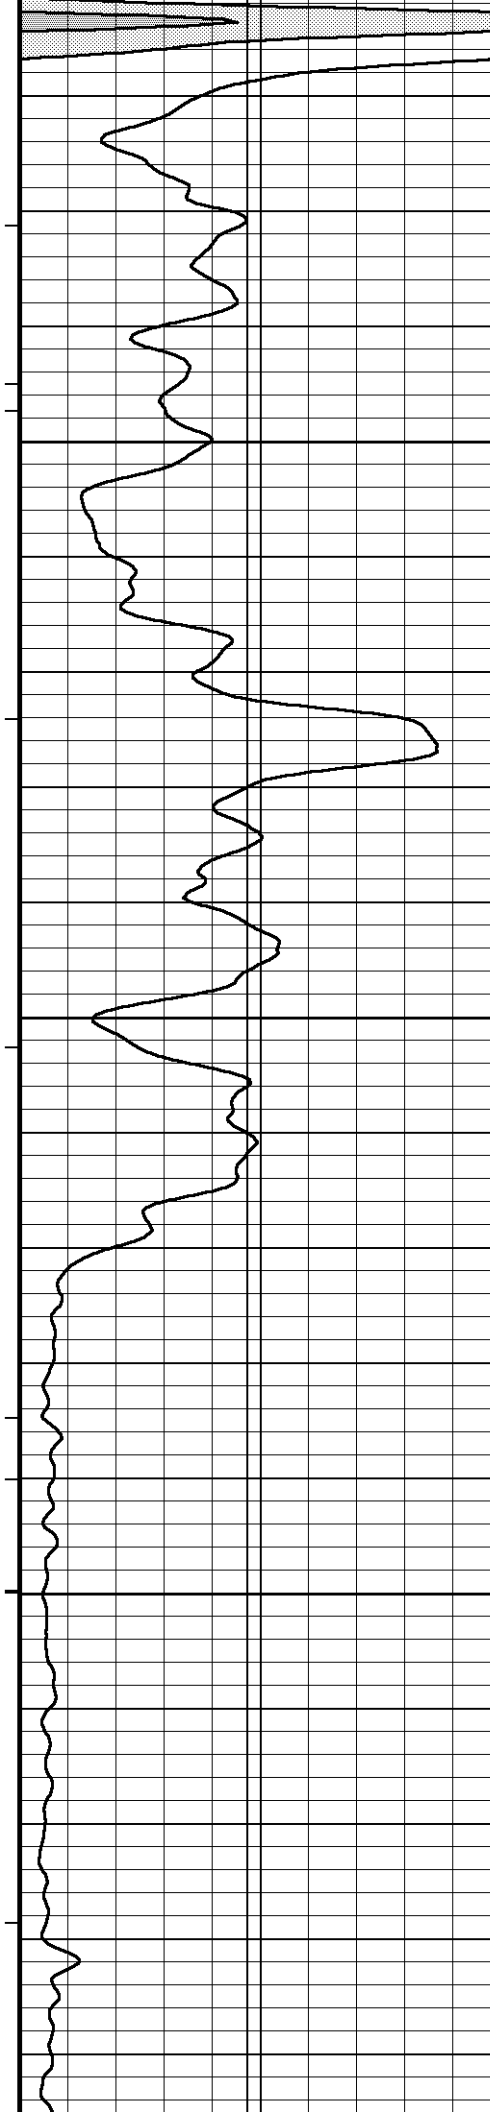

131°

5150


131°


5200


132°


5250


132°

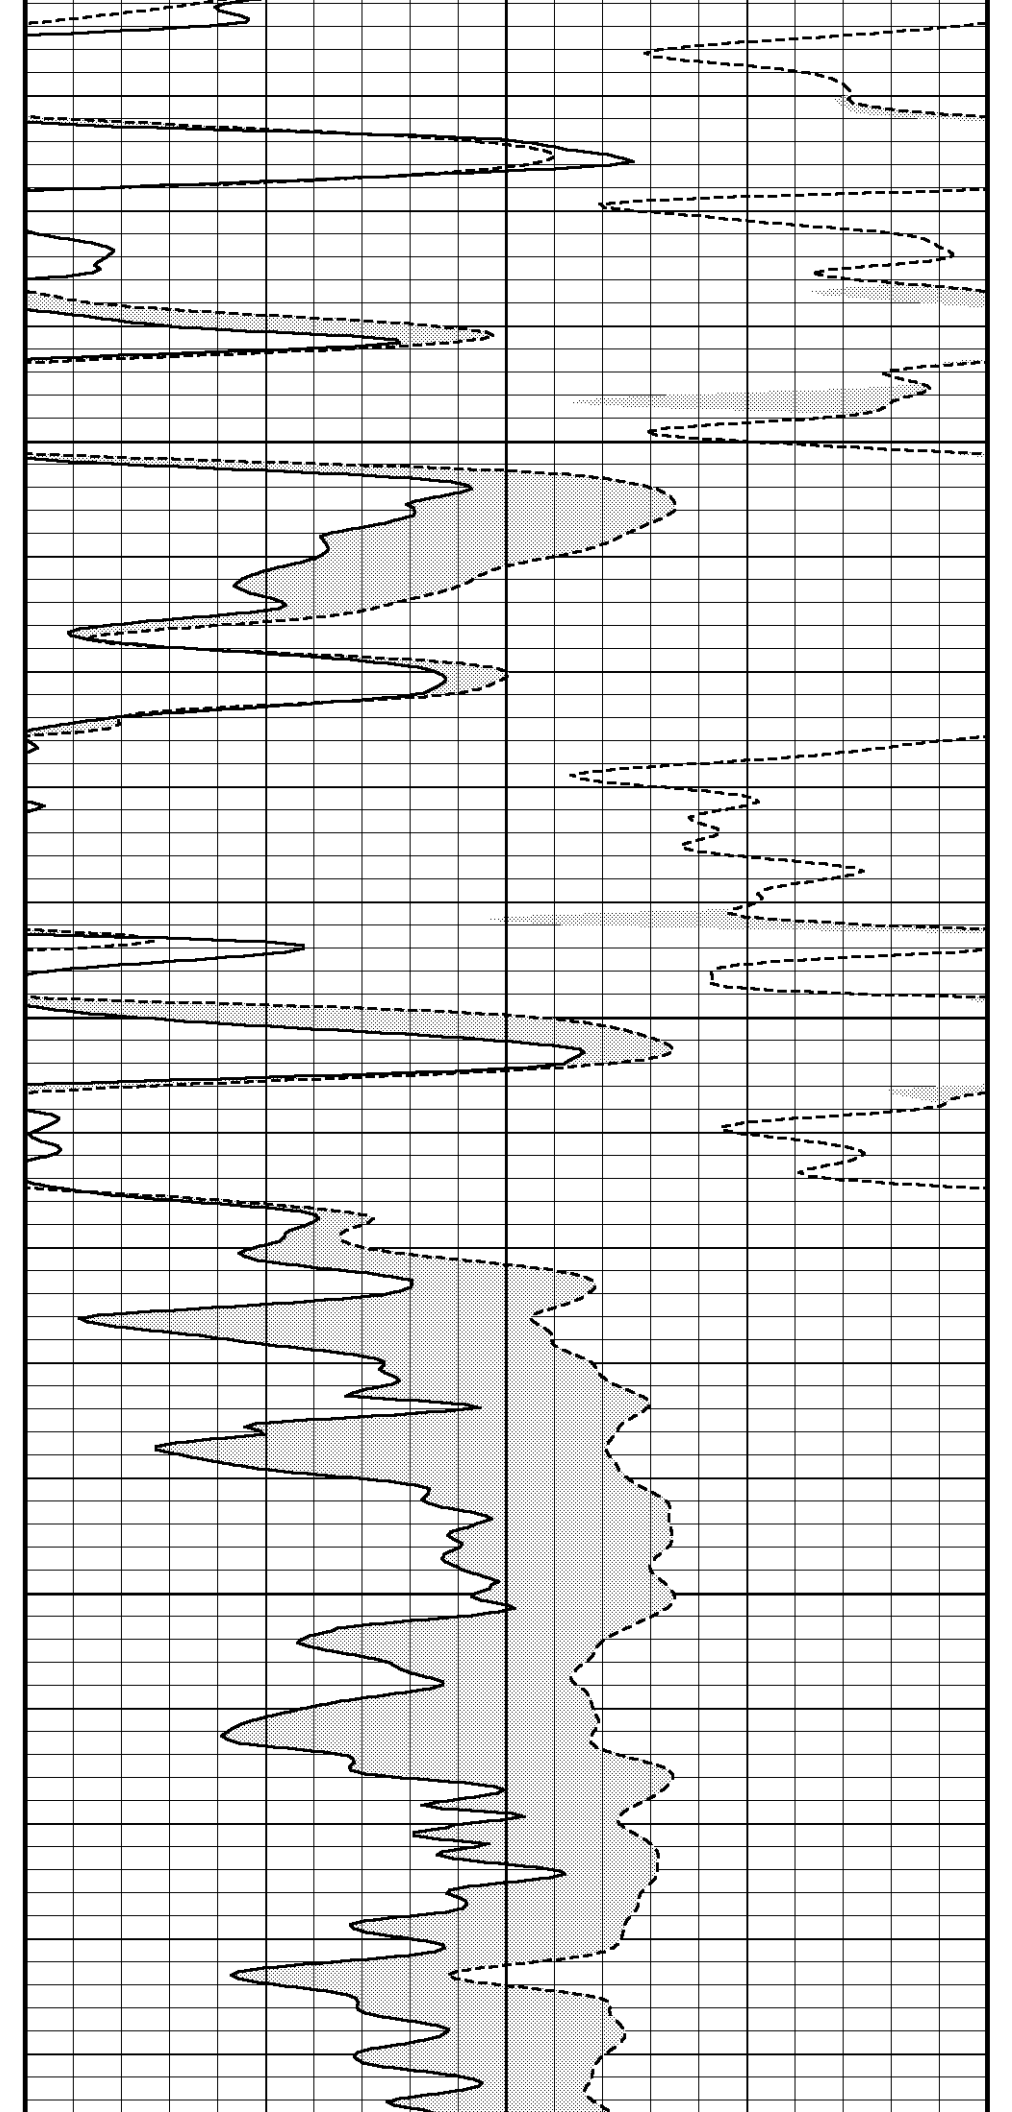


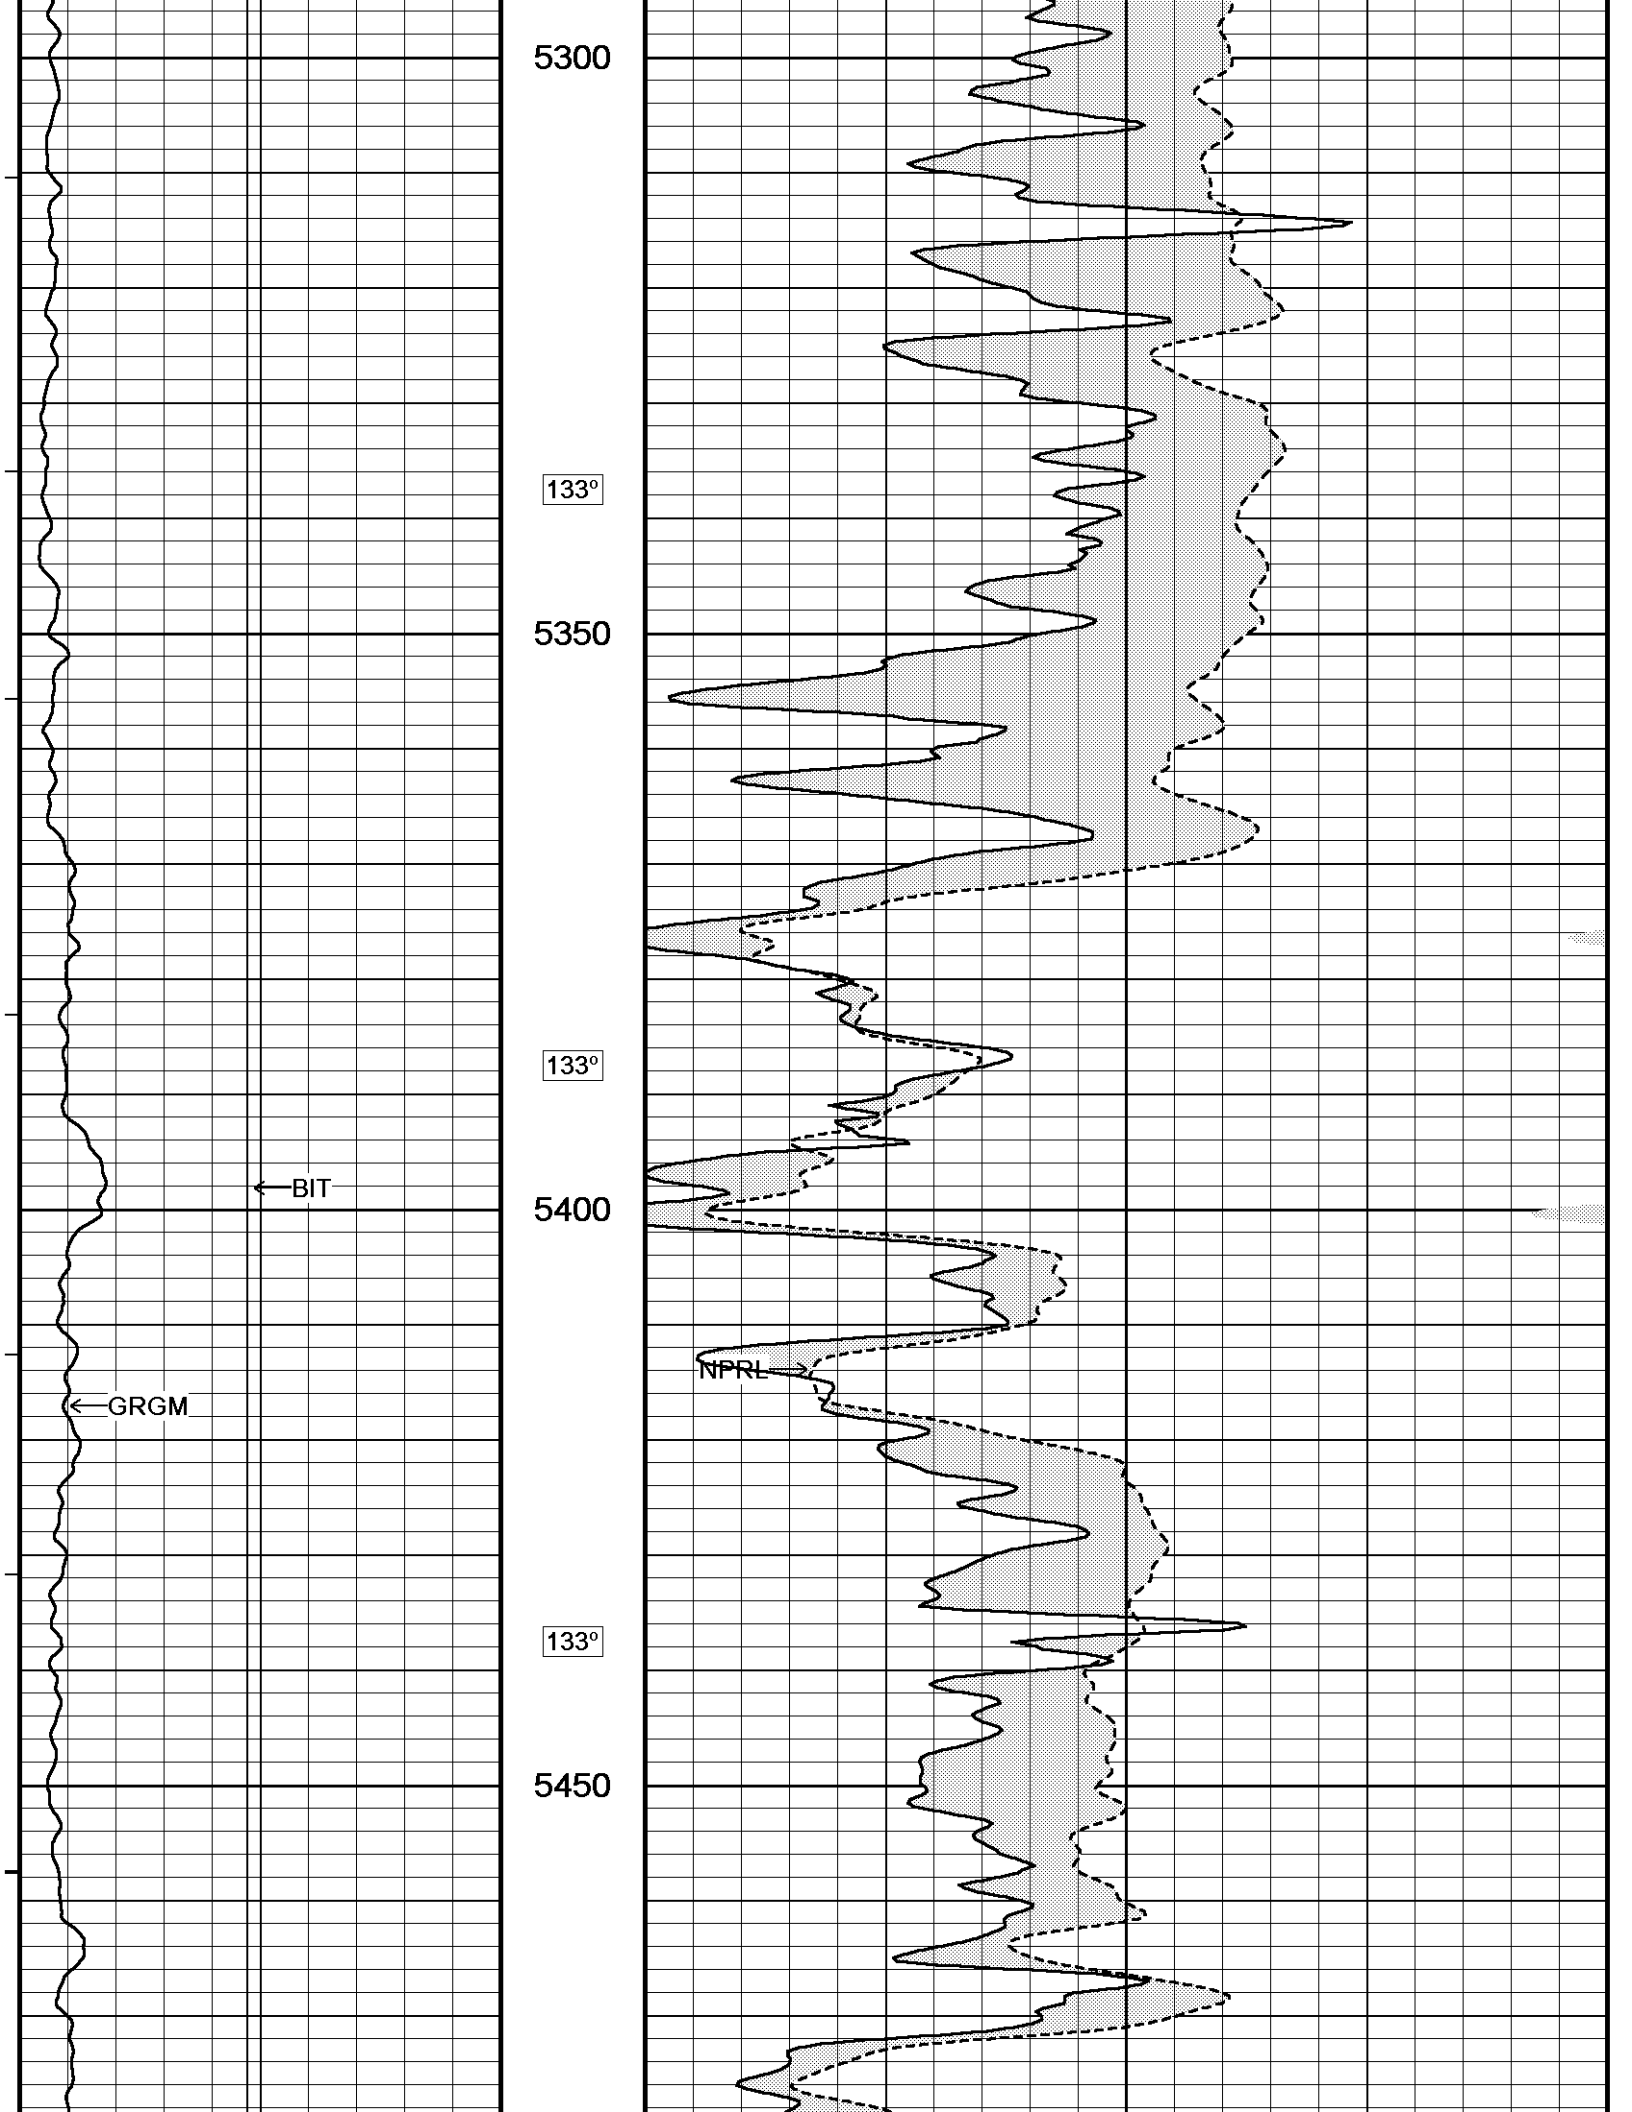


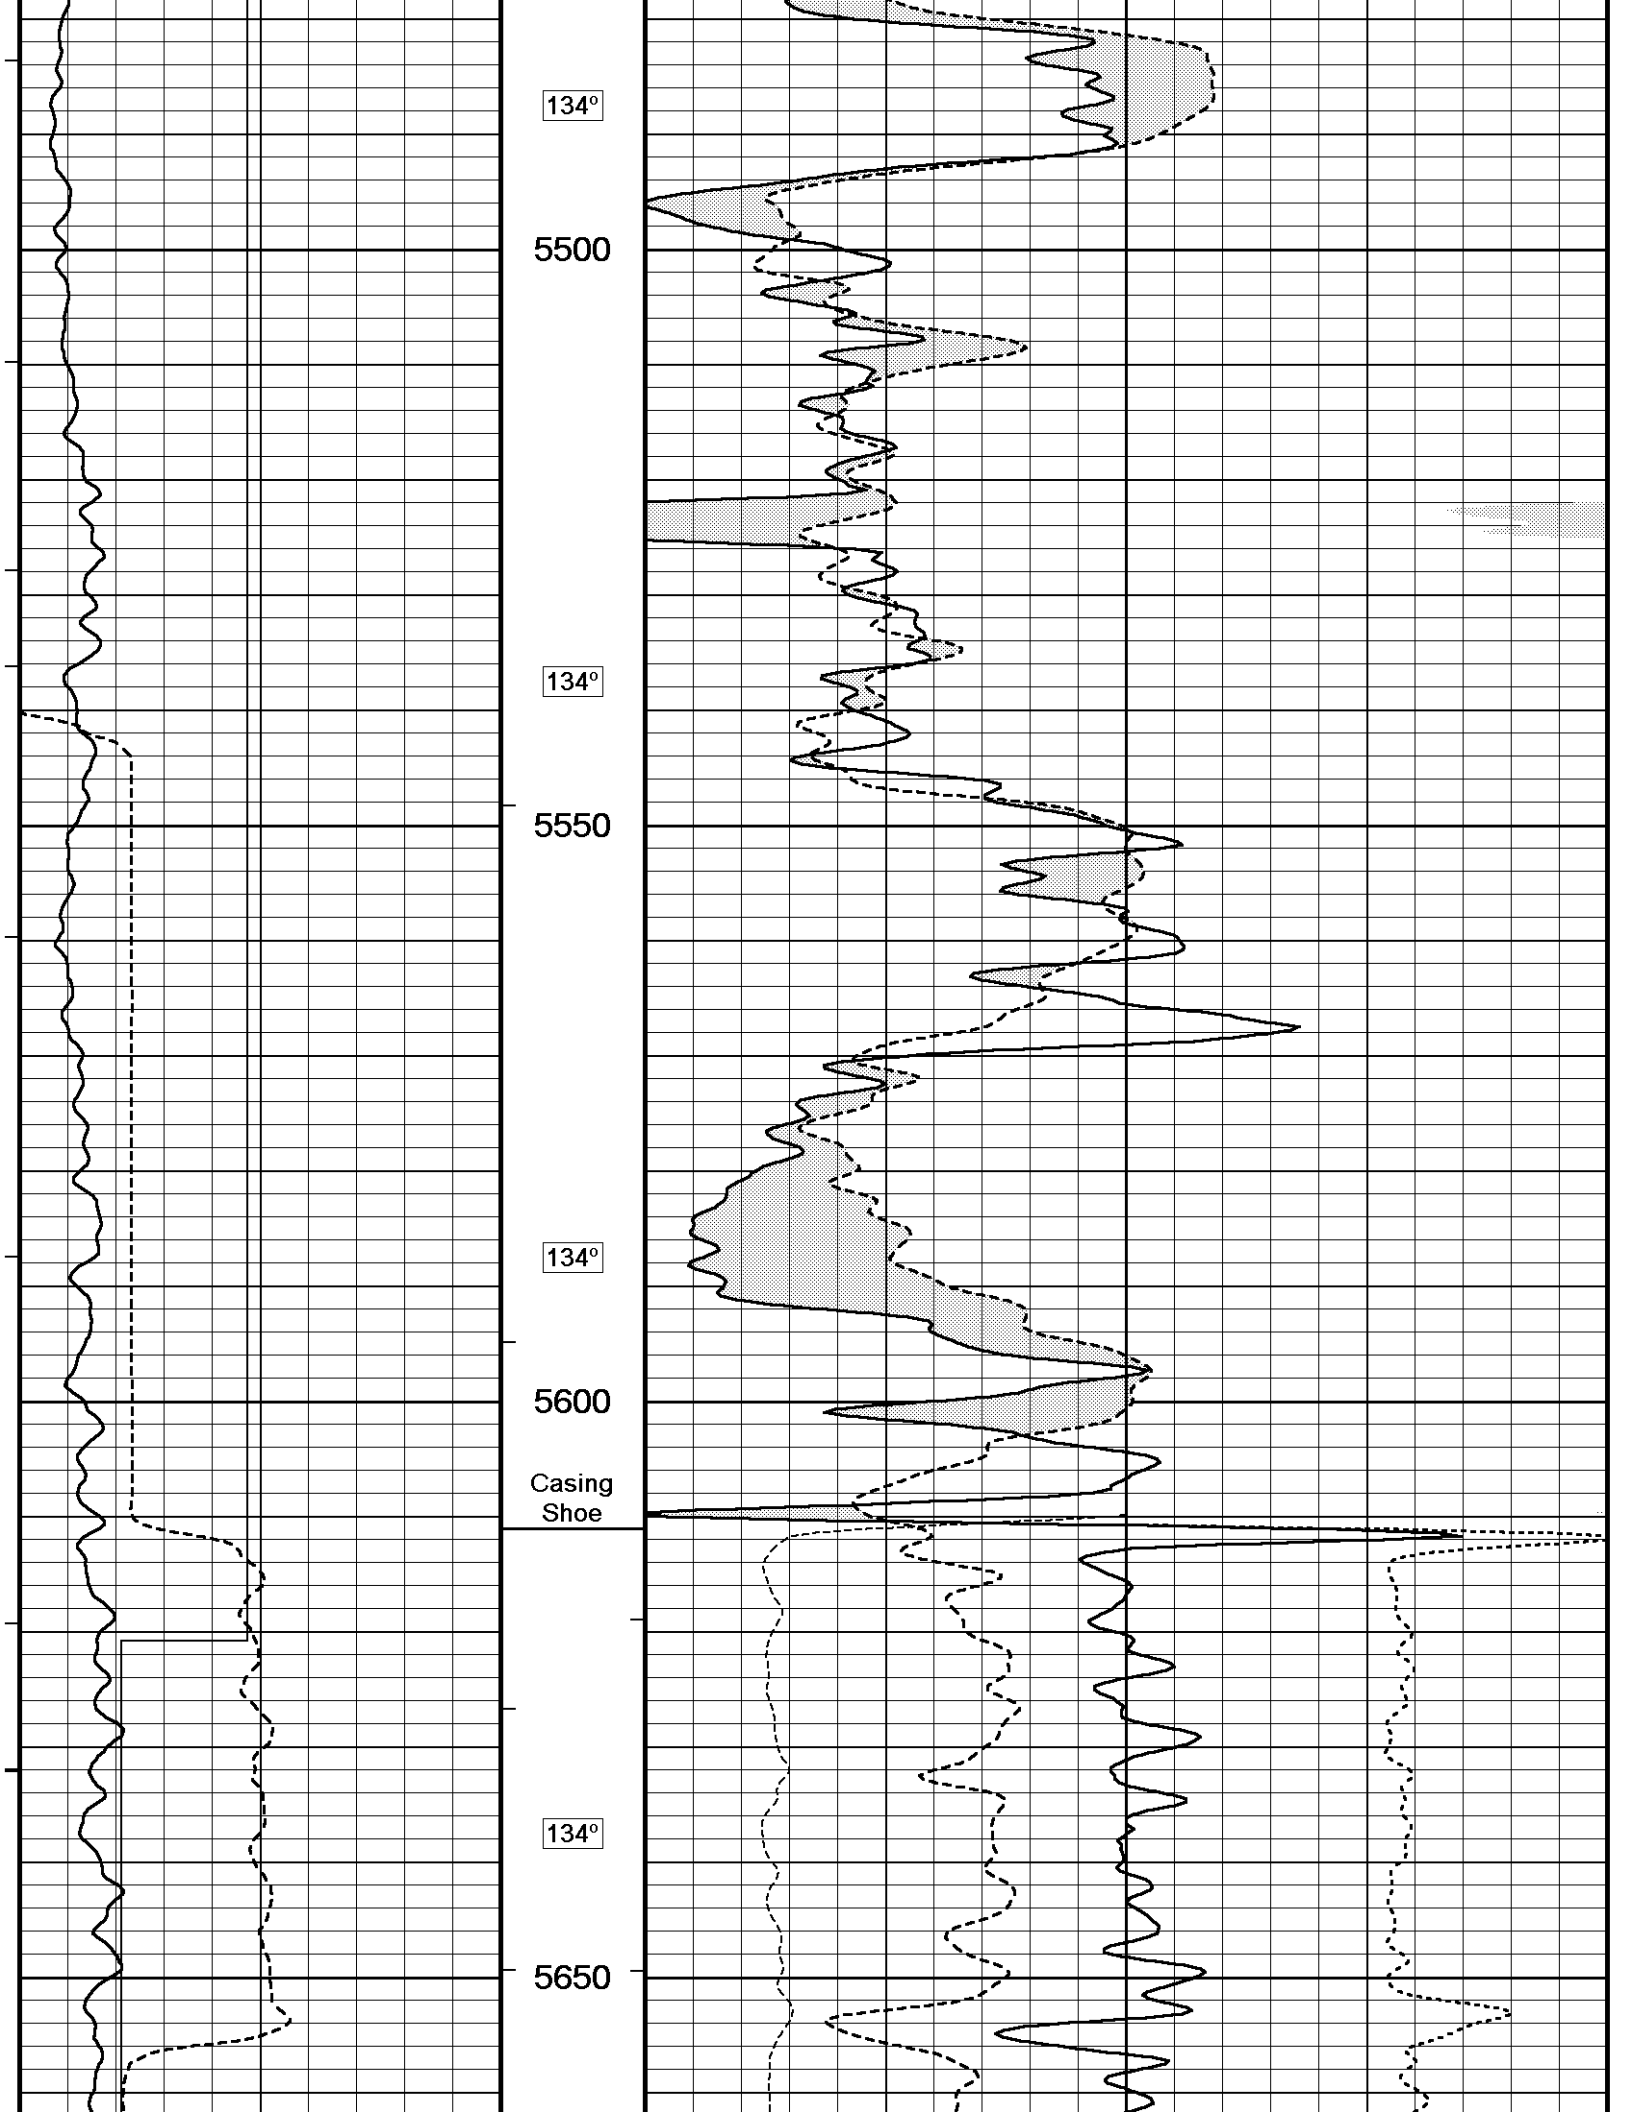


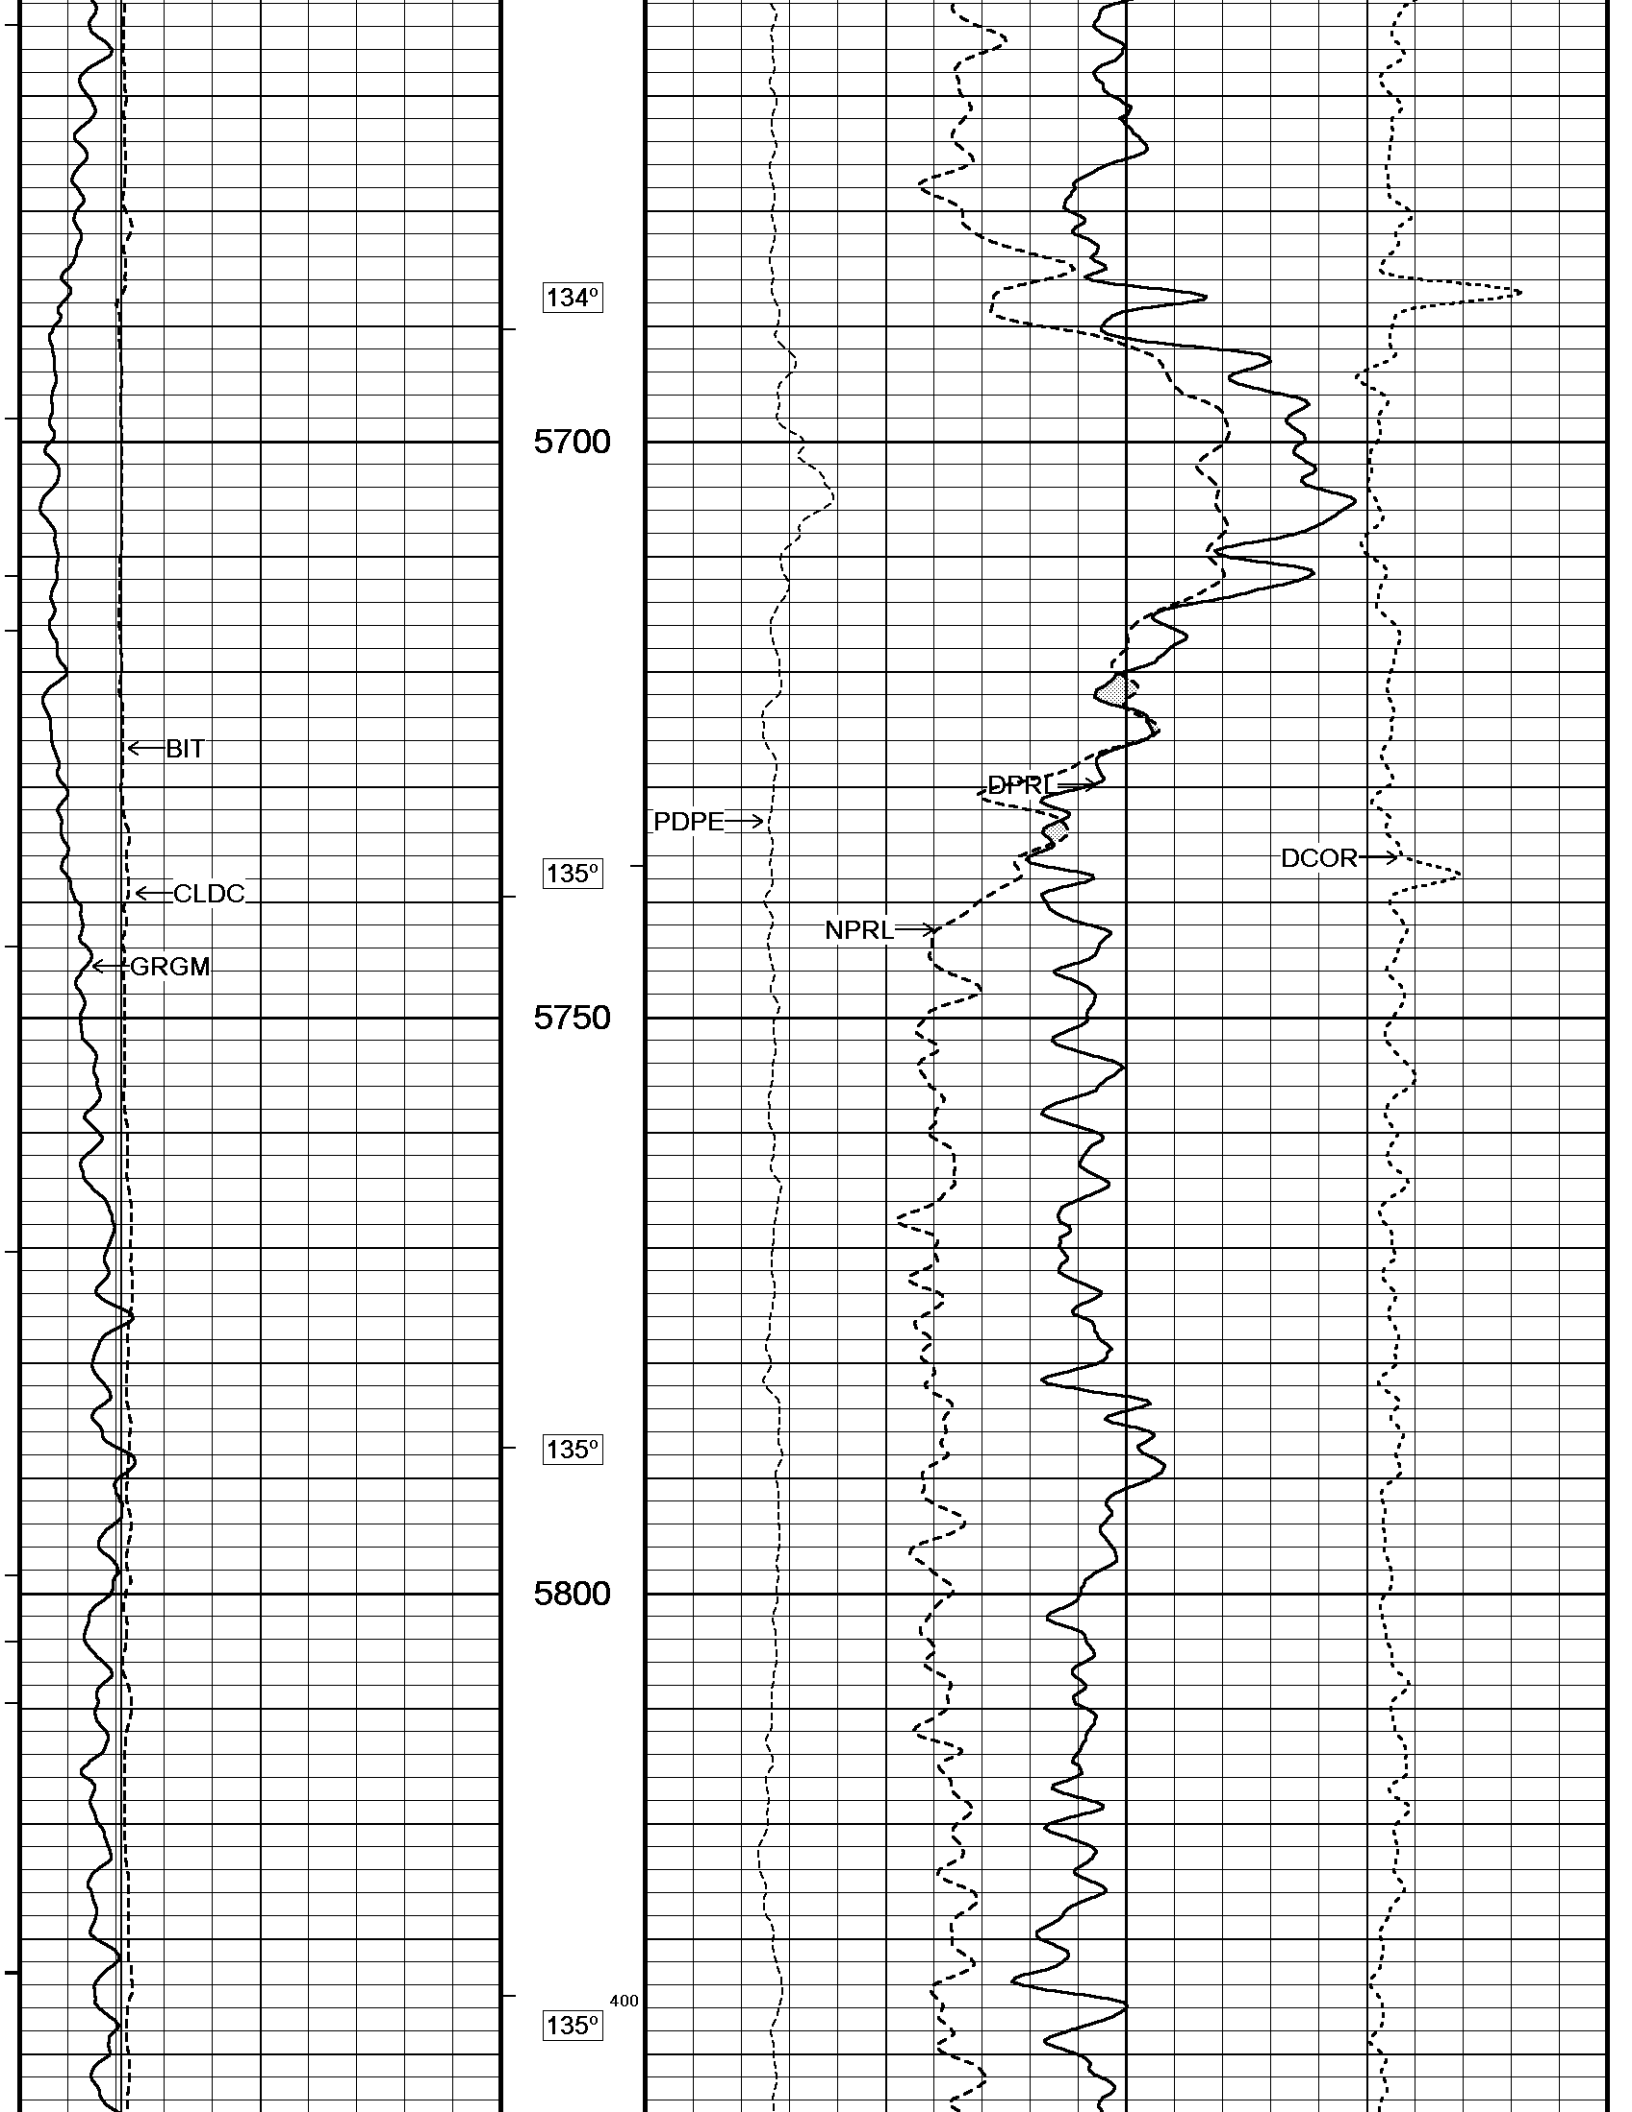


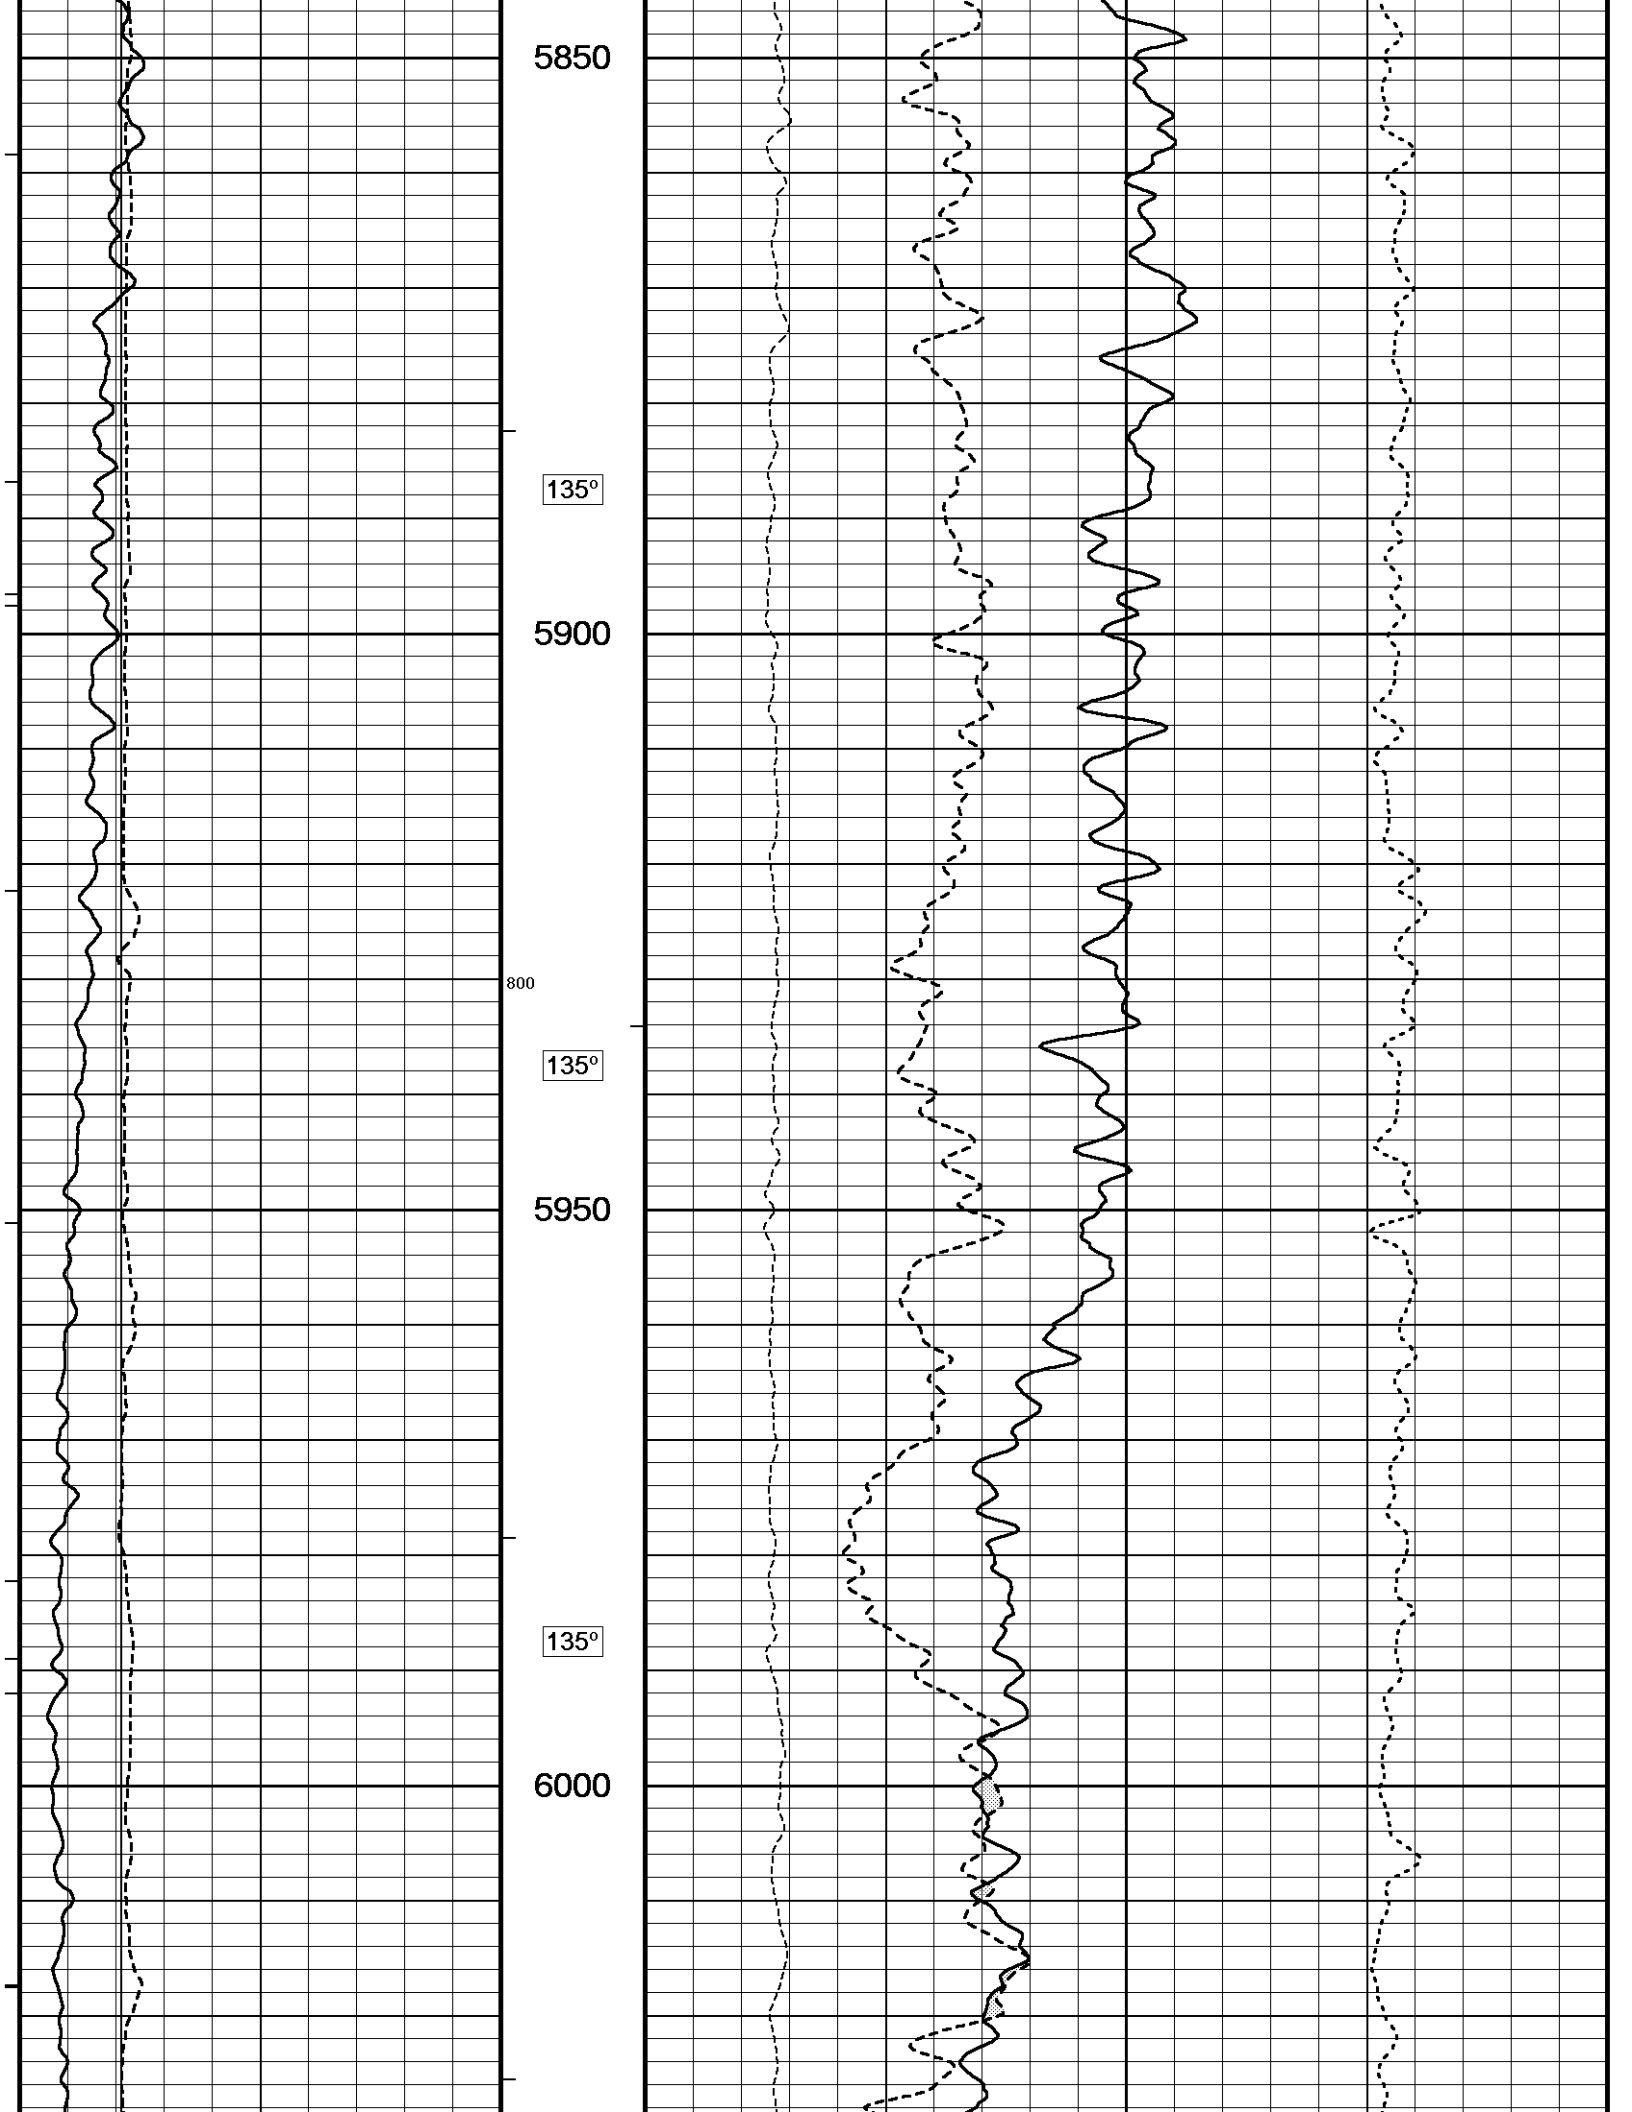


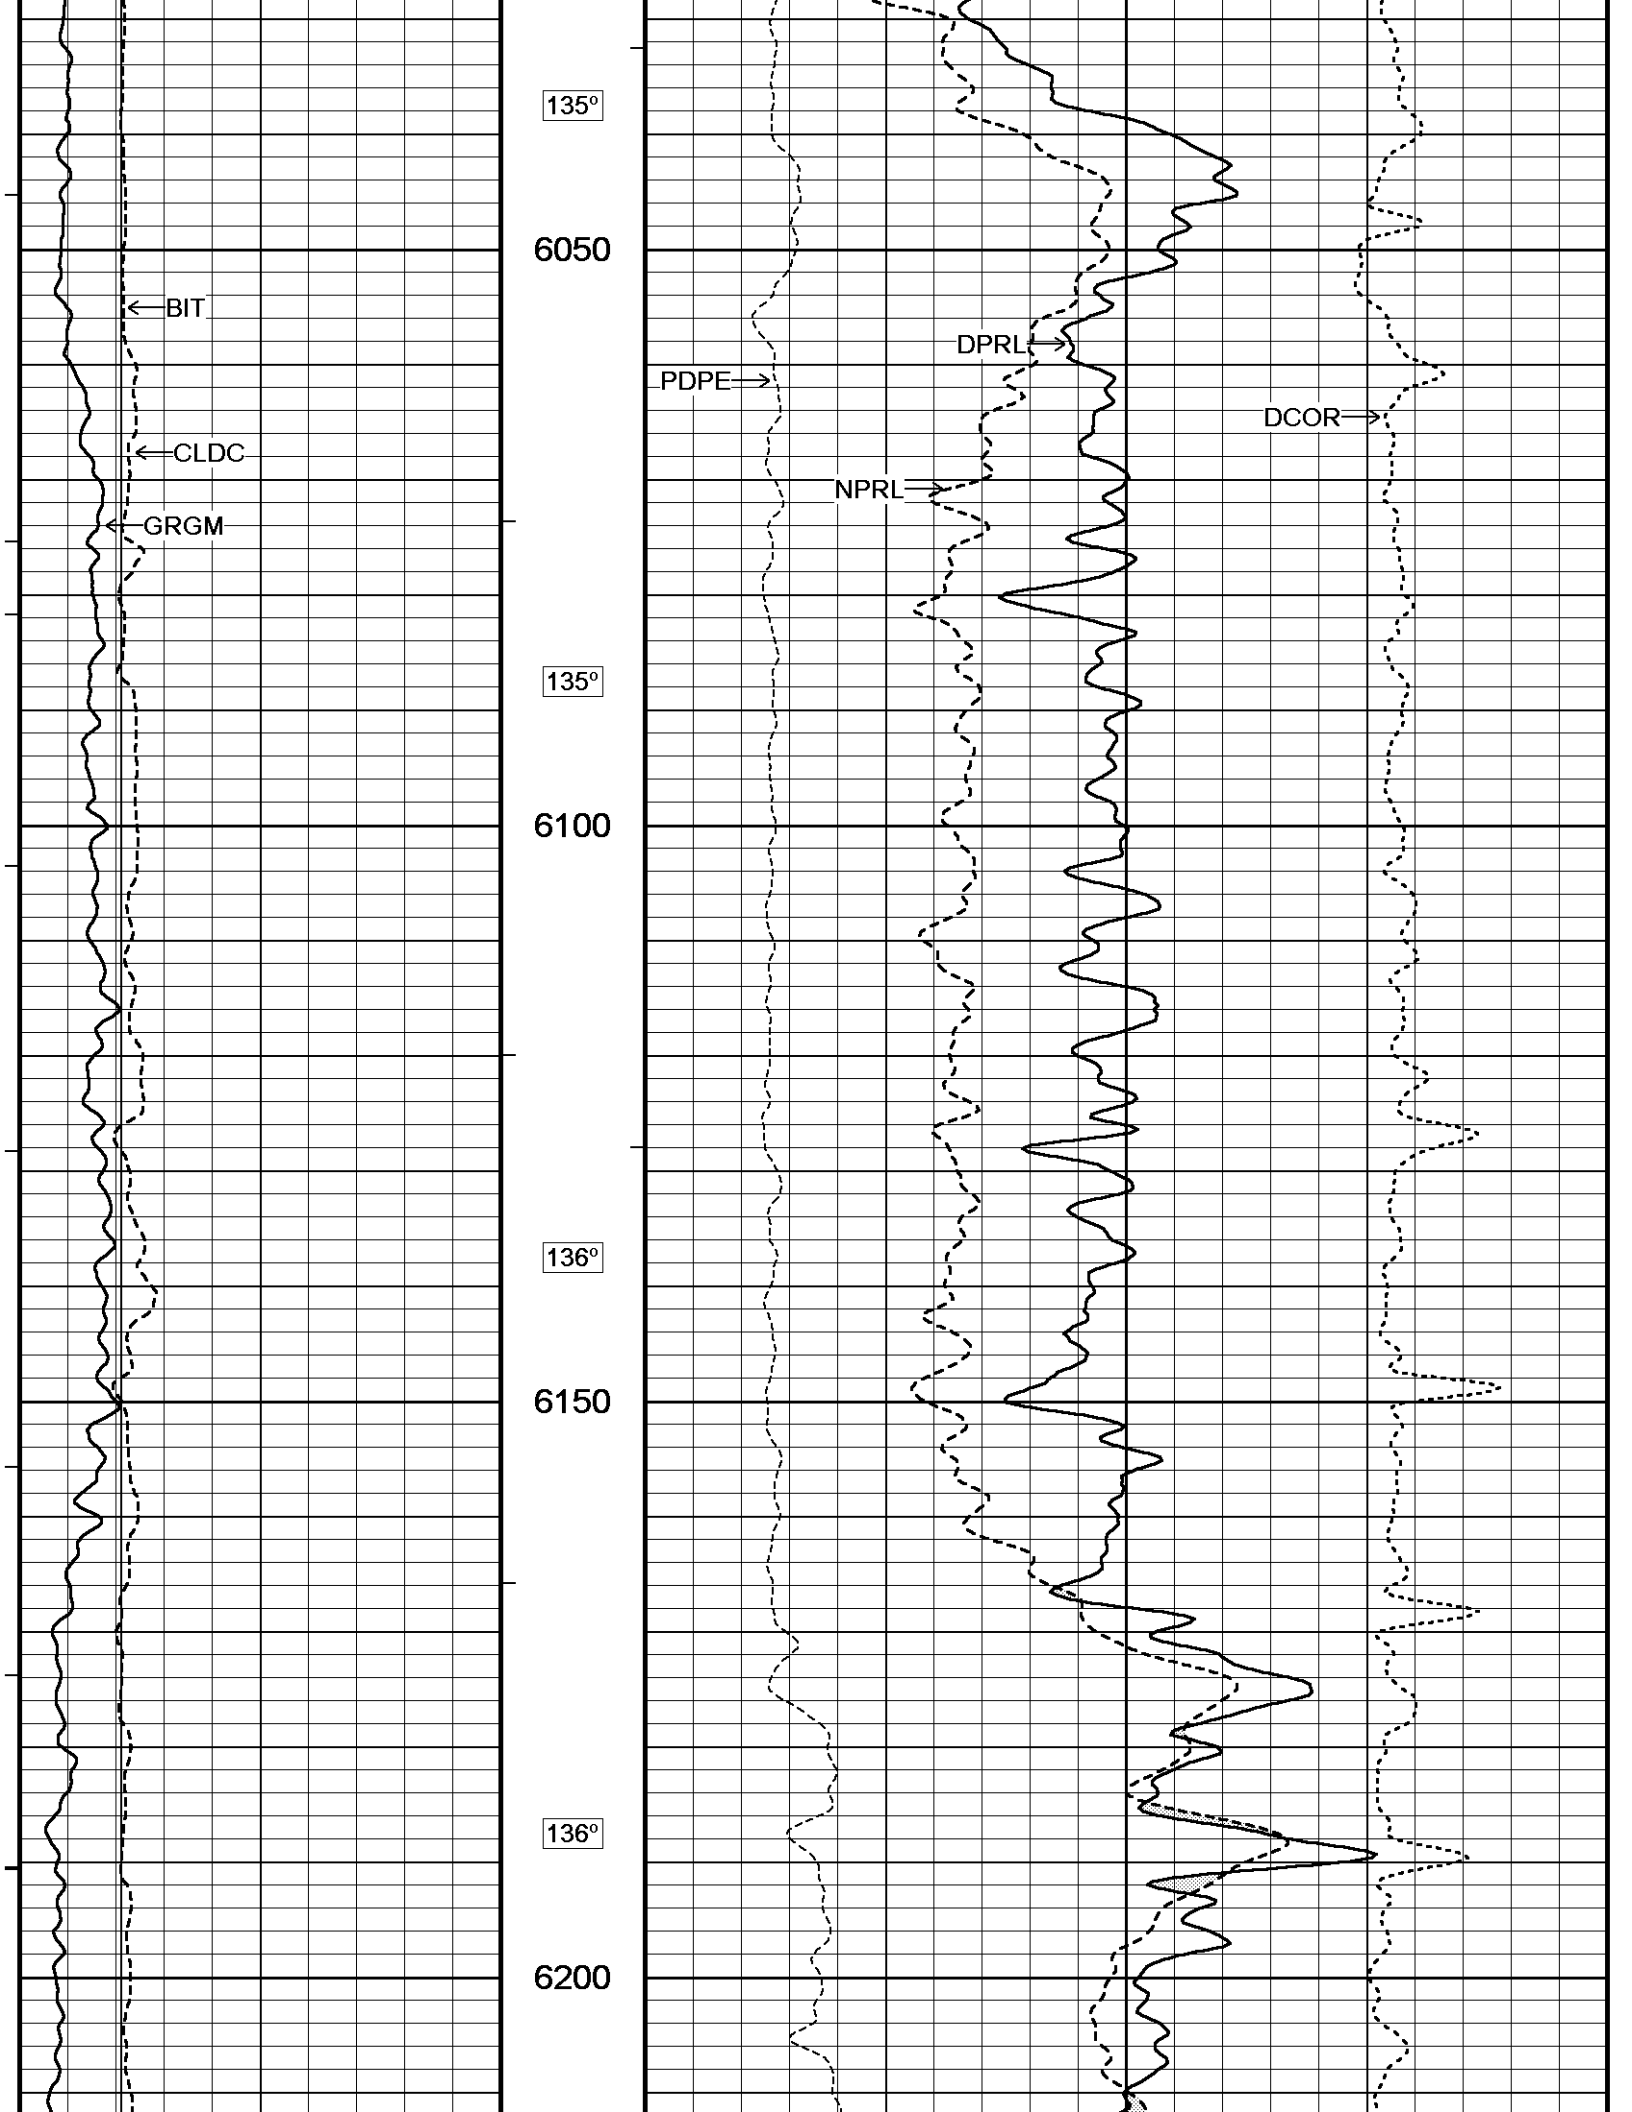


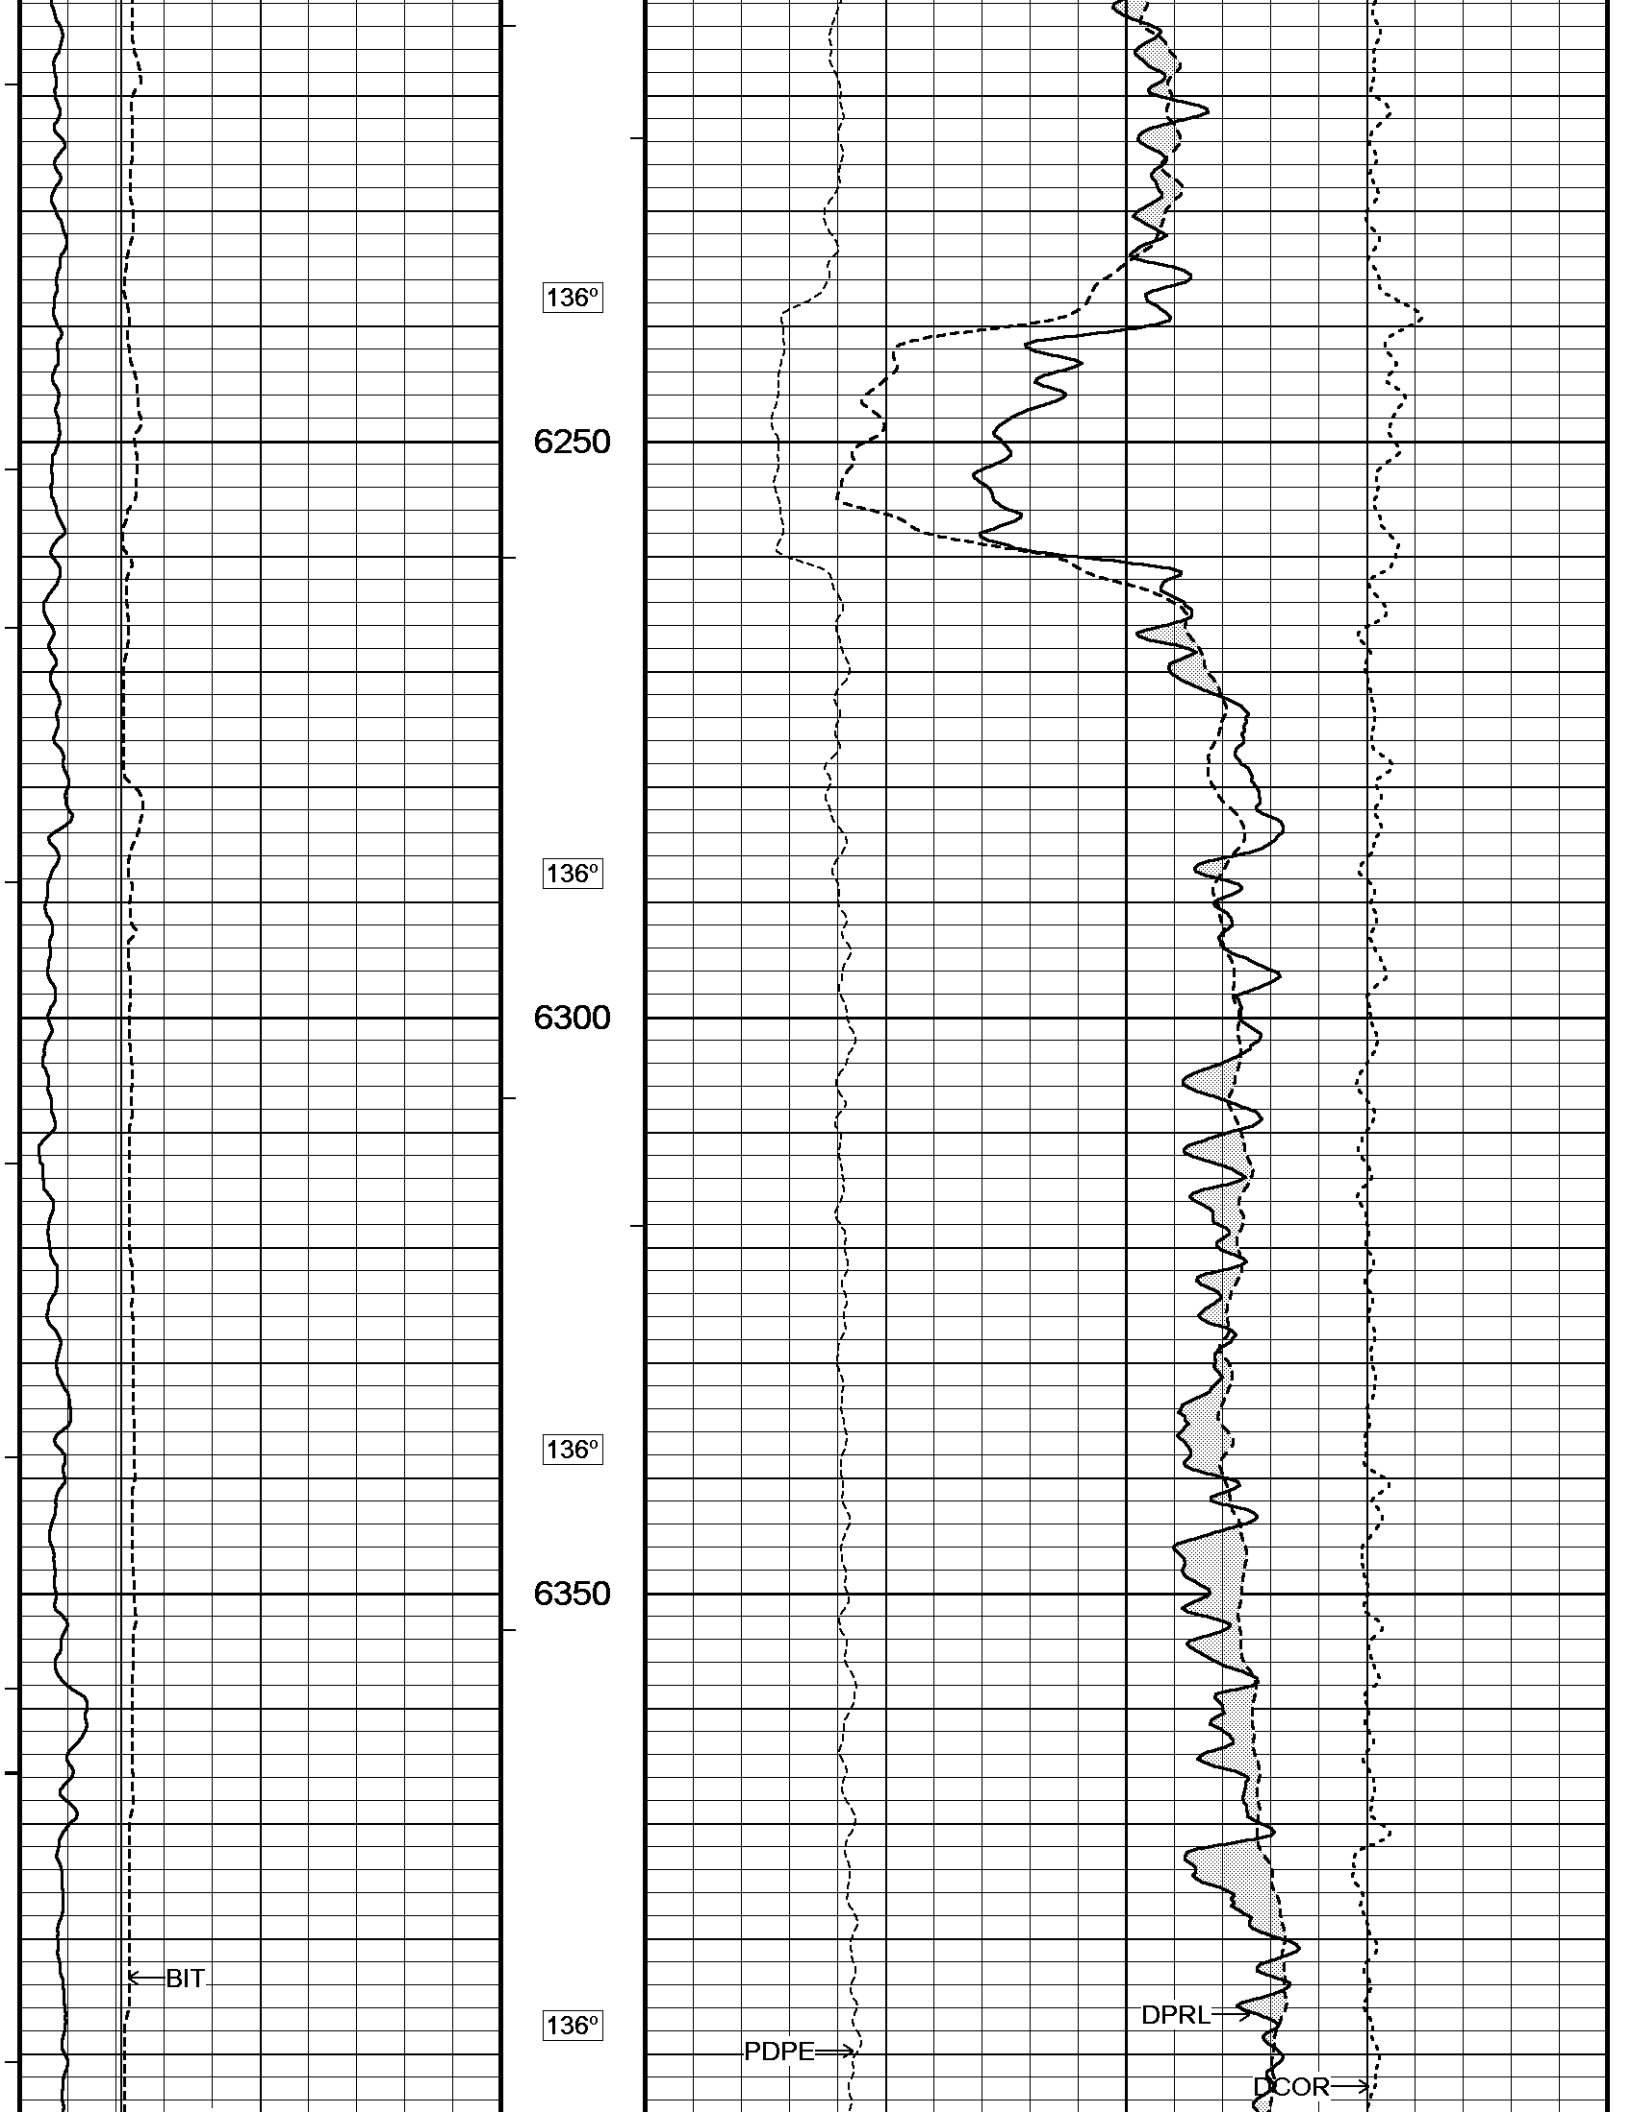


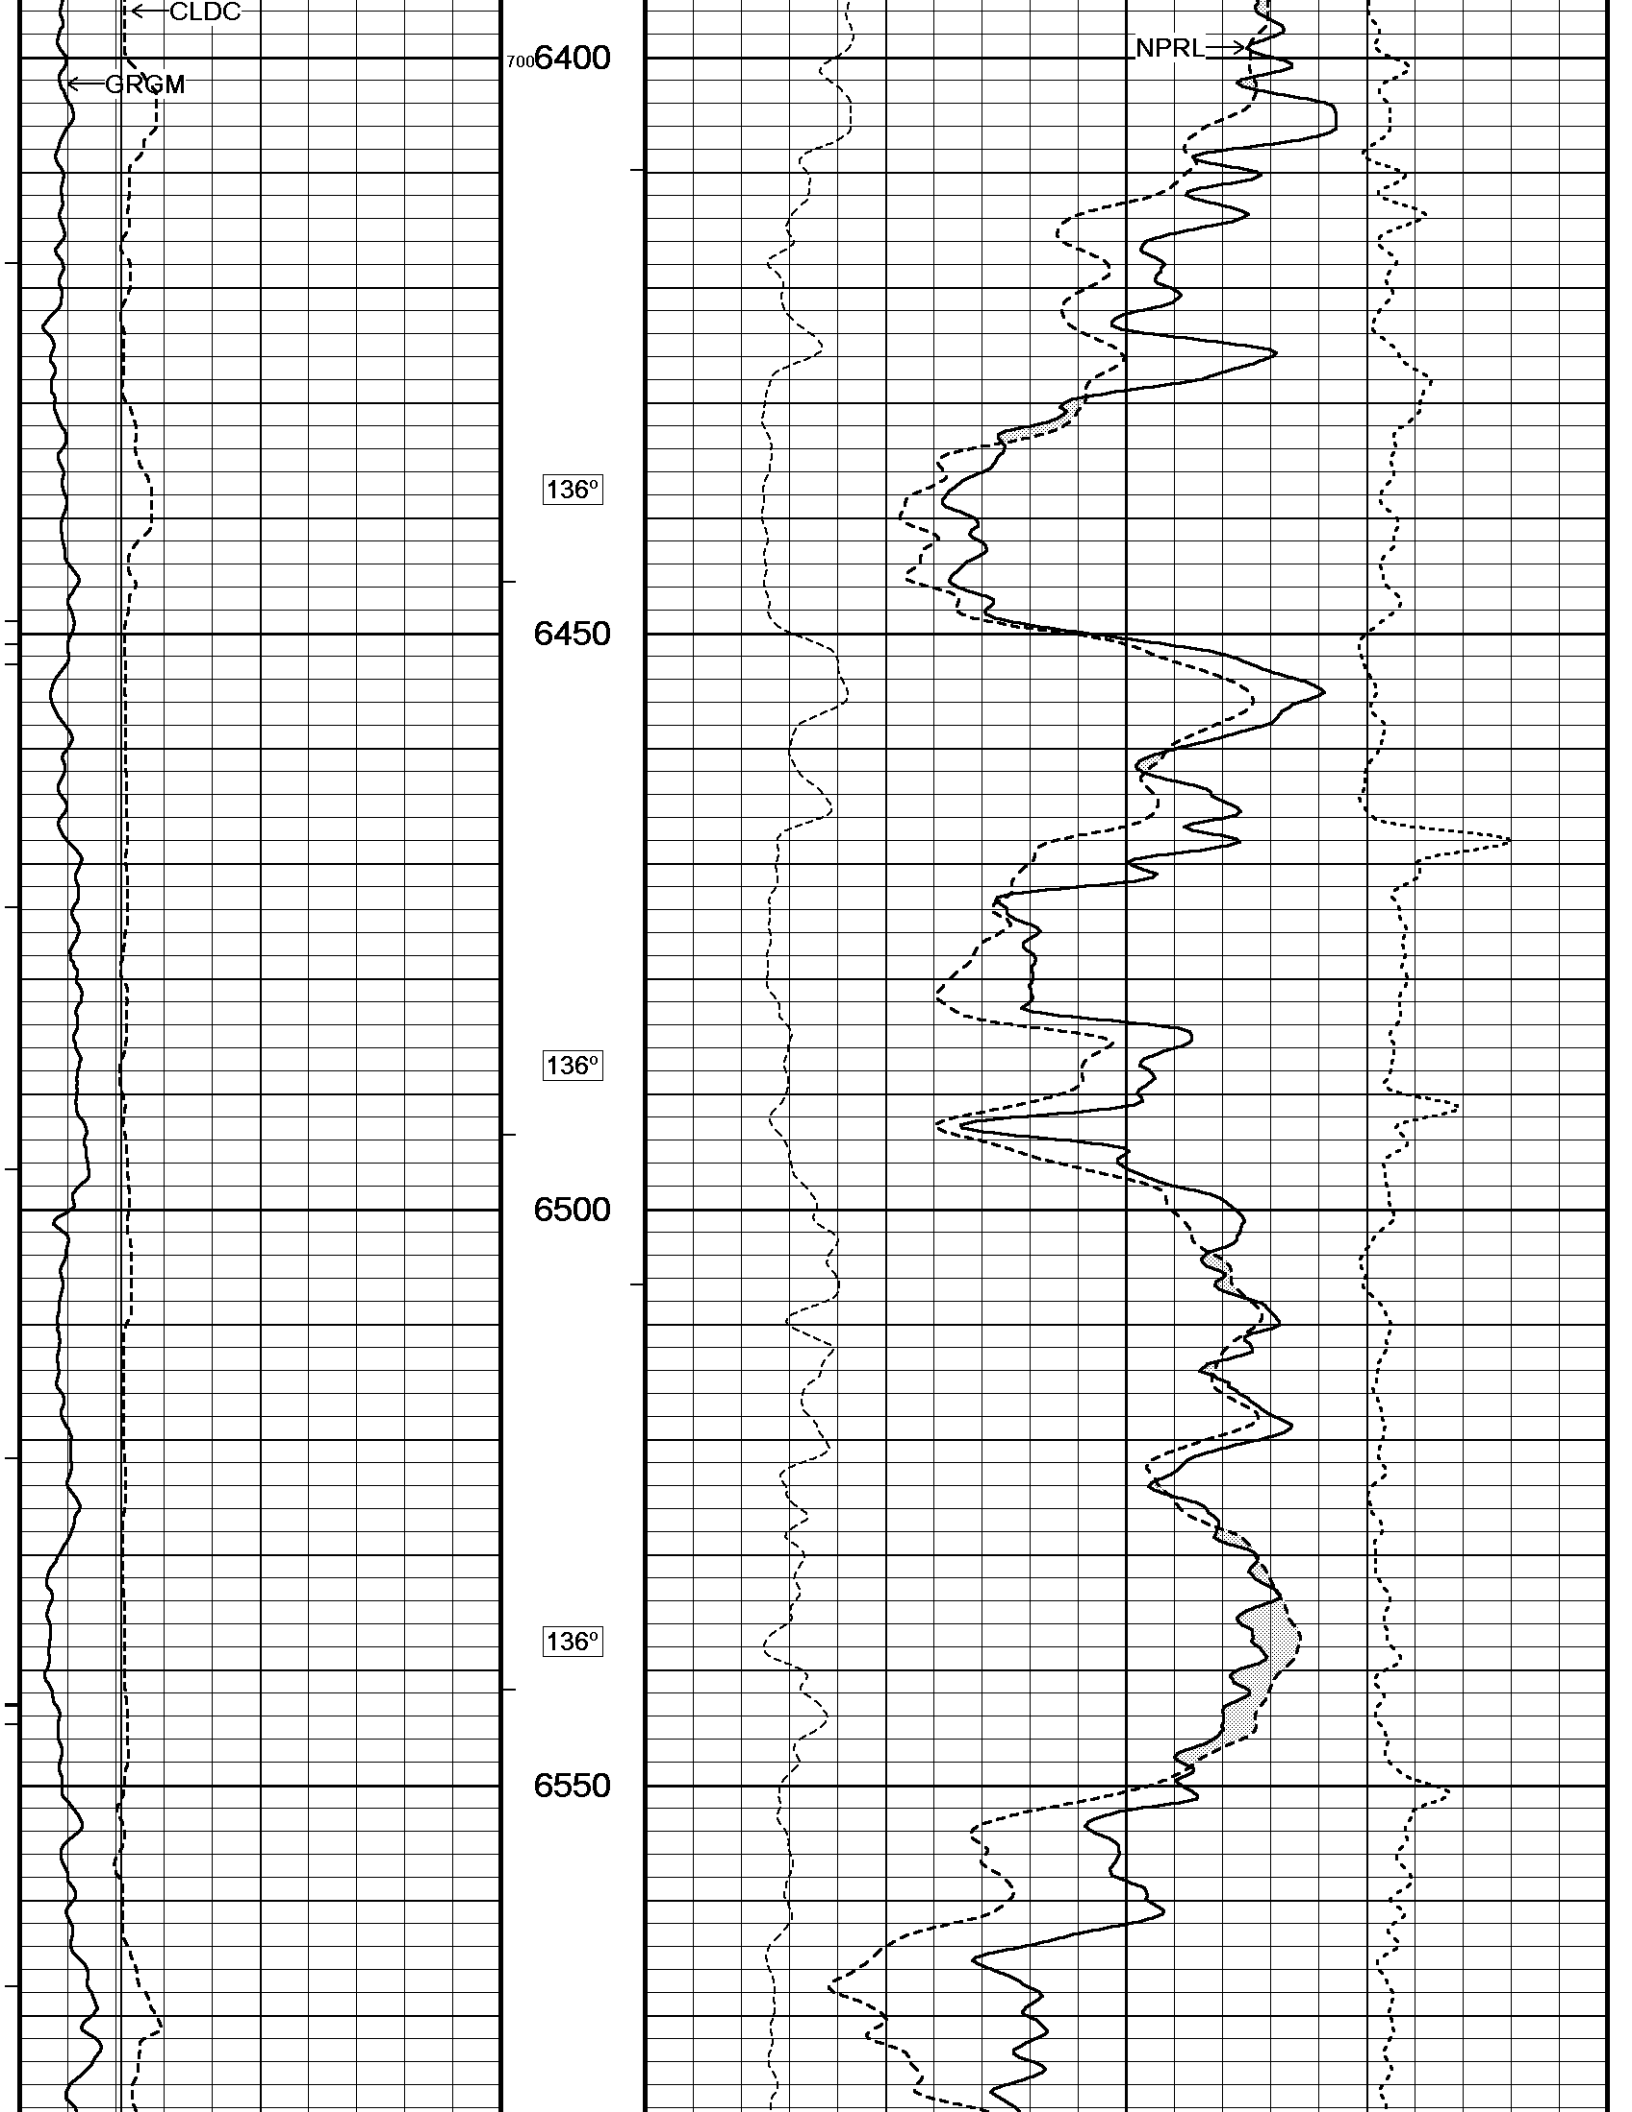


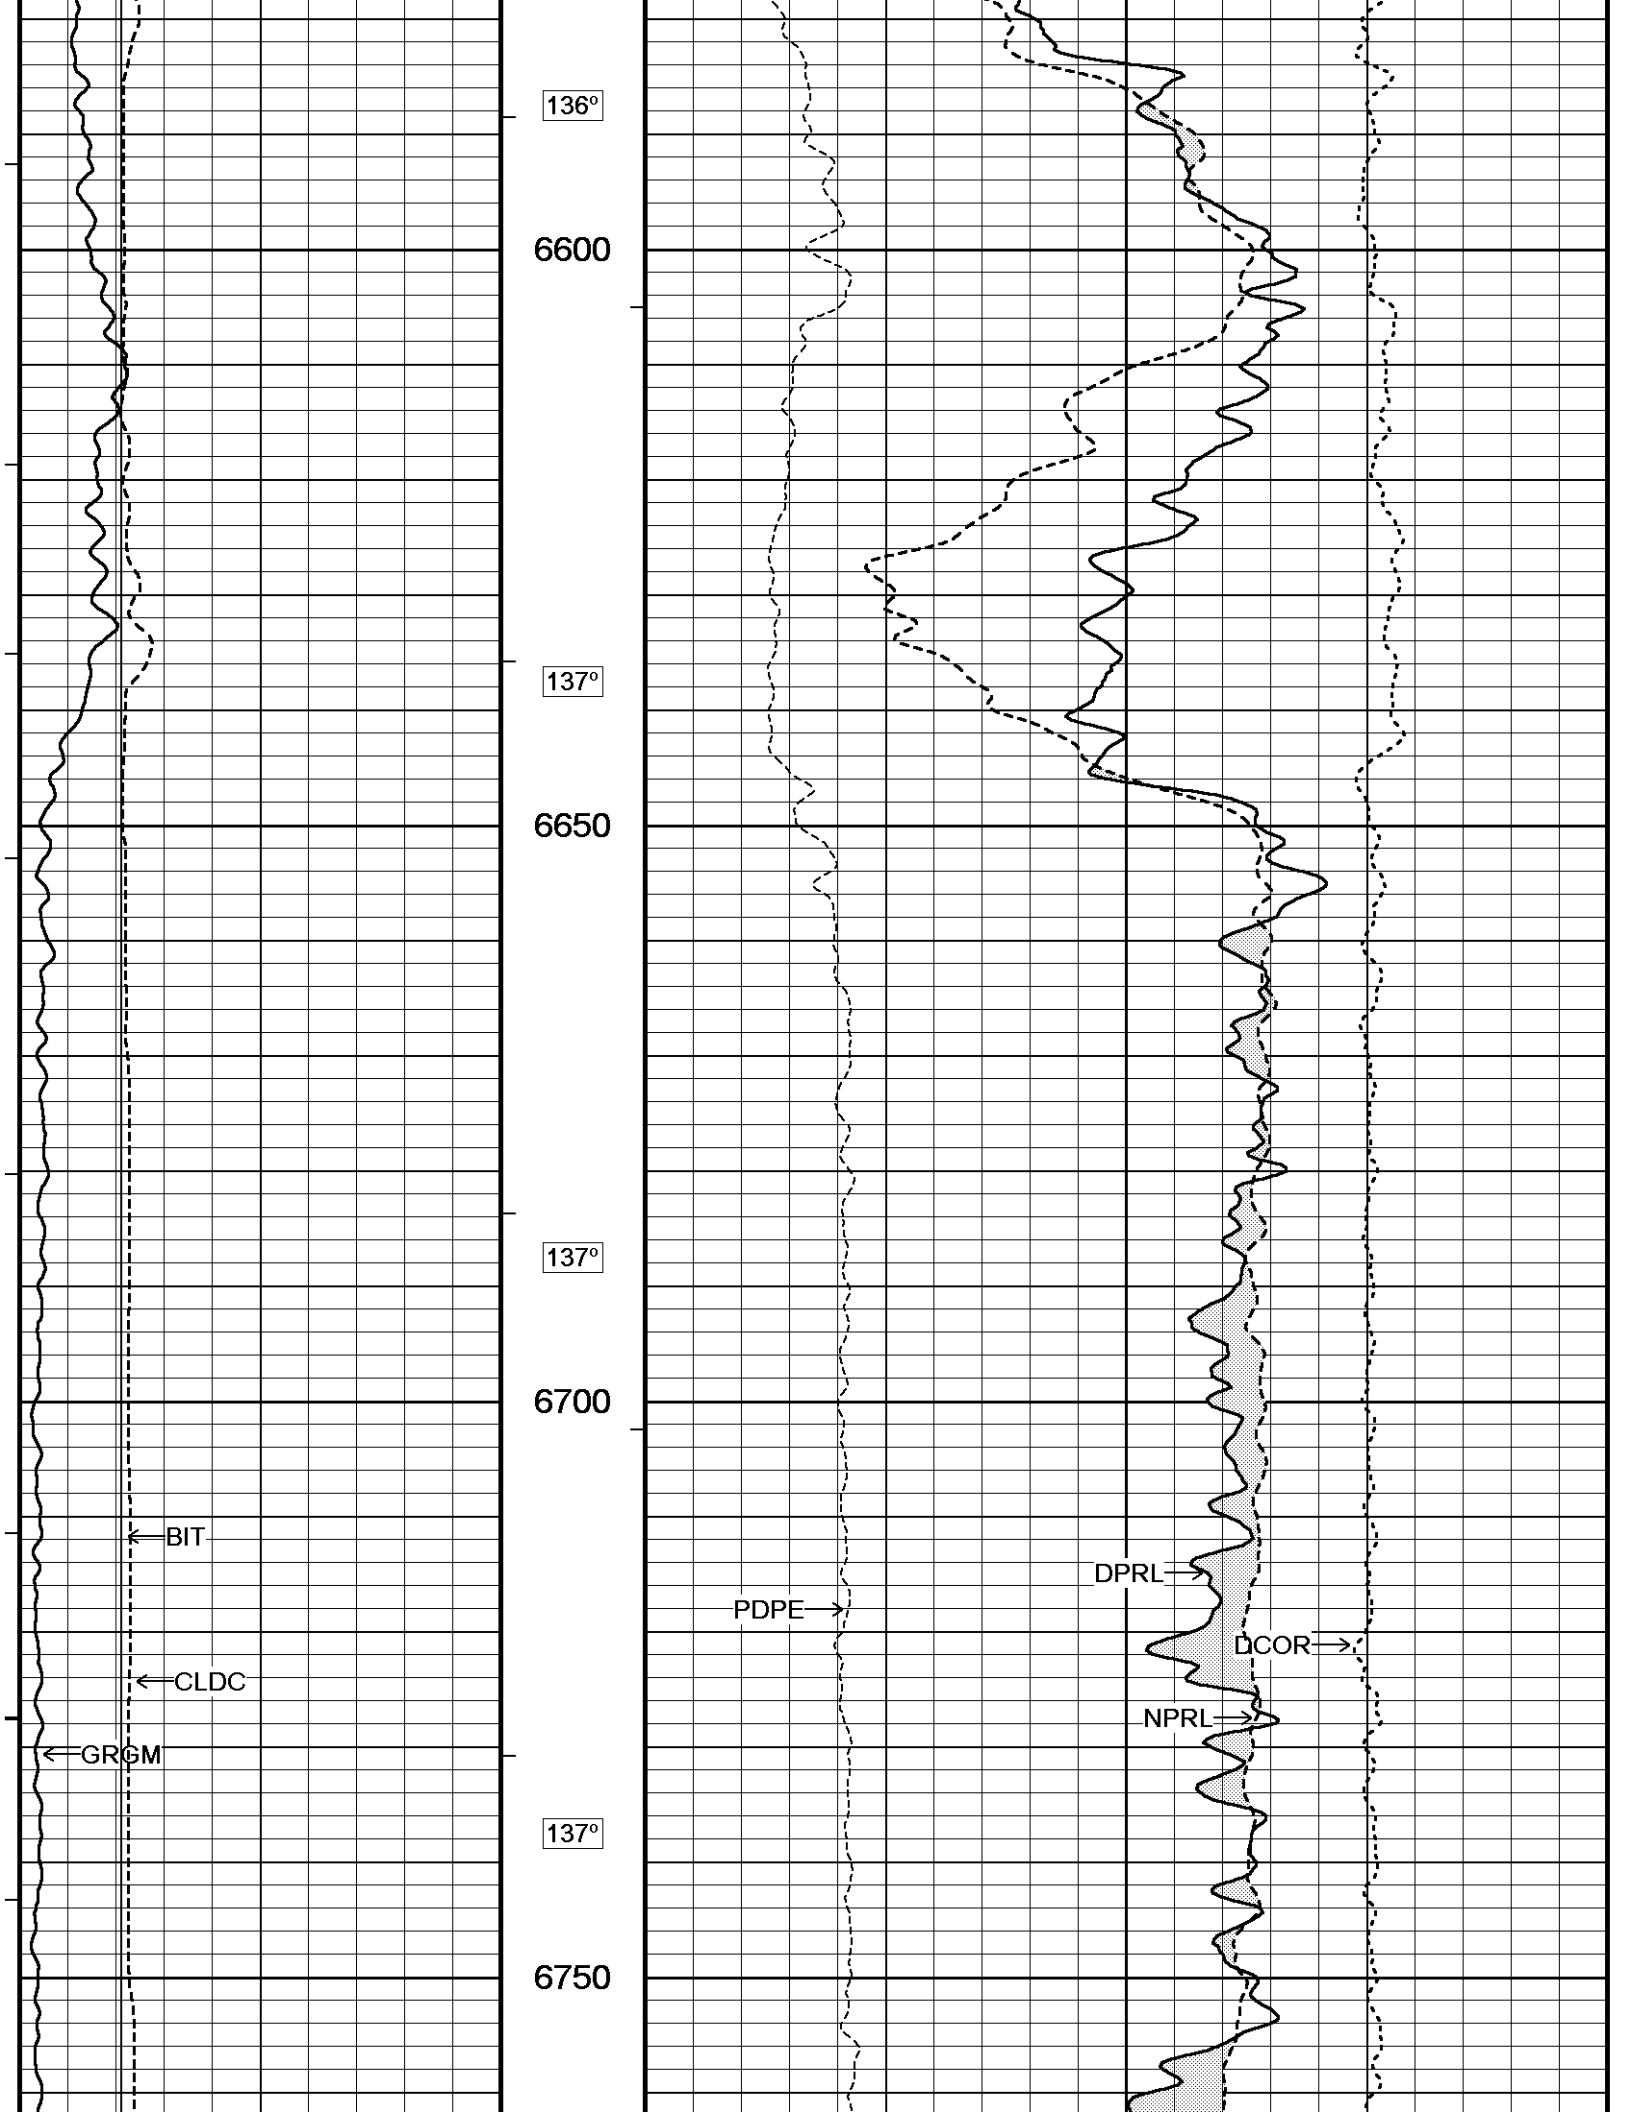


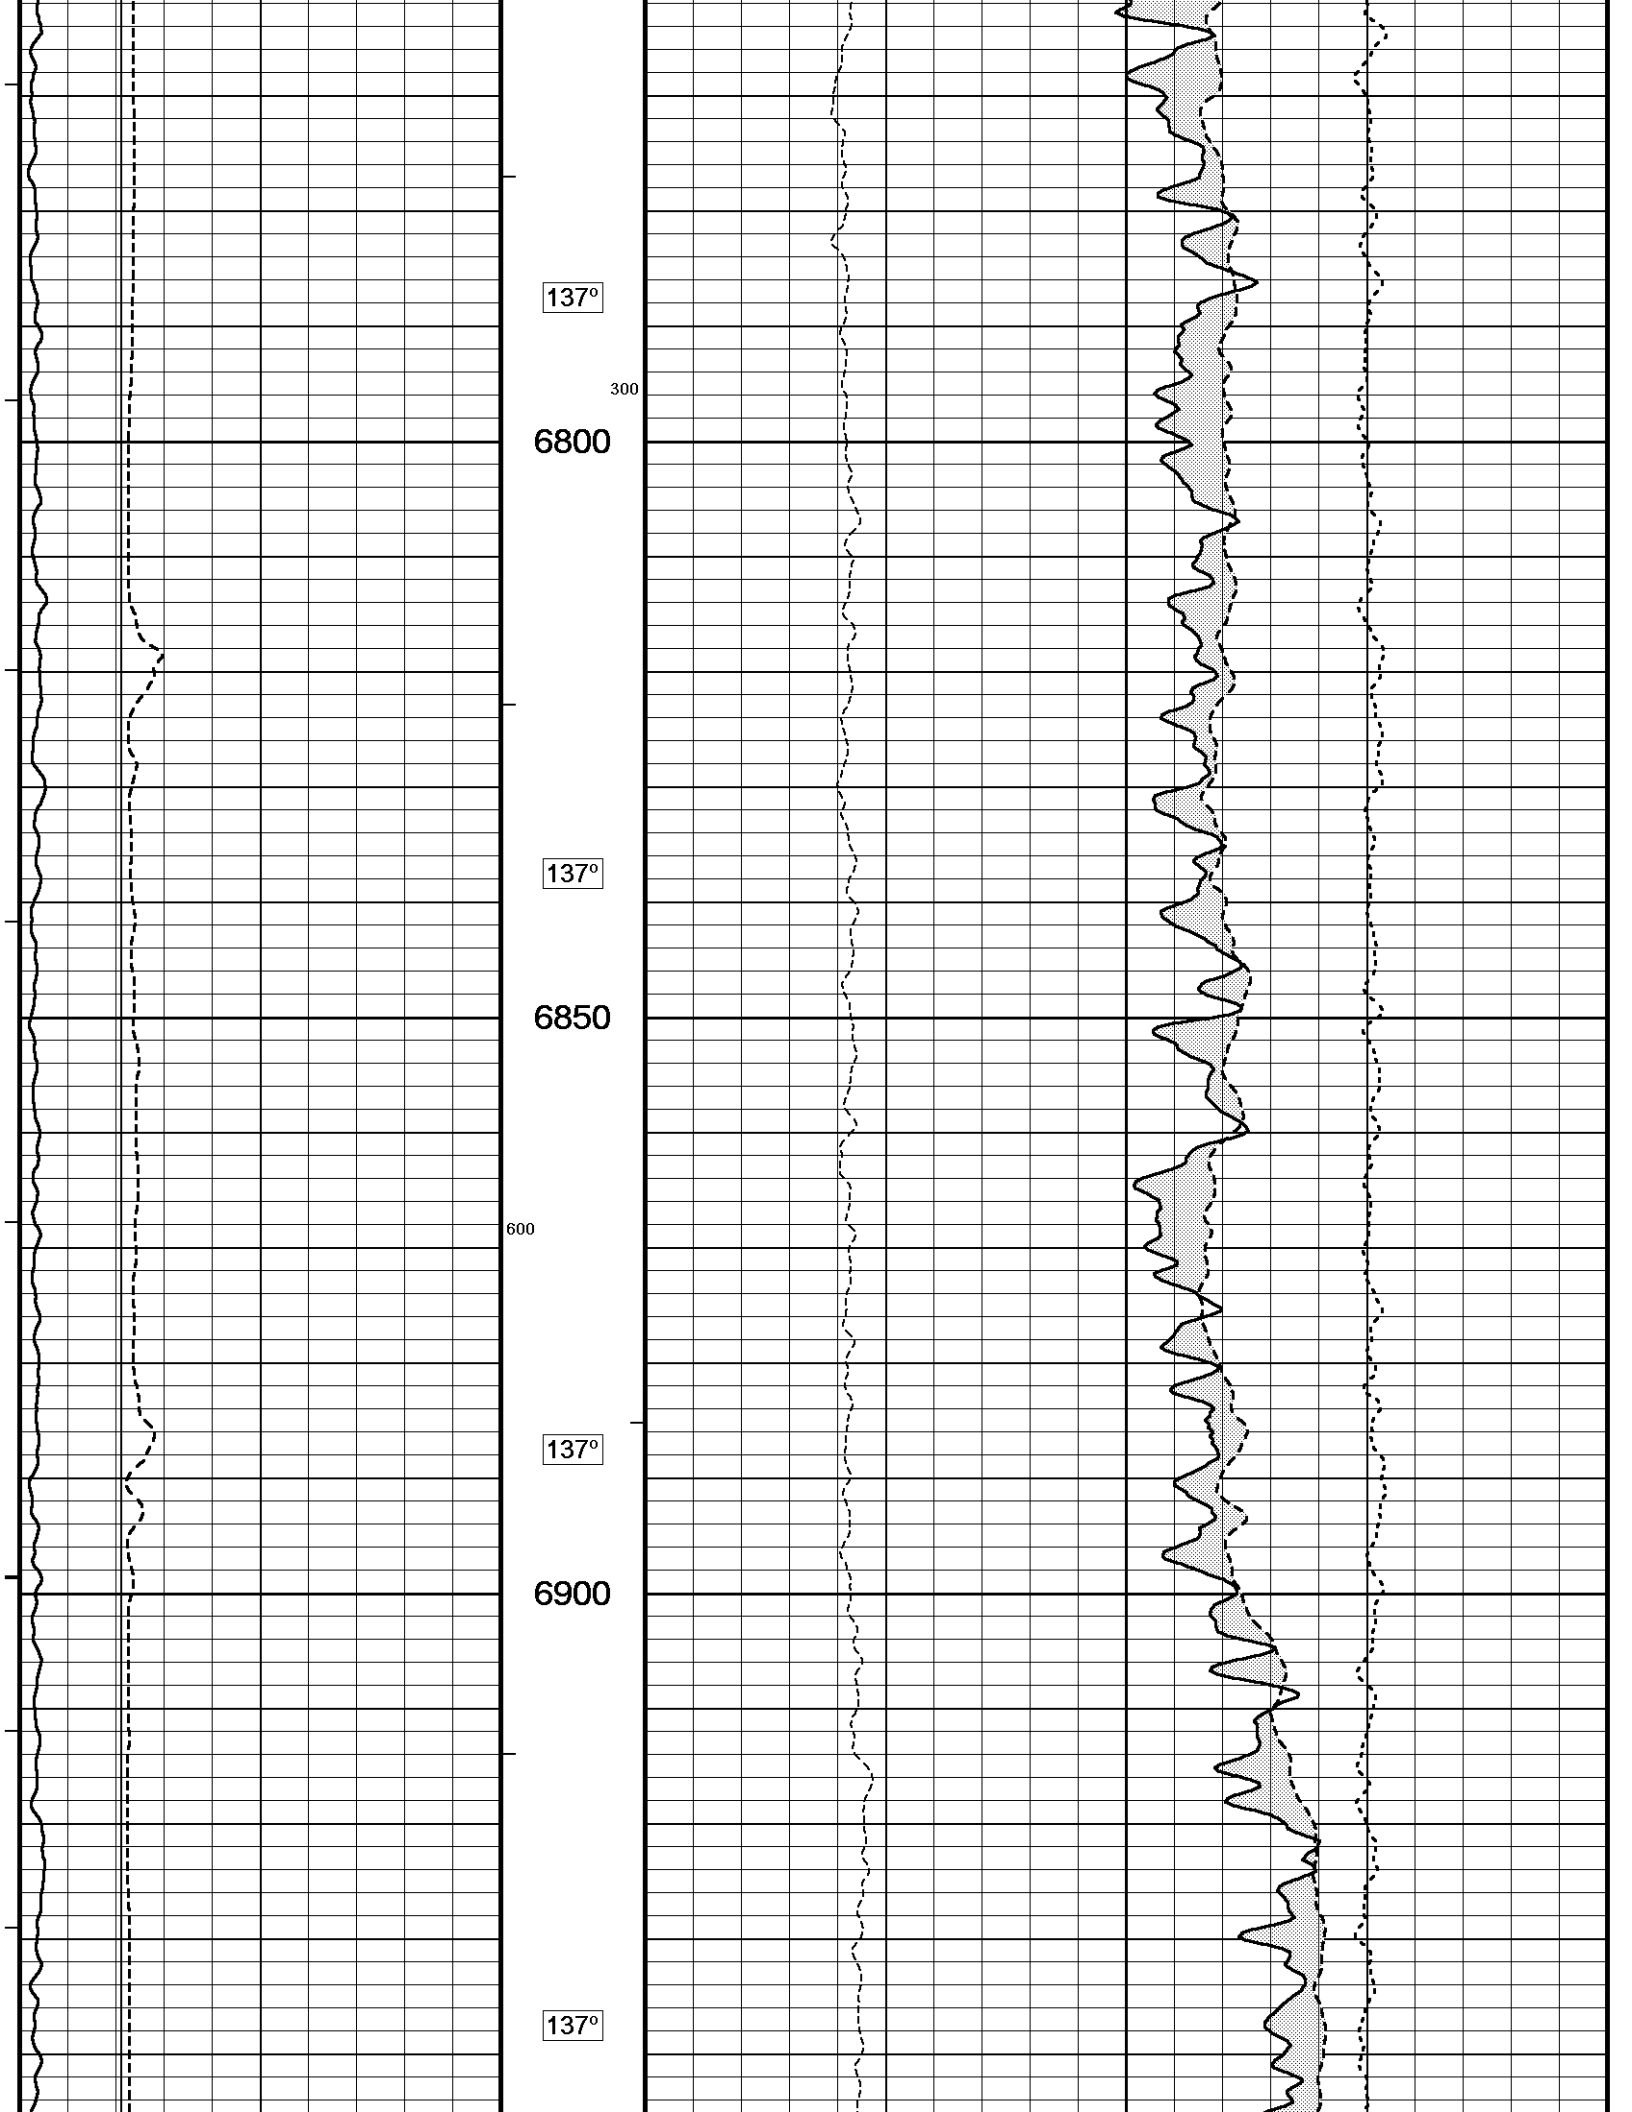


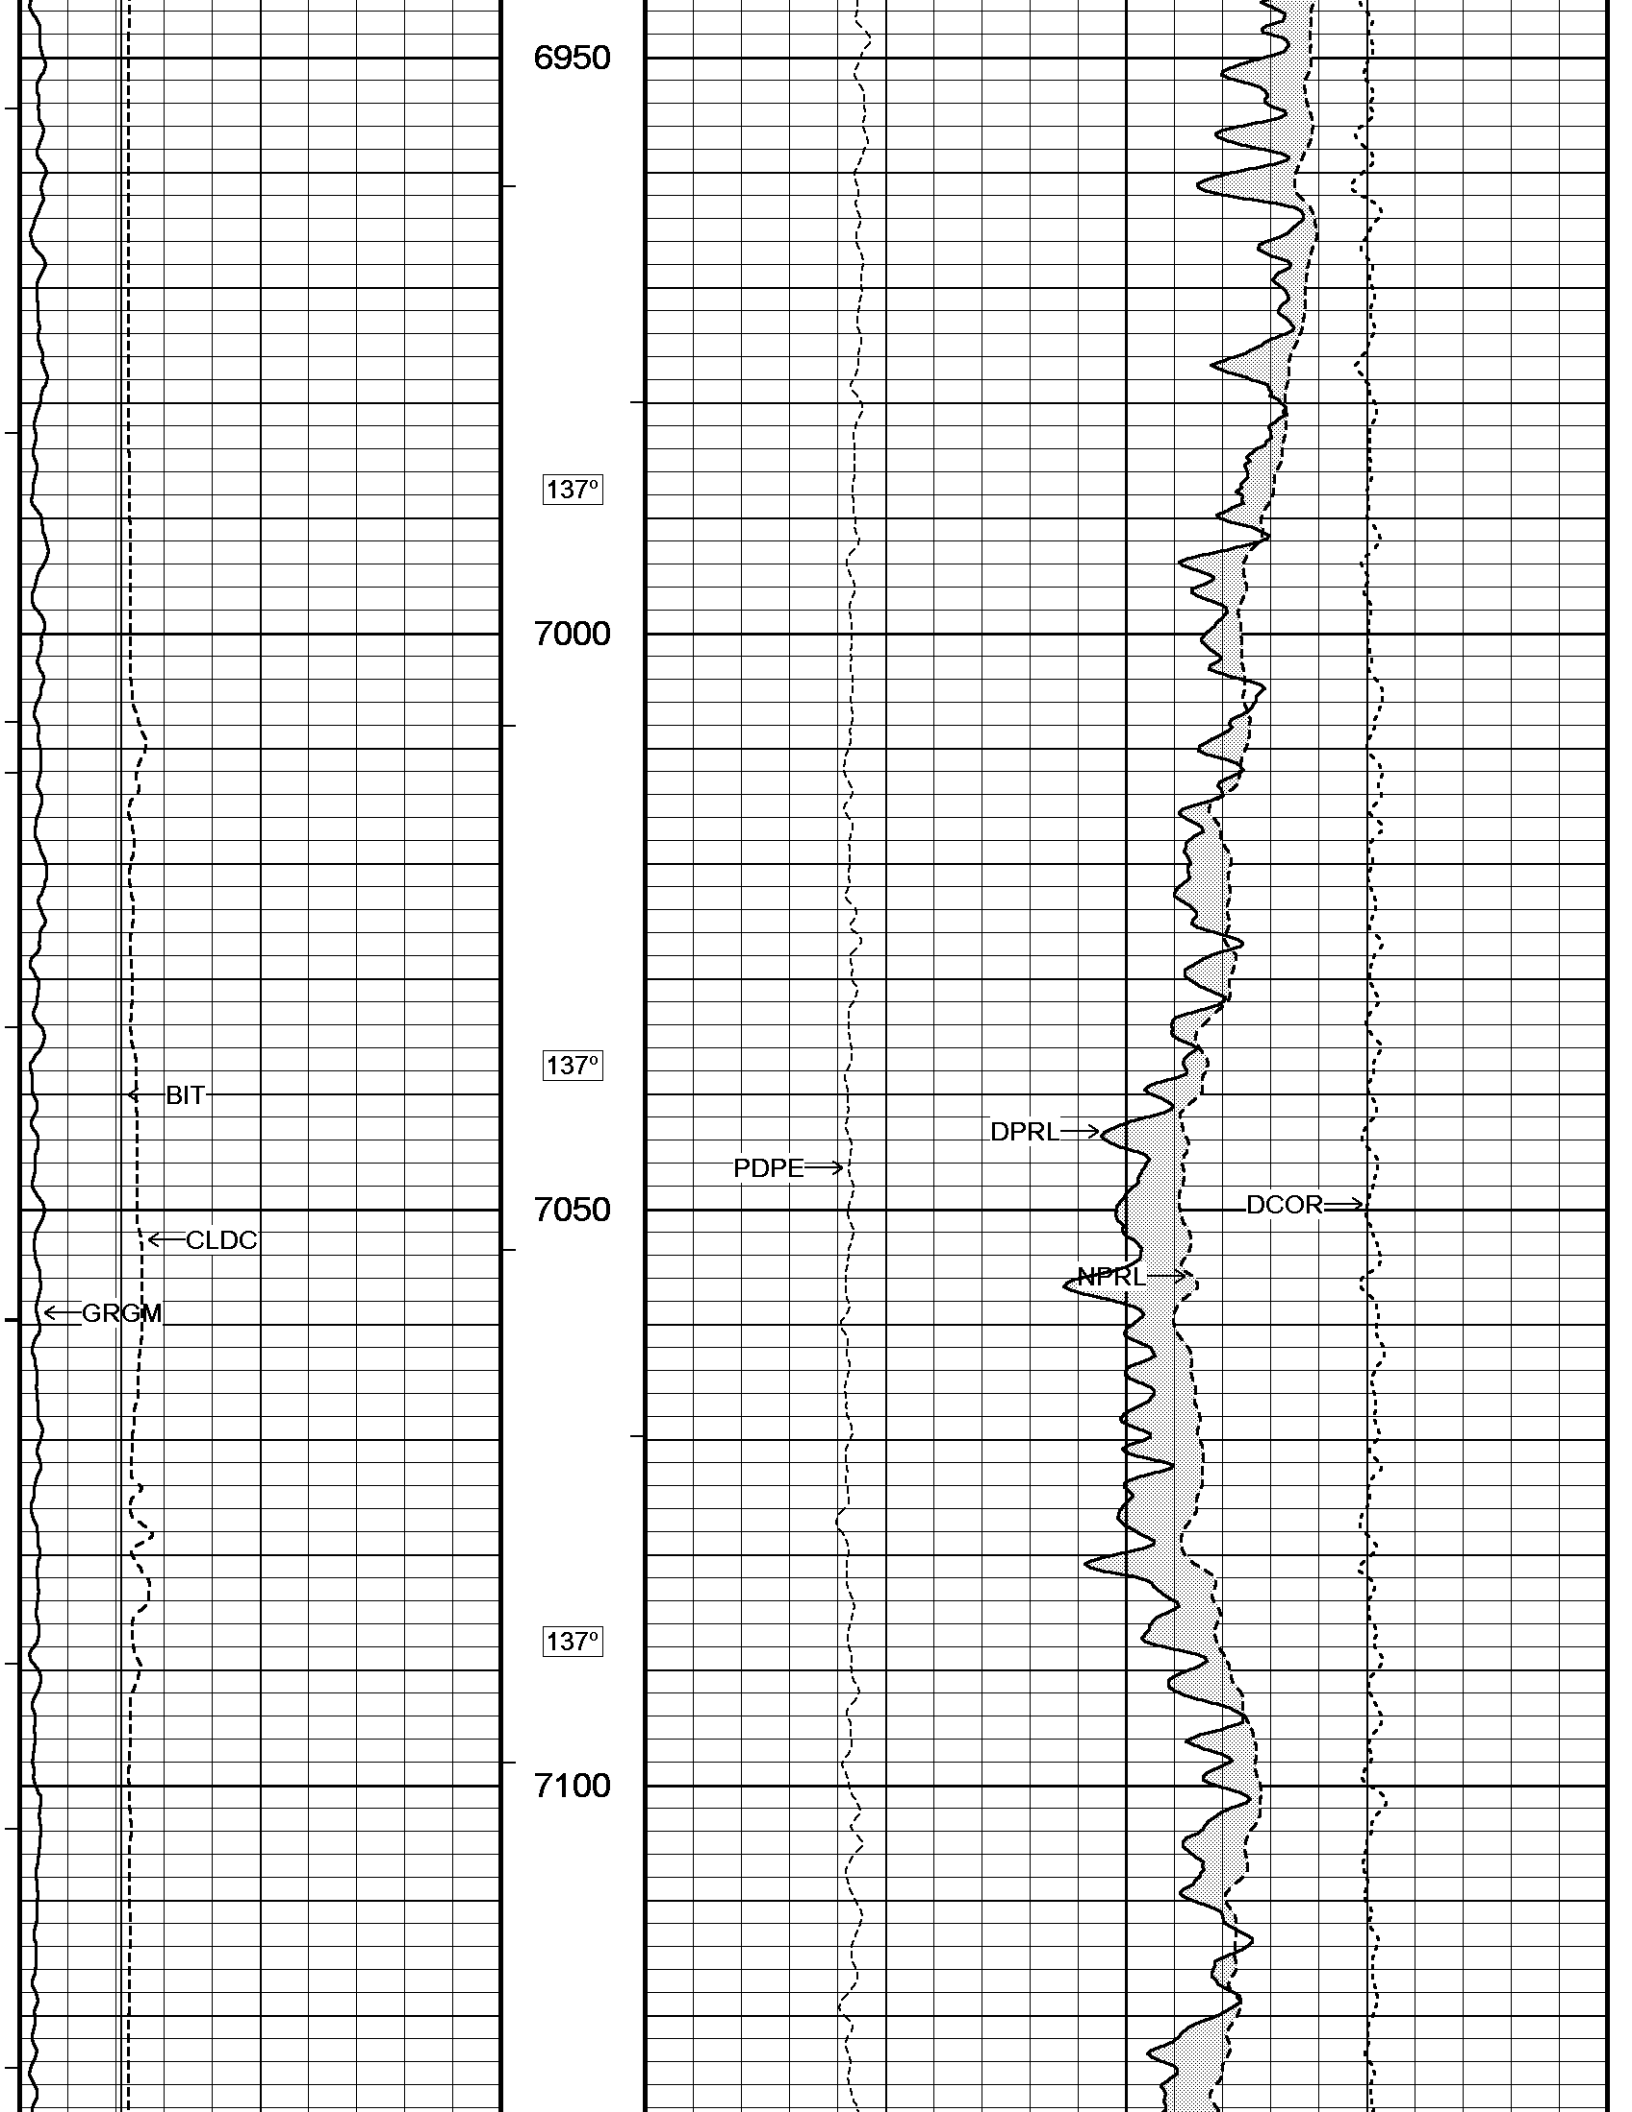


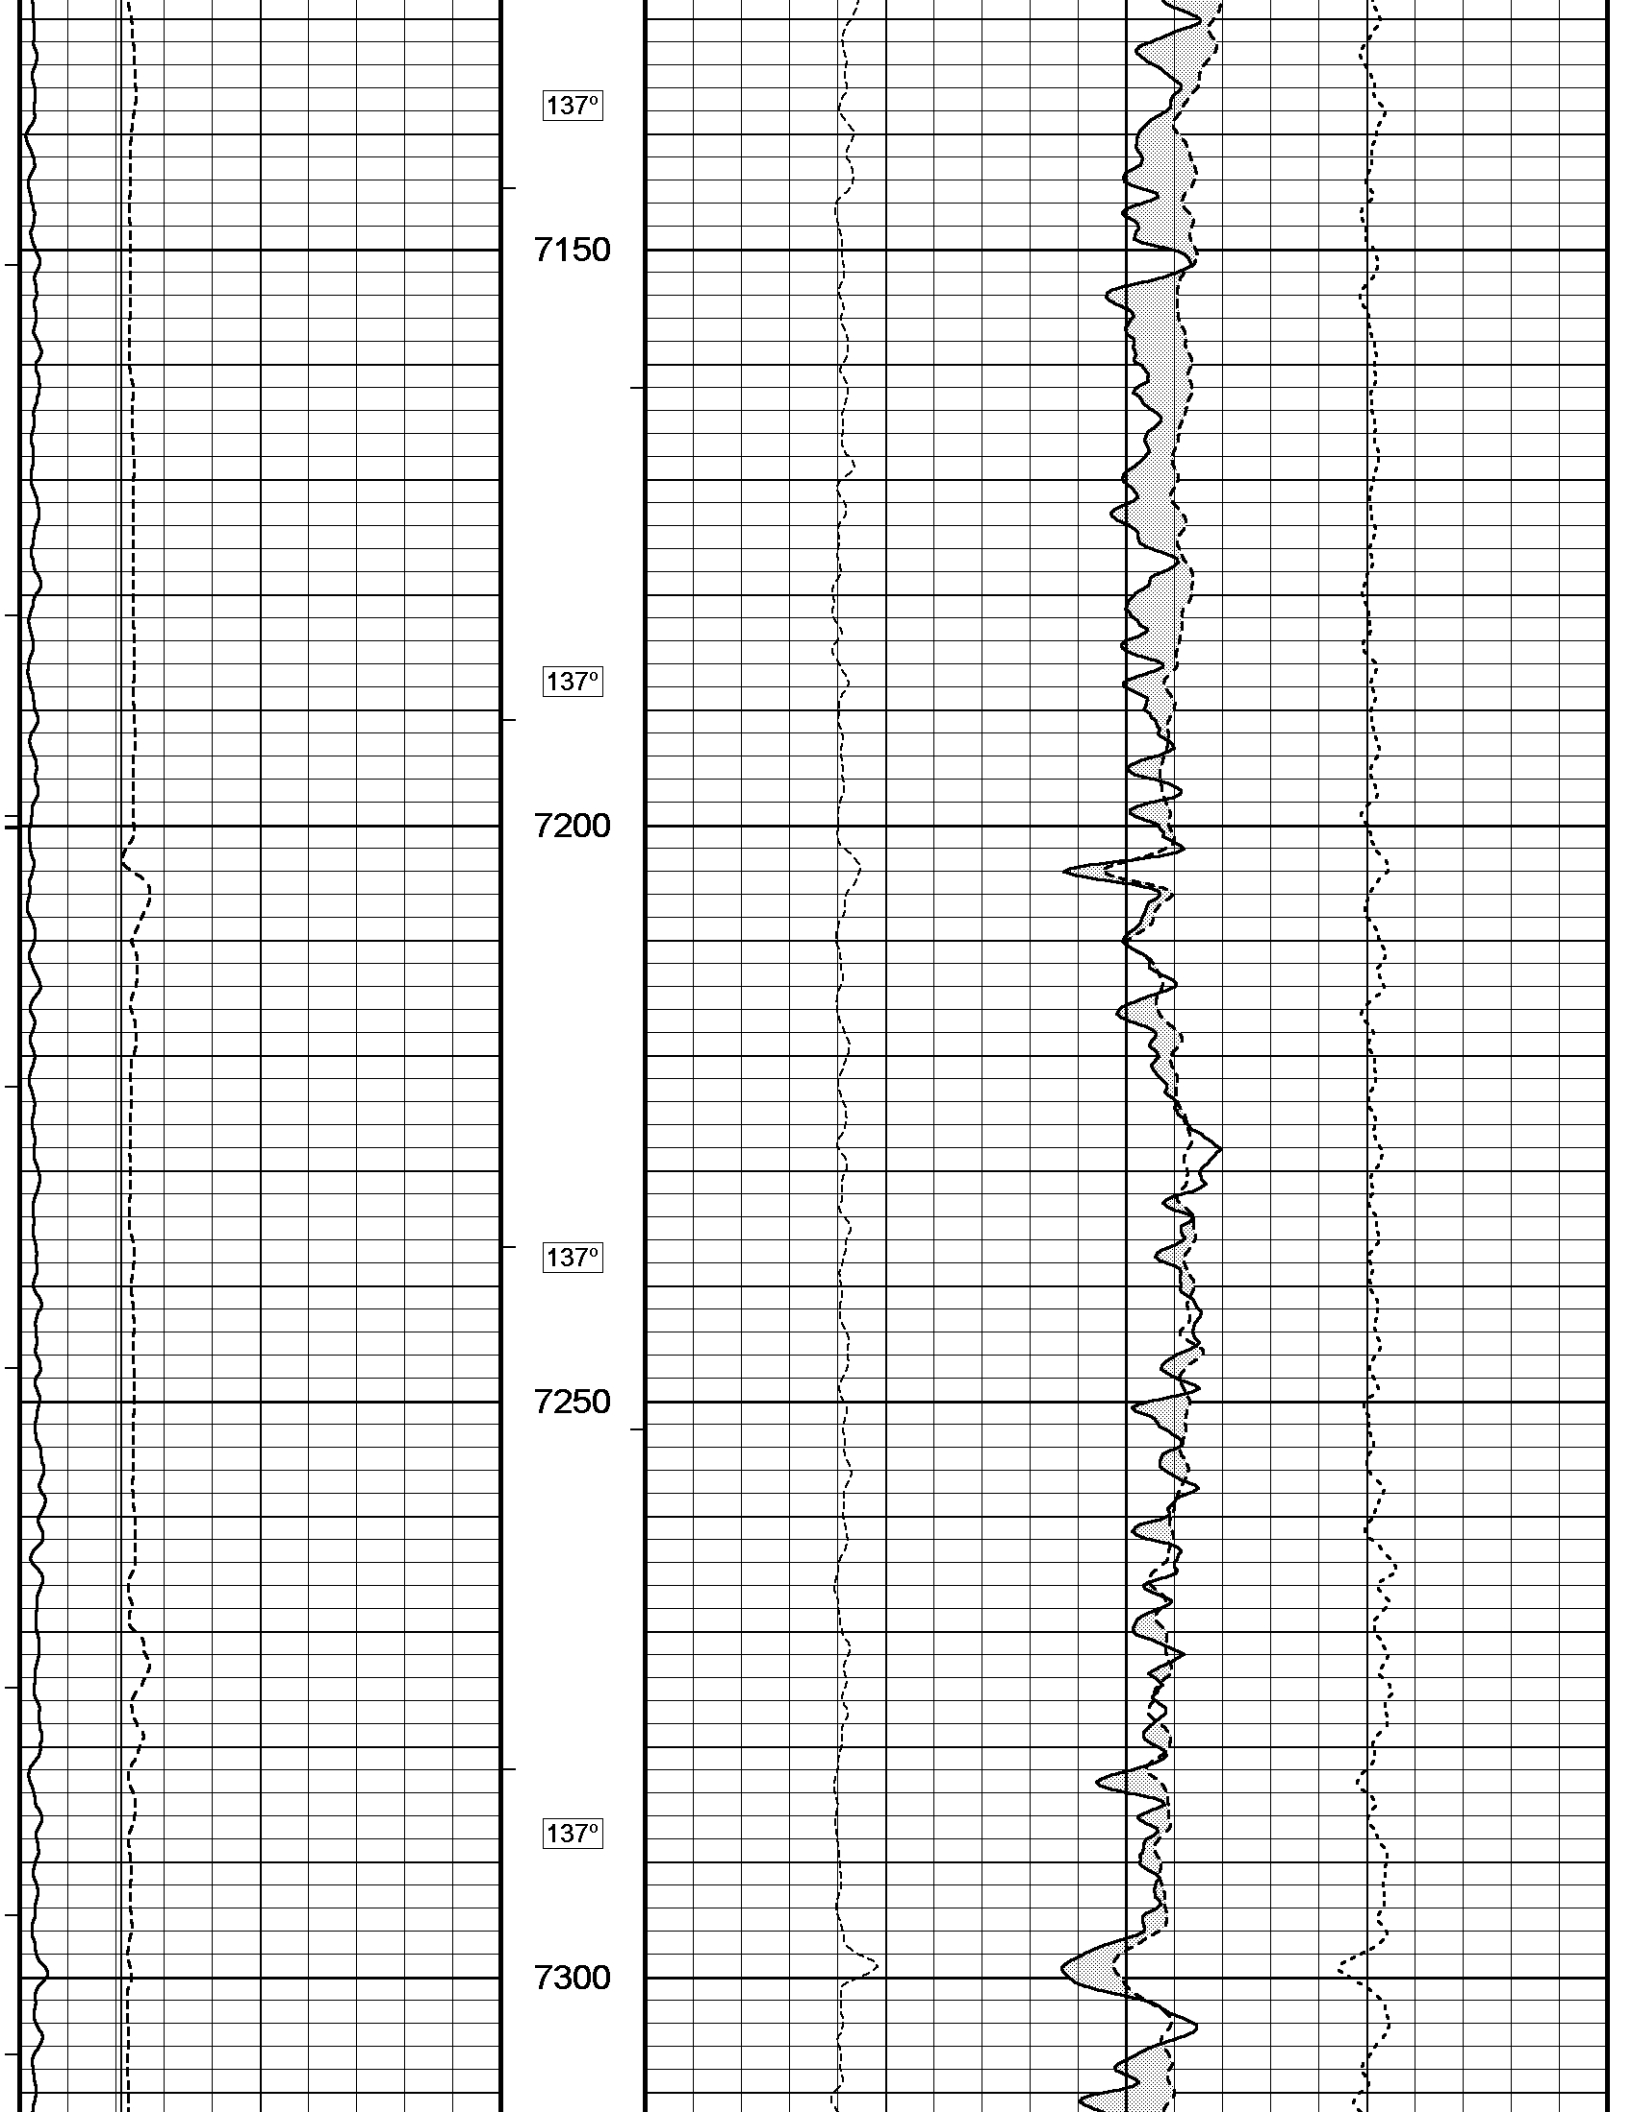


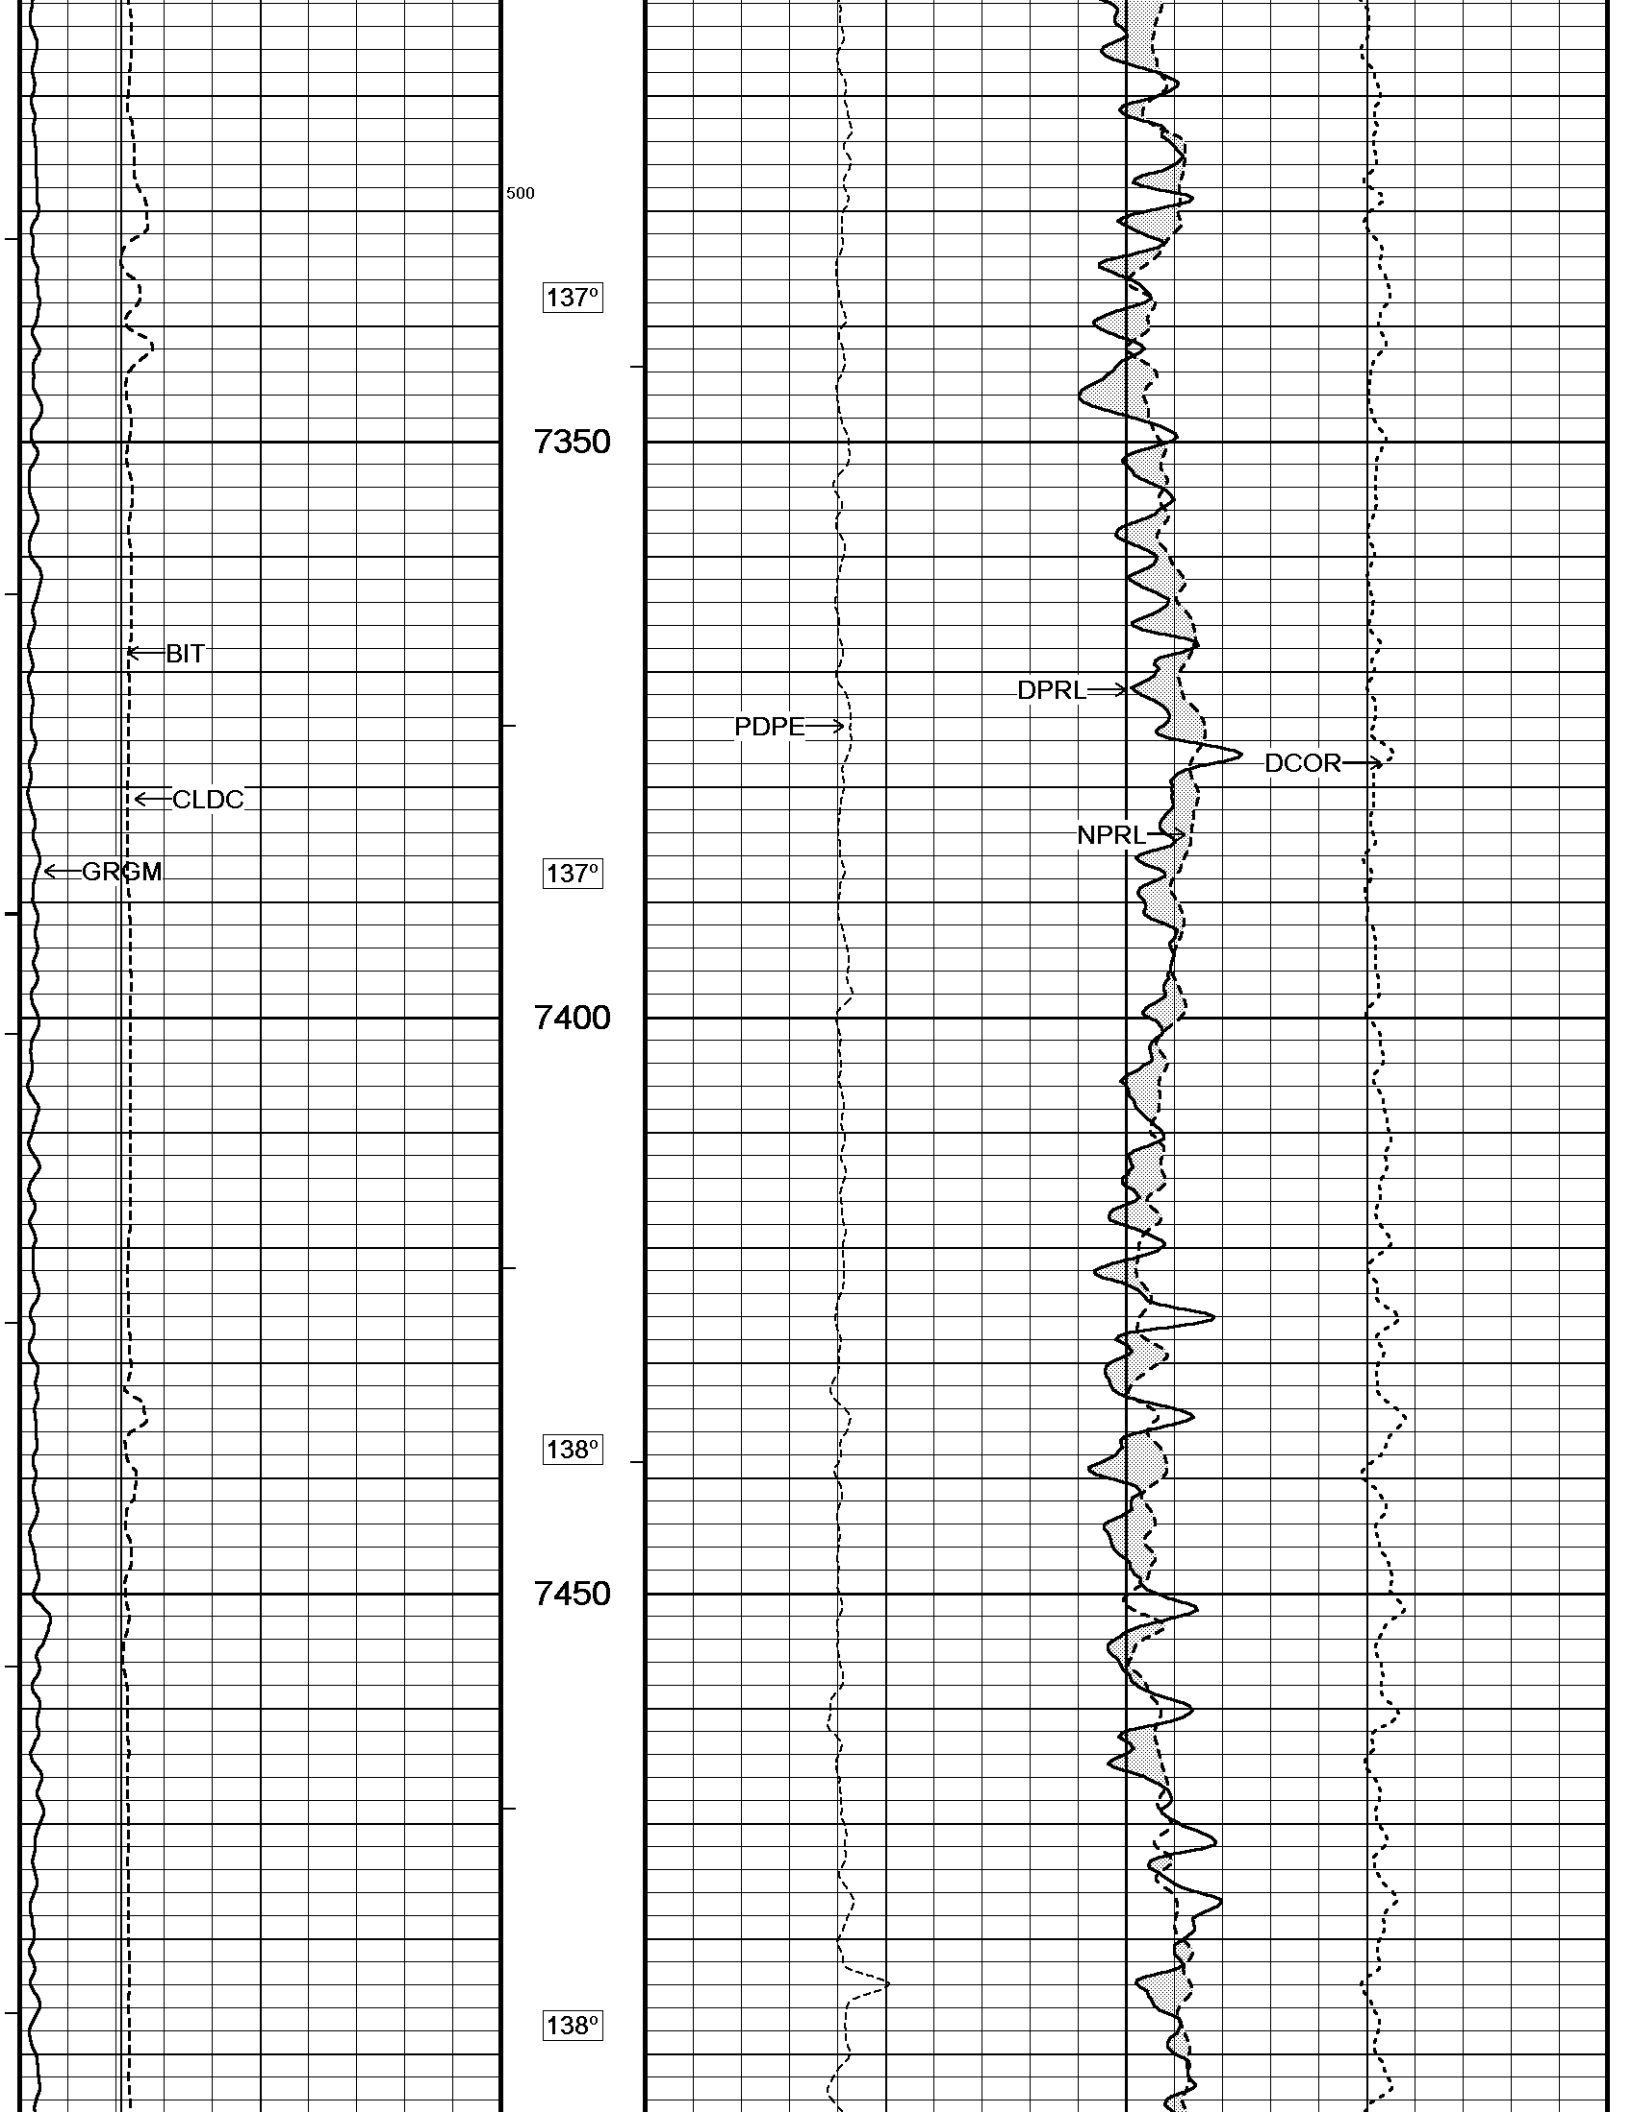


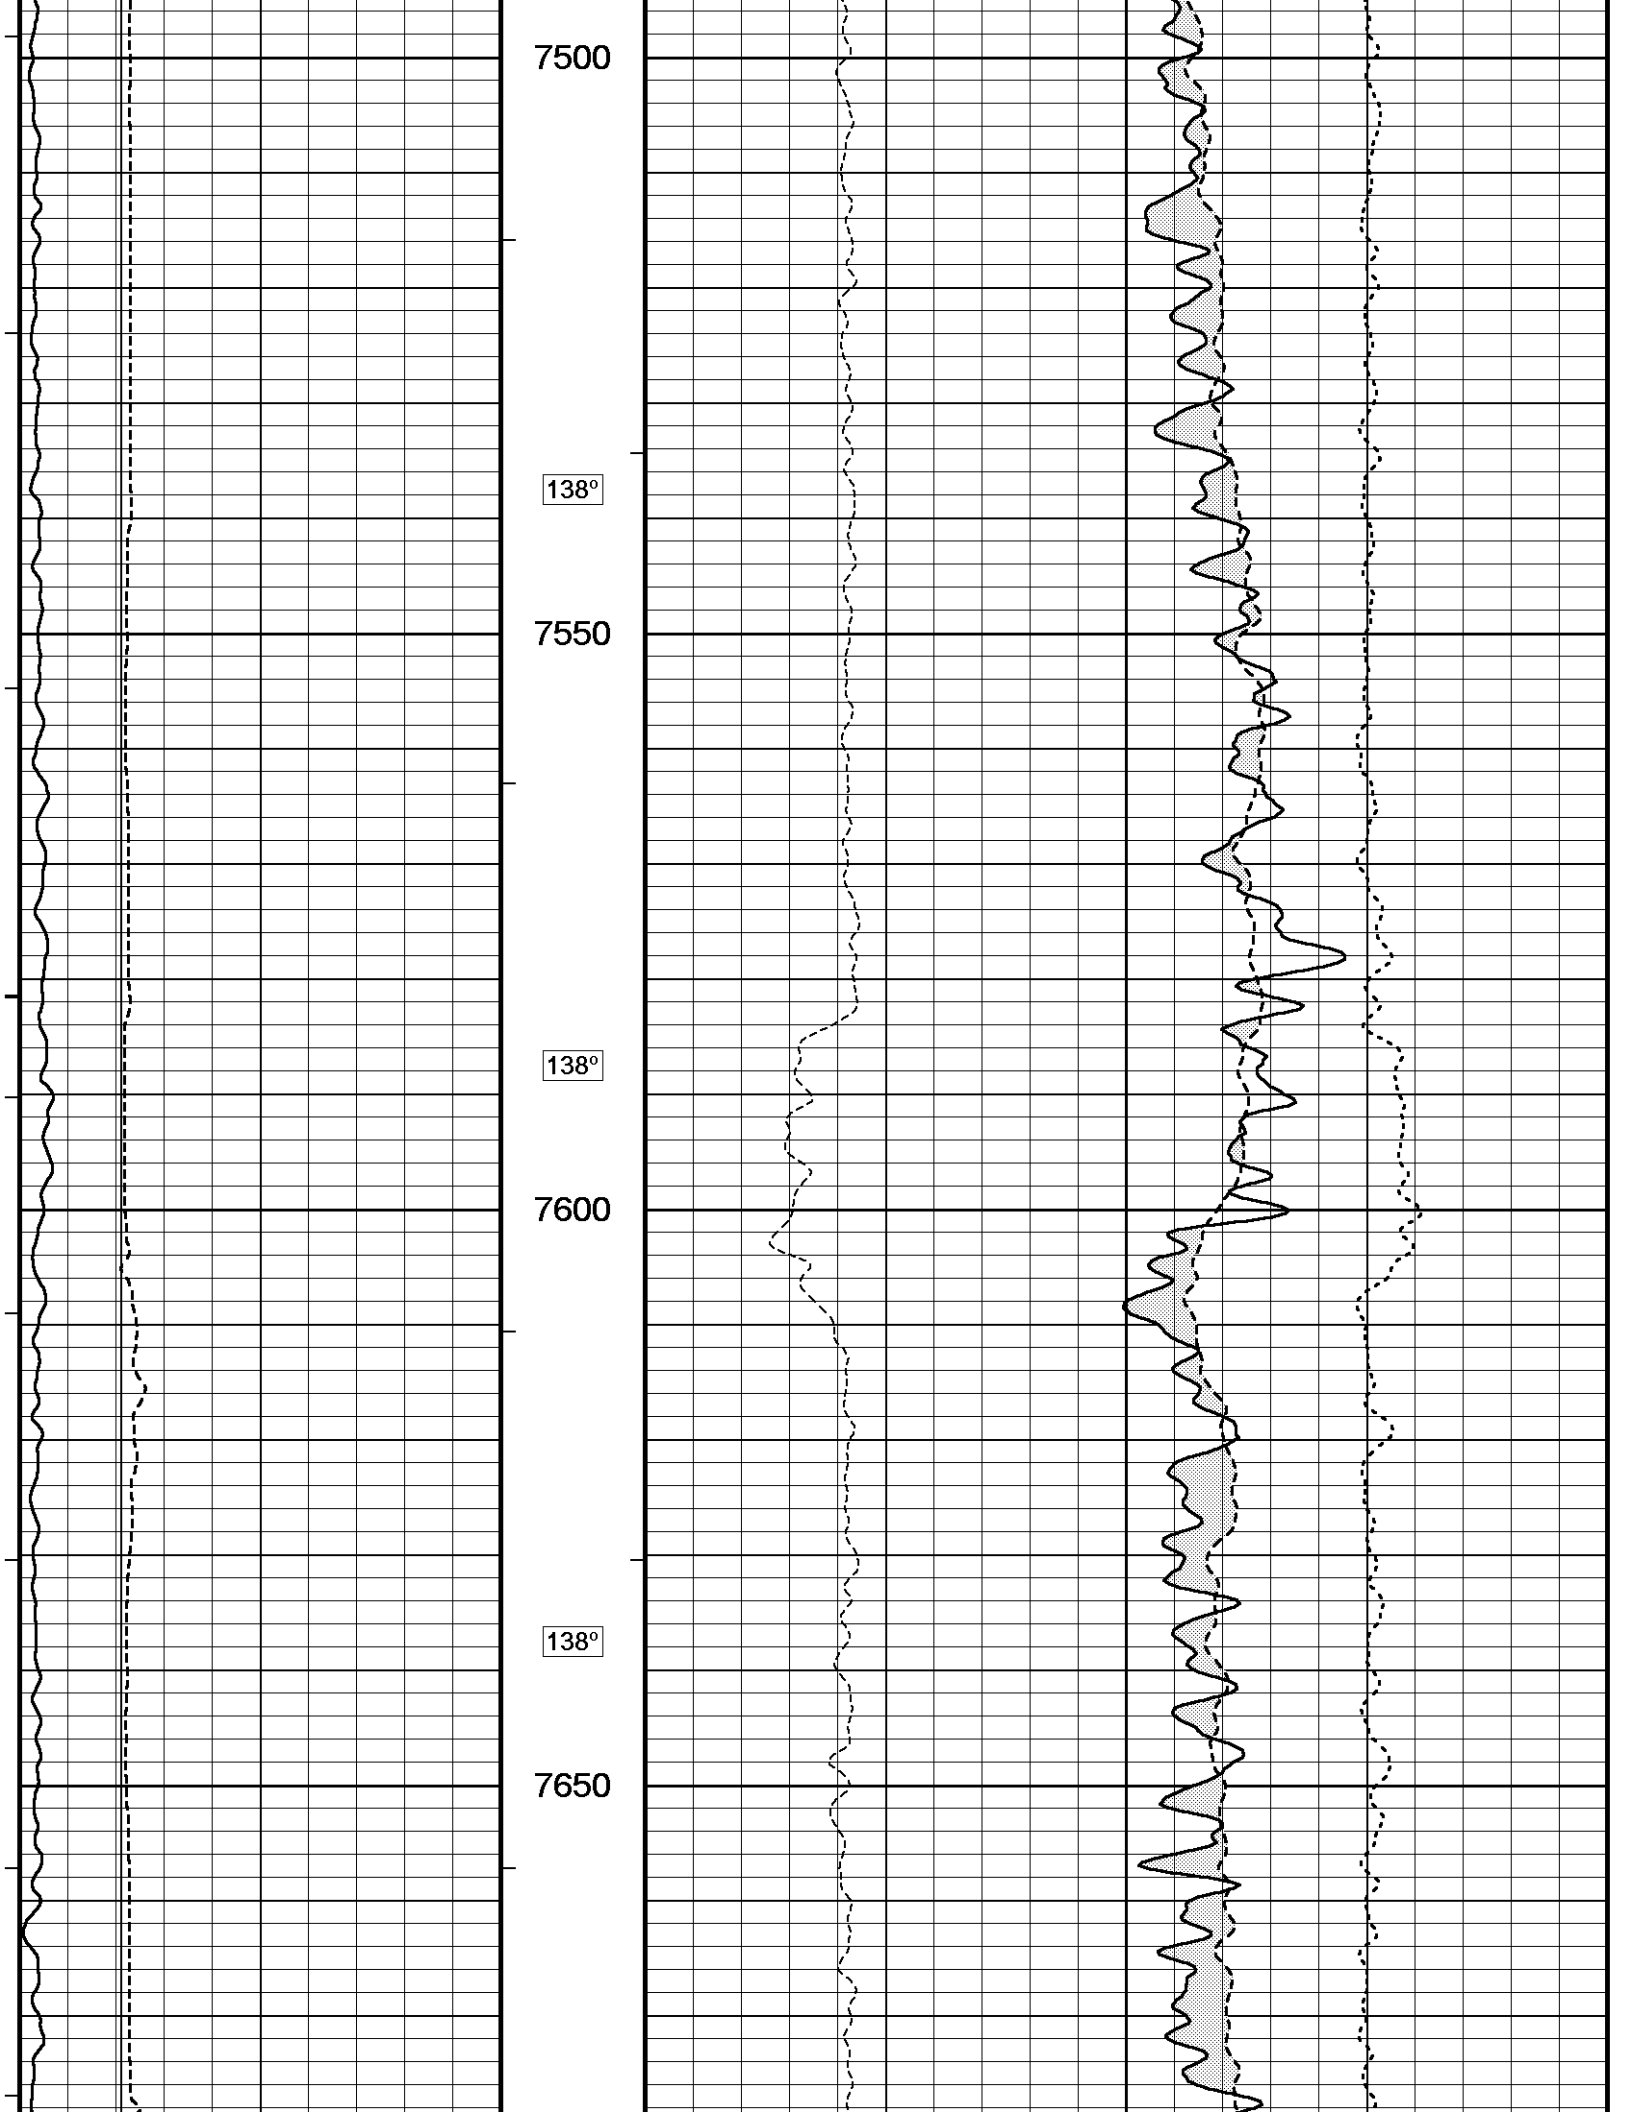


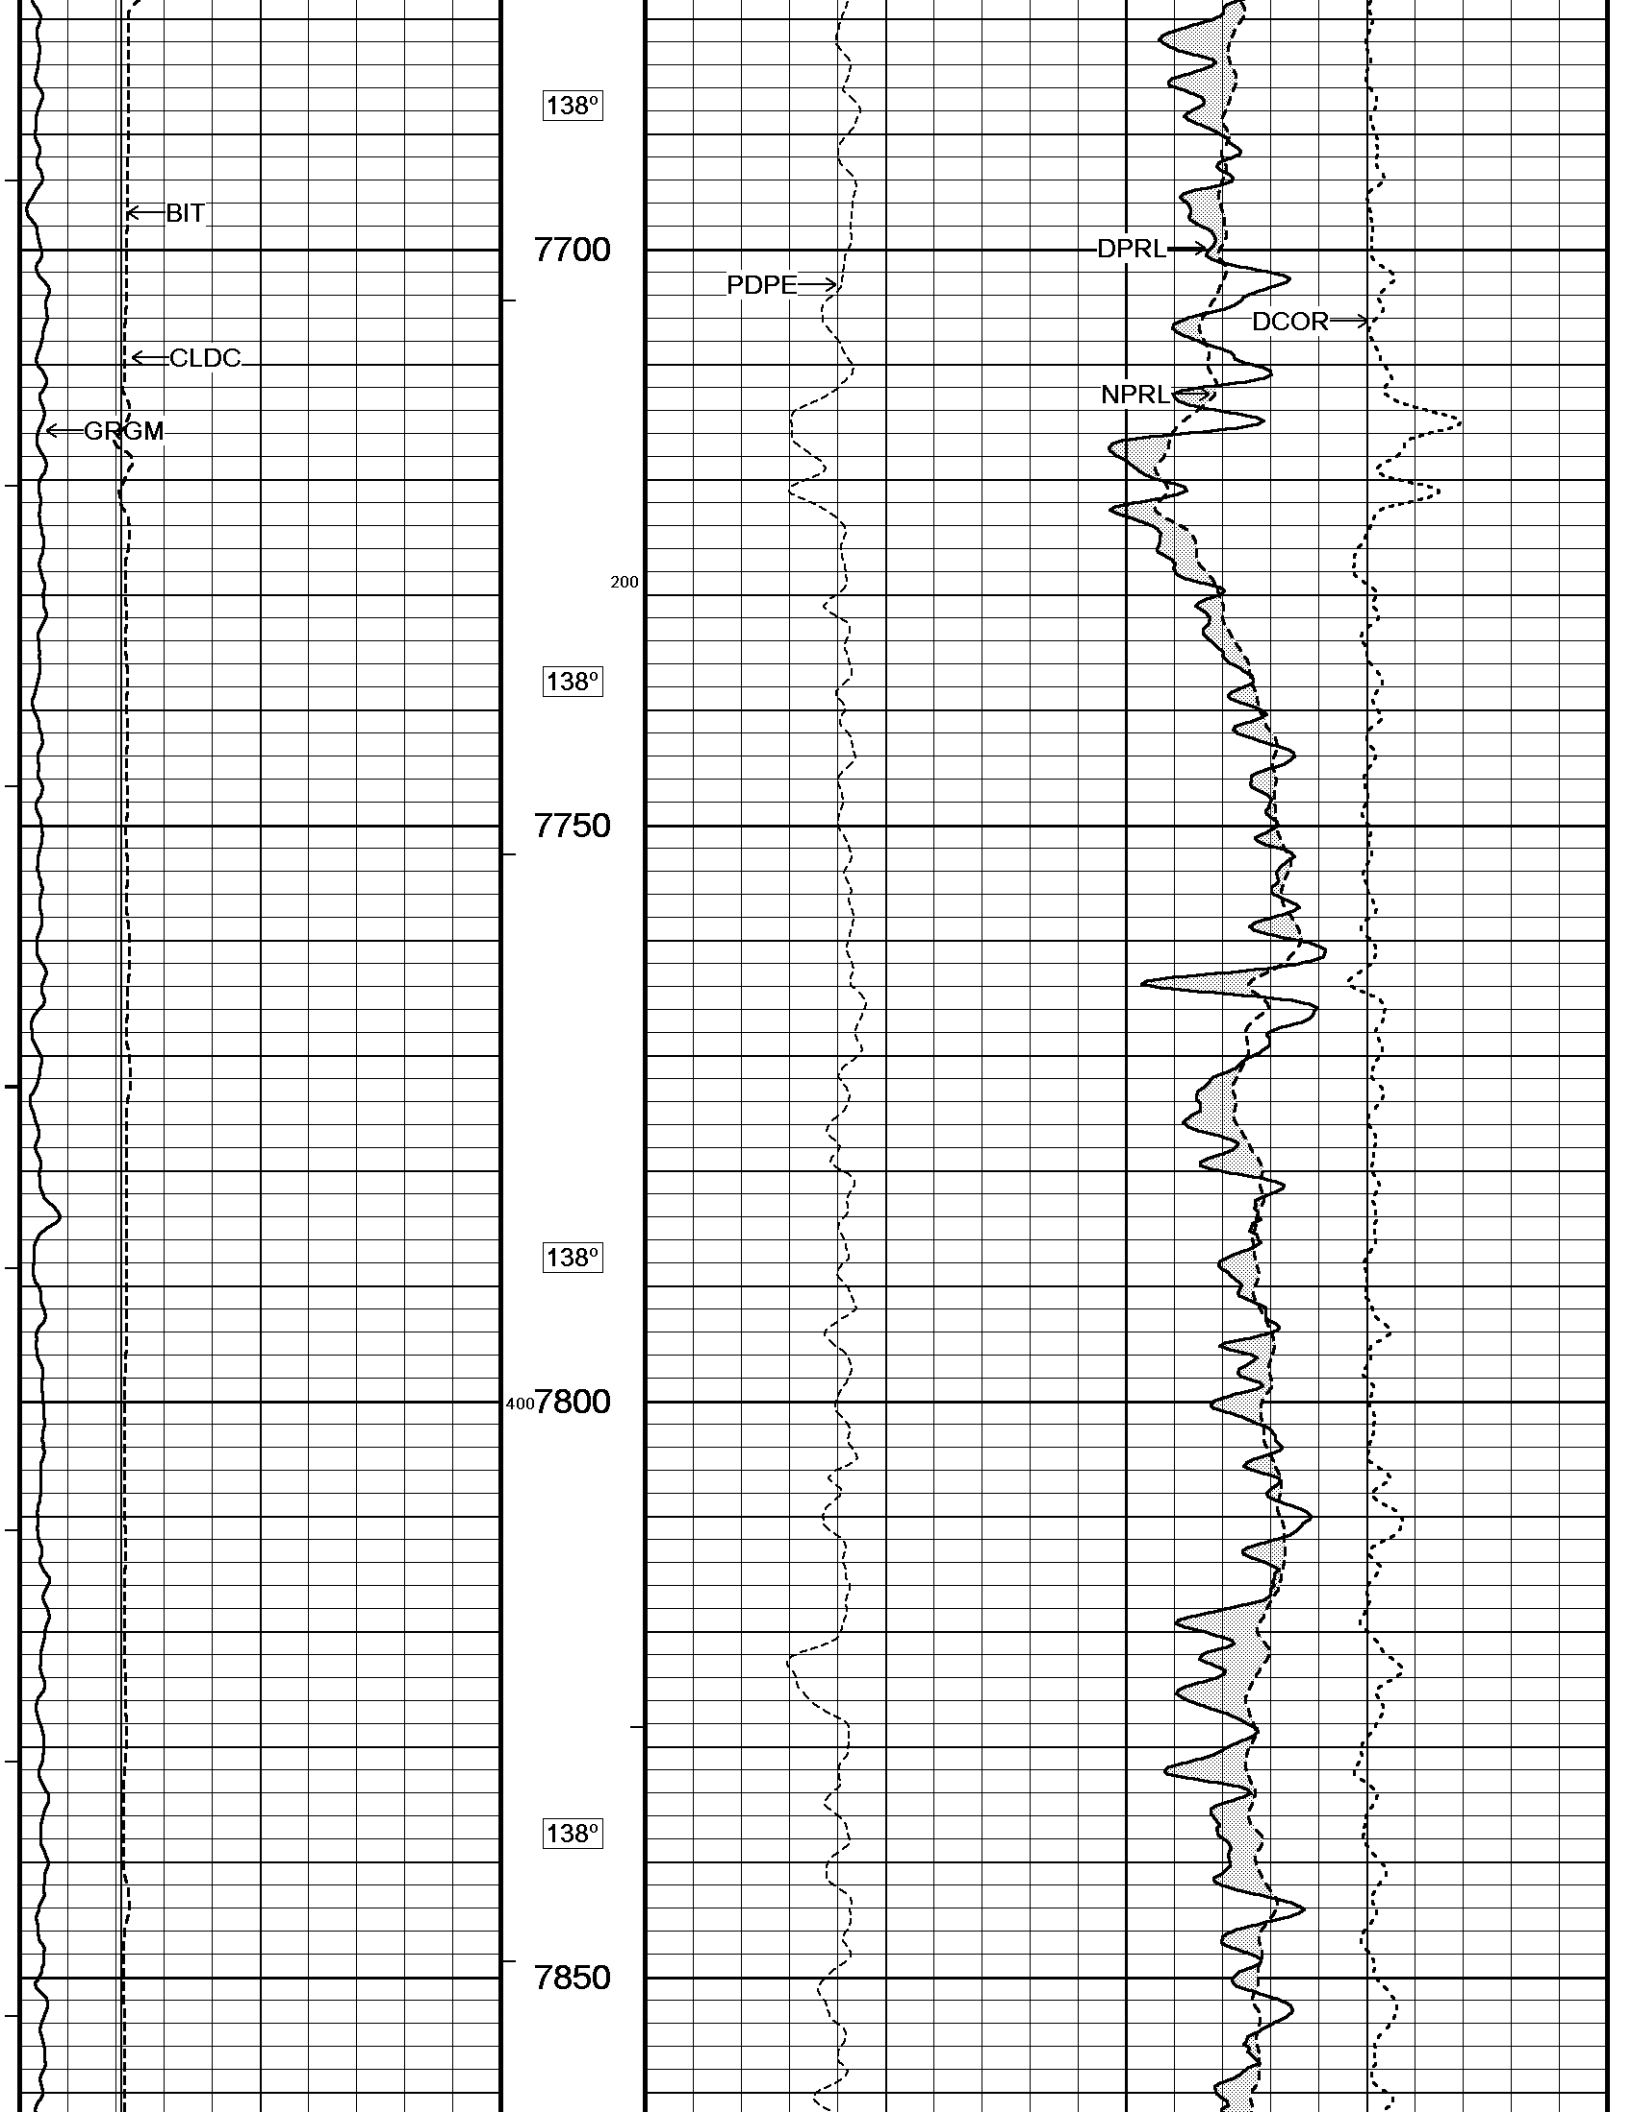


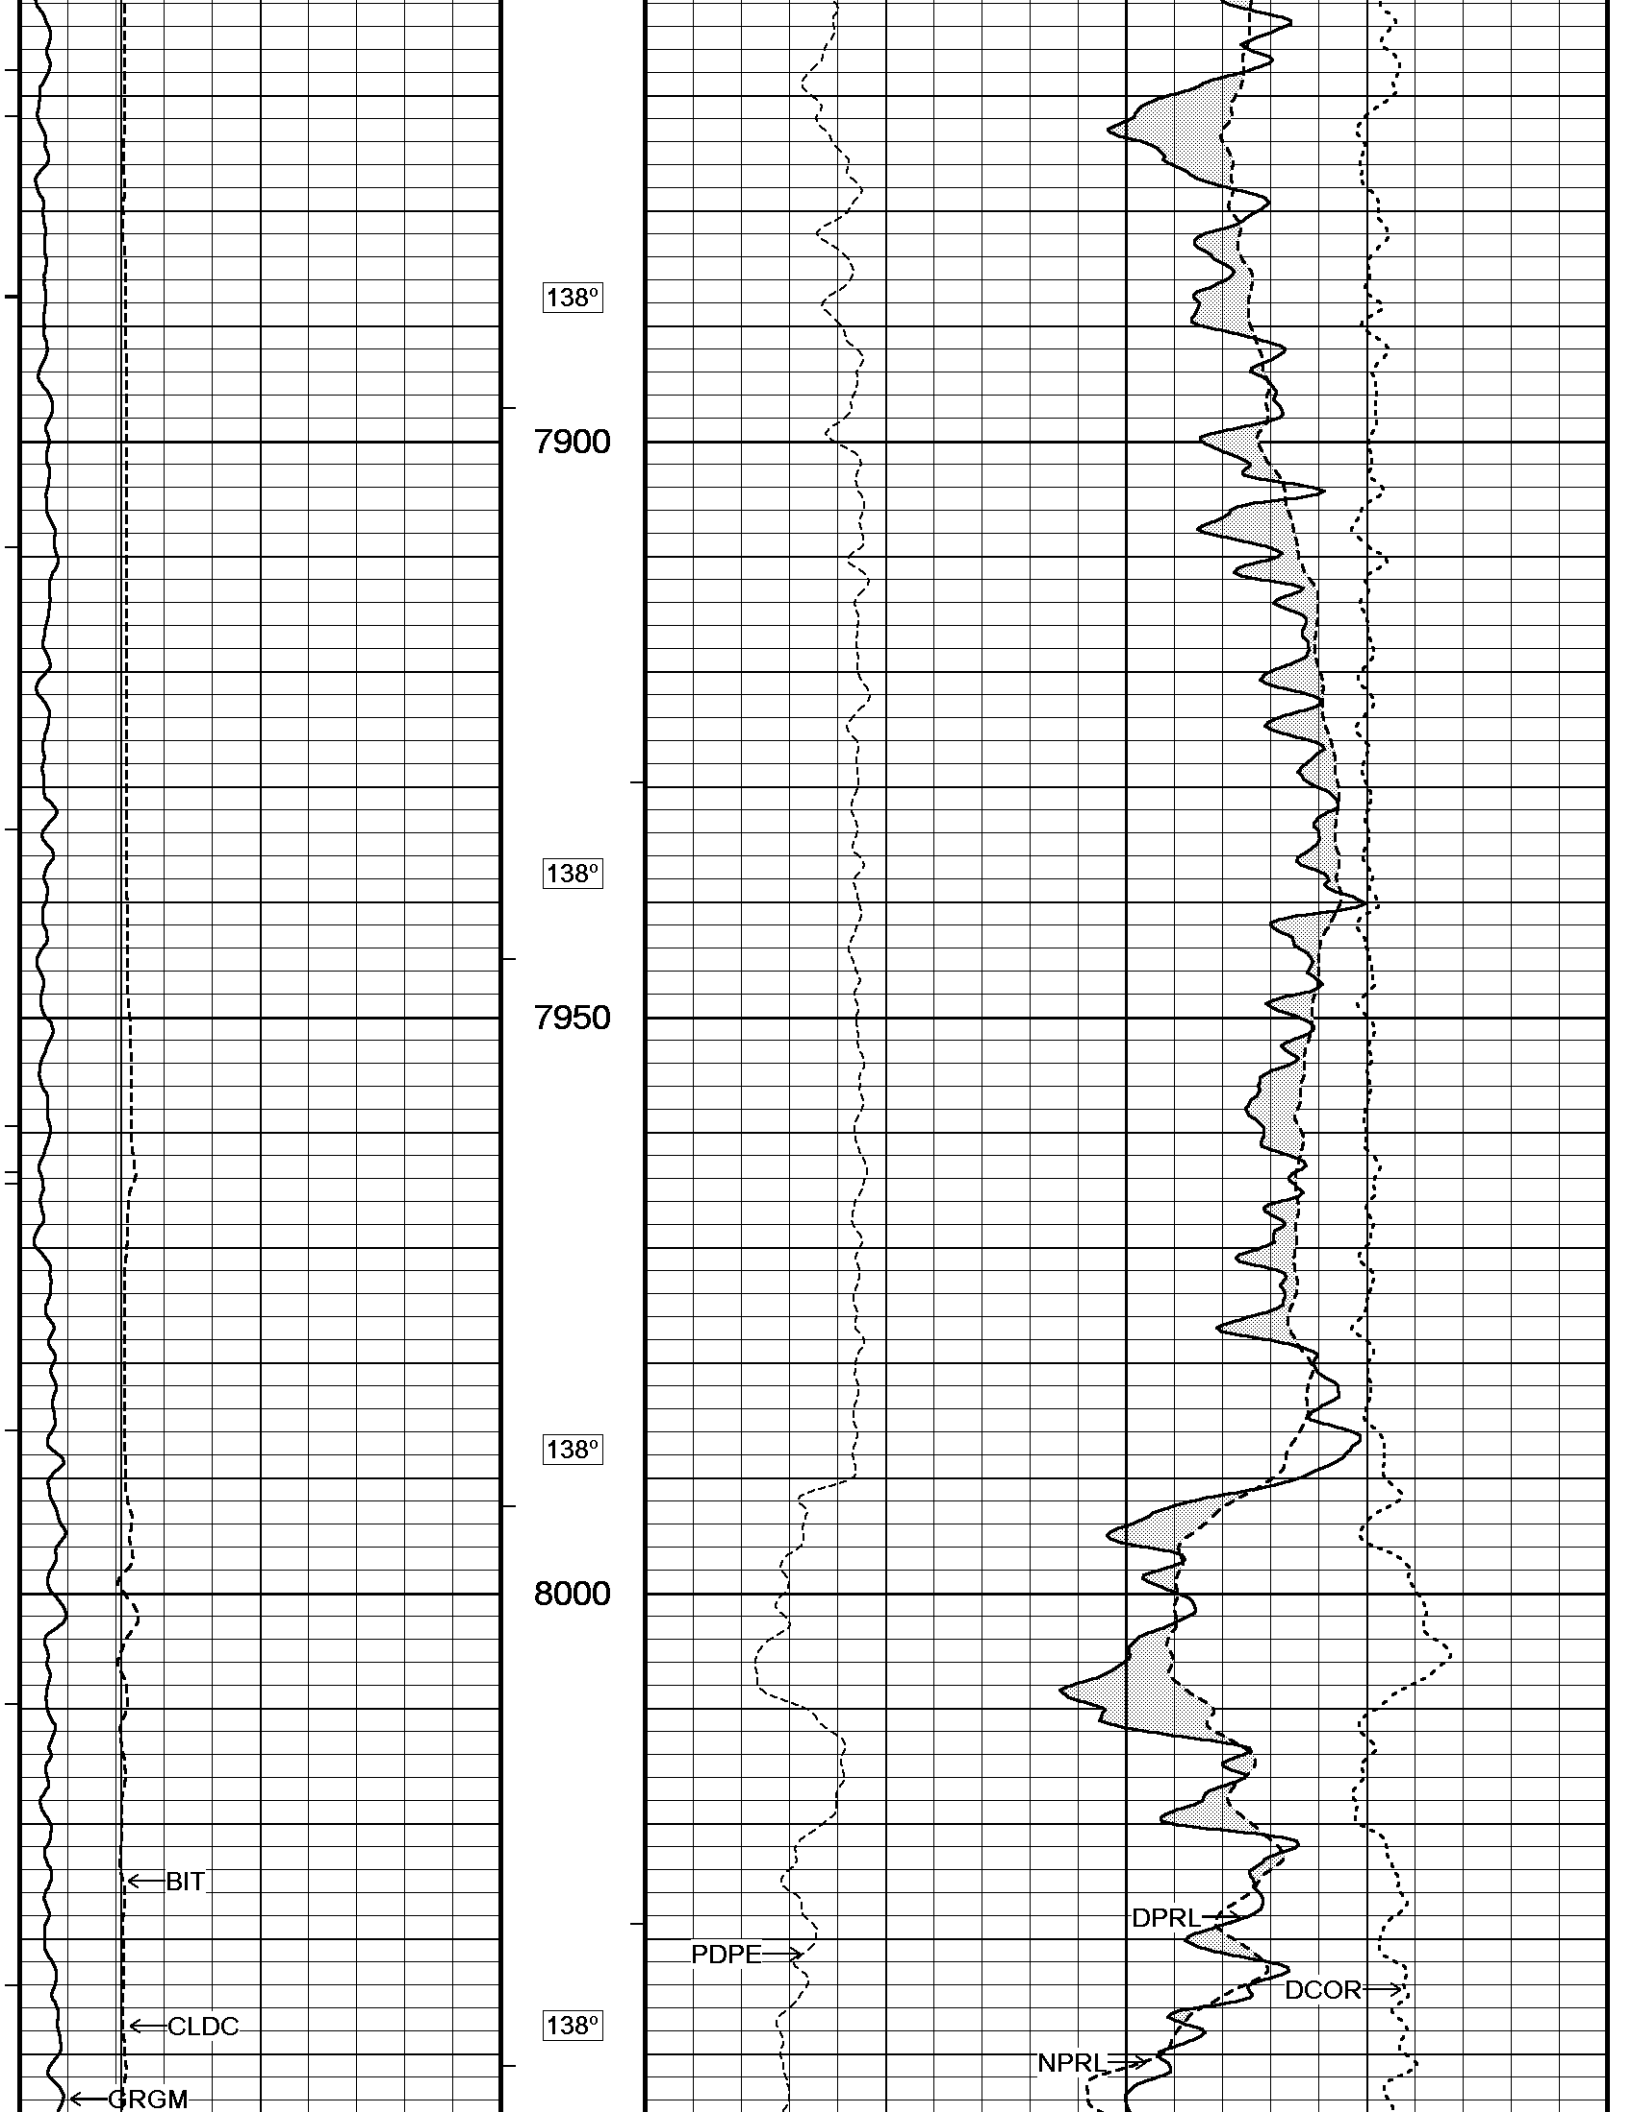


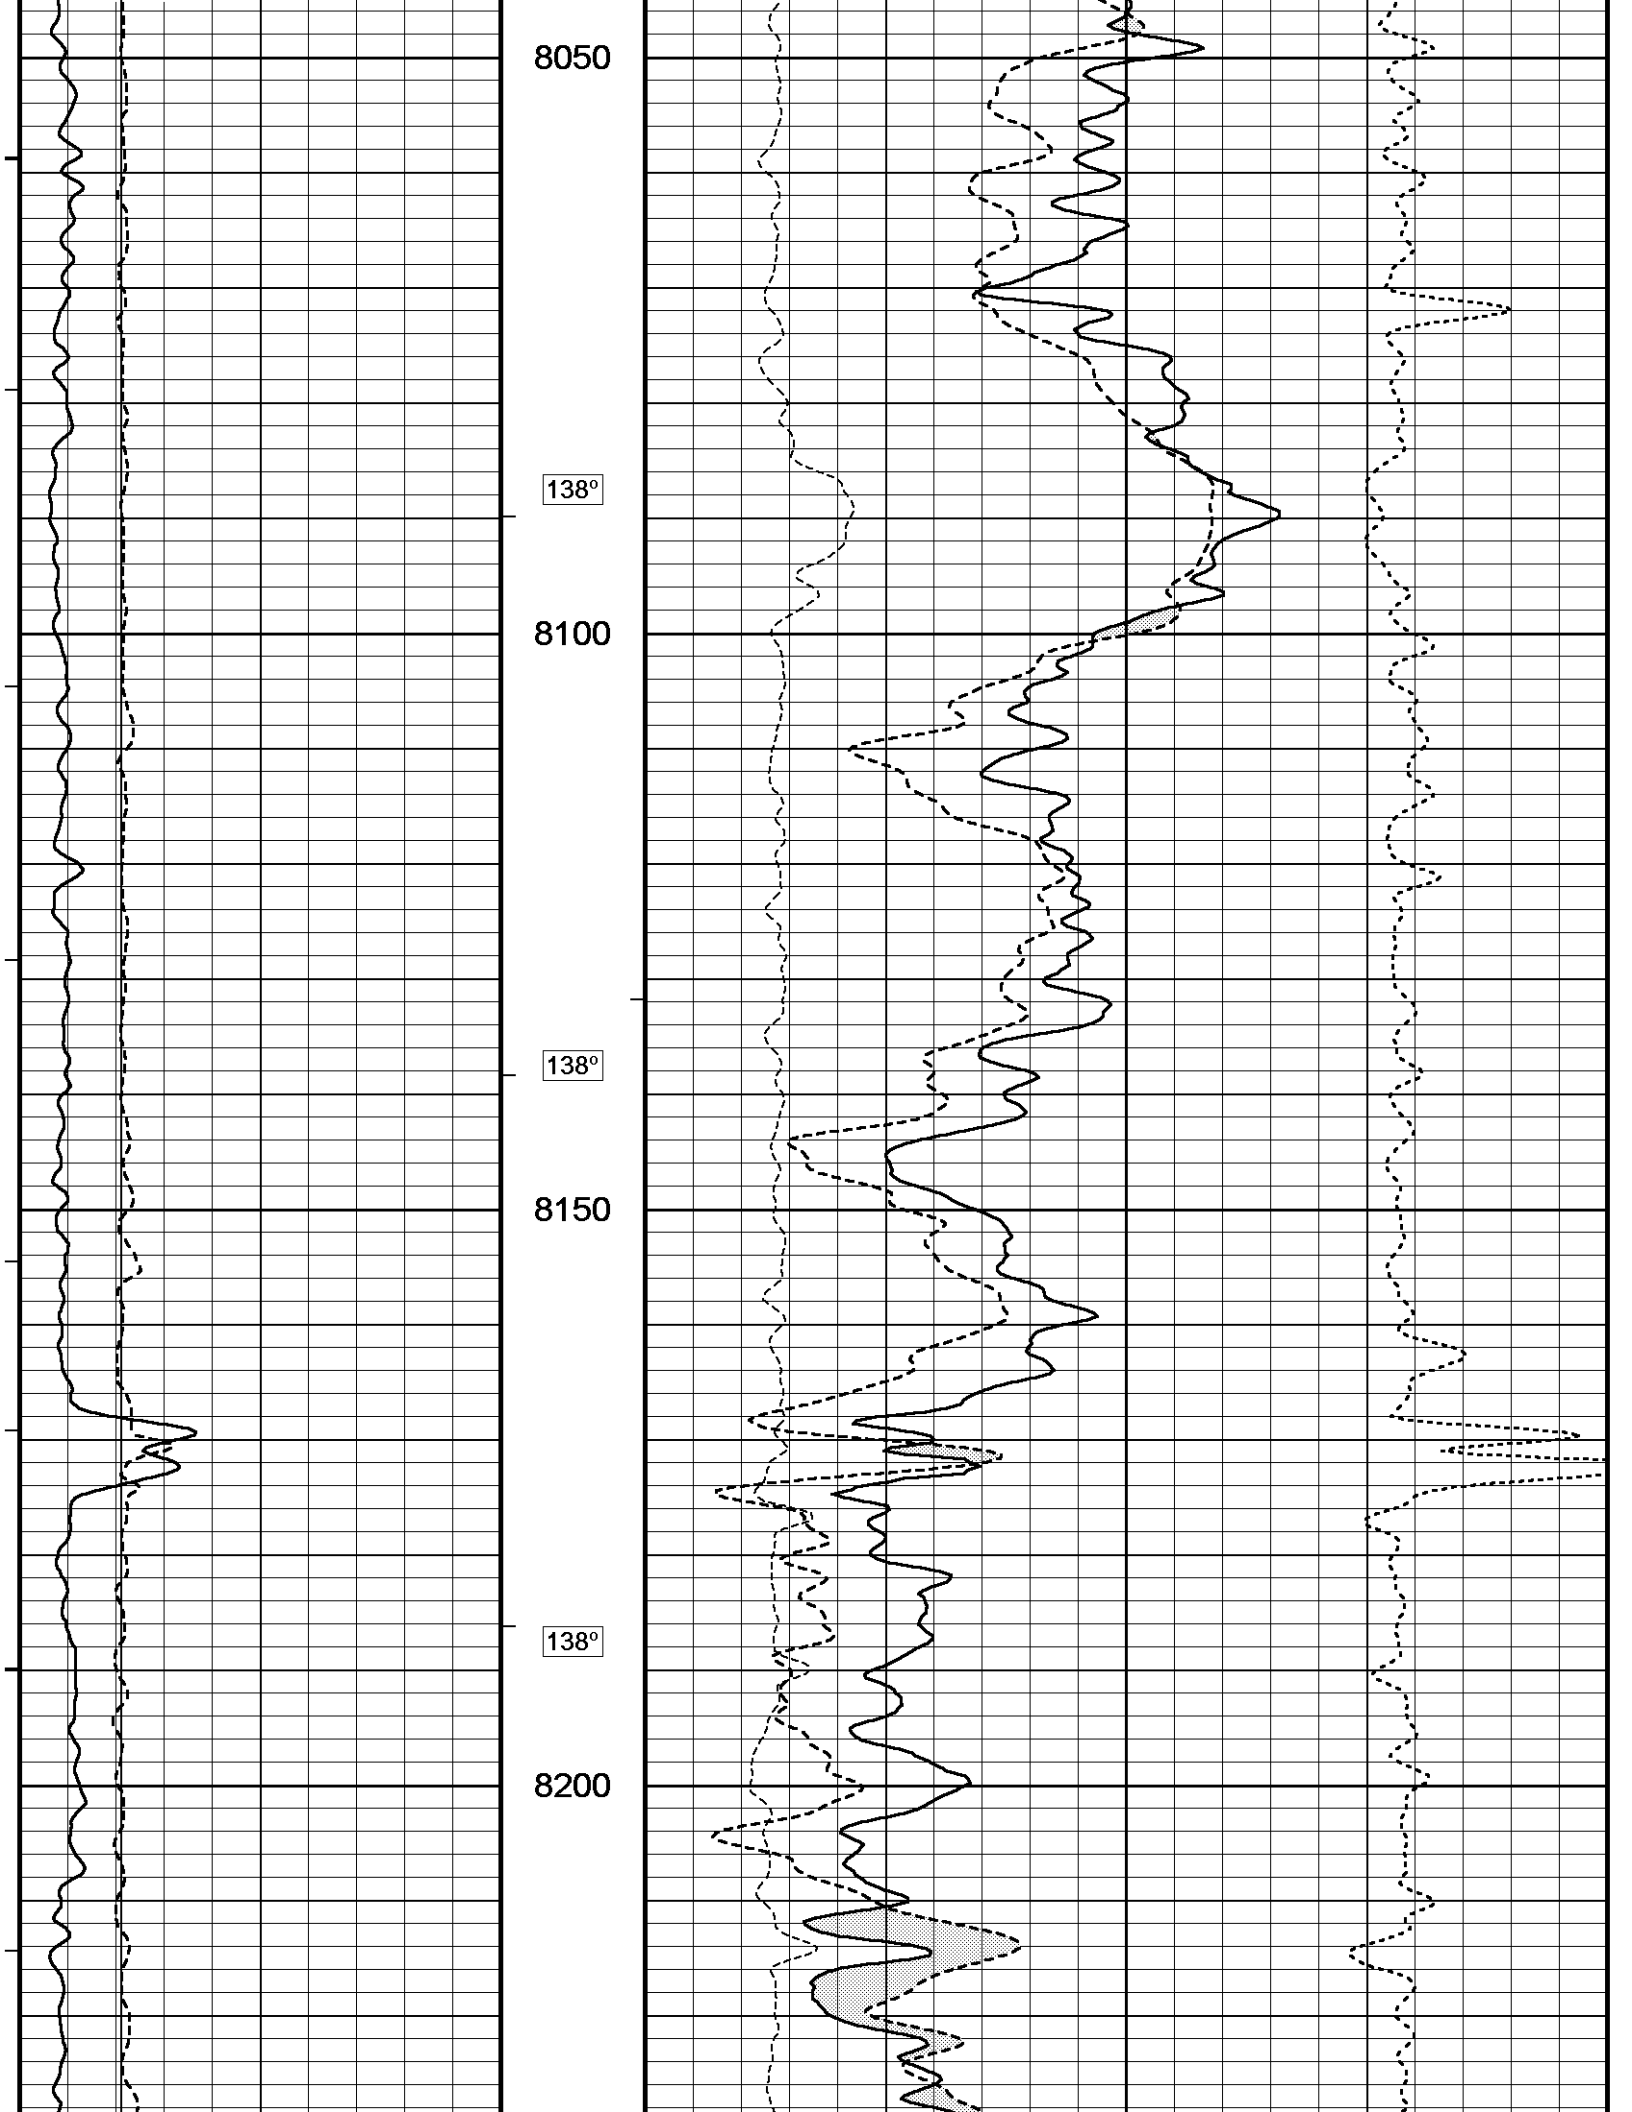


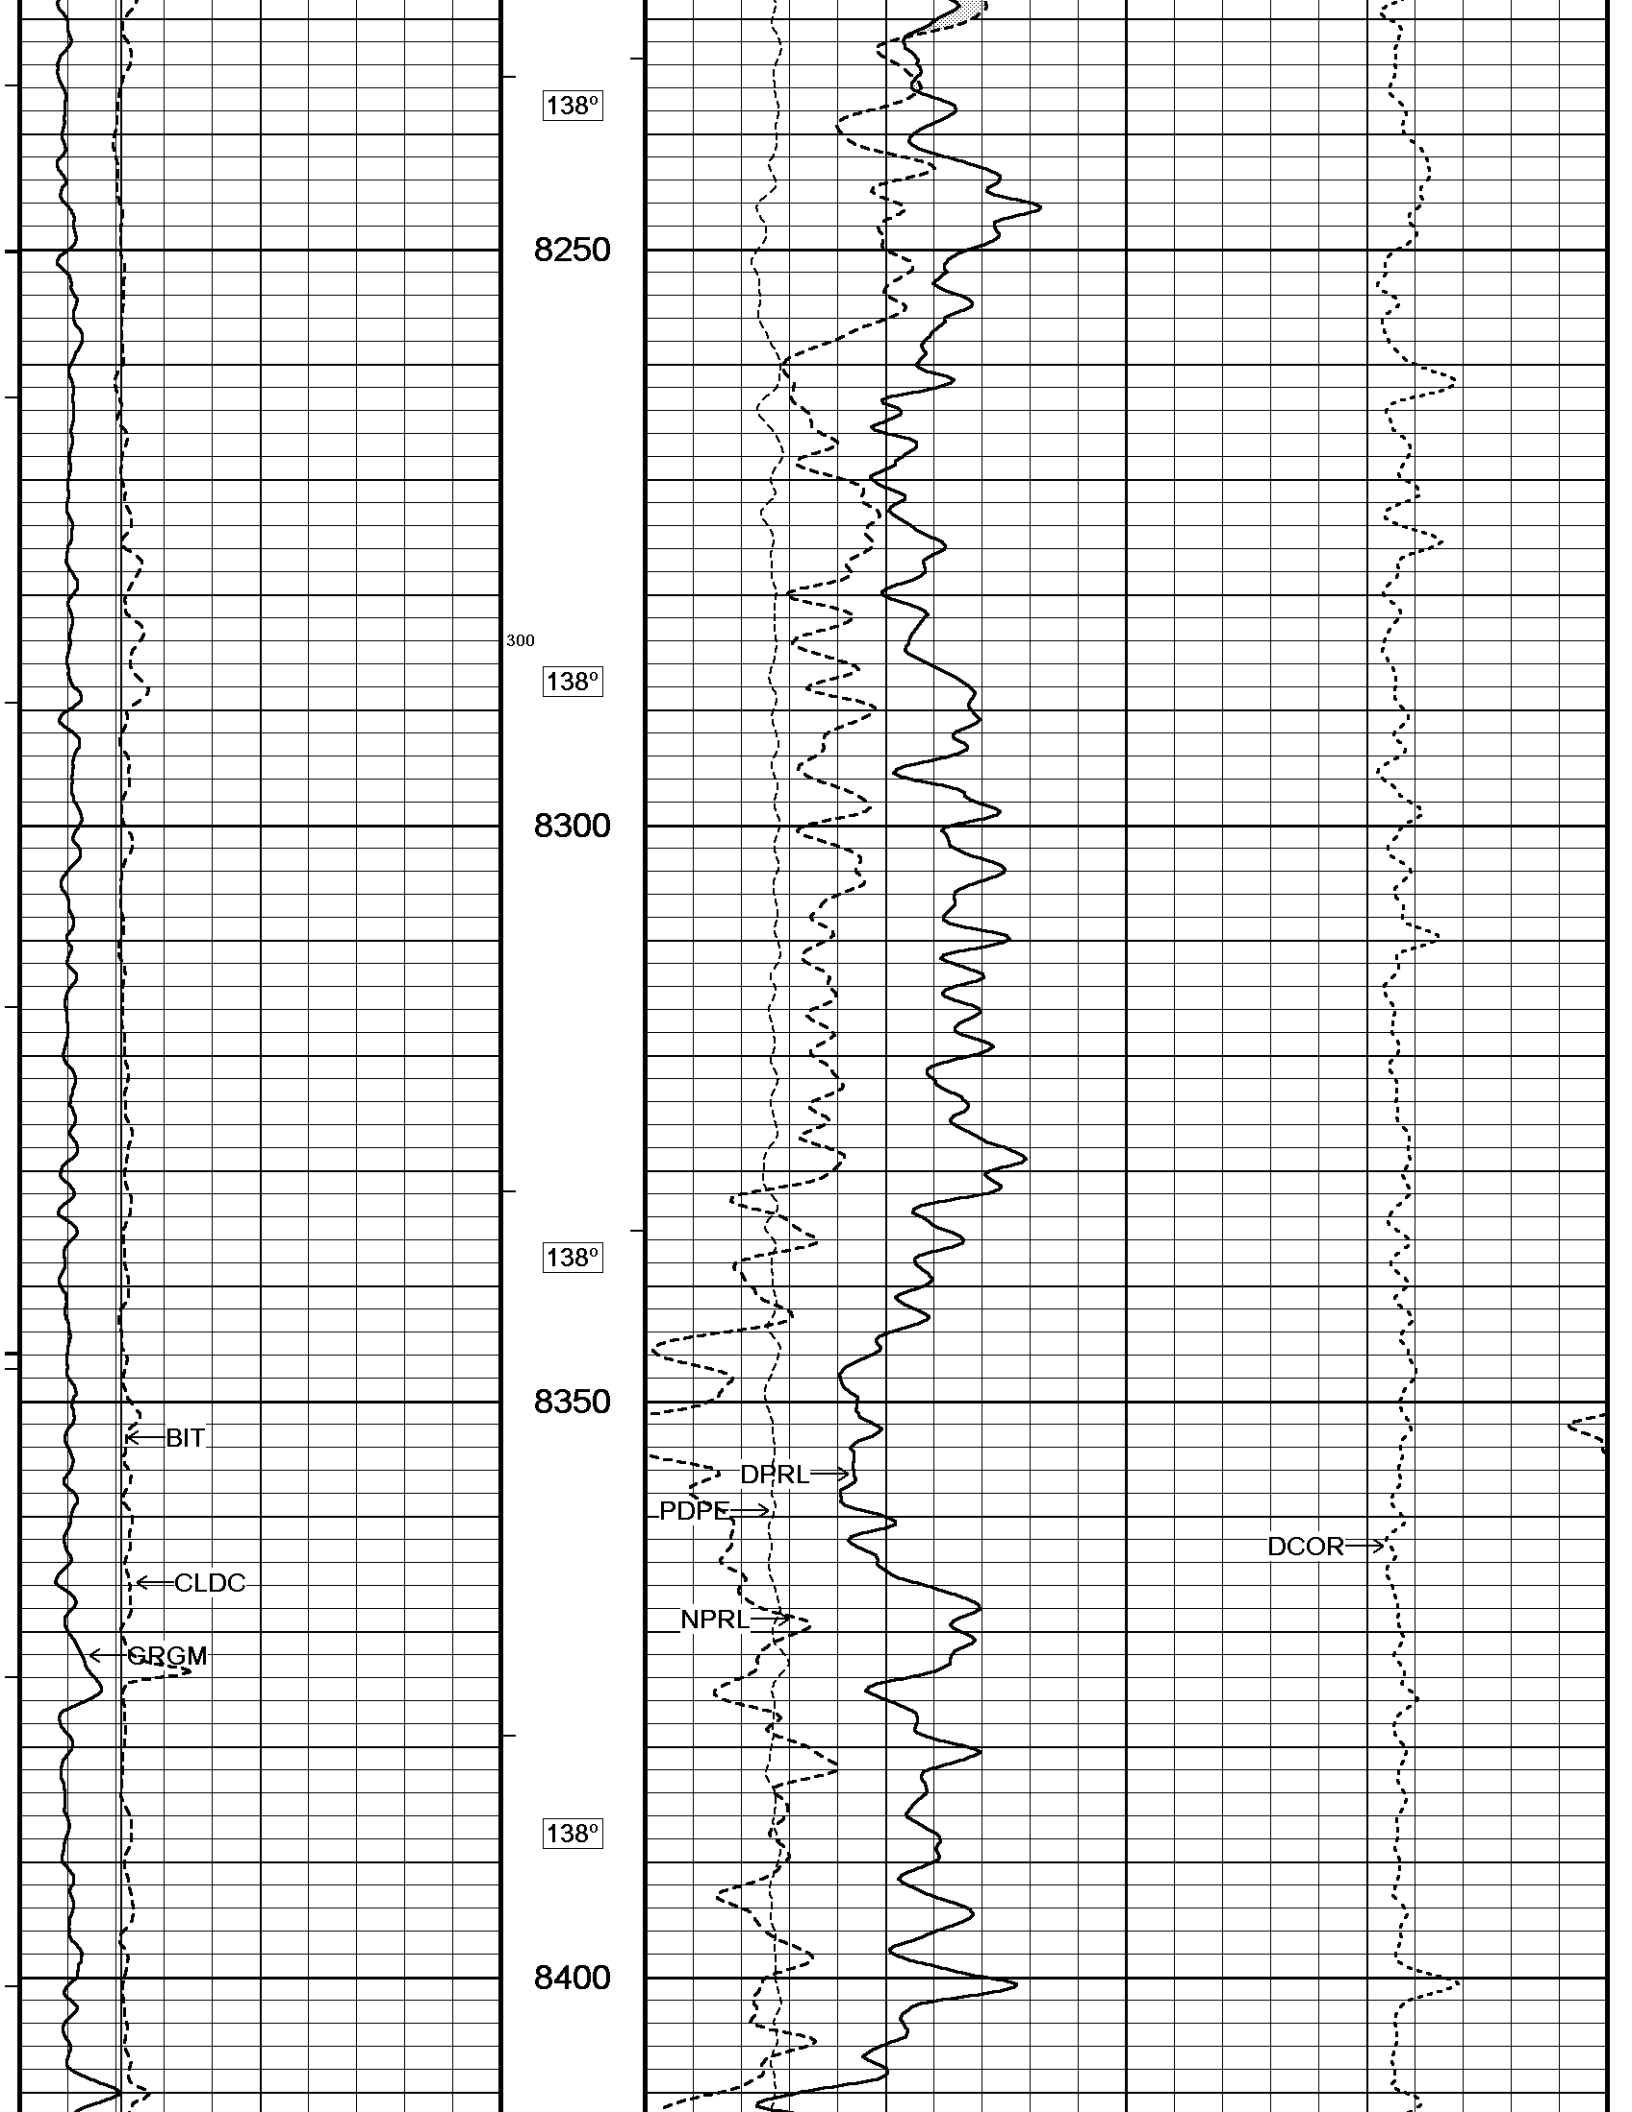


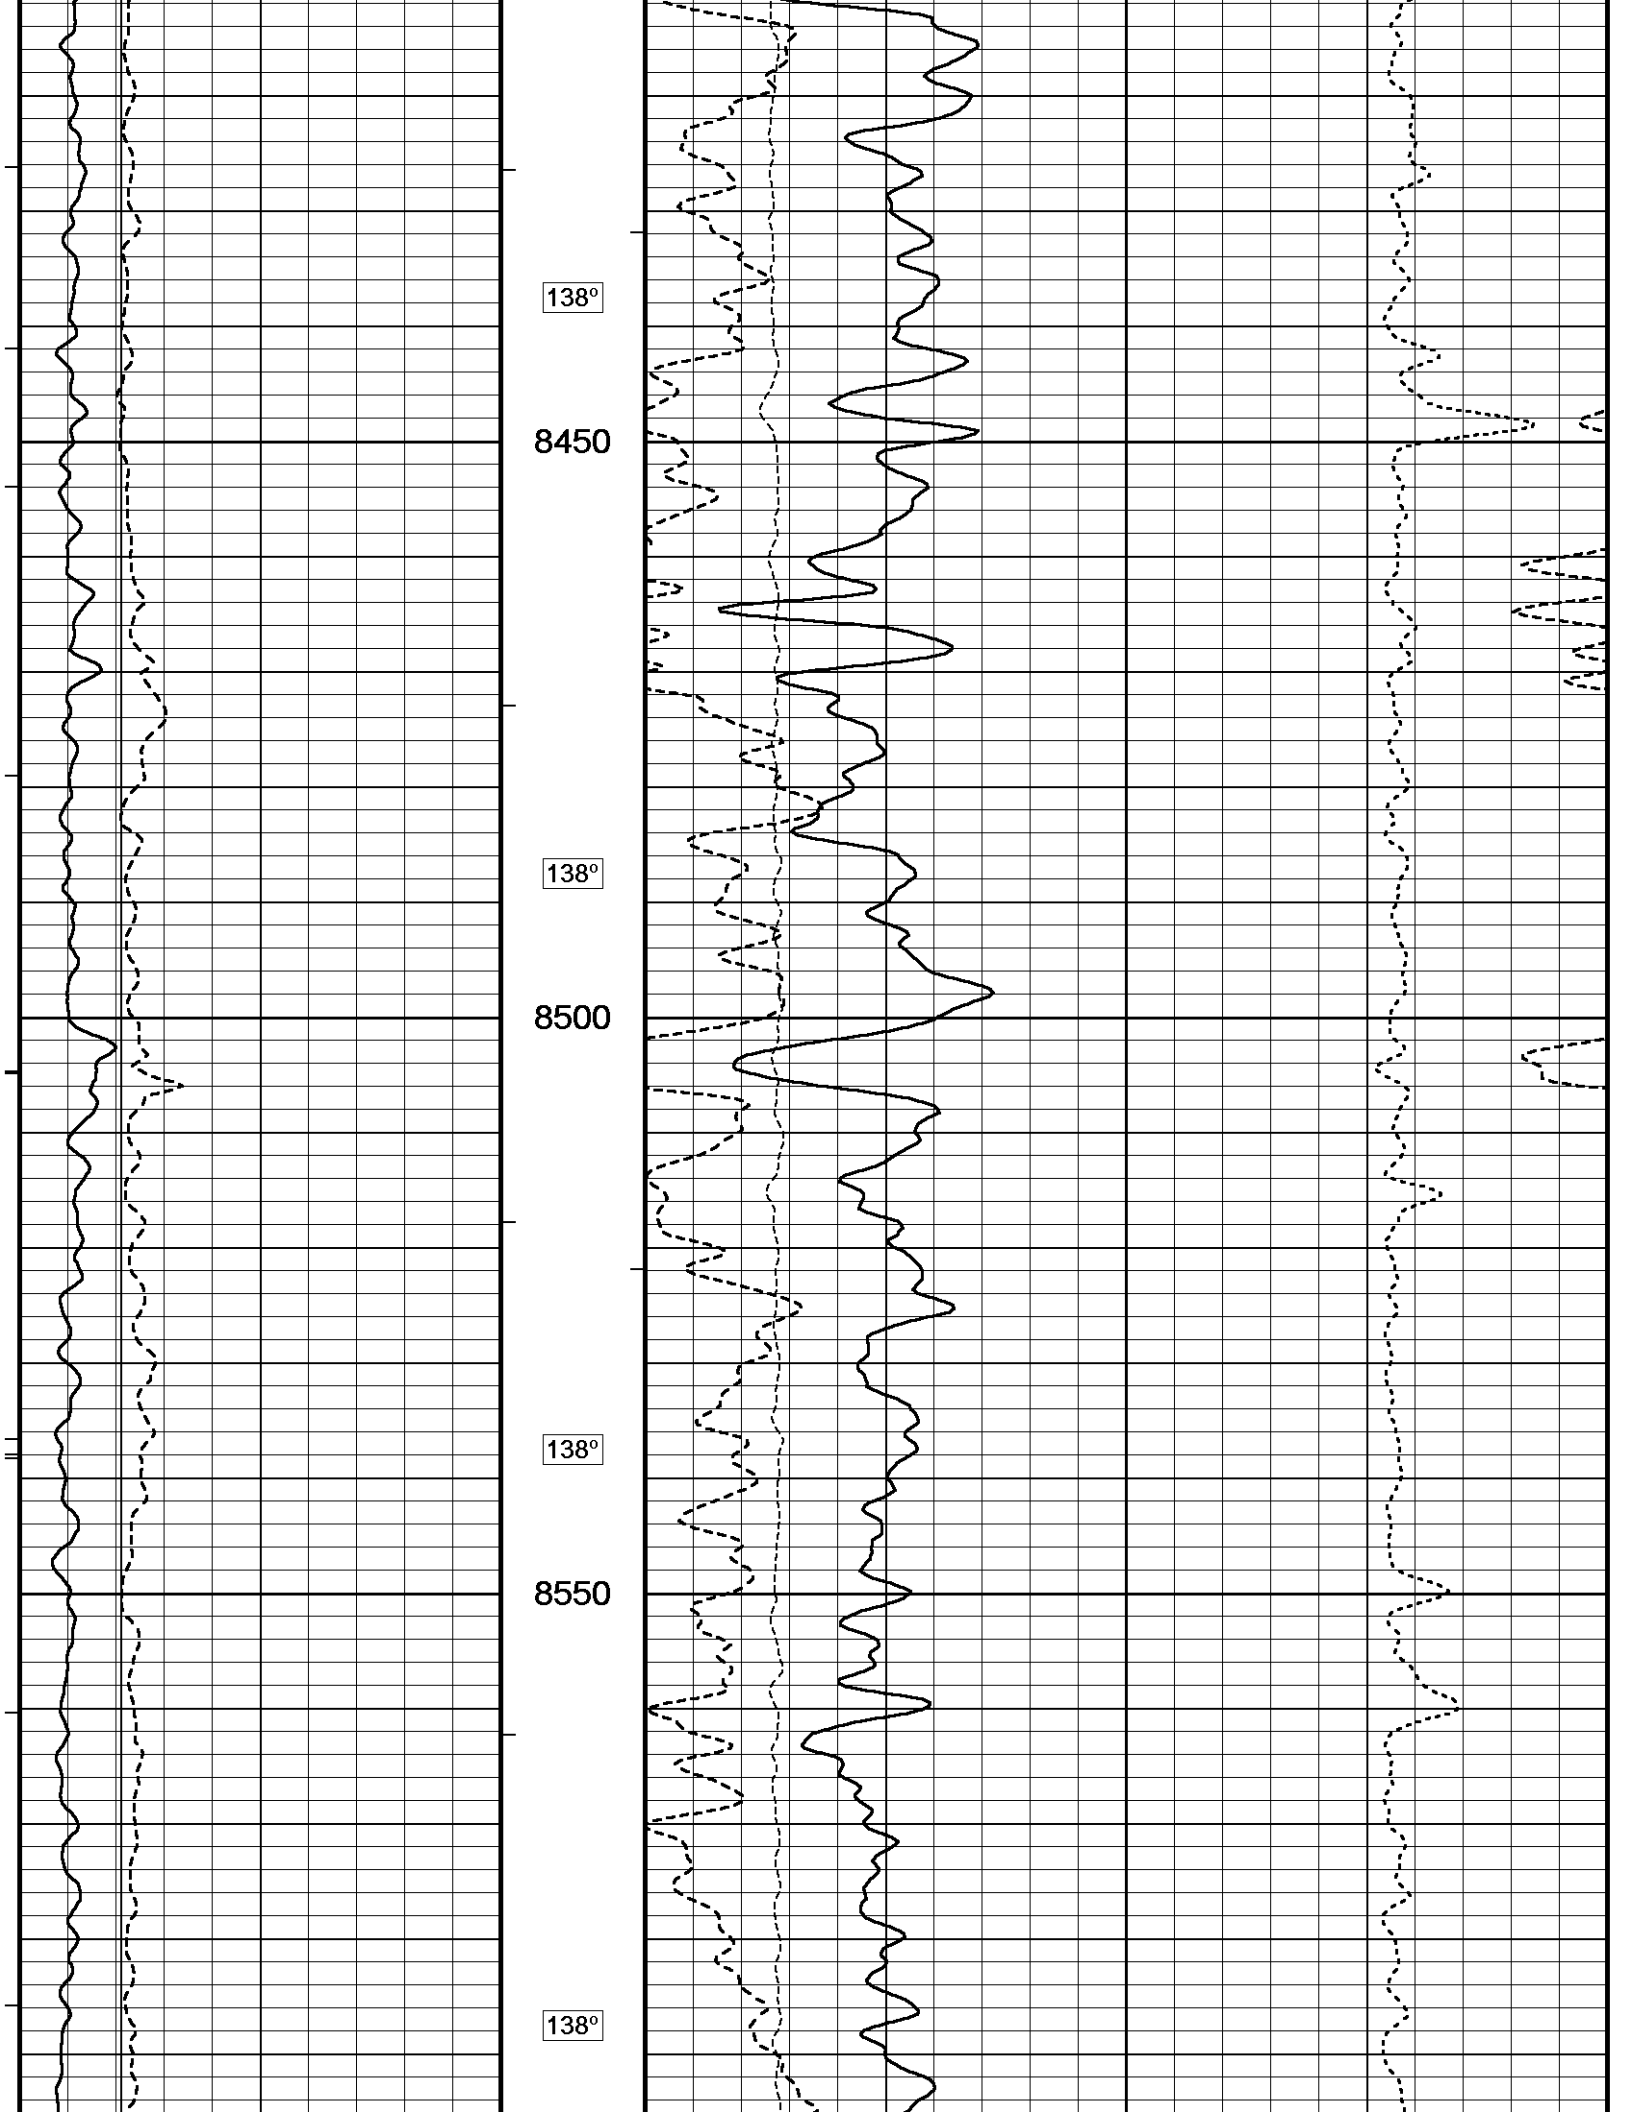


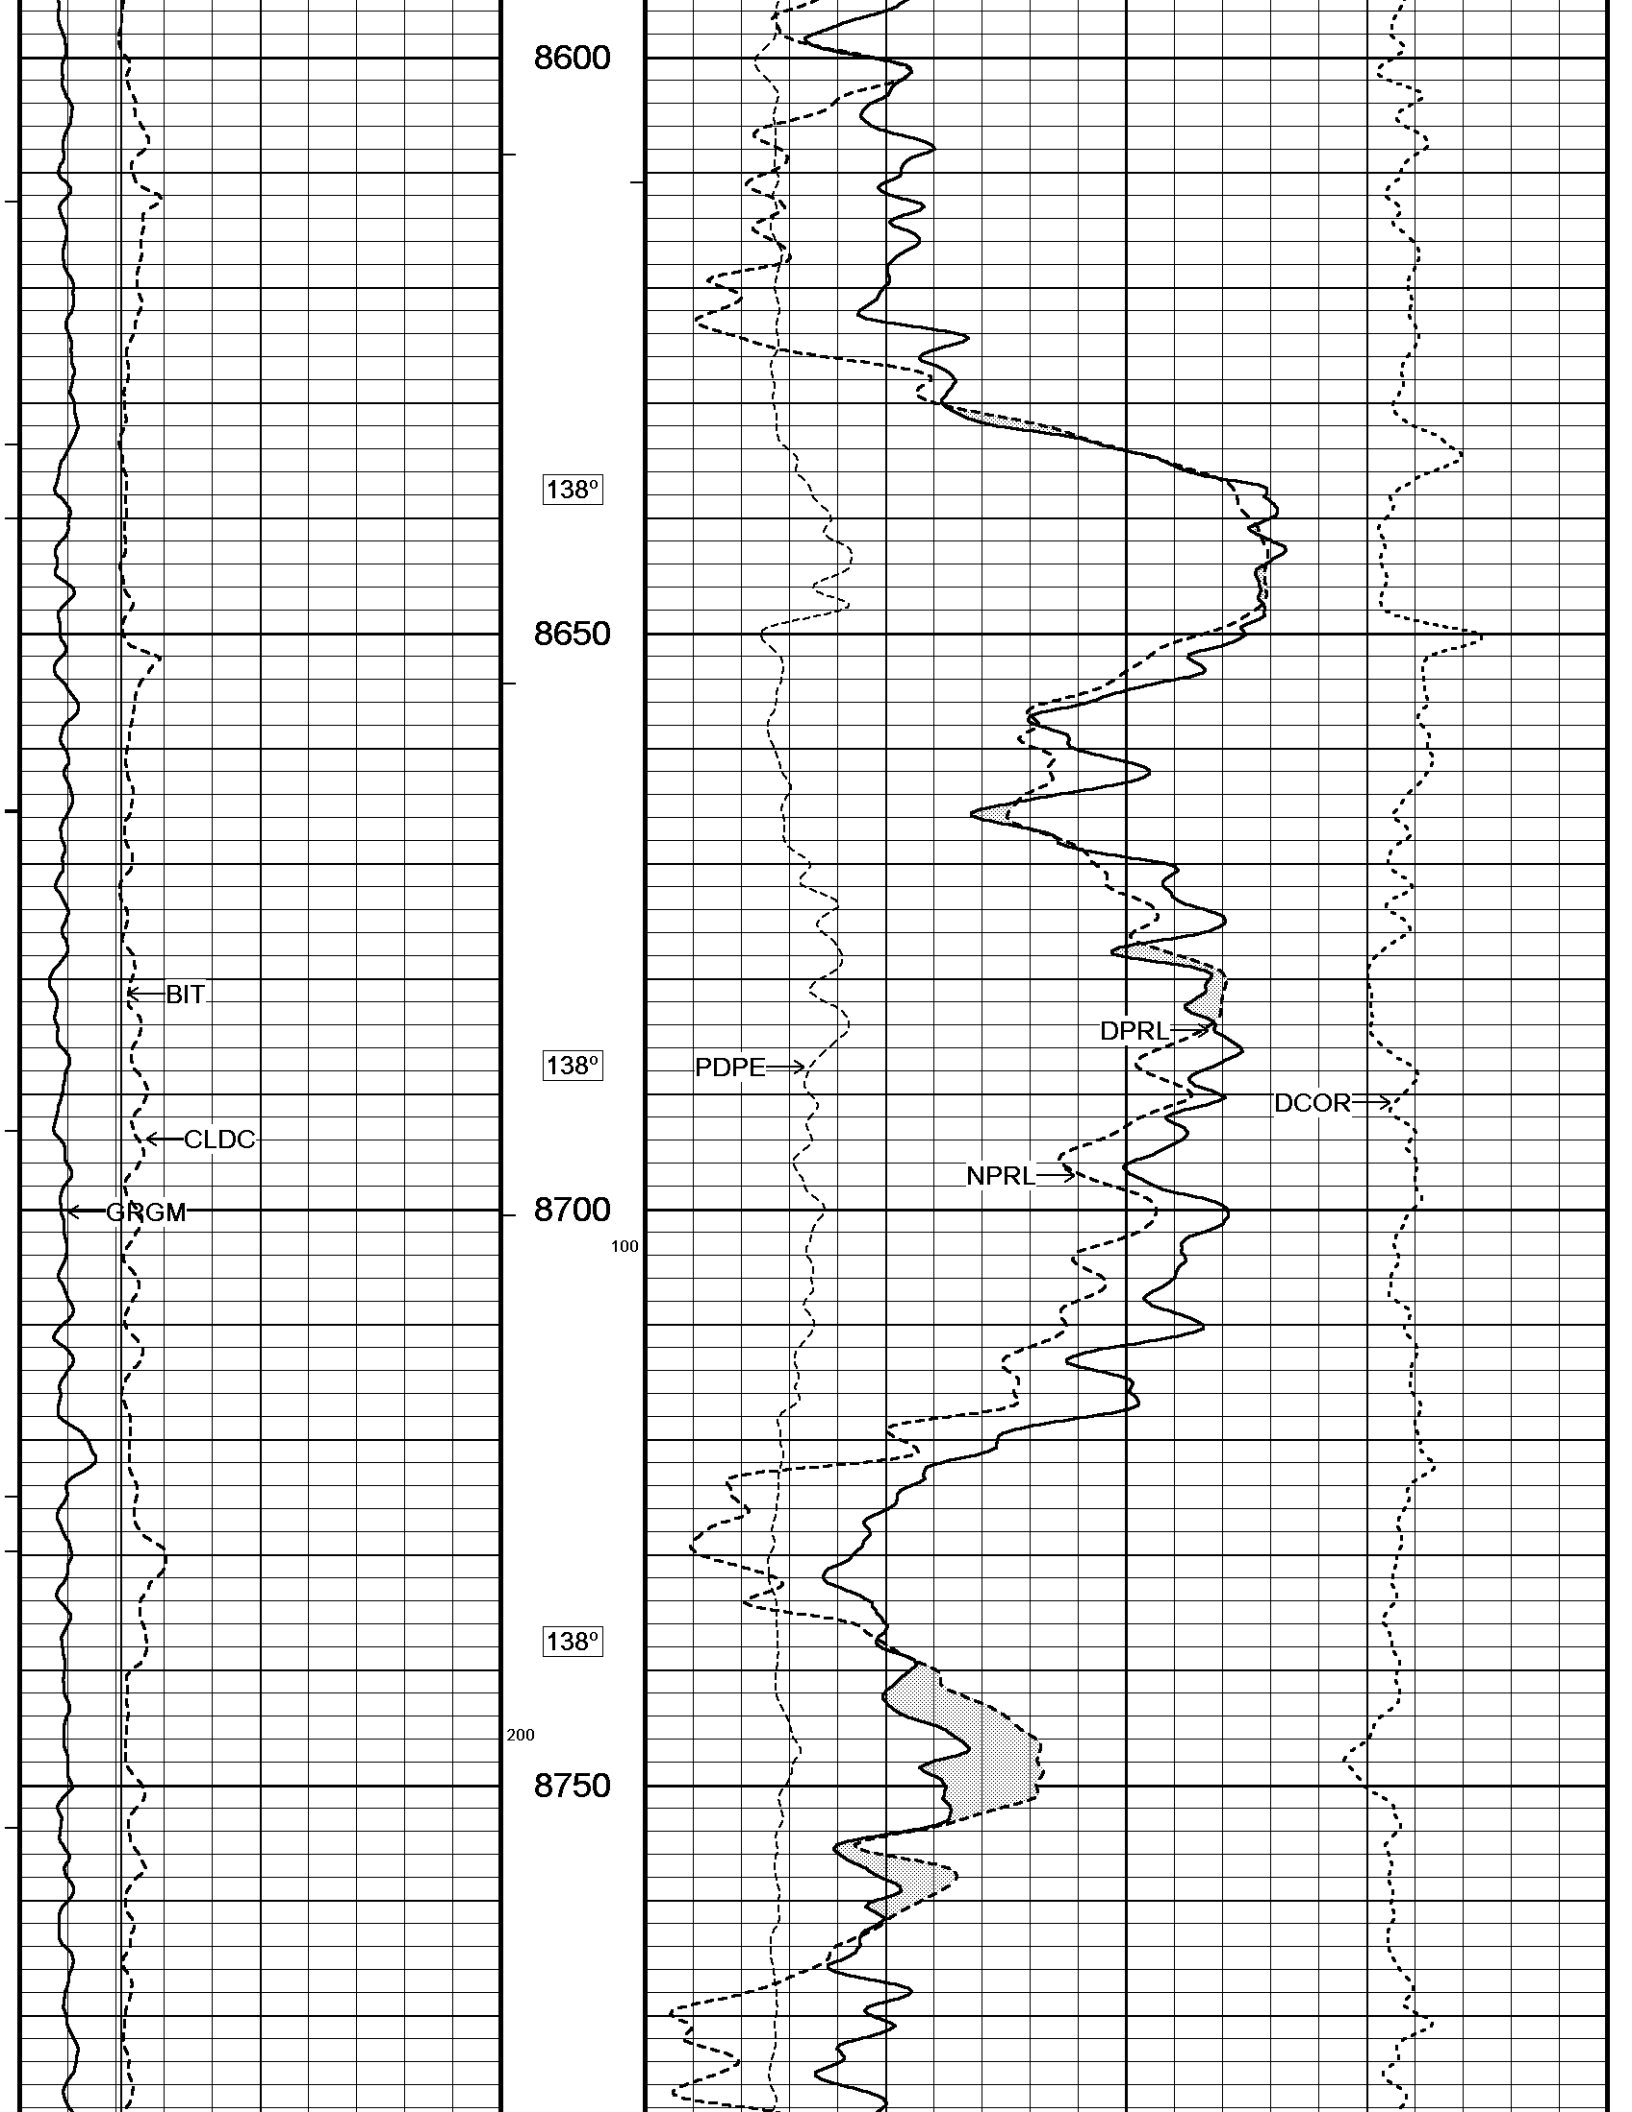

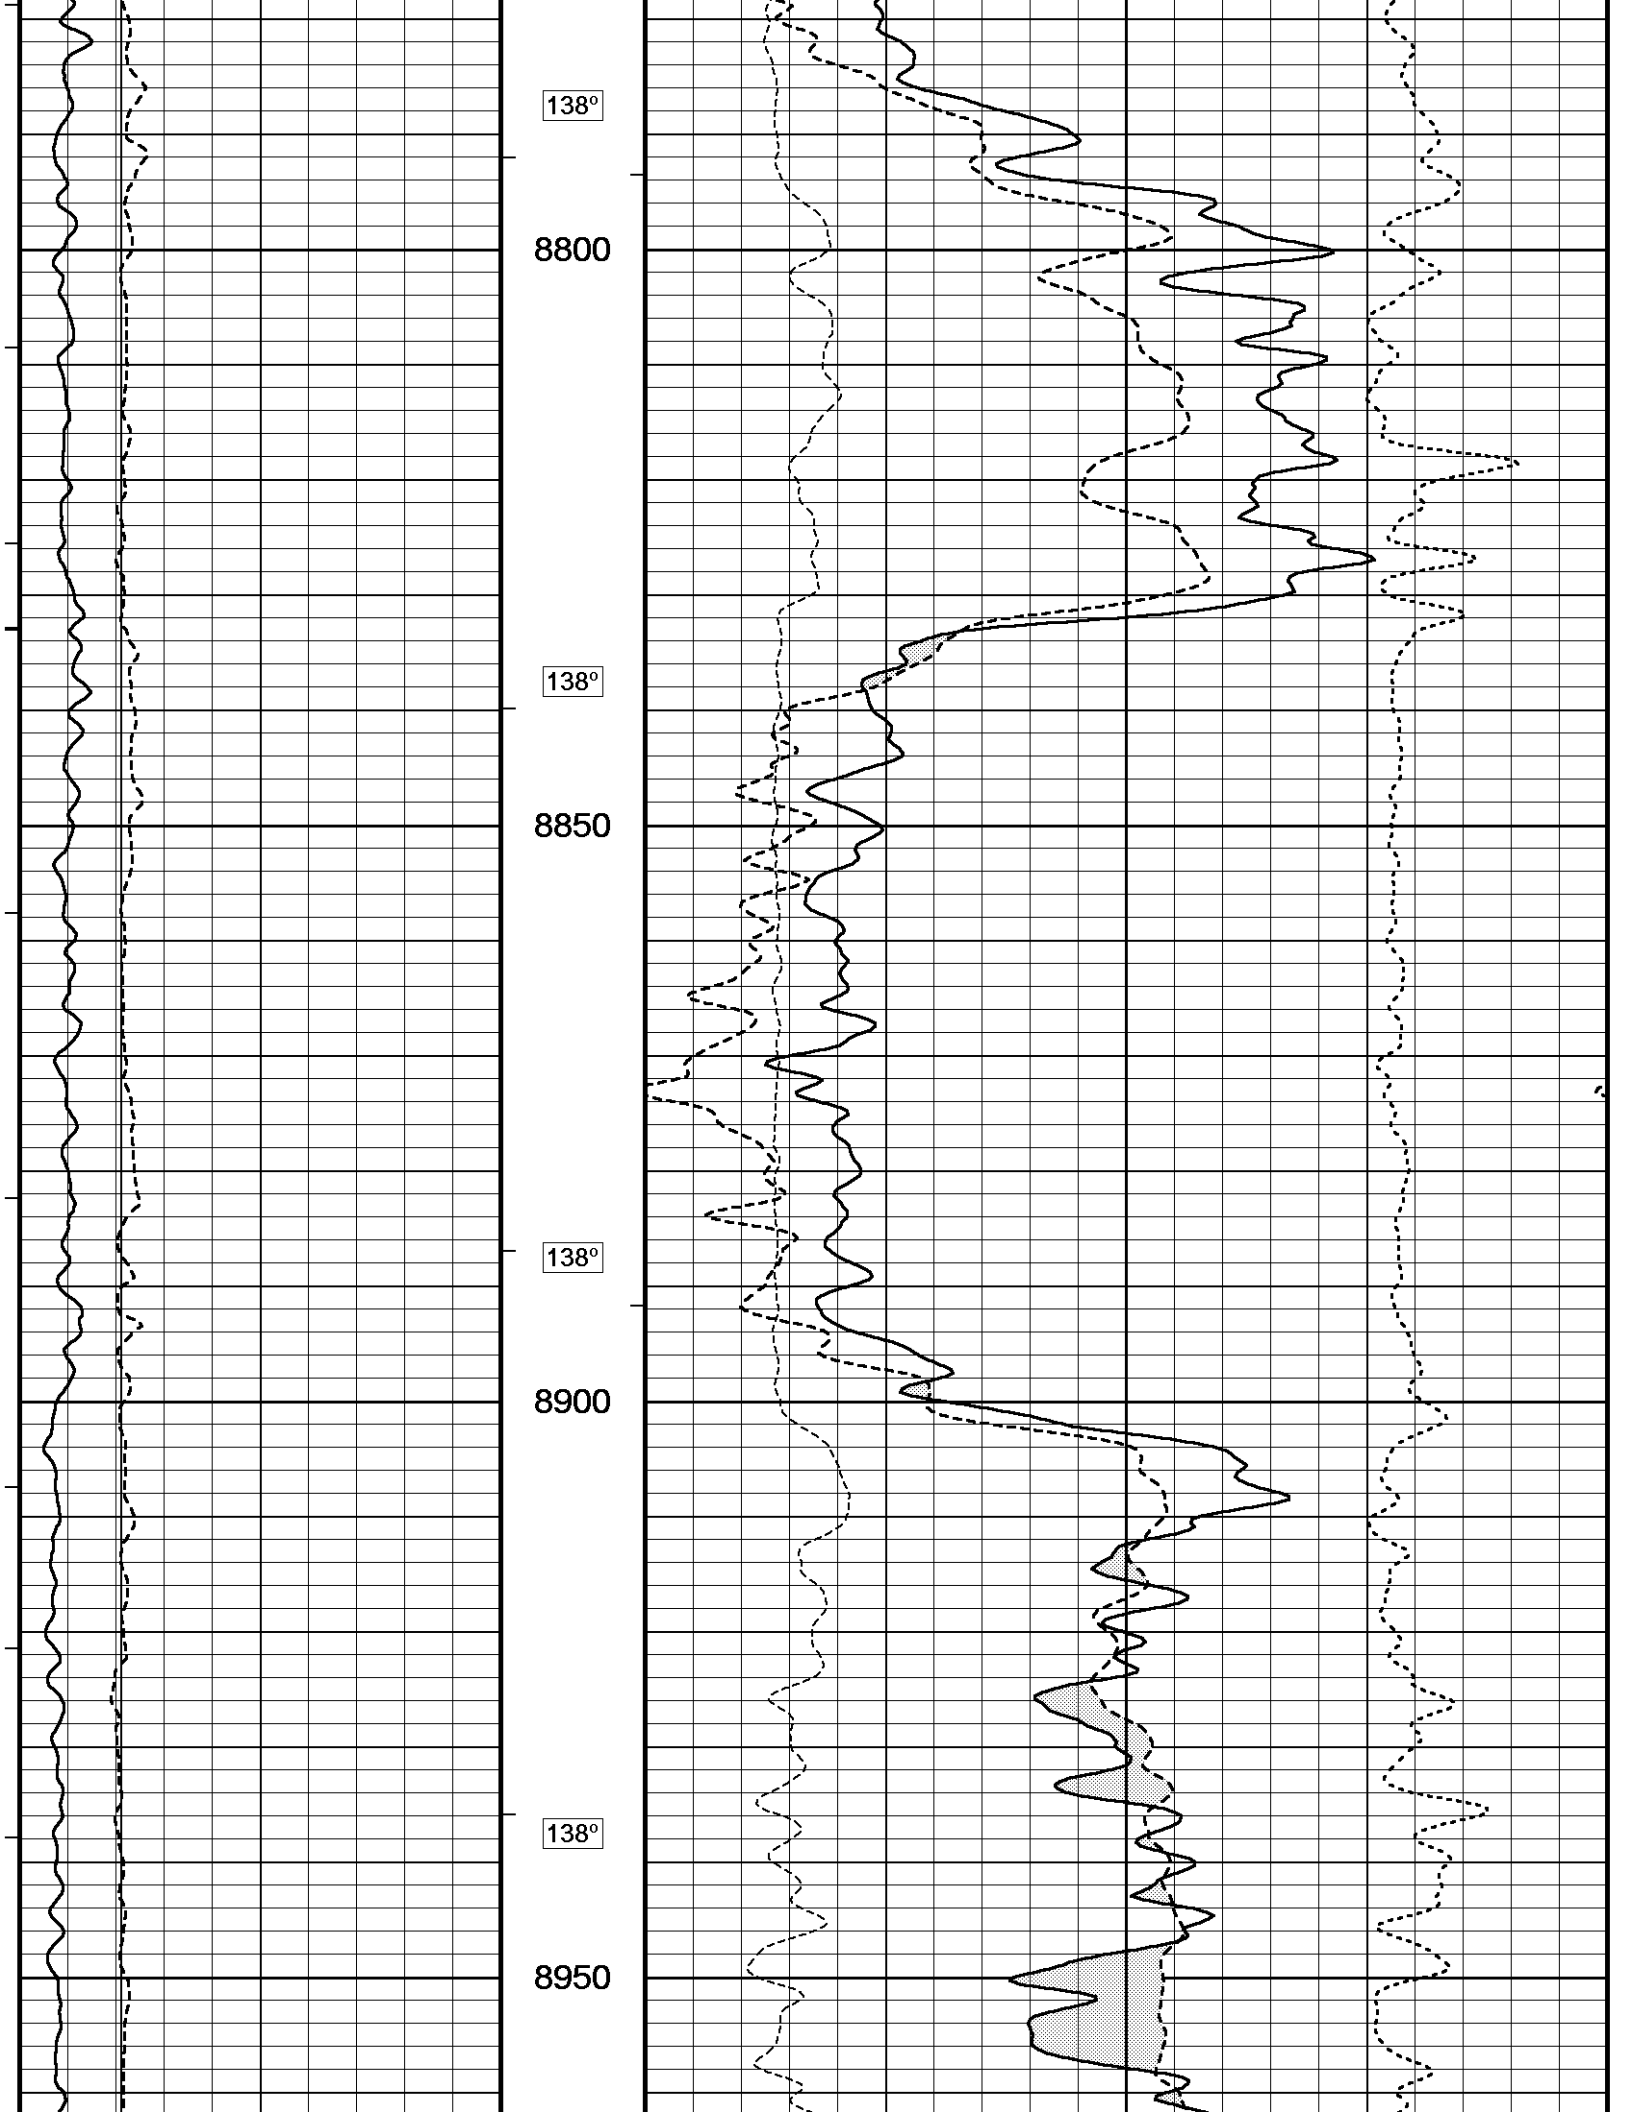

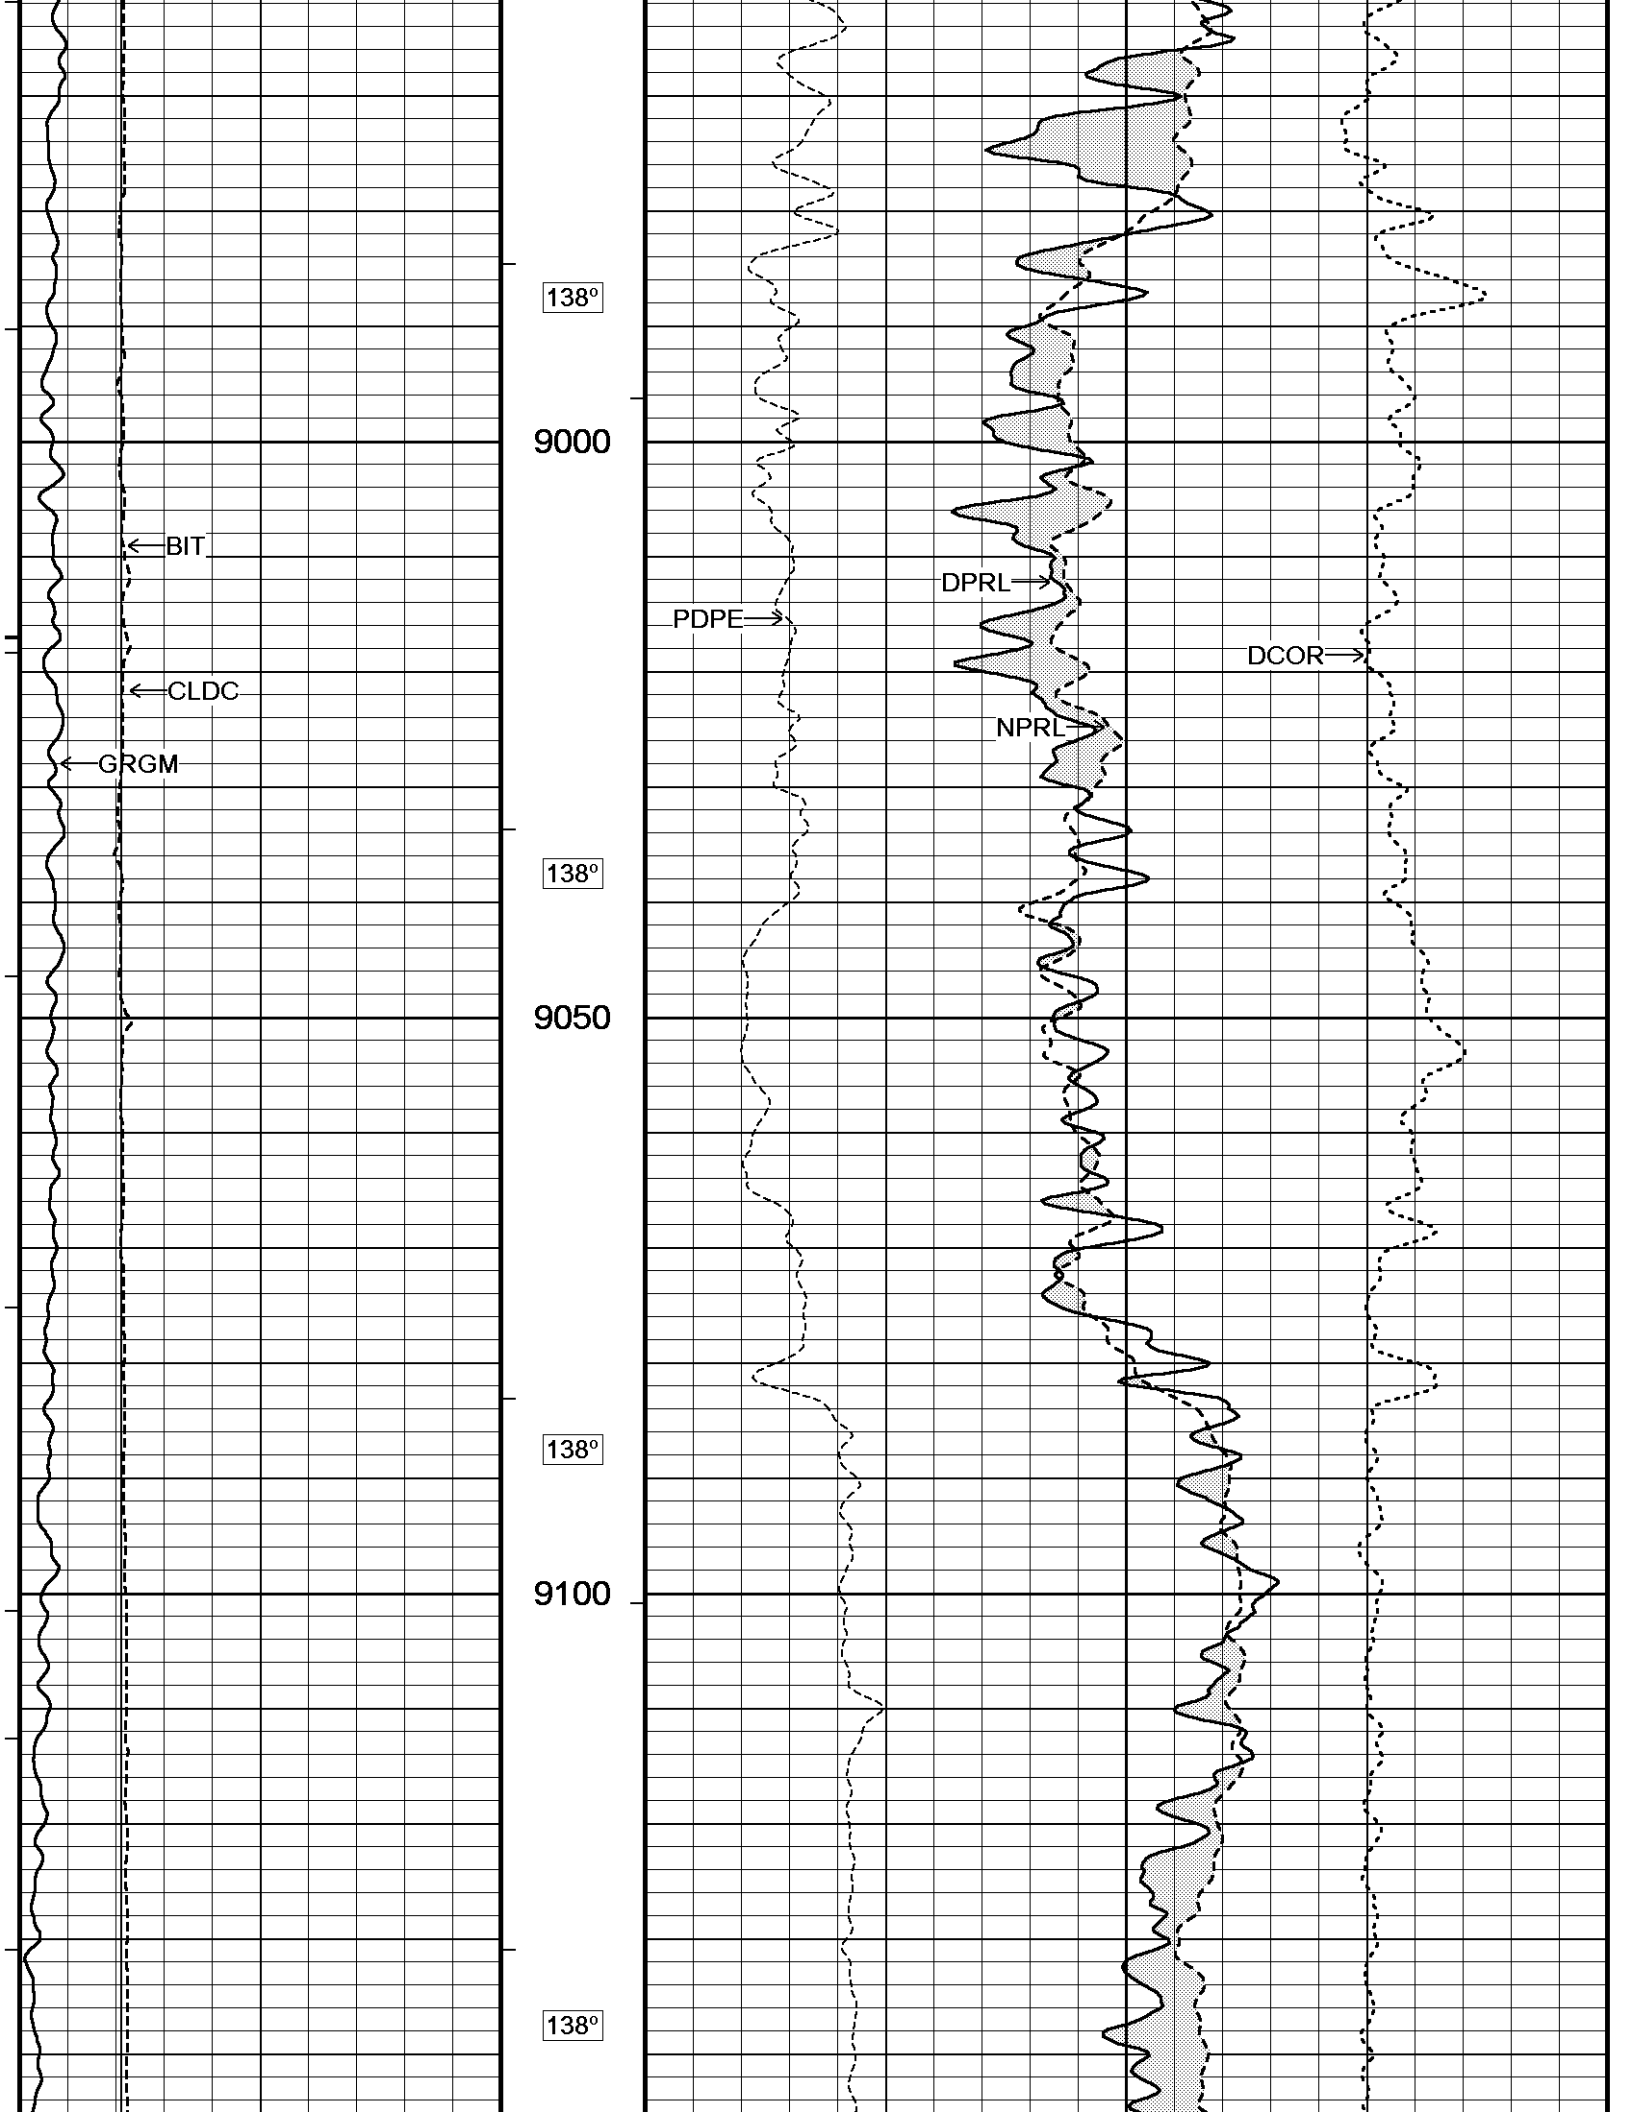

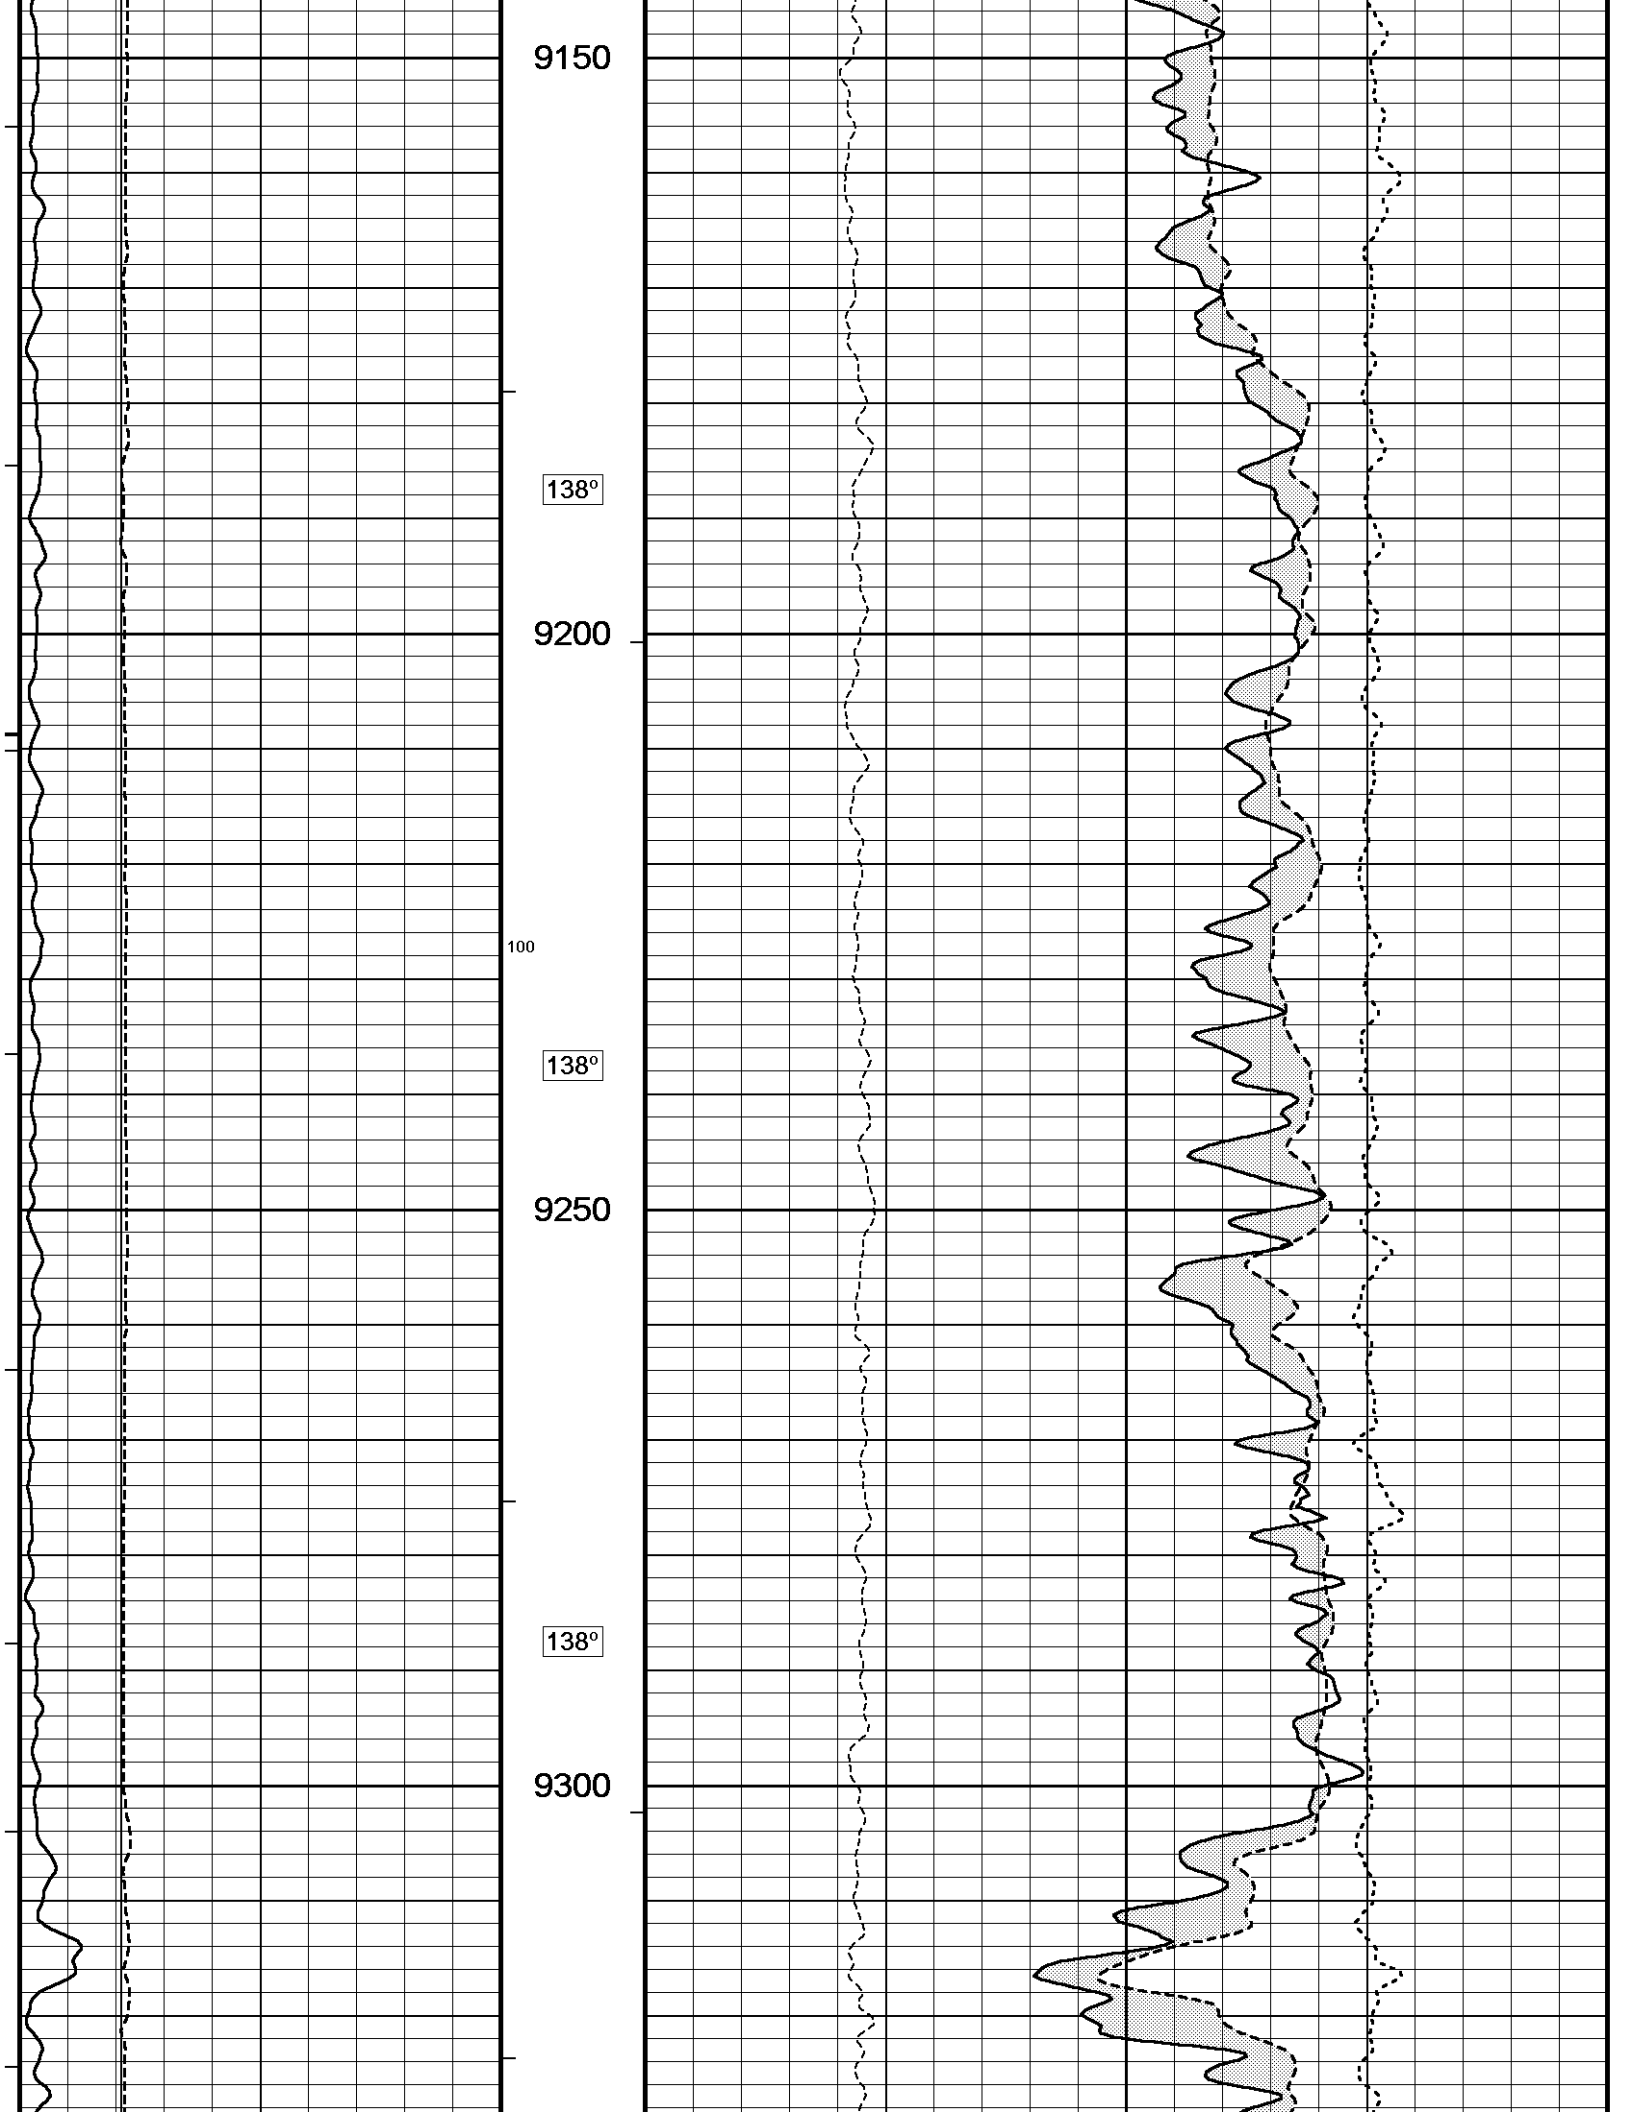

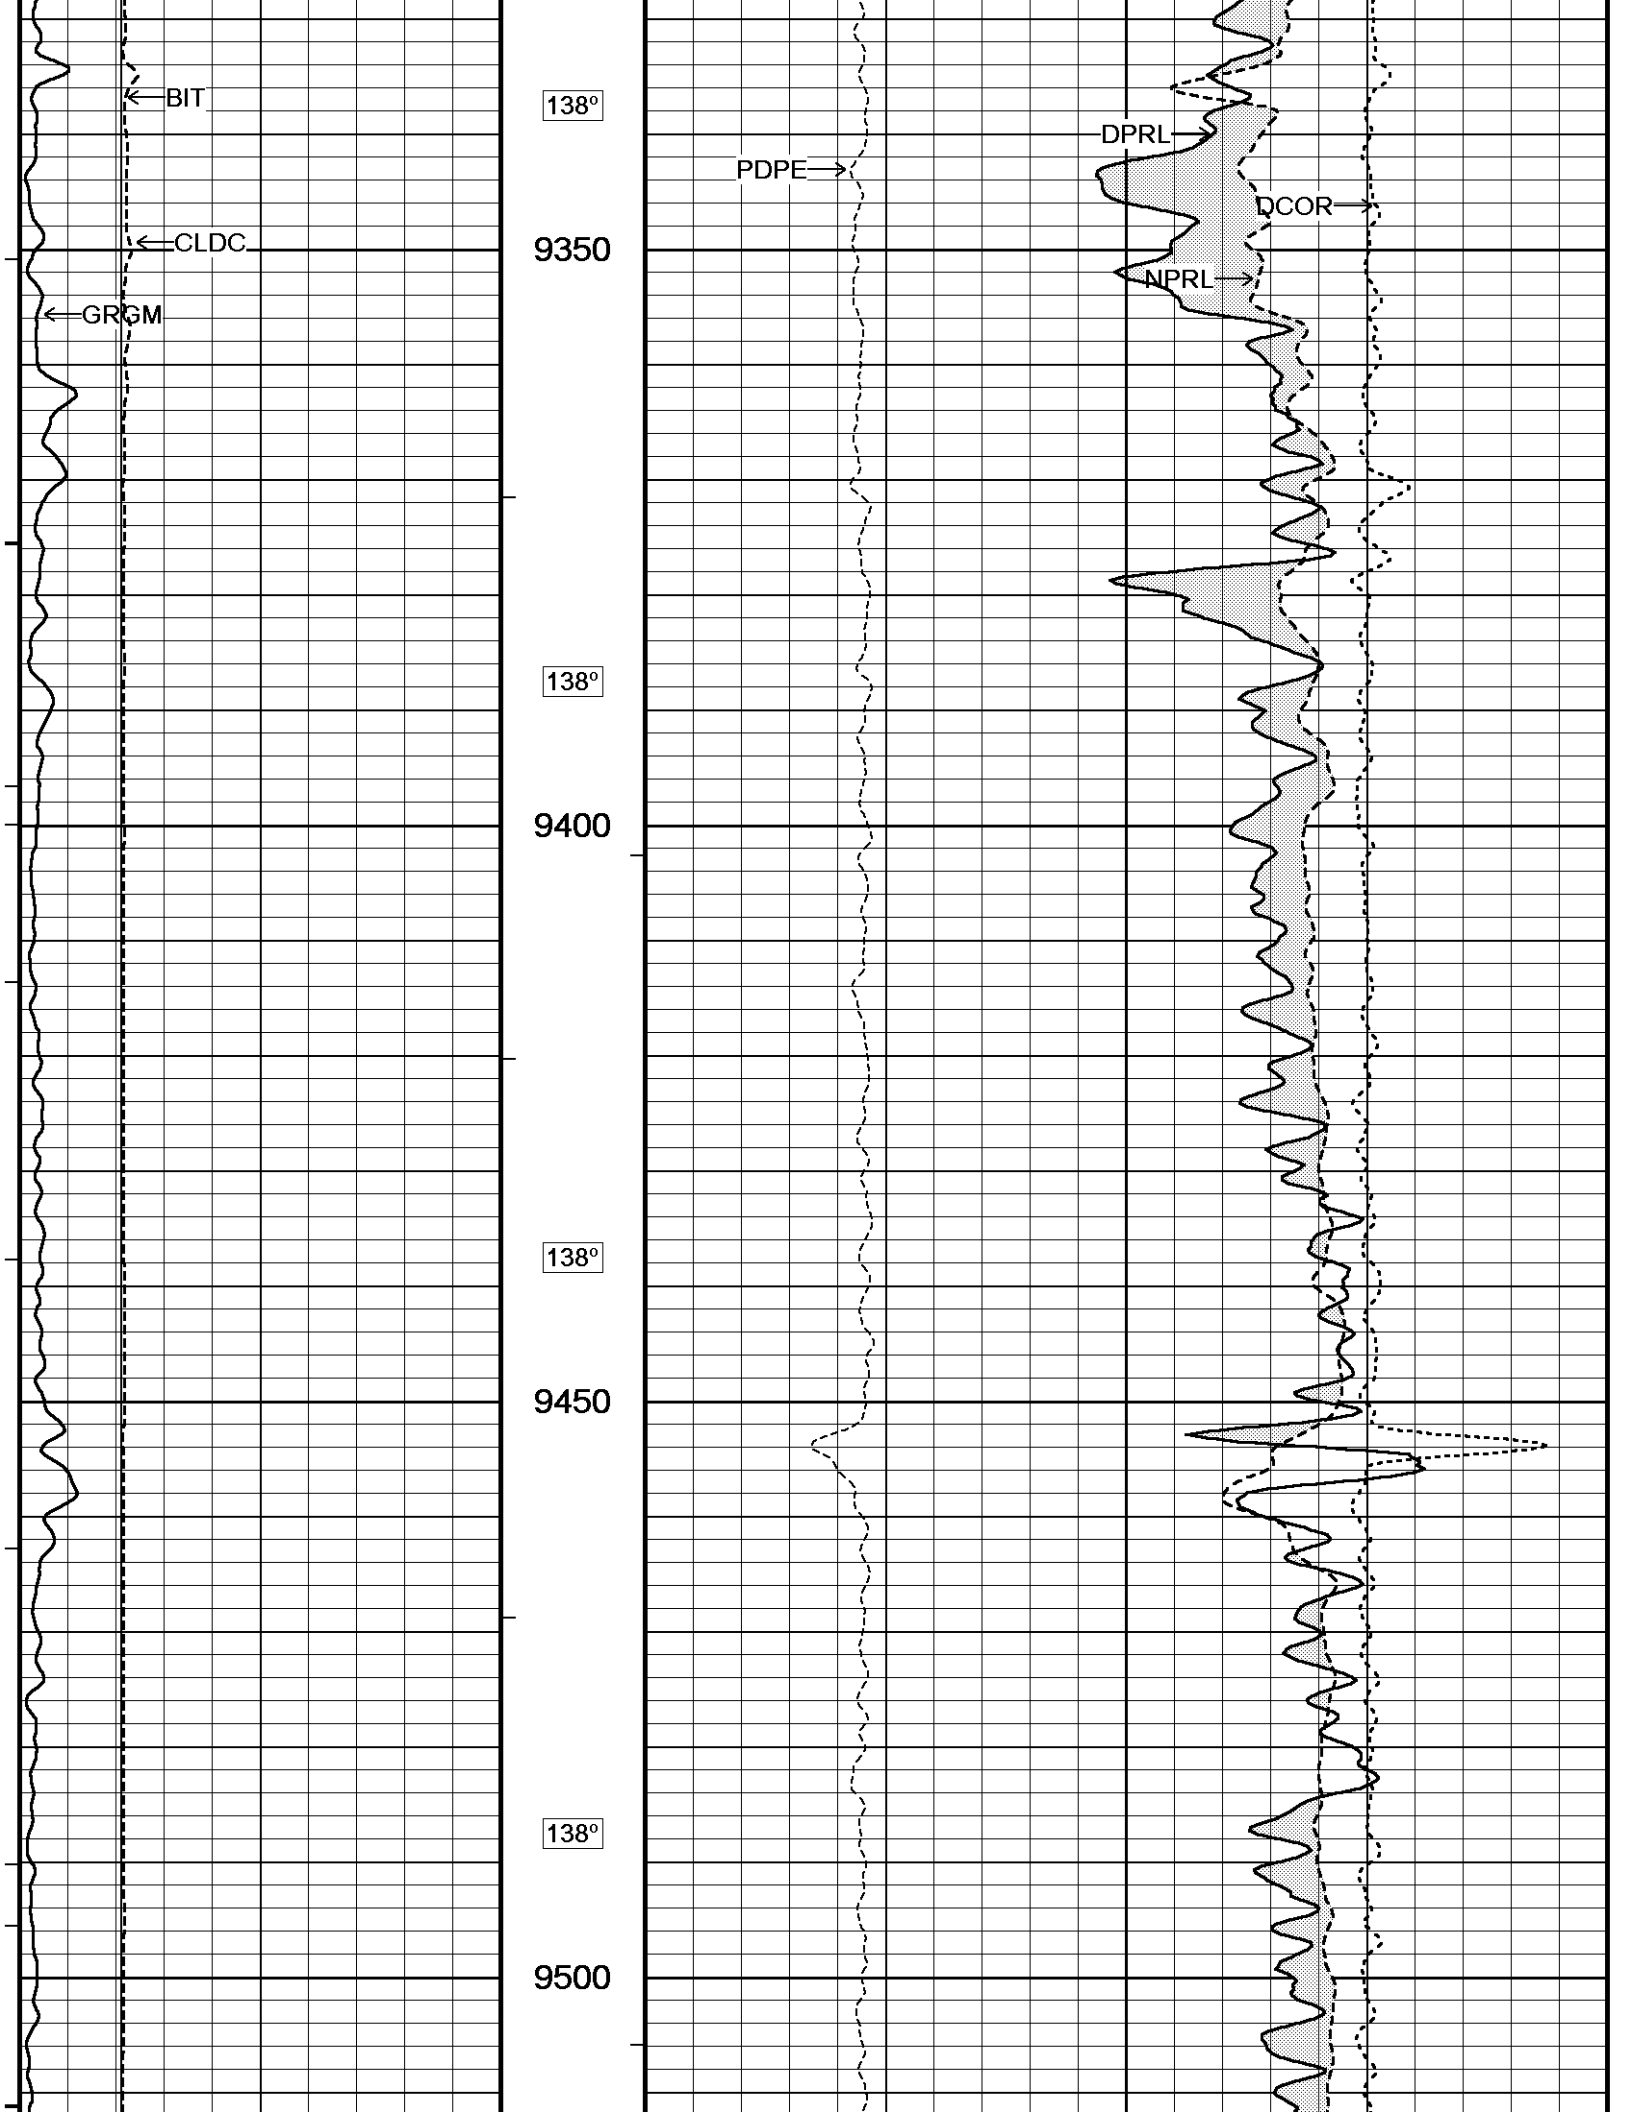

138°

9350

138°

9400

138°

9450

138°

9500

← BIT

← CLDC


← GRGM


PDPE →

DPRL

DCOR

NPRL →

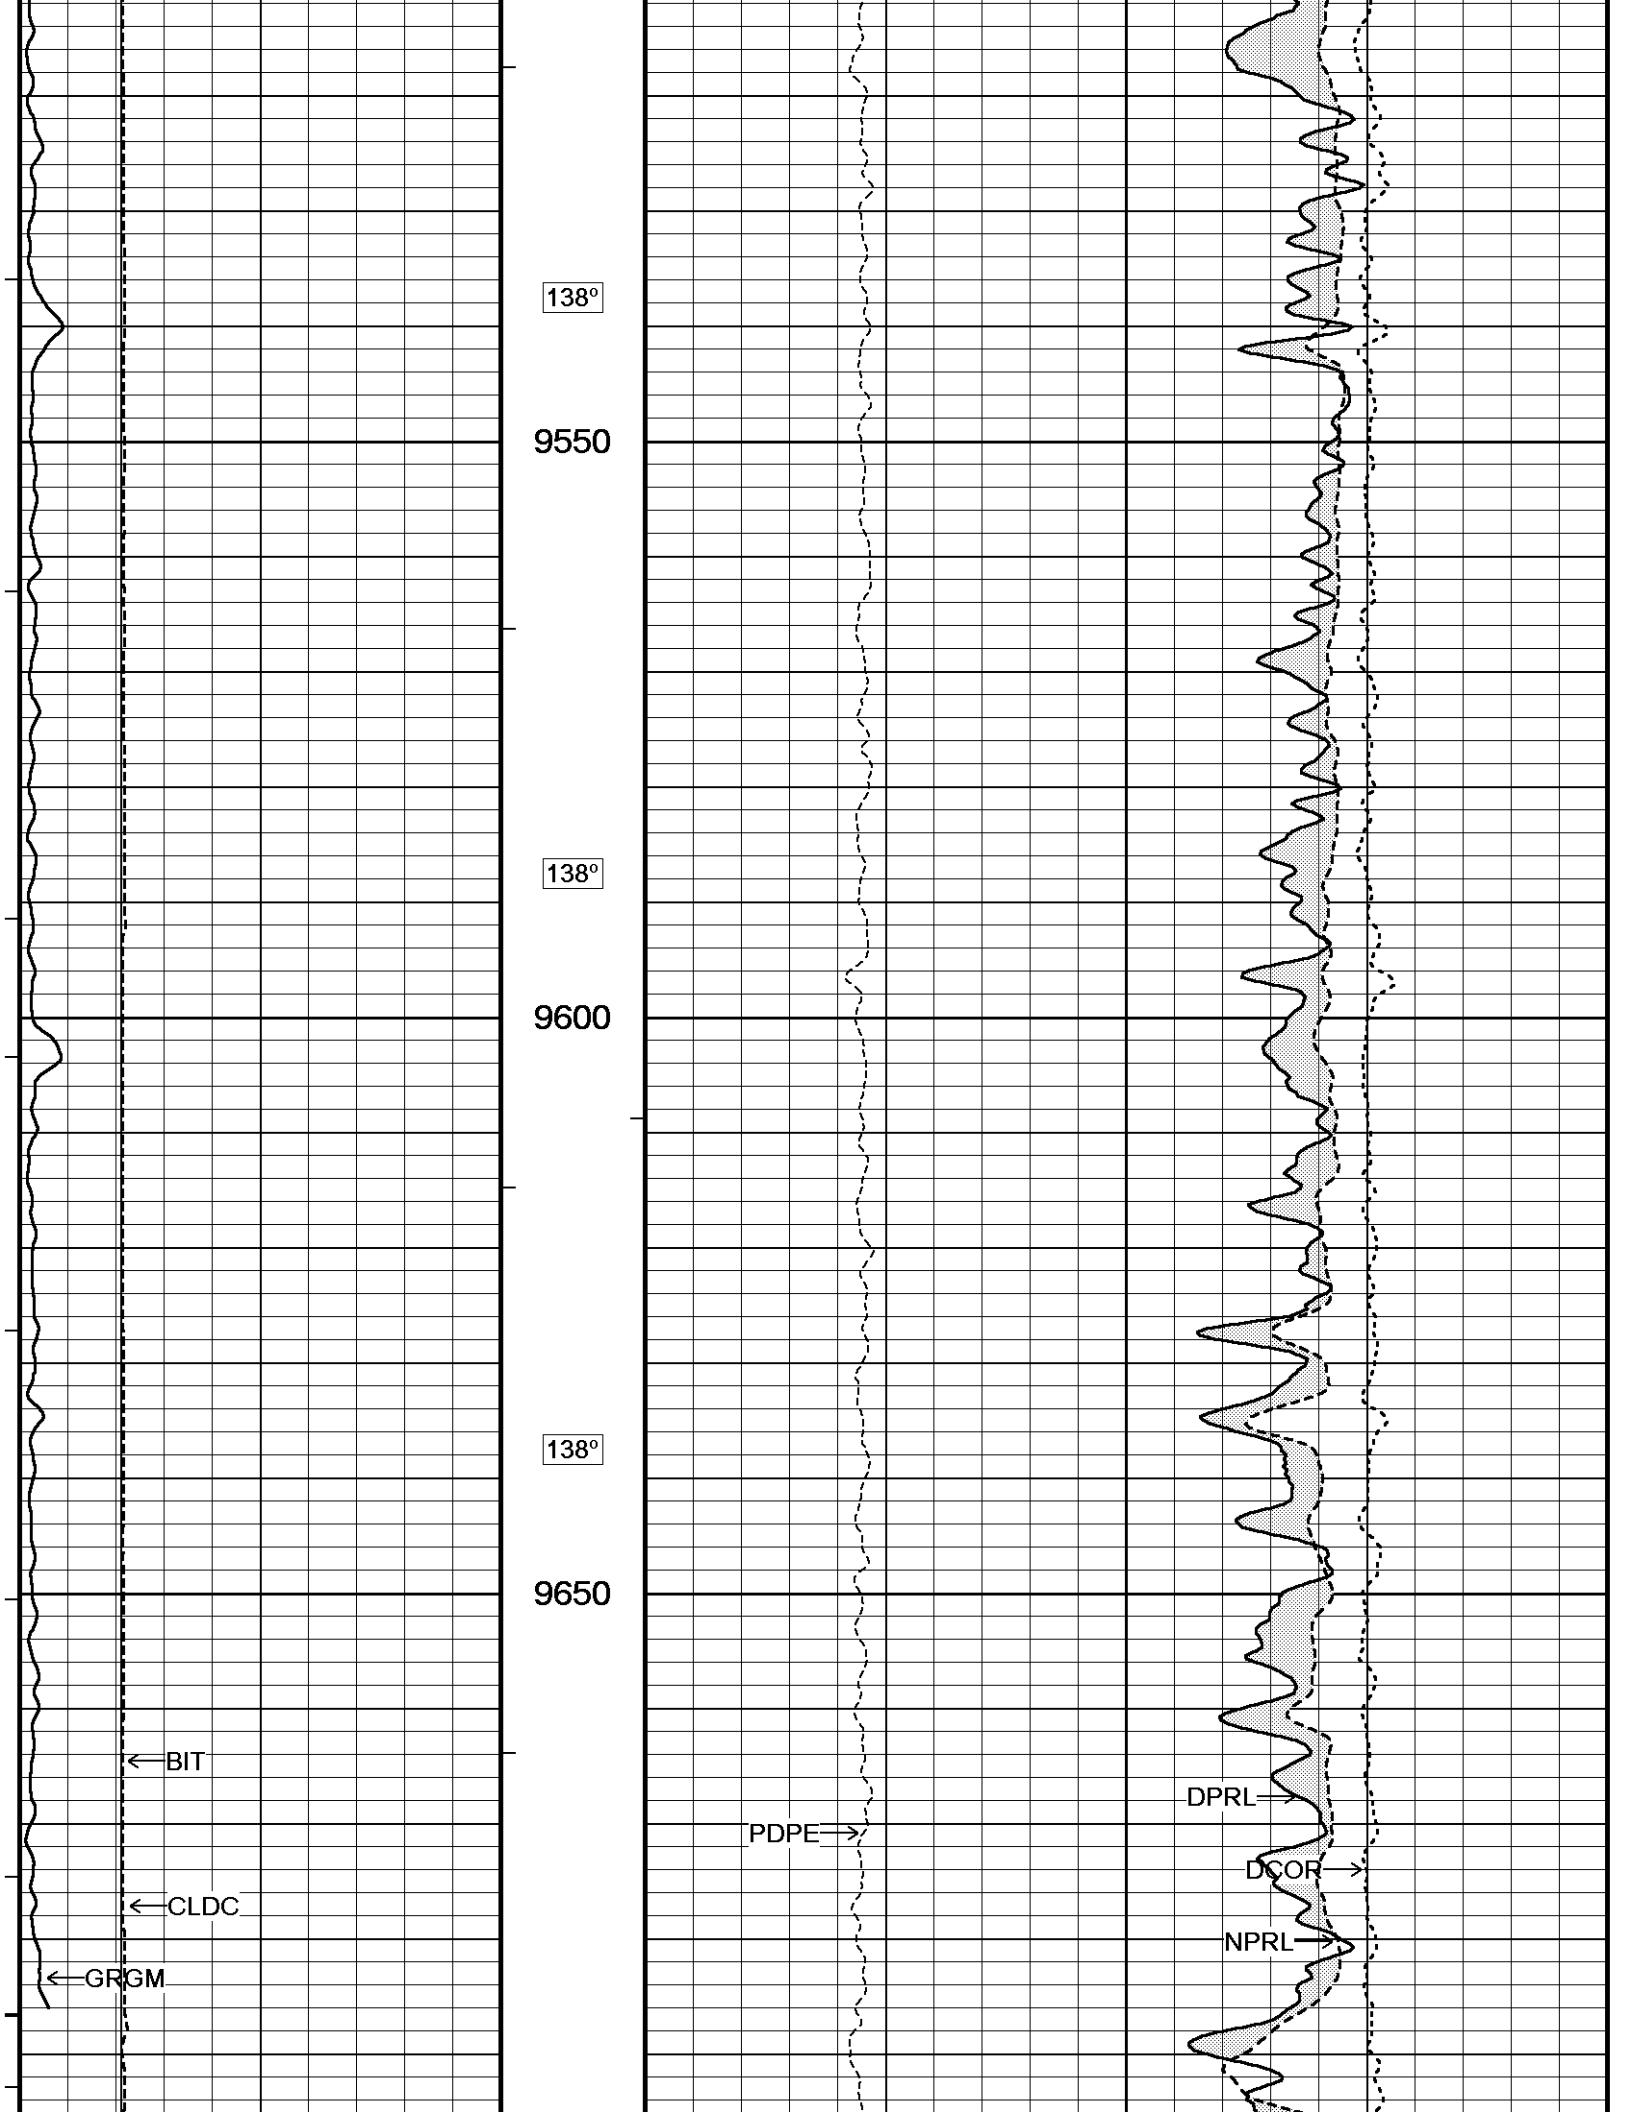

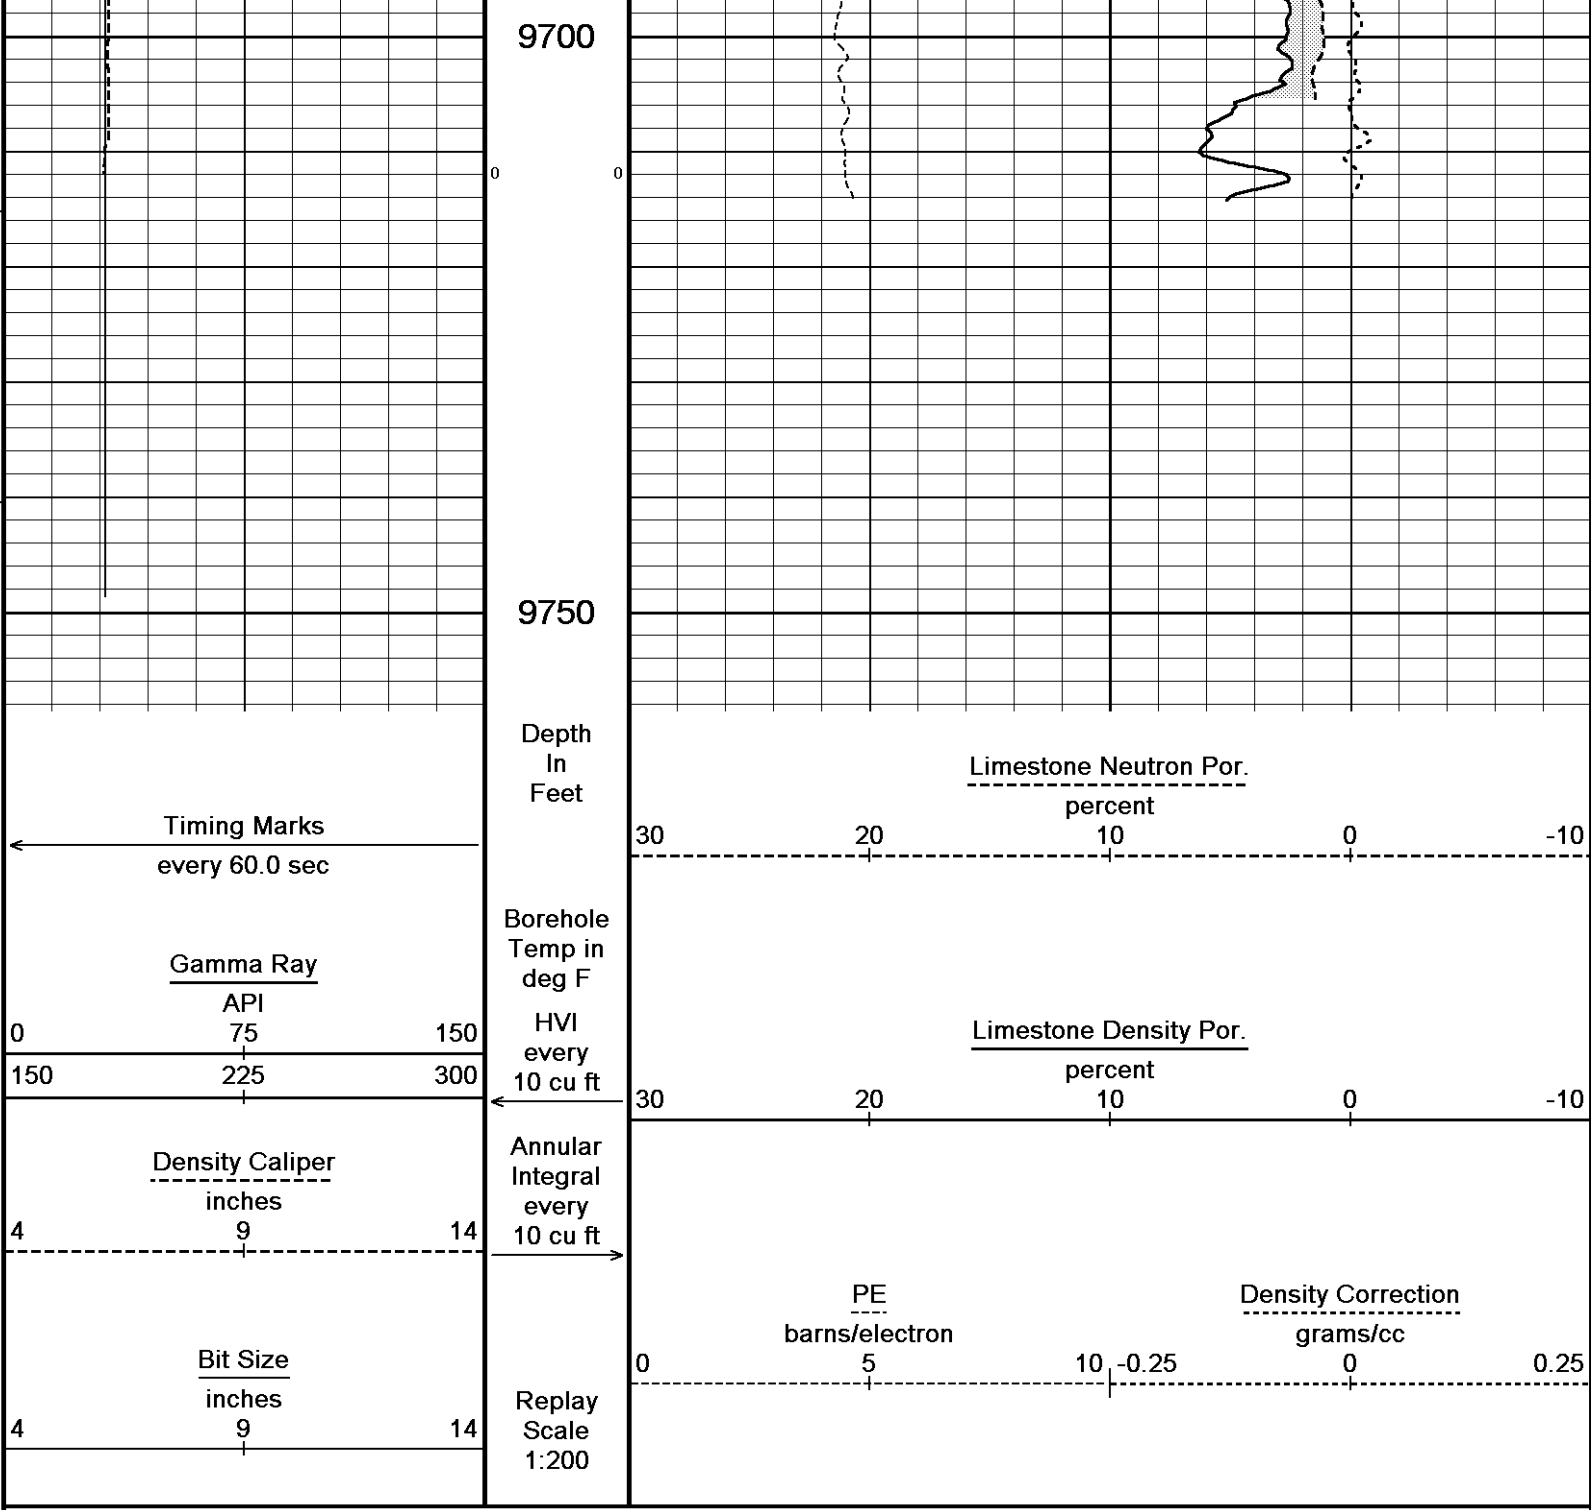


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 24-AUG-2012 01:39  
 Filename: C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta Recorded on 24-AUG-2012 00:00  
 System Versions: Processed with 13.02.6600 Plotted with 13.02.6600

5 INCH MAIN LOG

5 INCH MAIN LOG

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 24-AUG-2012 01:39  
 Filename: C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta Recorded on 24-AUG-2012 00:00  
 System Versions: Processed with 13.02.6600 Plotted with 13.02.6600

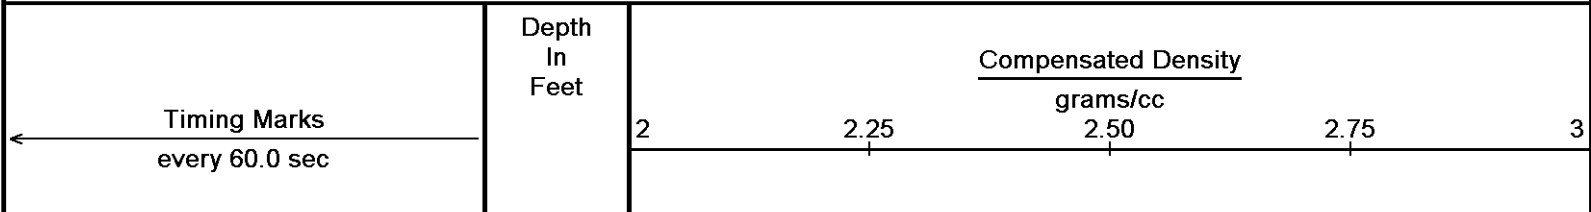

Gamma Ray  
API

0                      150

---

75

150                      300

---

225

Density Caliper  
inches

4                      14

---

9

4                      14

---

Bit Size  
inches

9

HVI  
every  
10 cu ft

---

Annular  
Integral  
every  
10 cu ft

---

Replay  
Scale  
1:240

Limestone Density Por.  
percent

30                      20                      10                      0                      -10

---

70                      60                      50                      40                      30

---


PE  
barns/electron


0                      5                      10

---

Density Correction  
grams/cc

-0.25                      0                      0.25

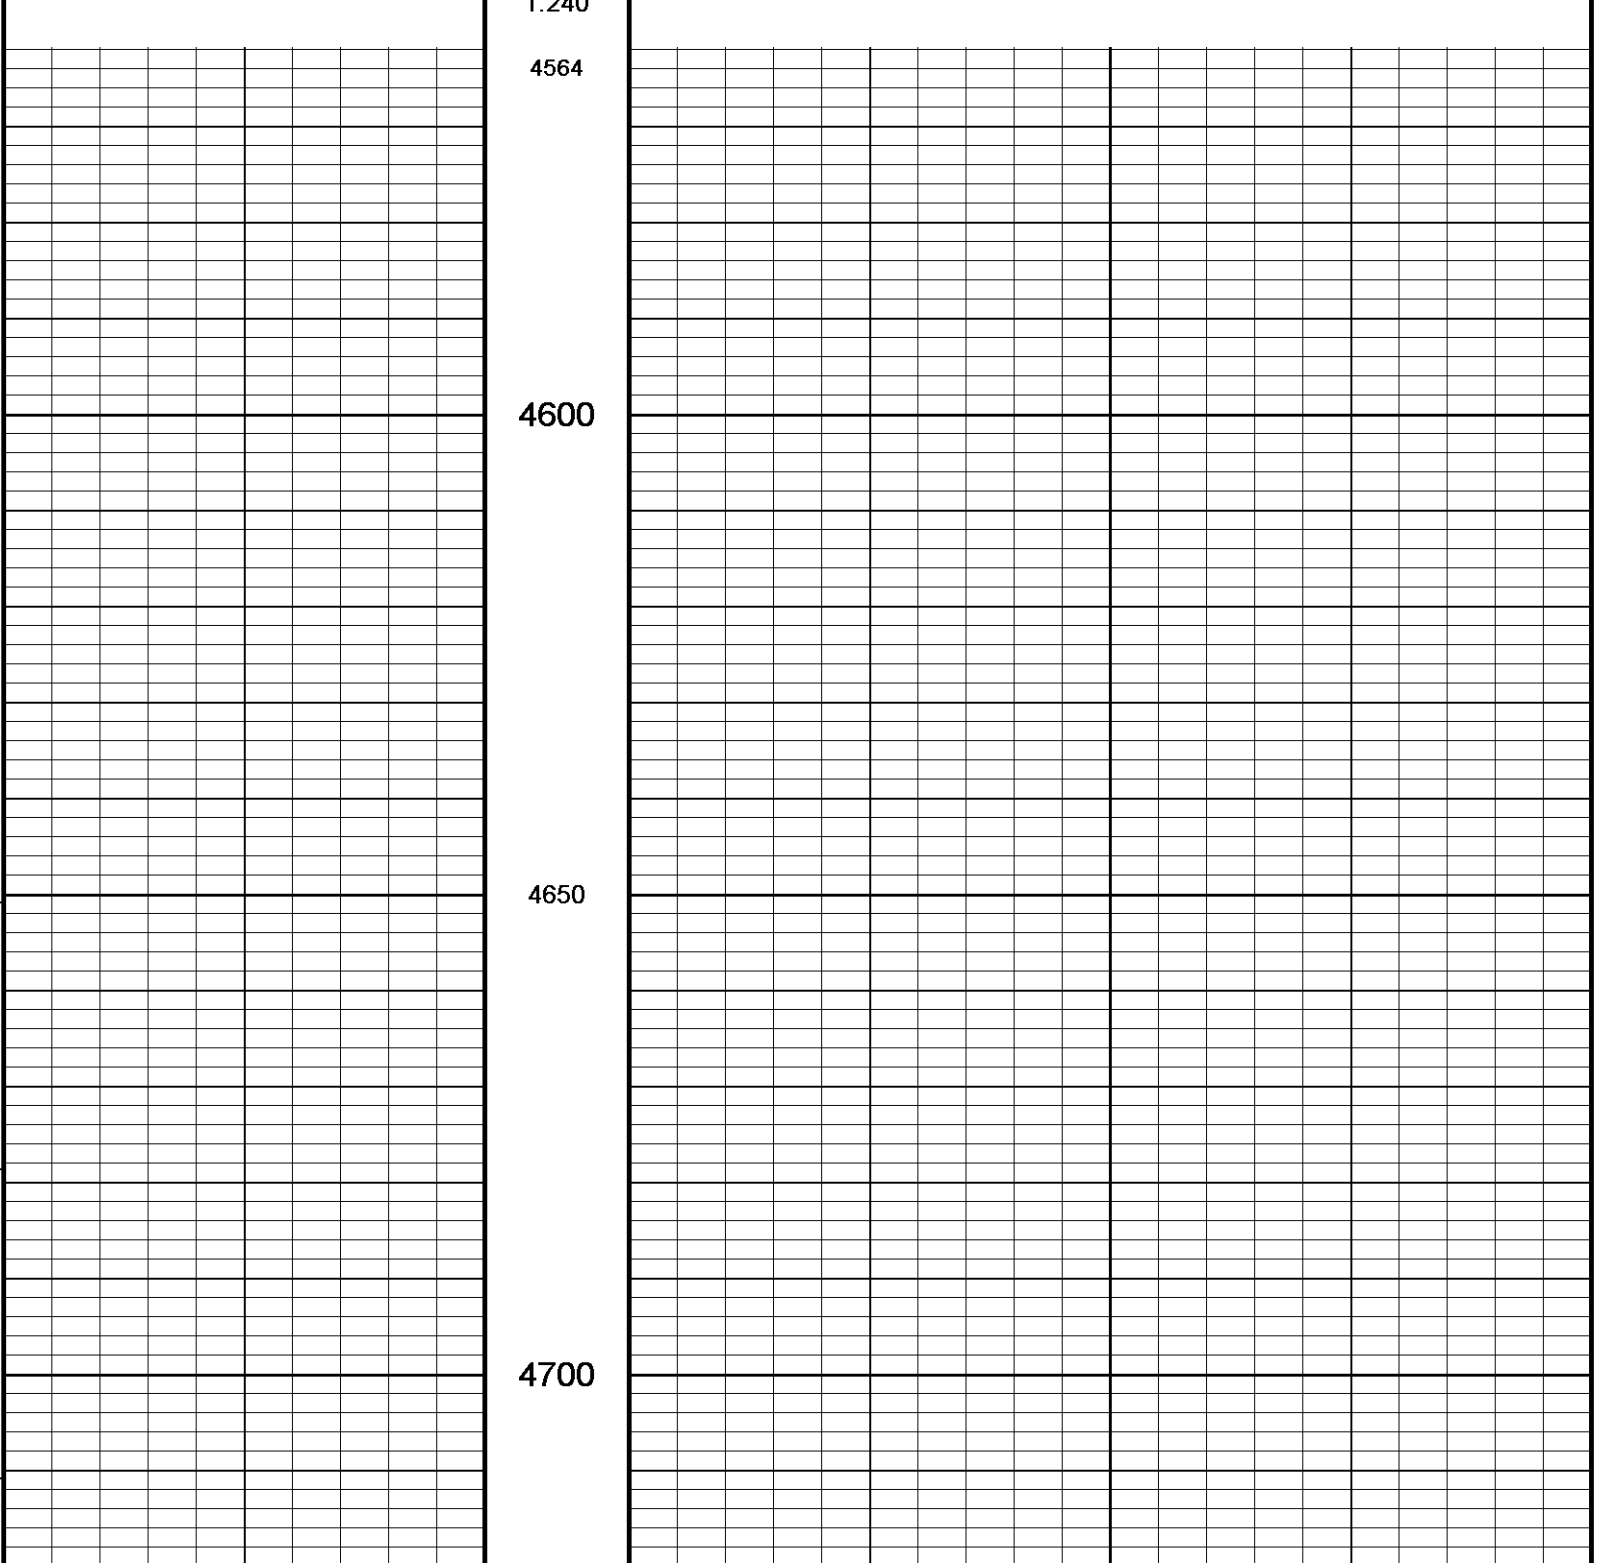

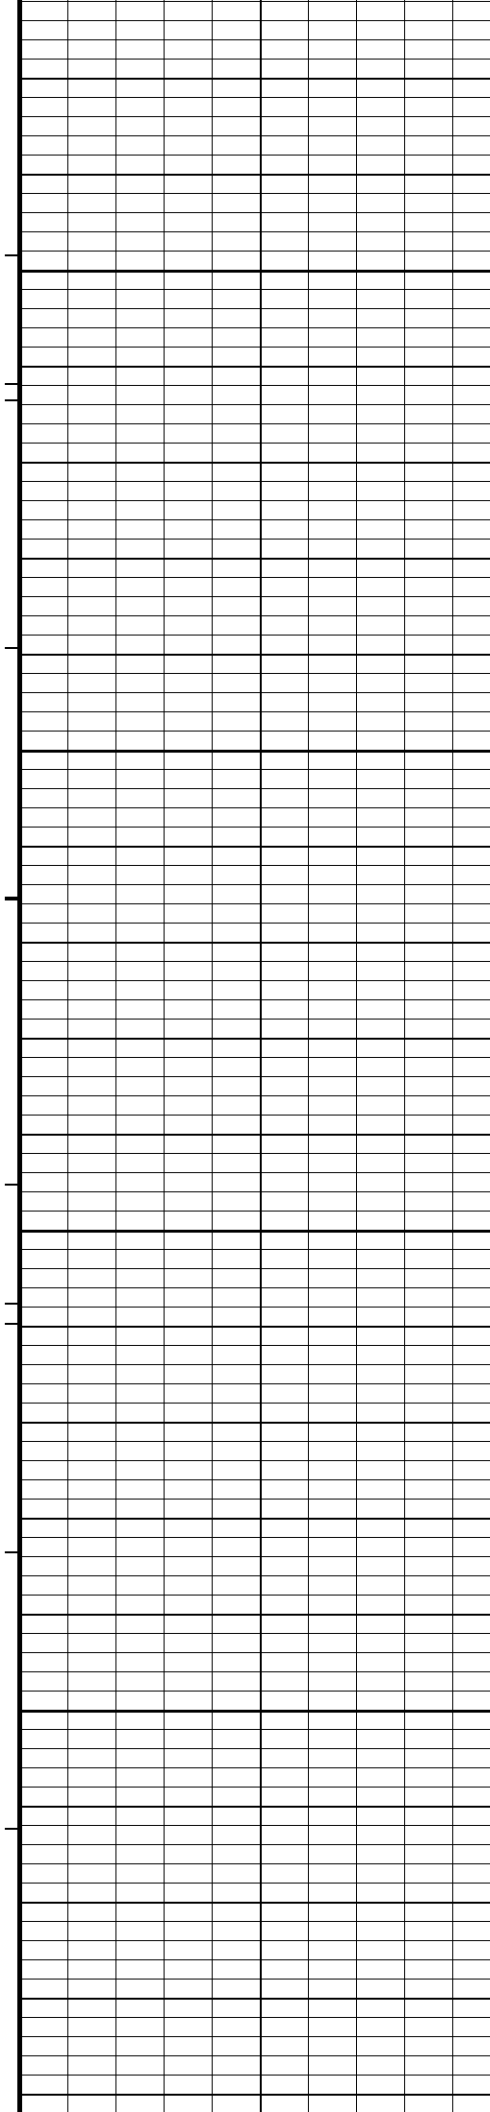


4750

4800

4850

4900

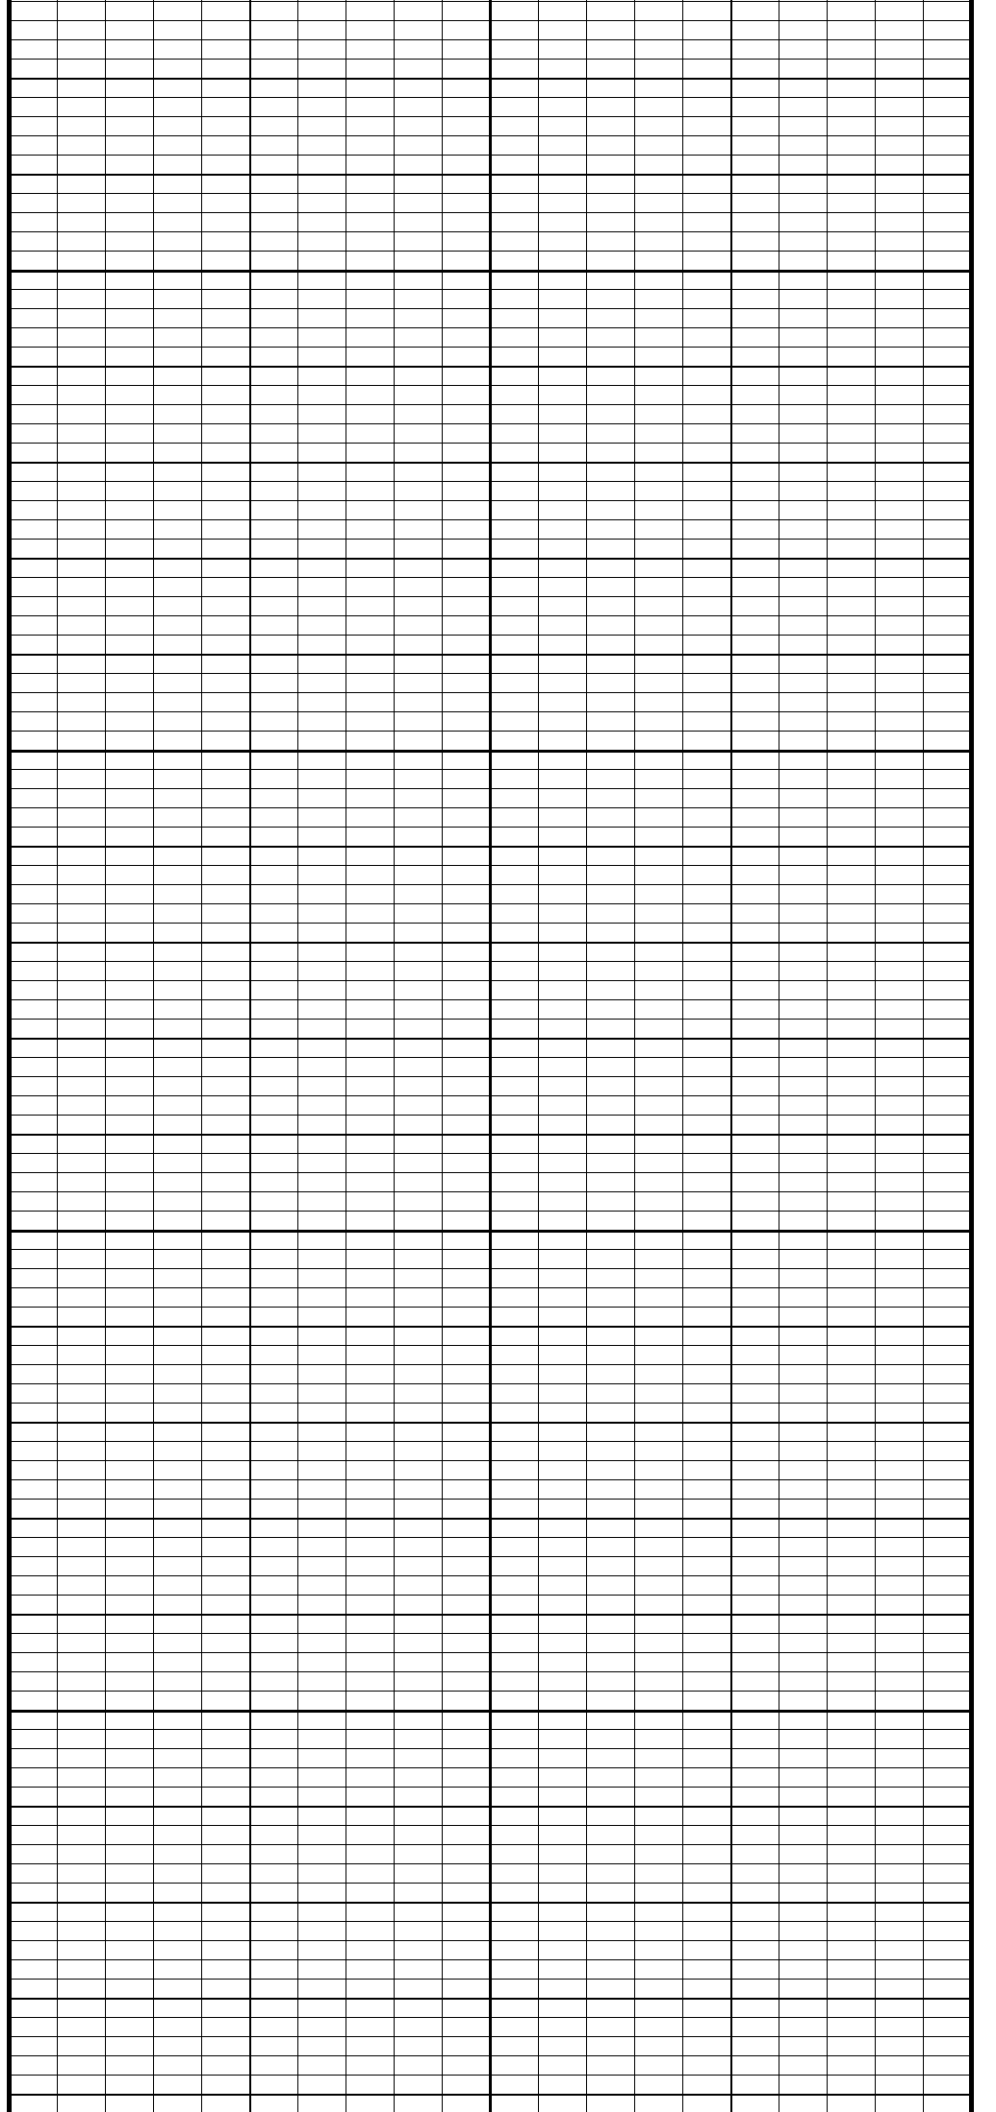


4950

5000

5050

5100

5150

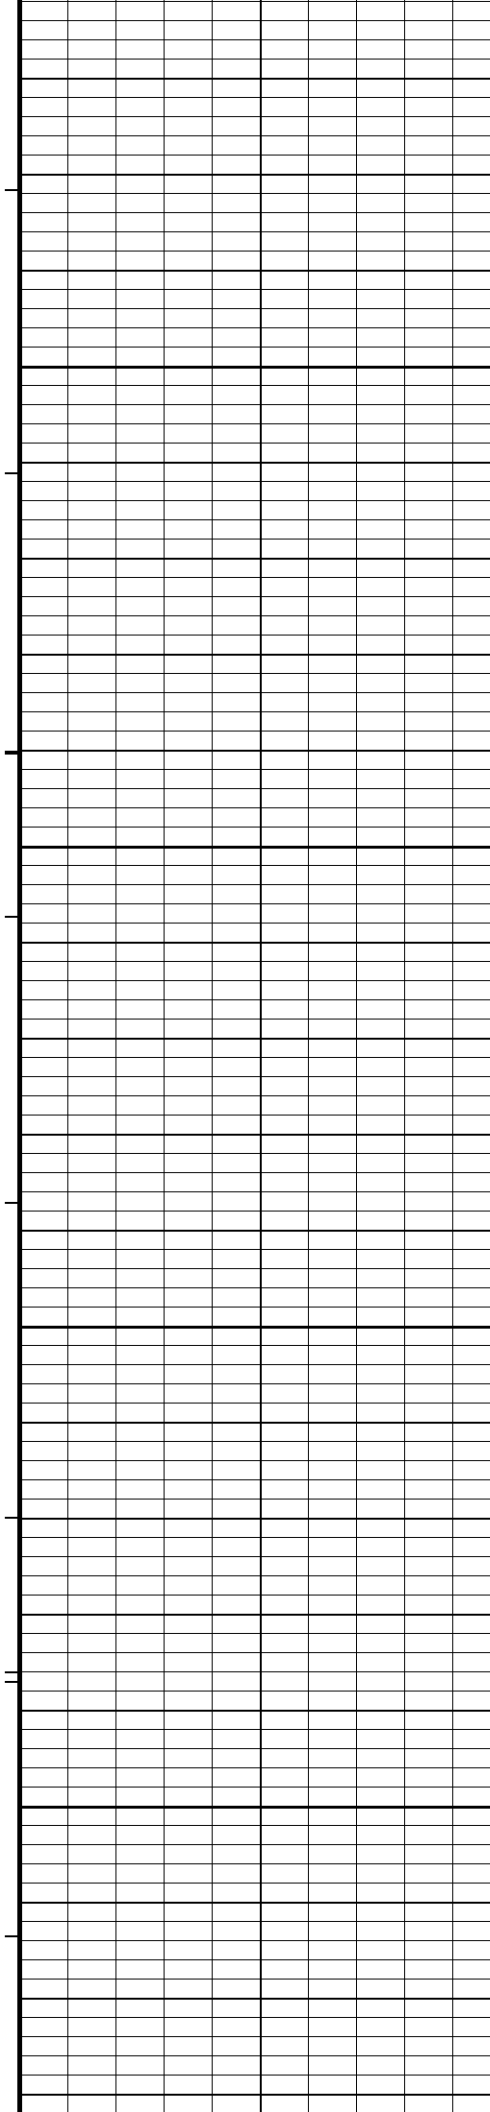



5200


5250


5300


5350

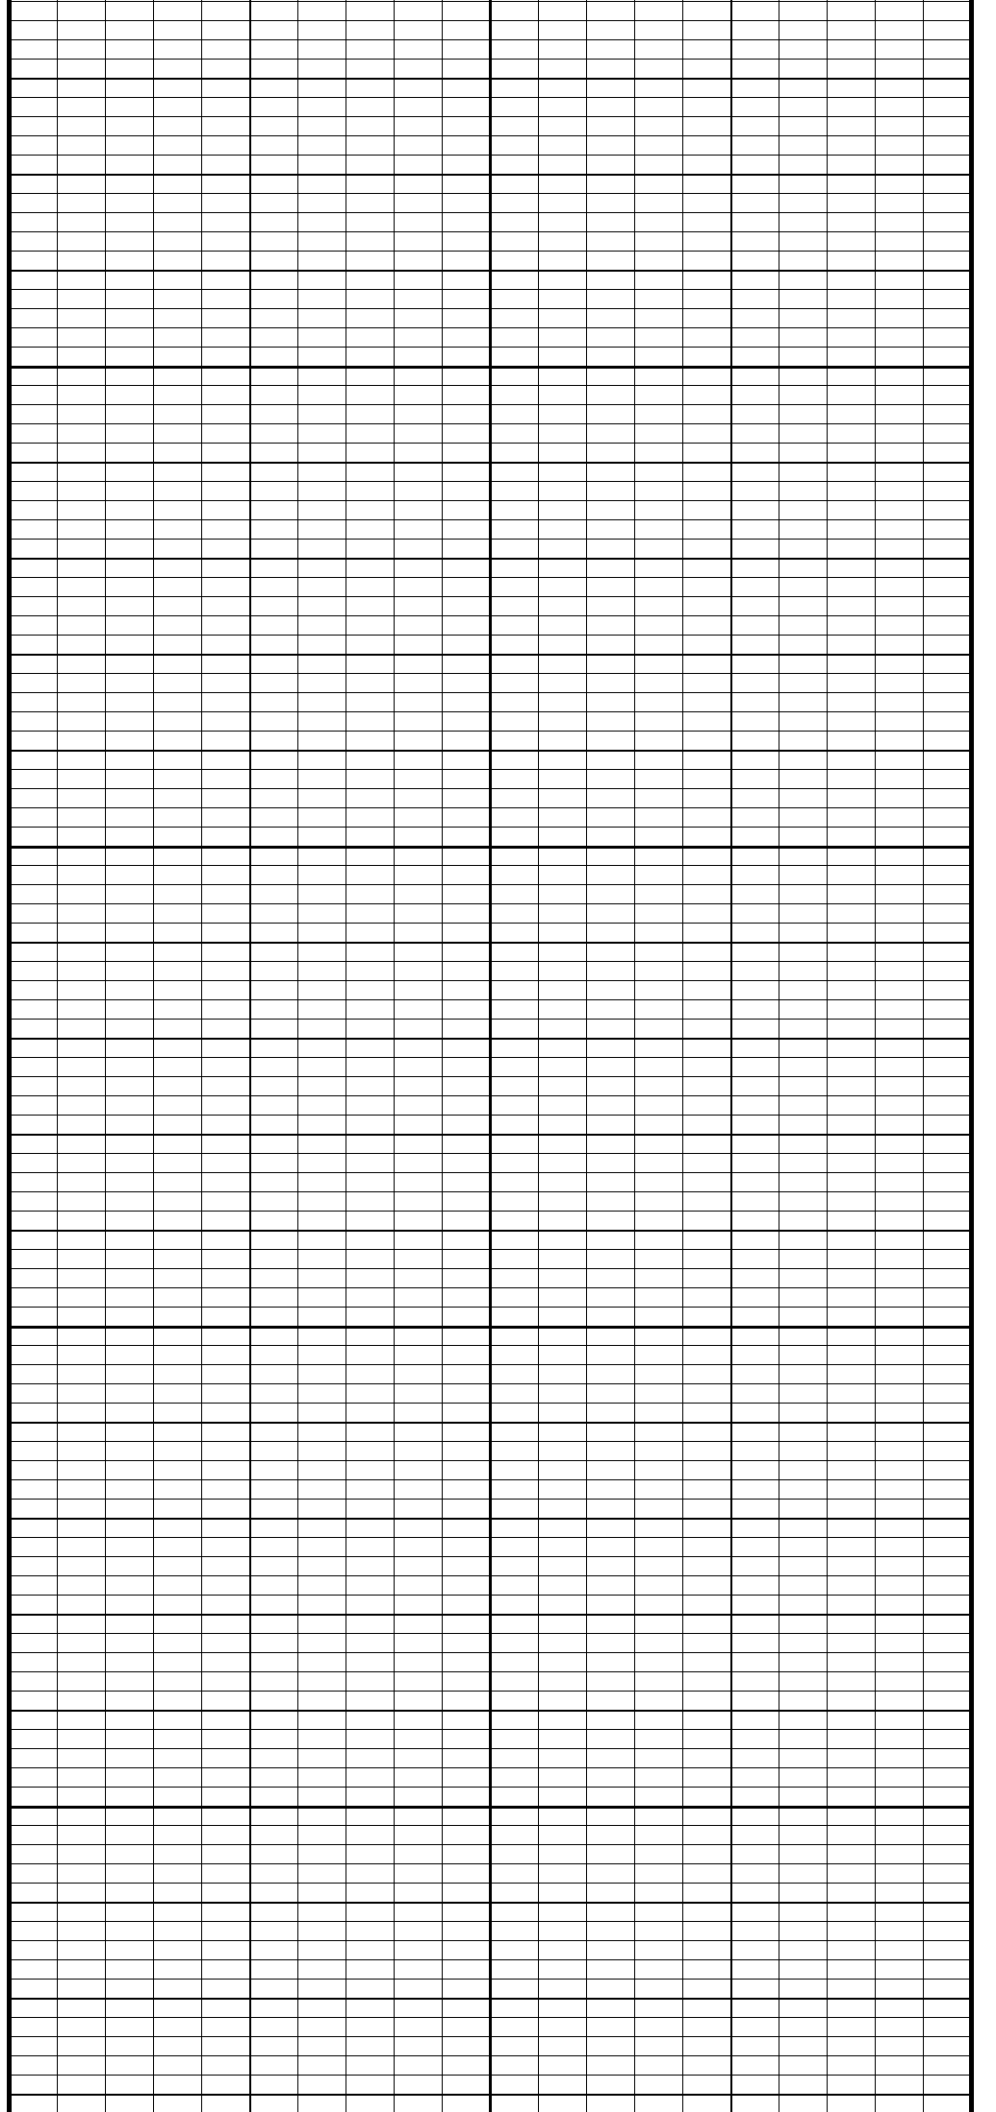


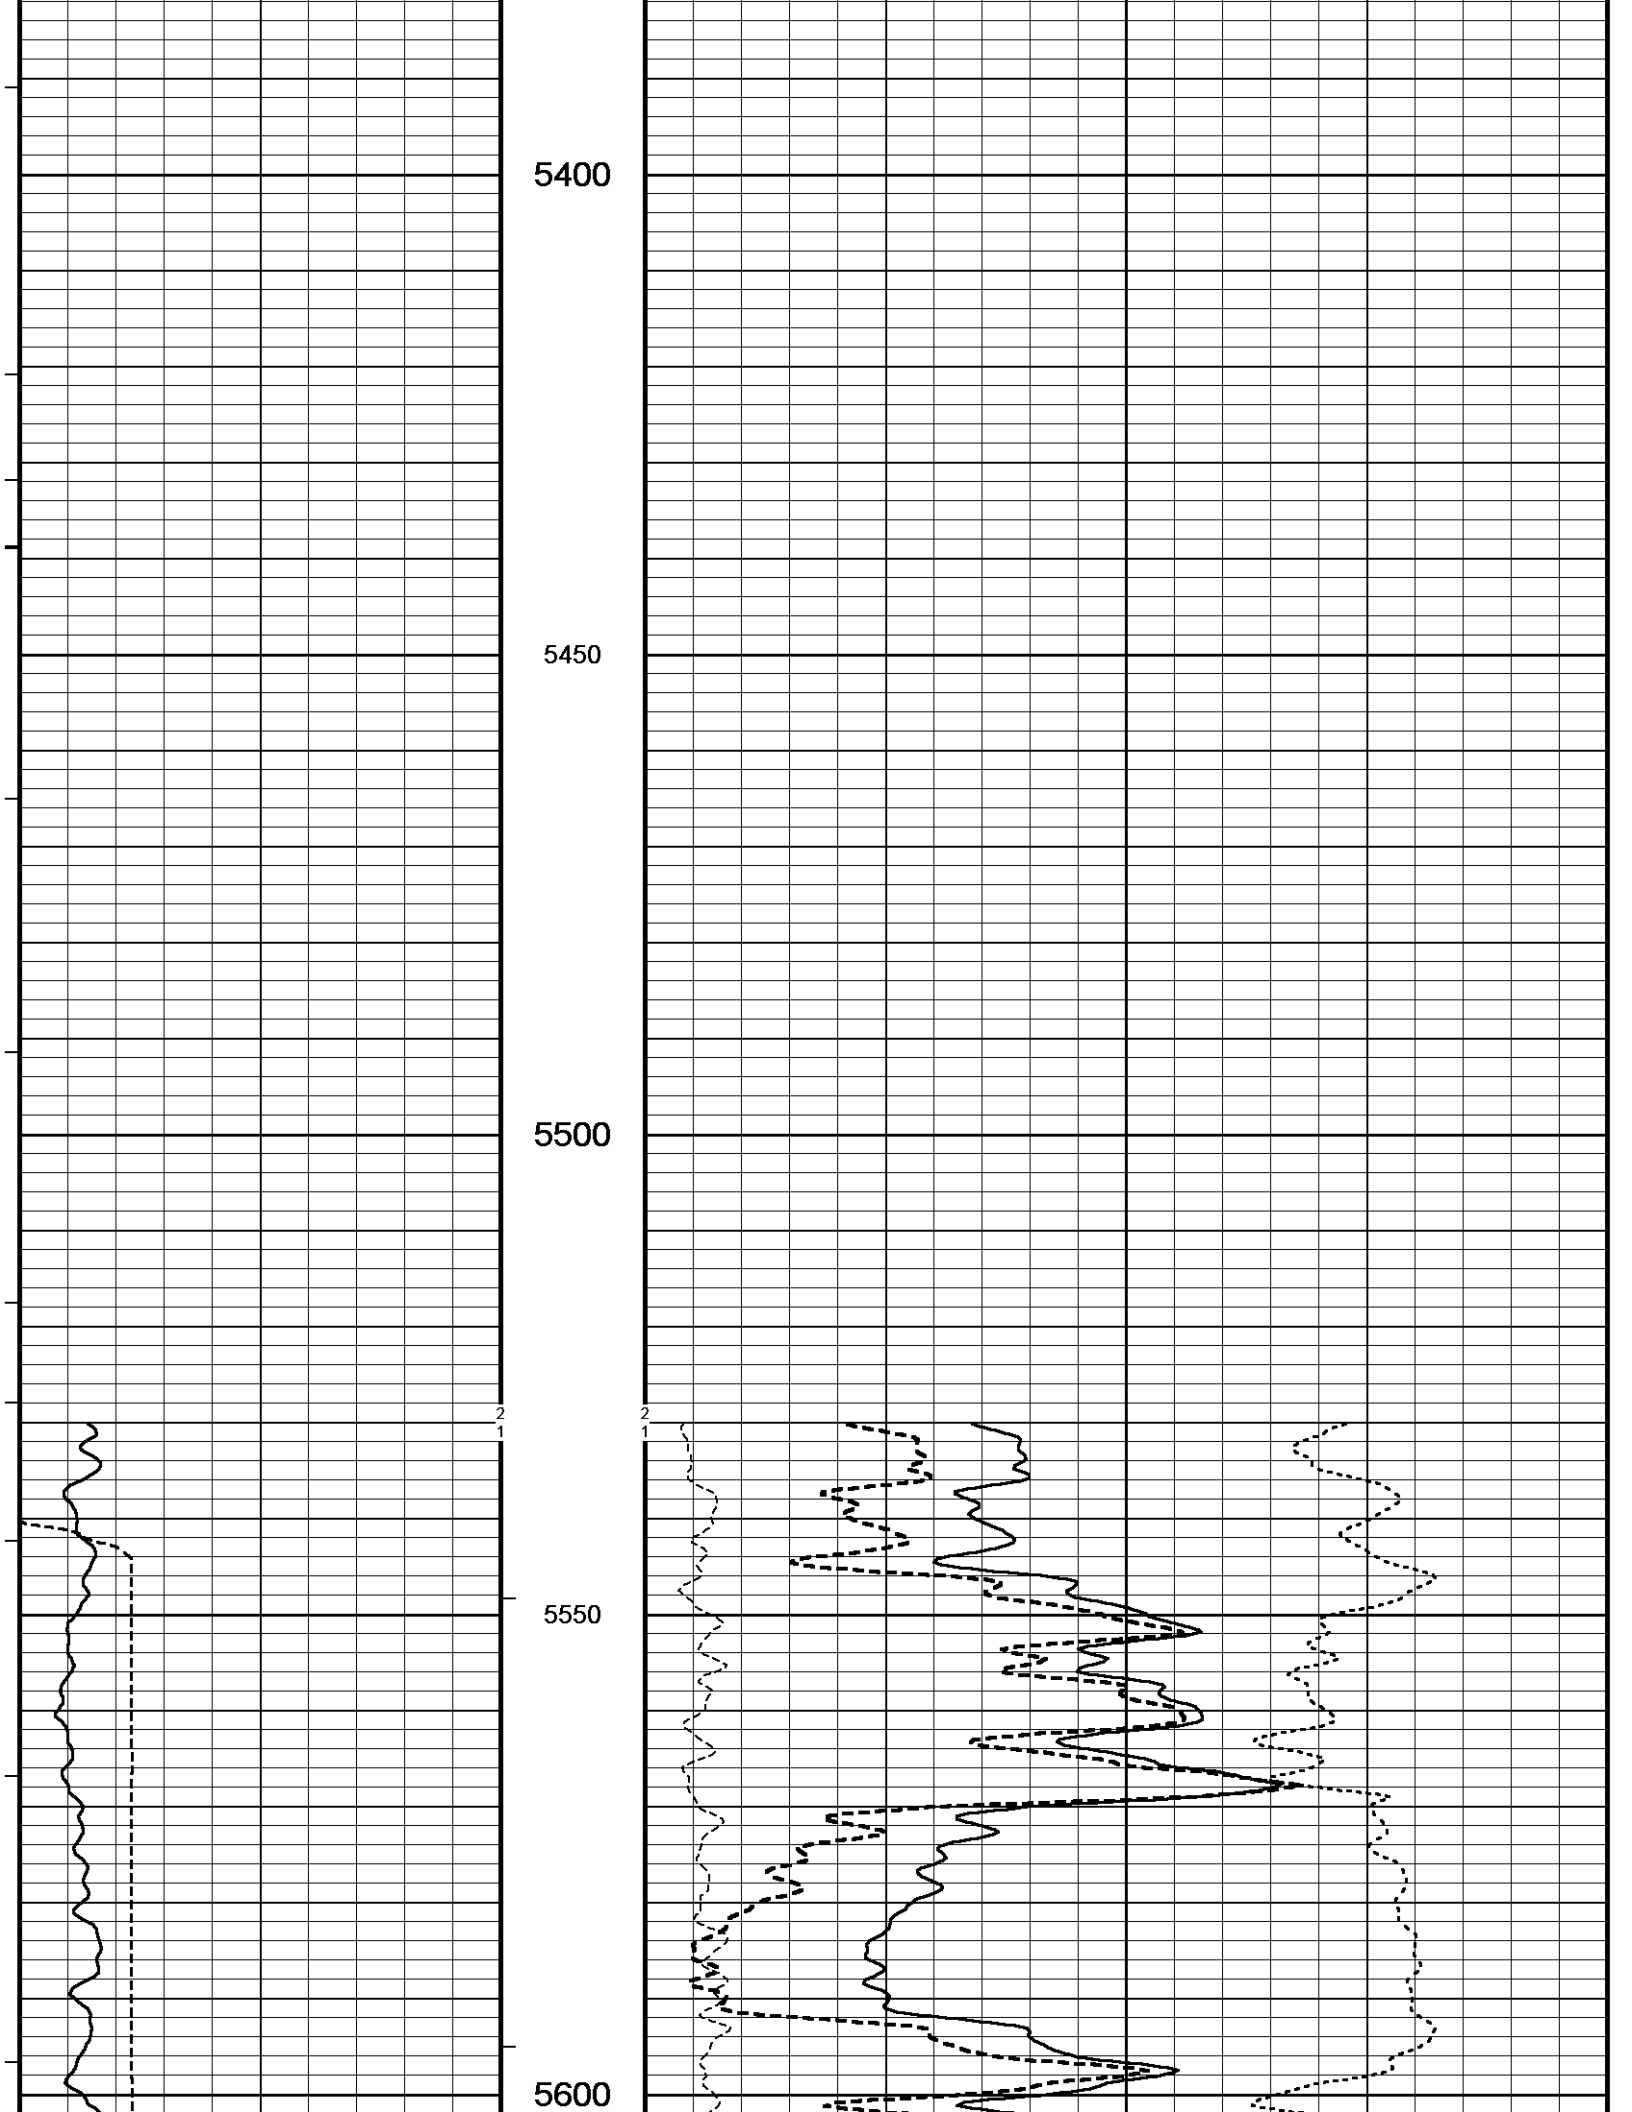


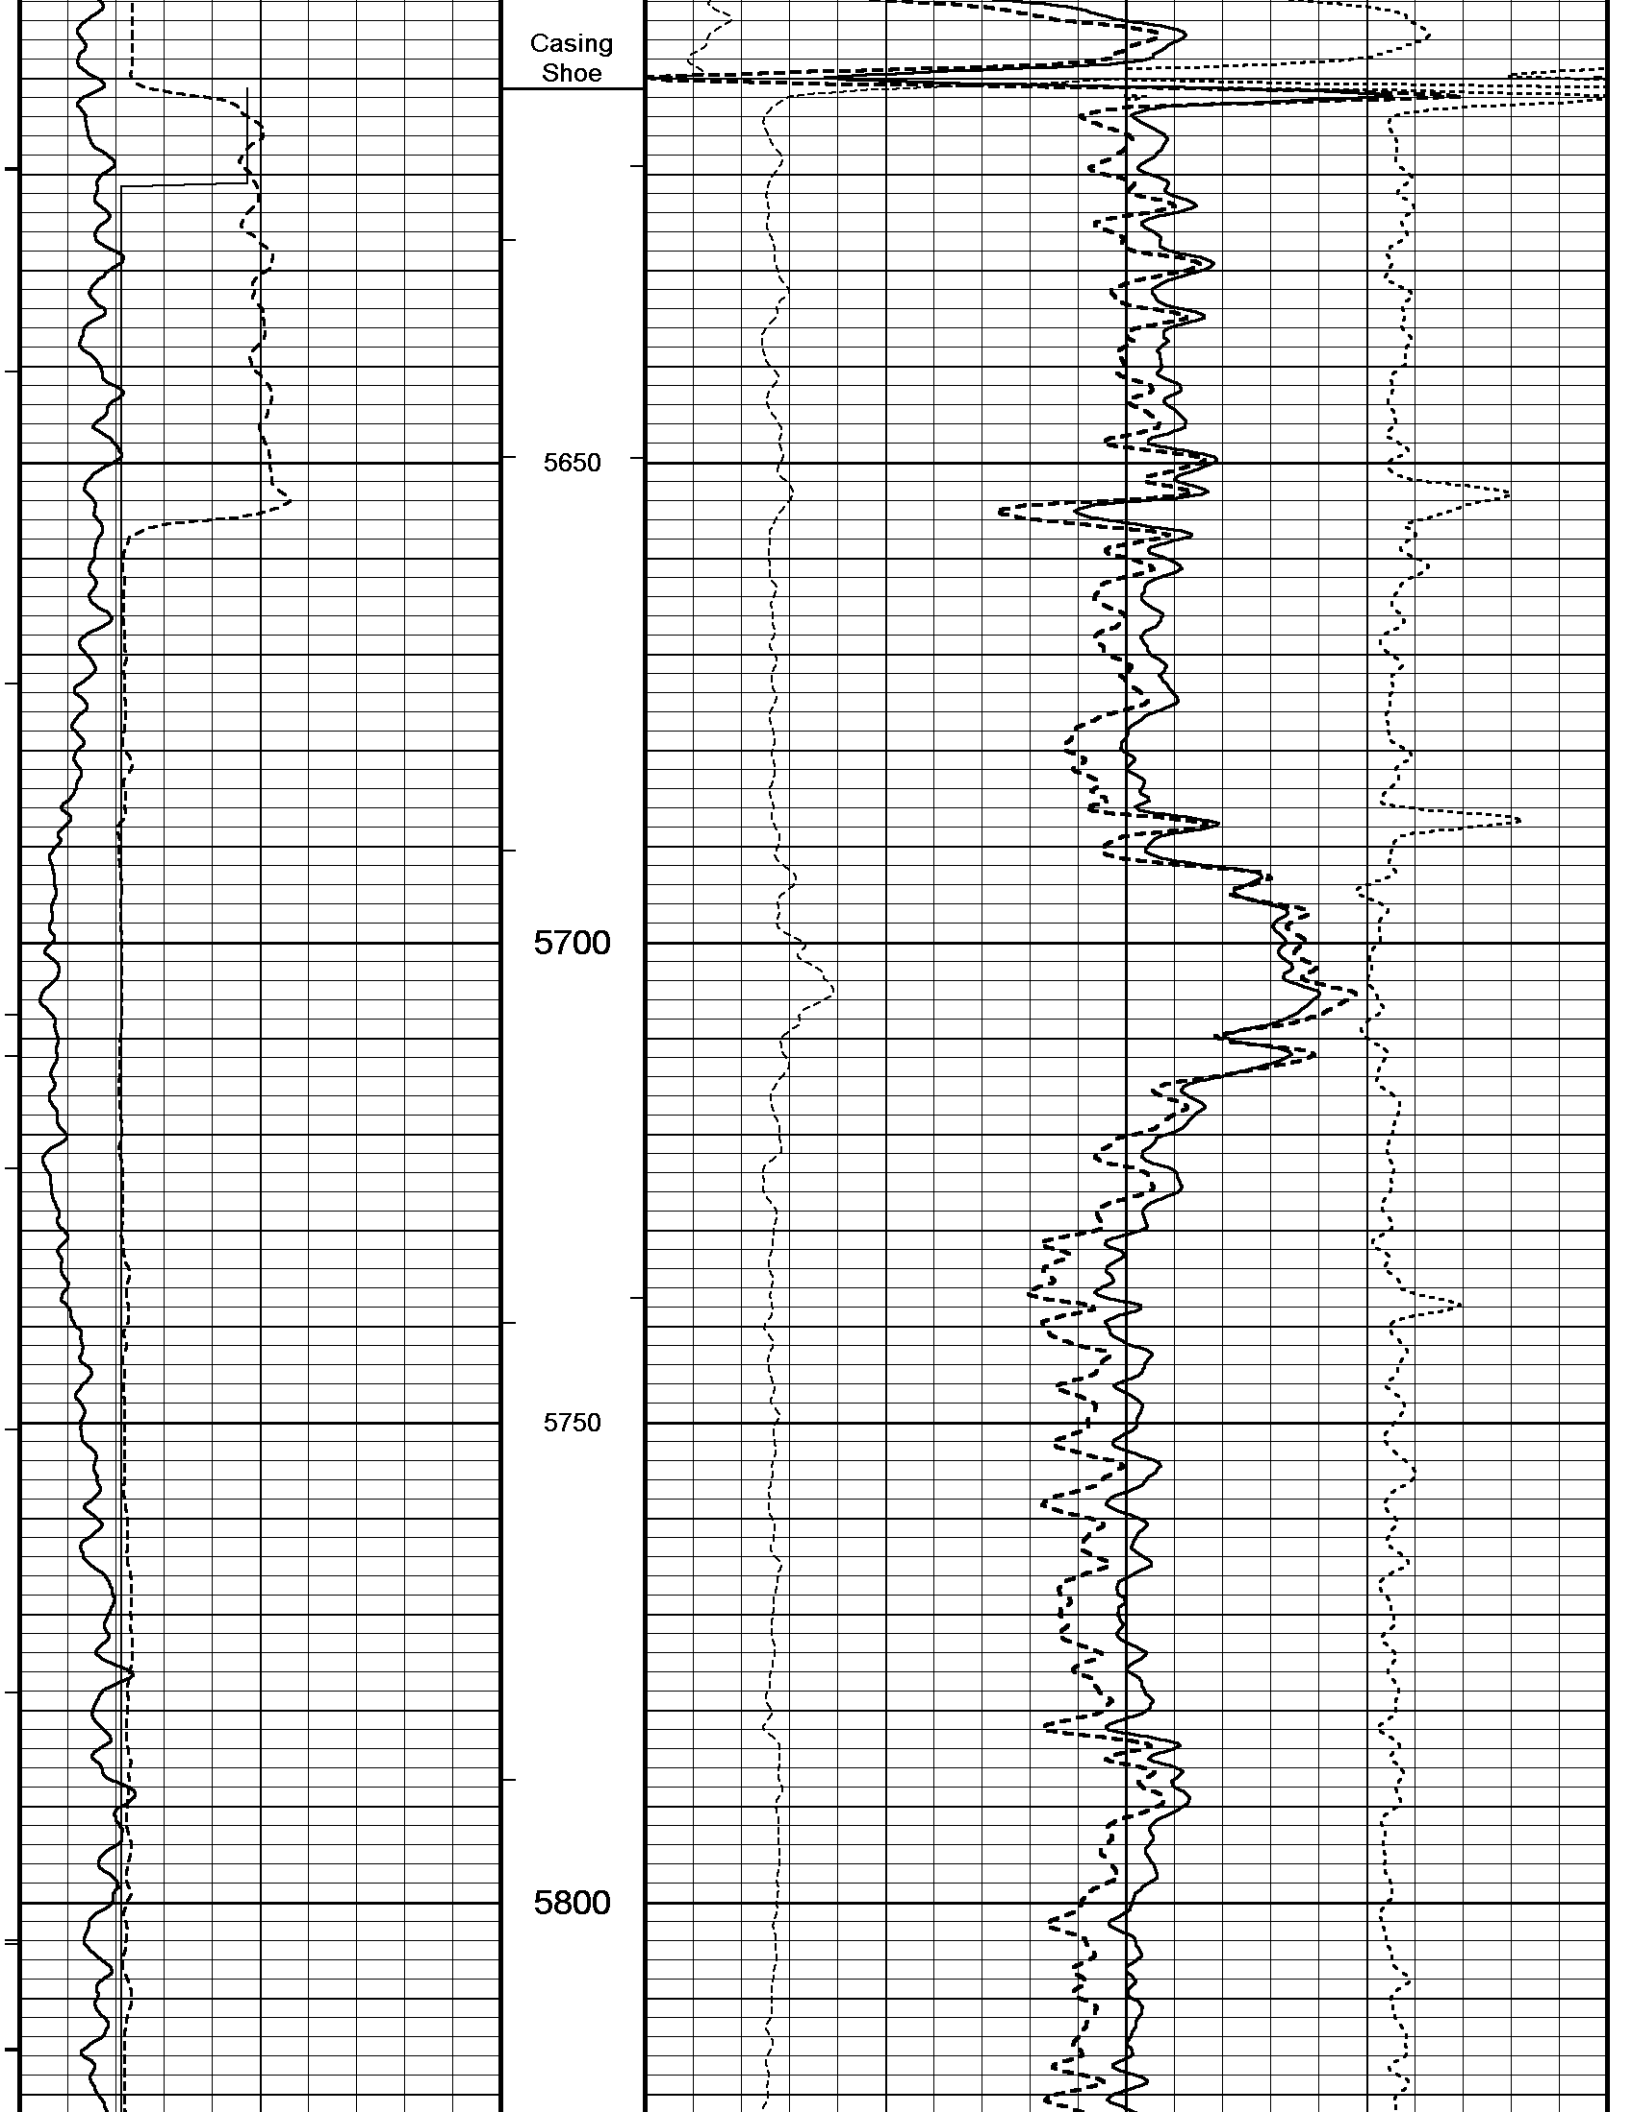


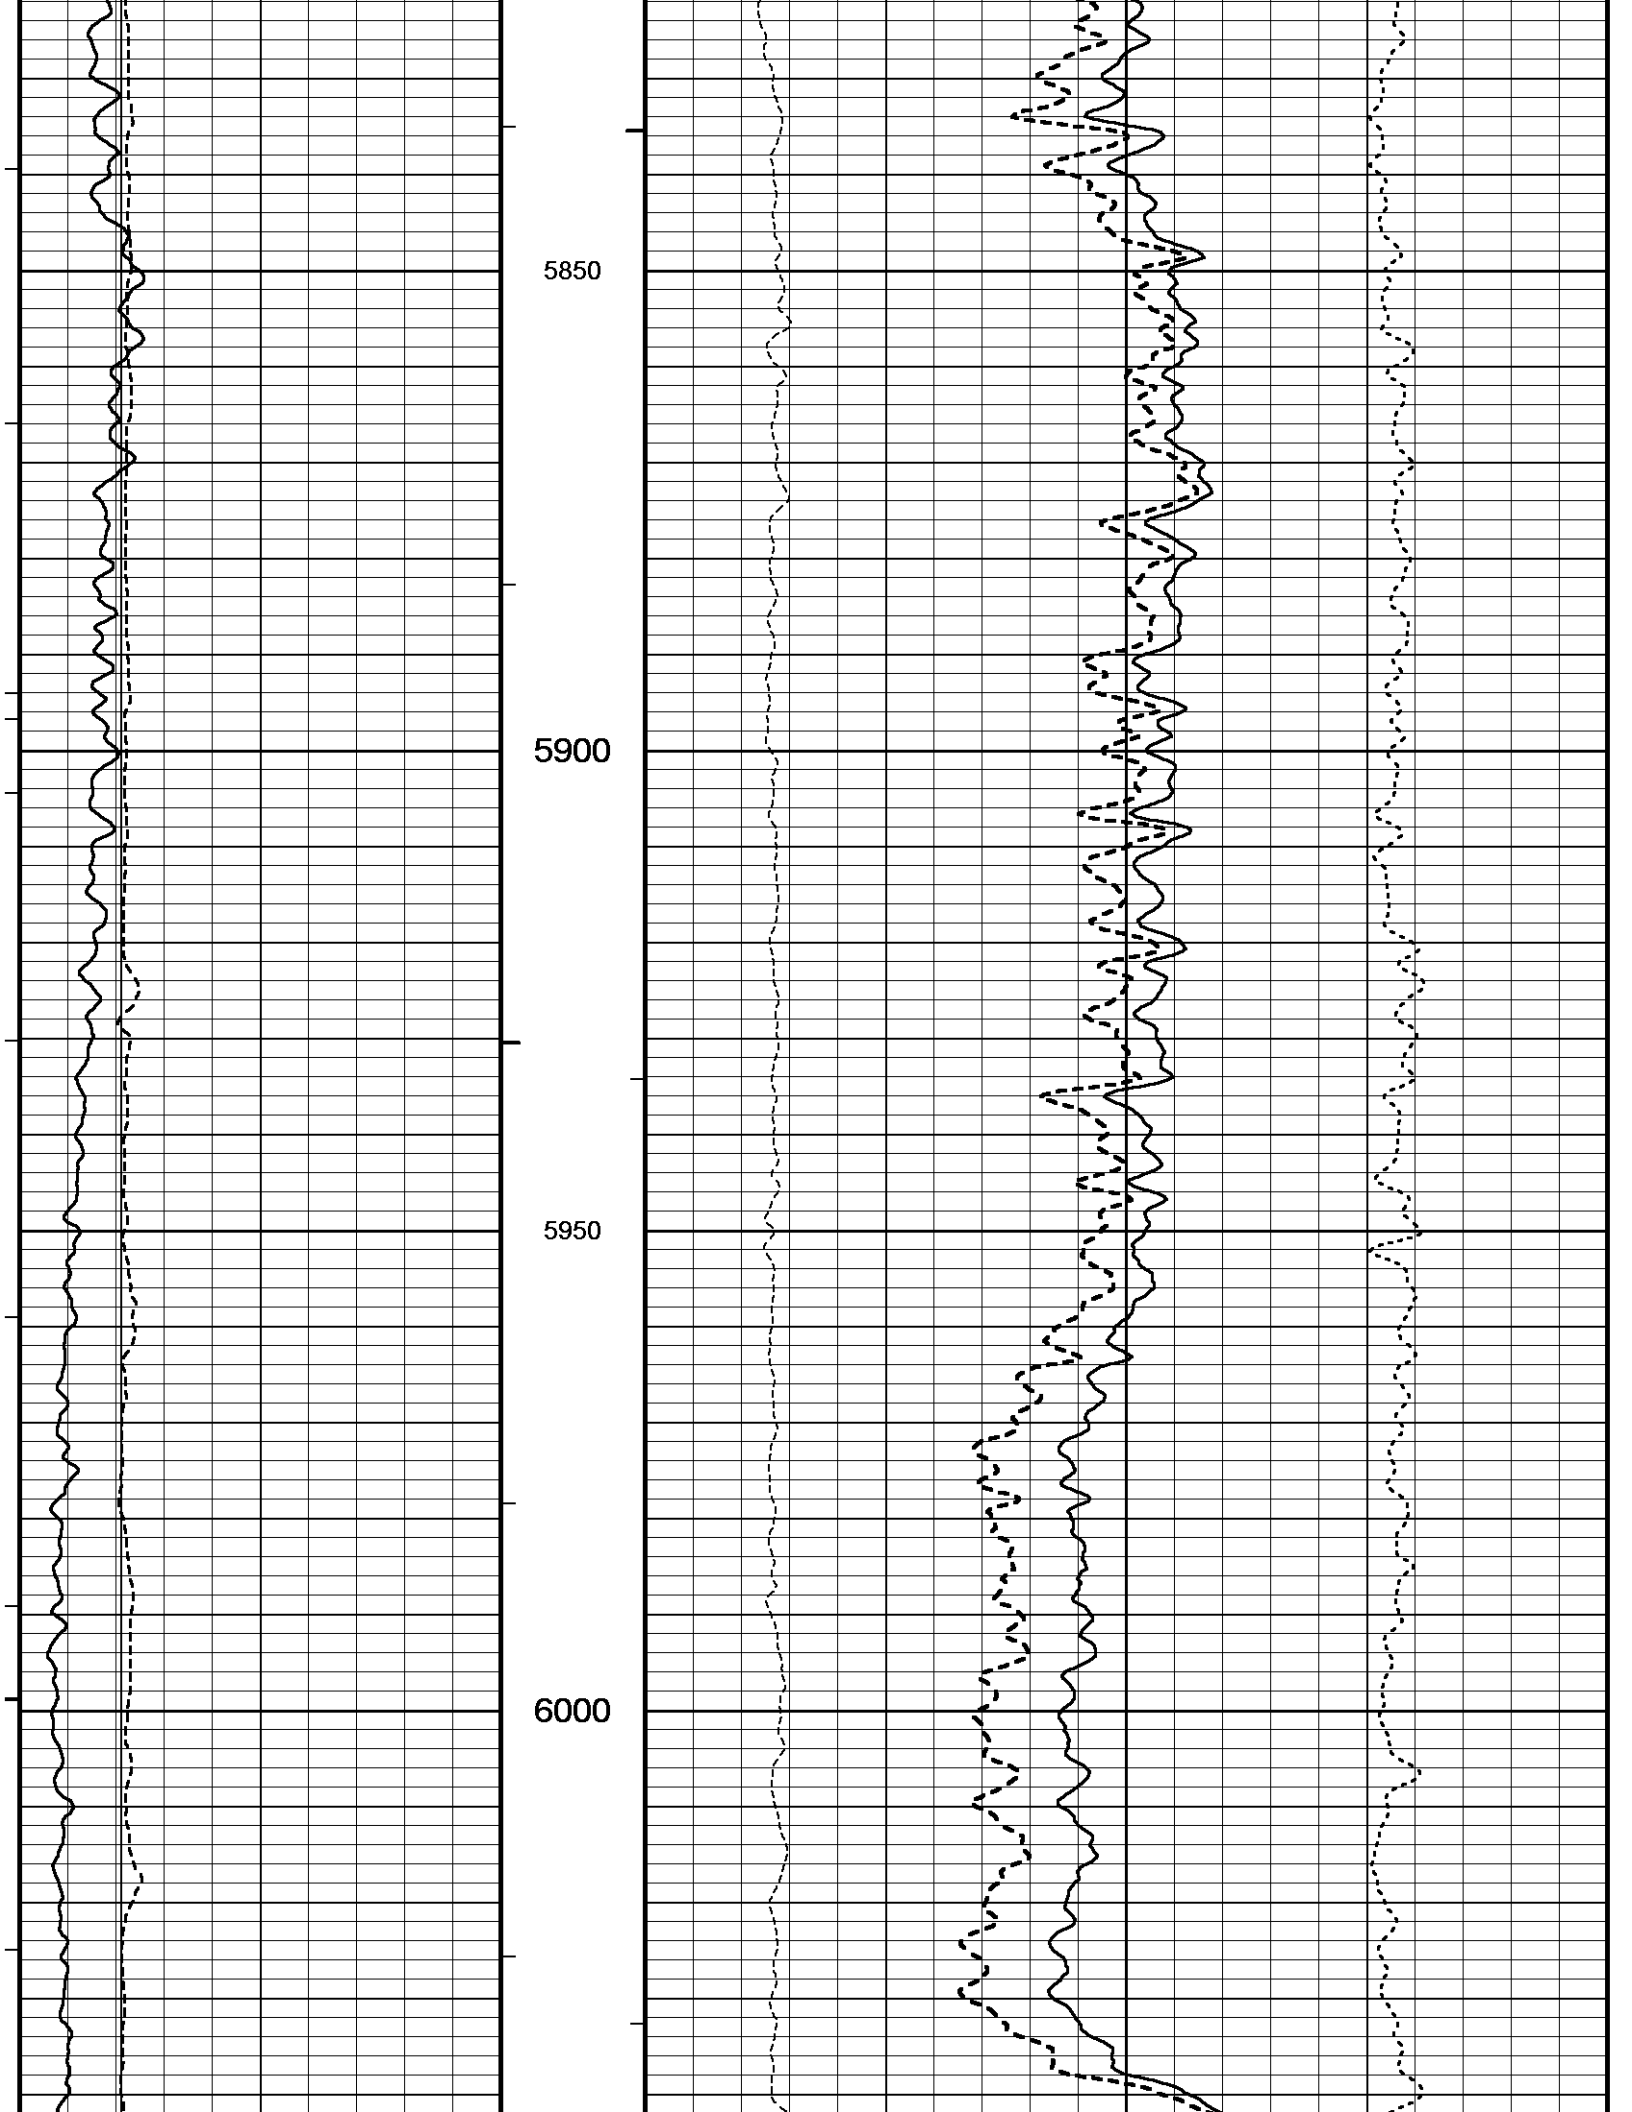


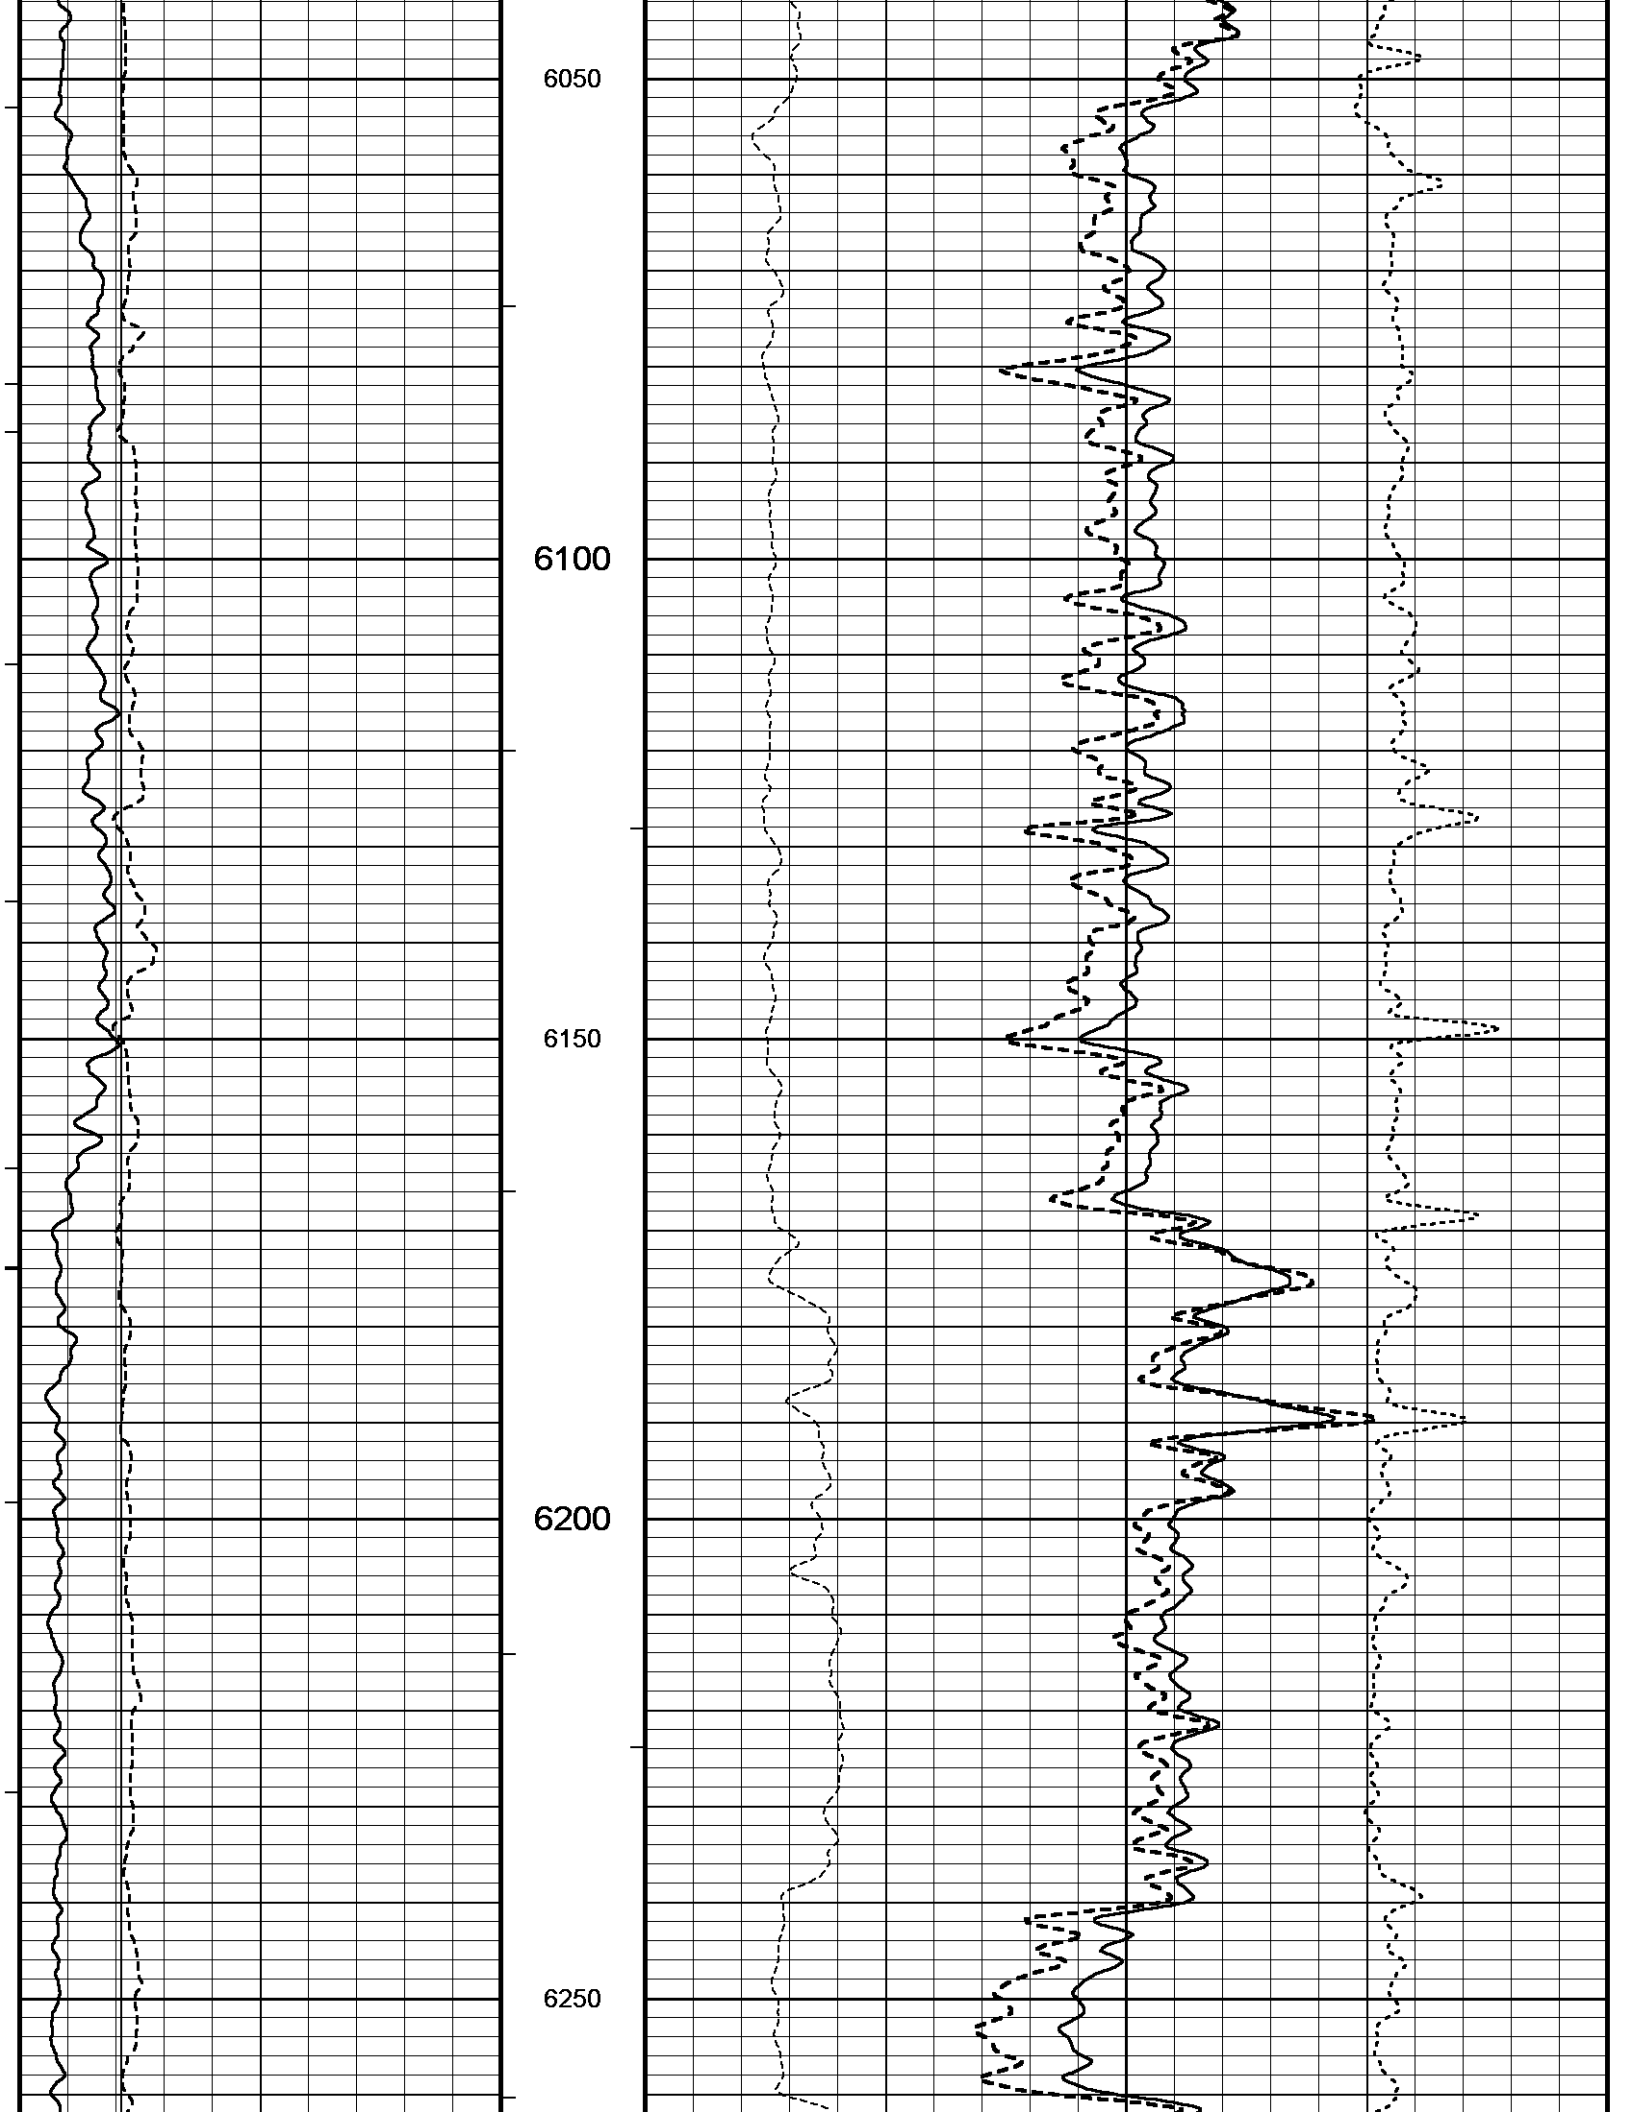


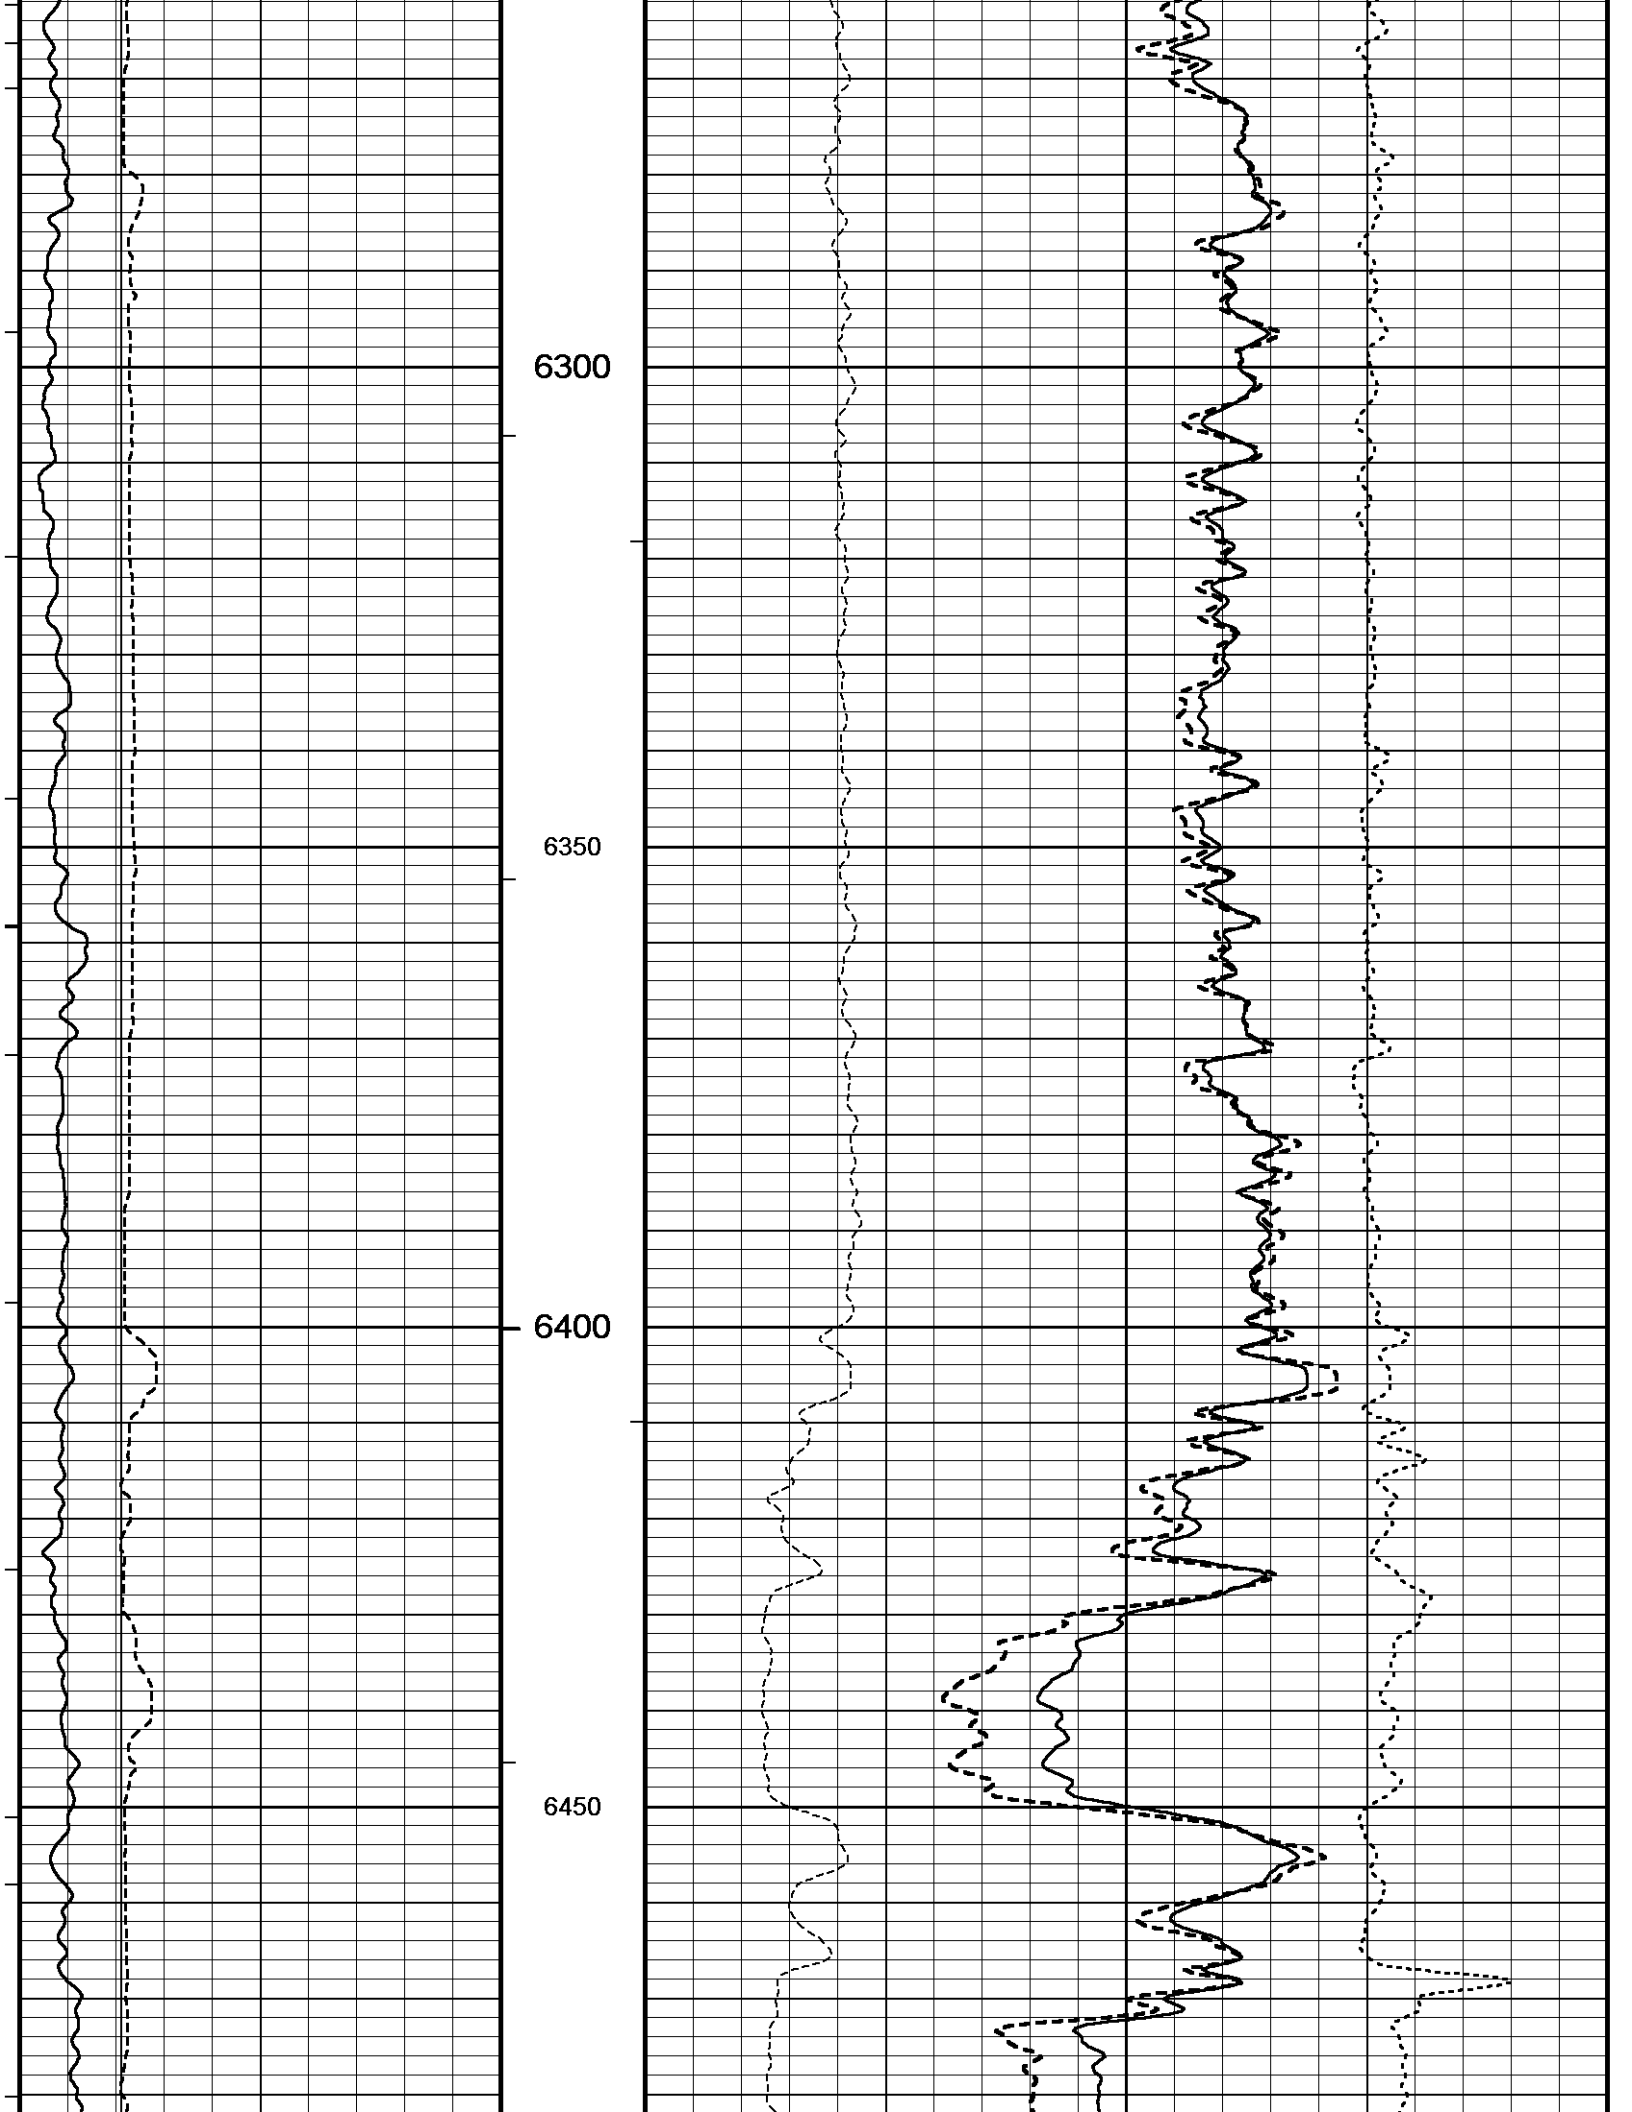


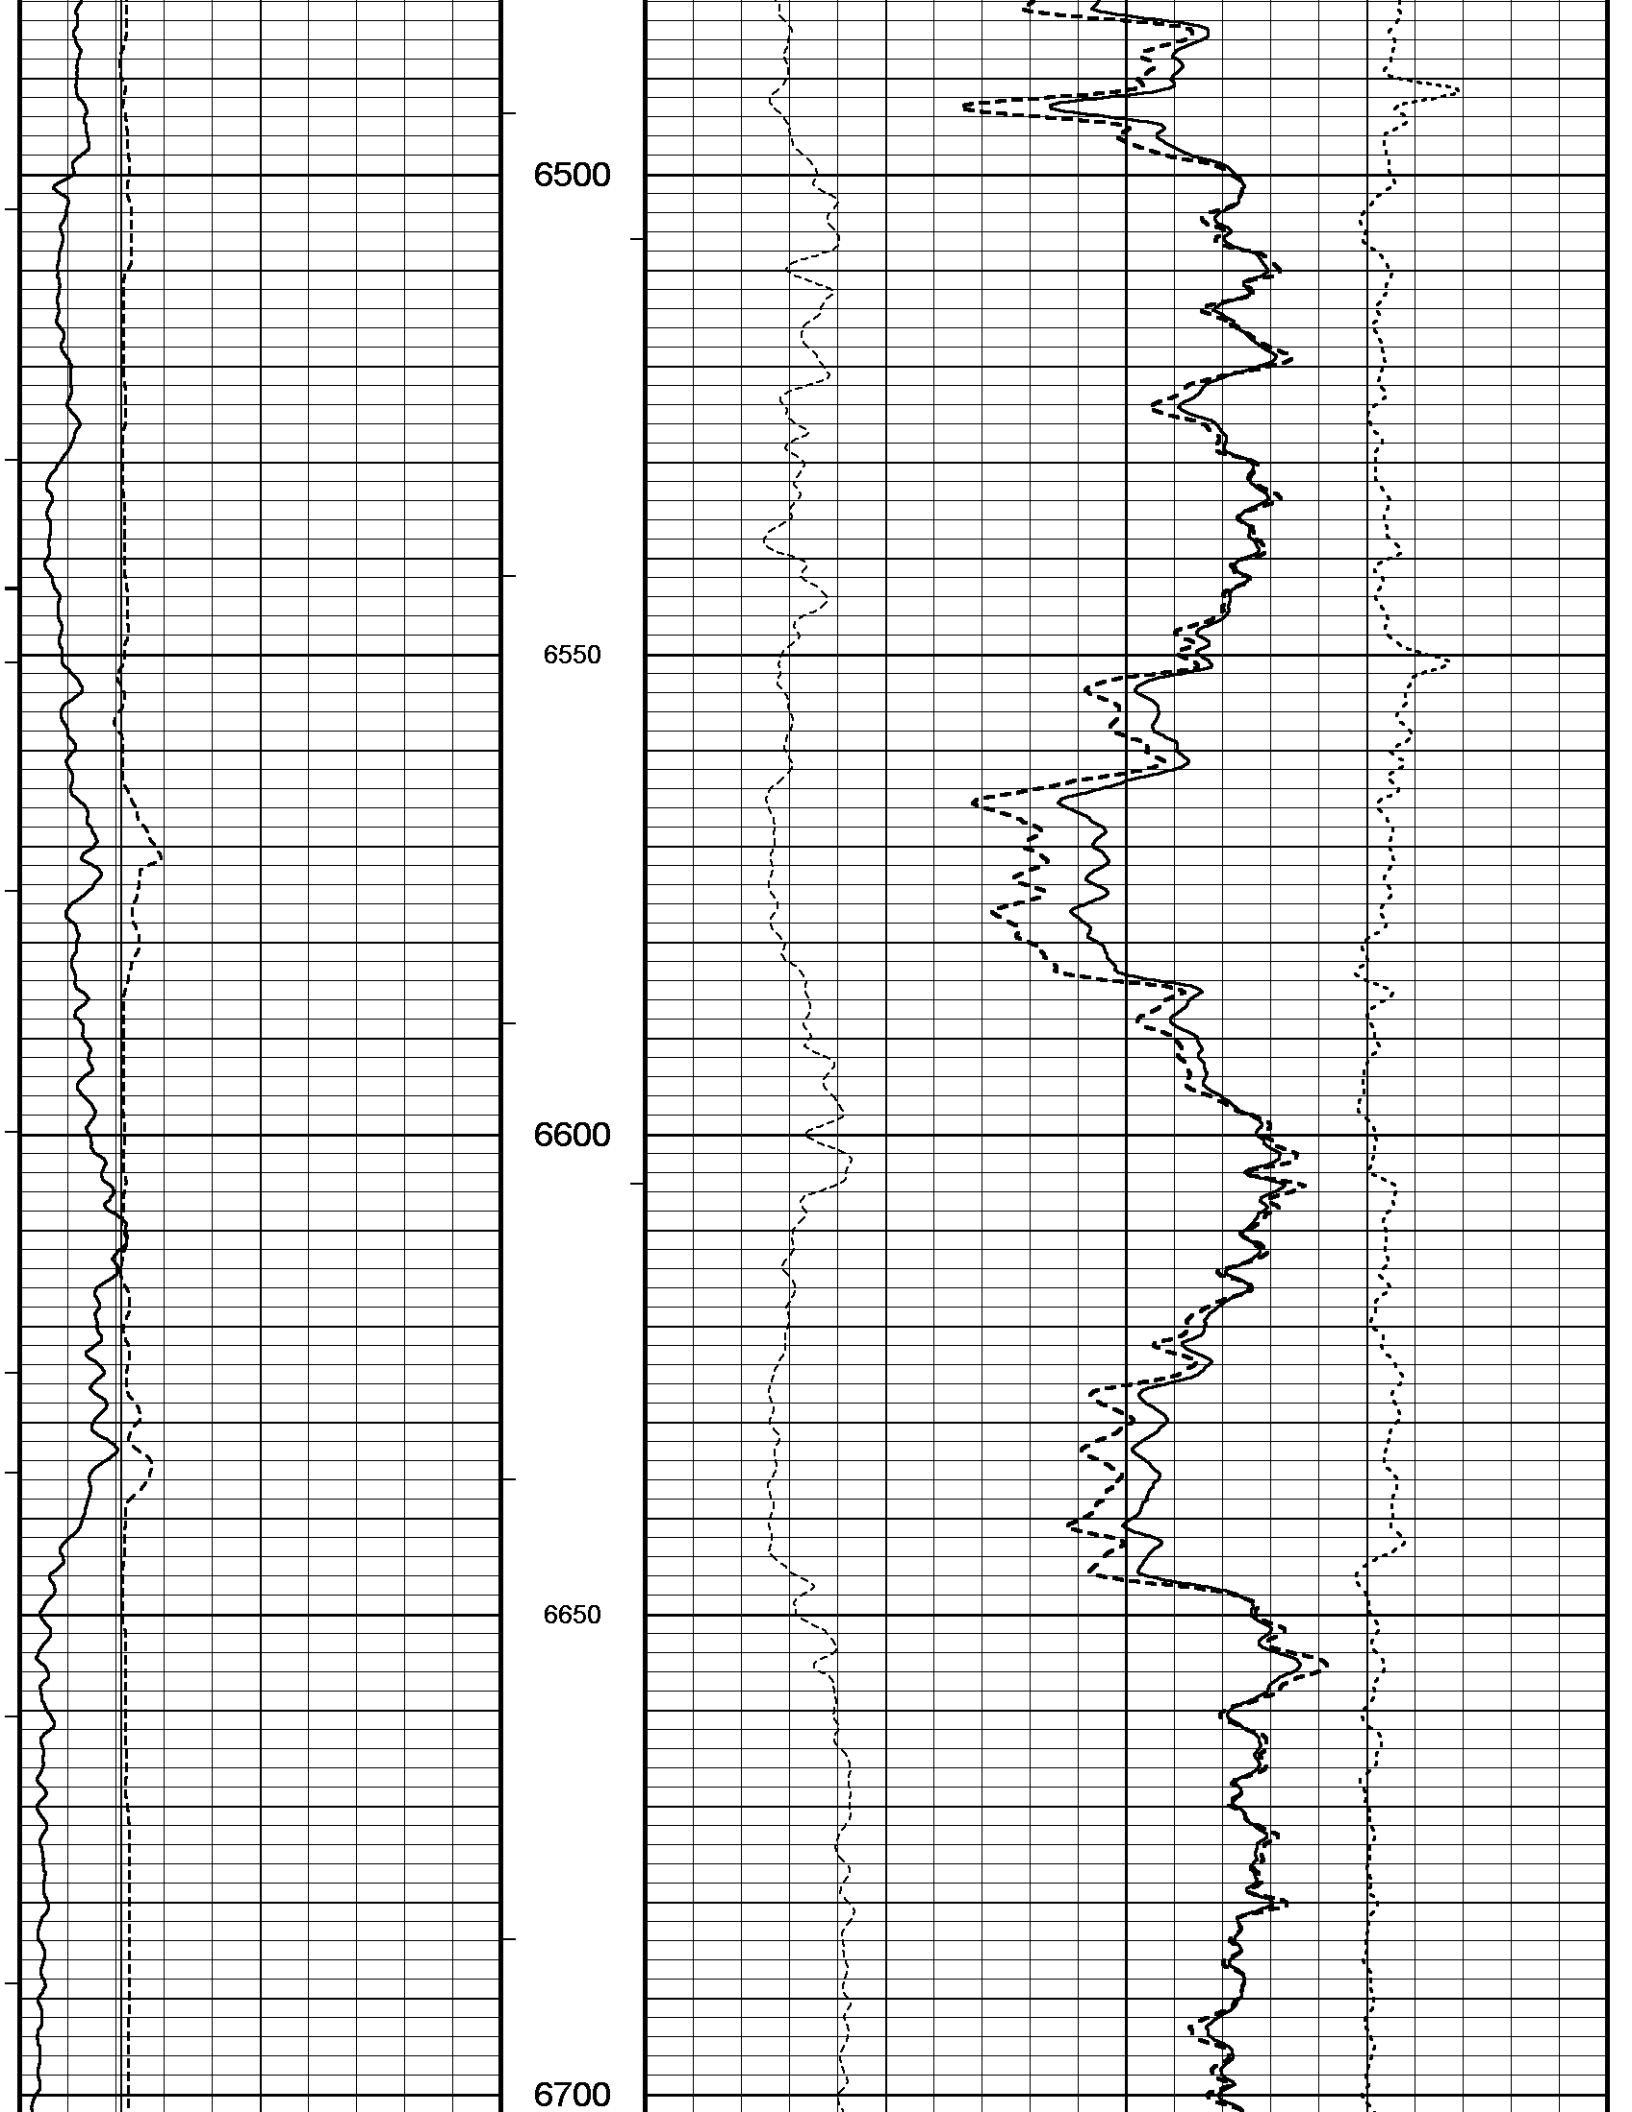


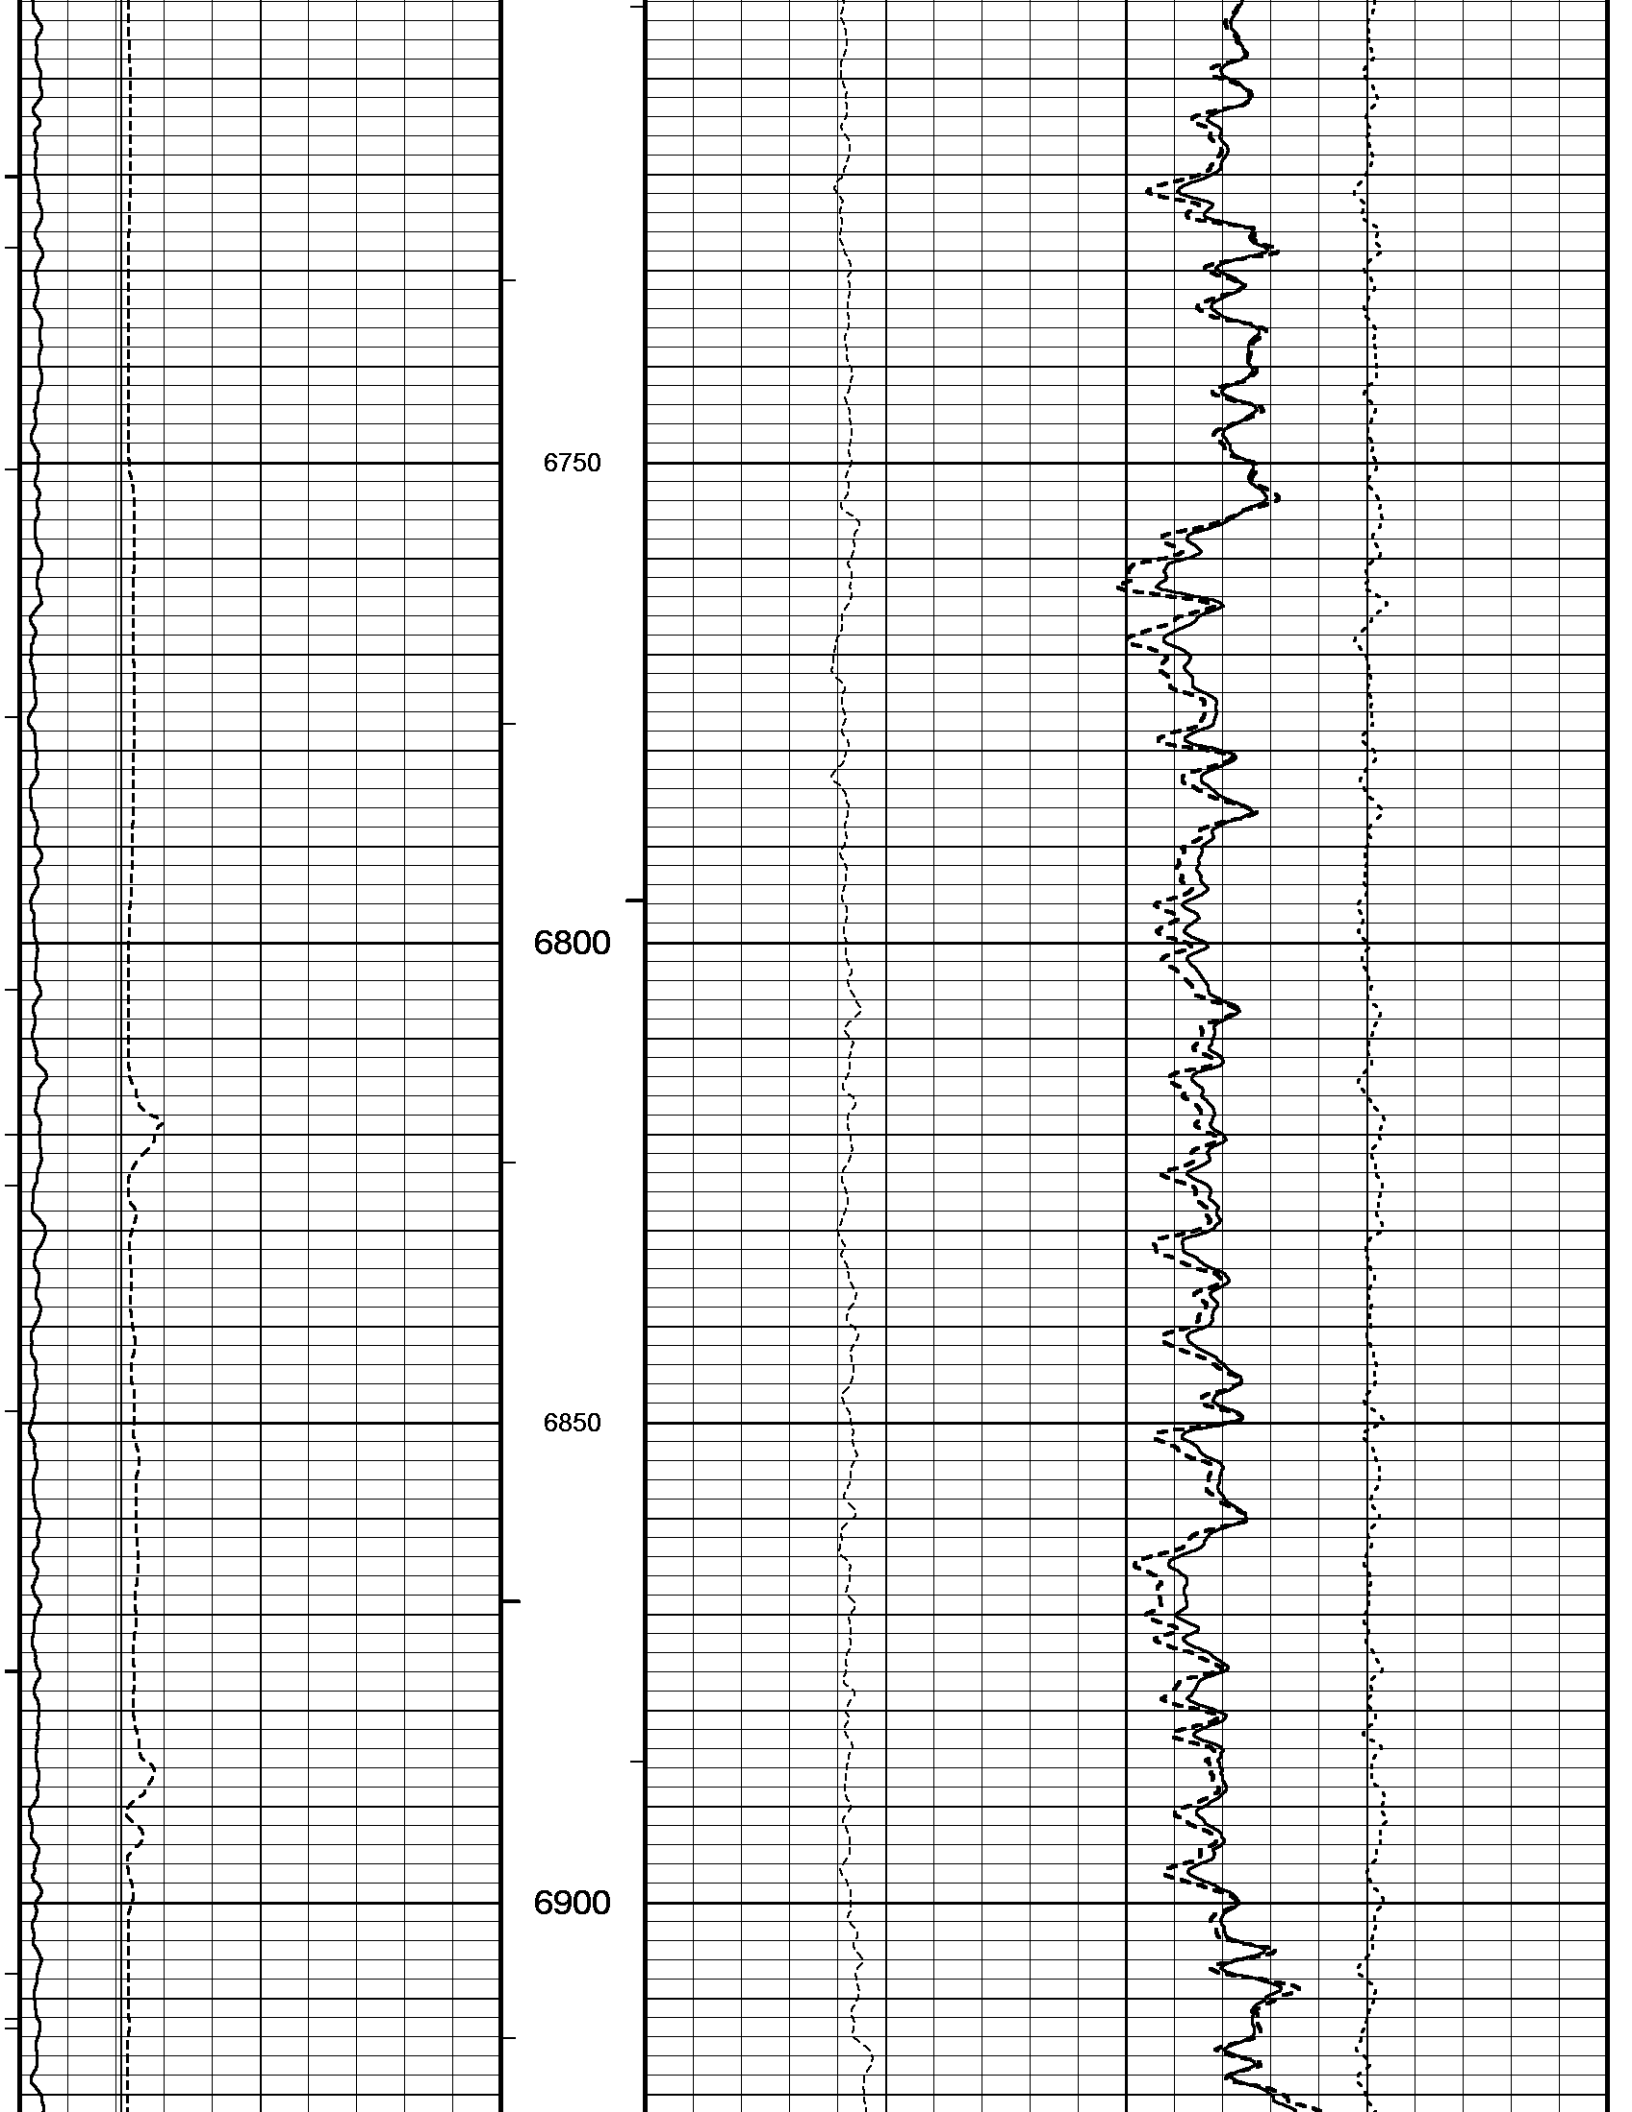


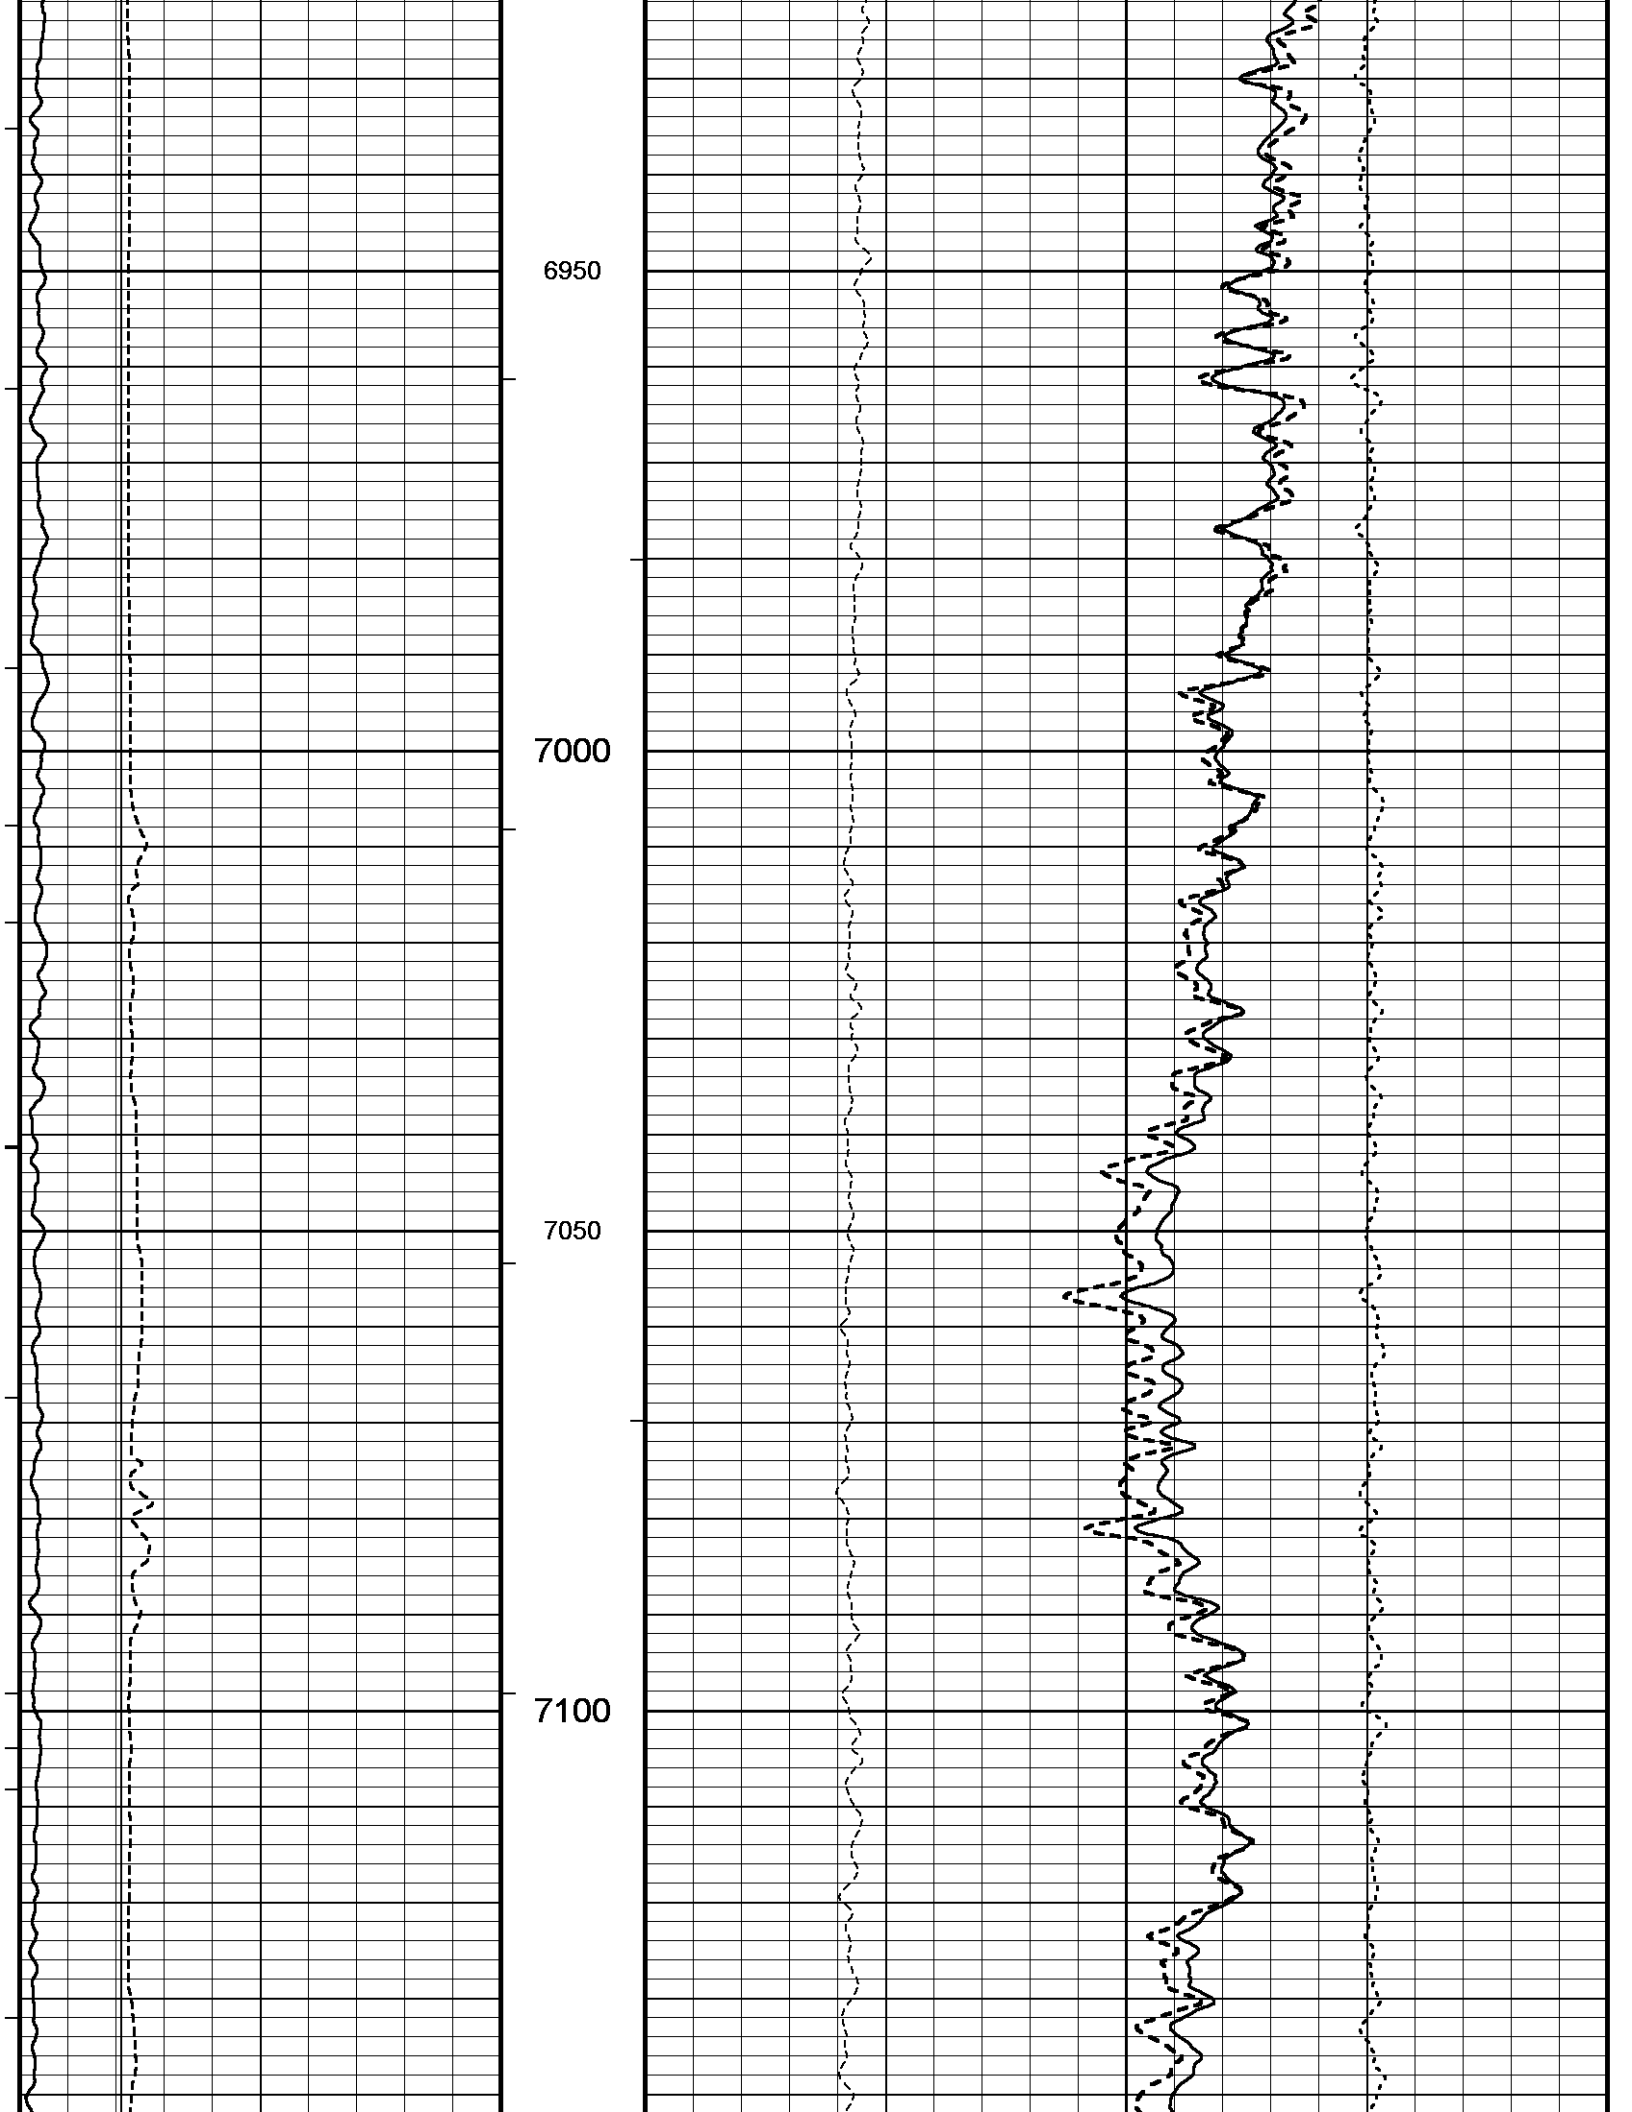


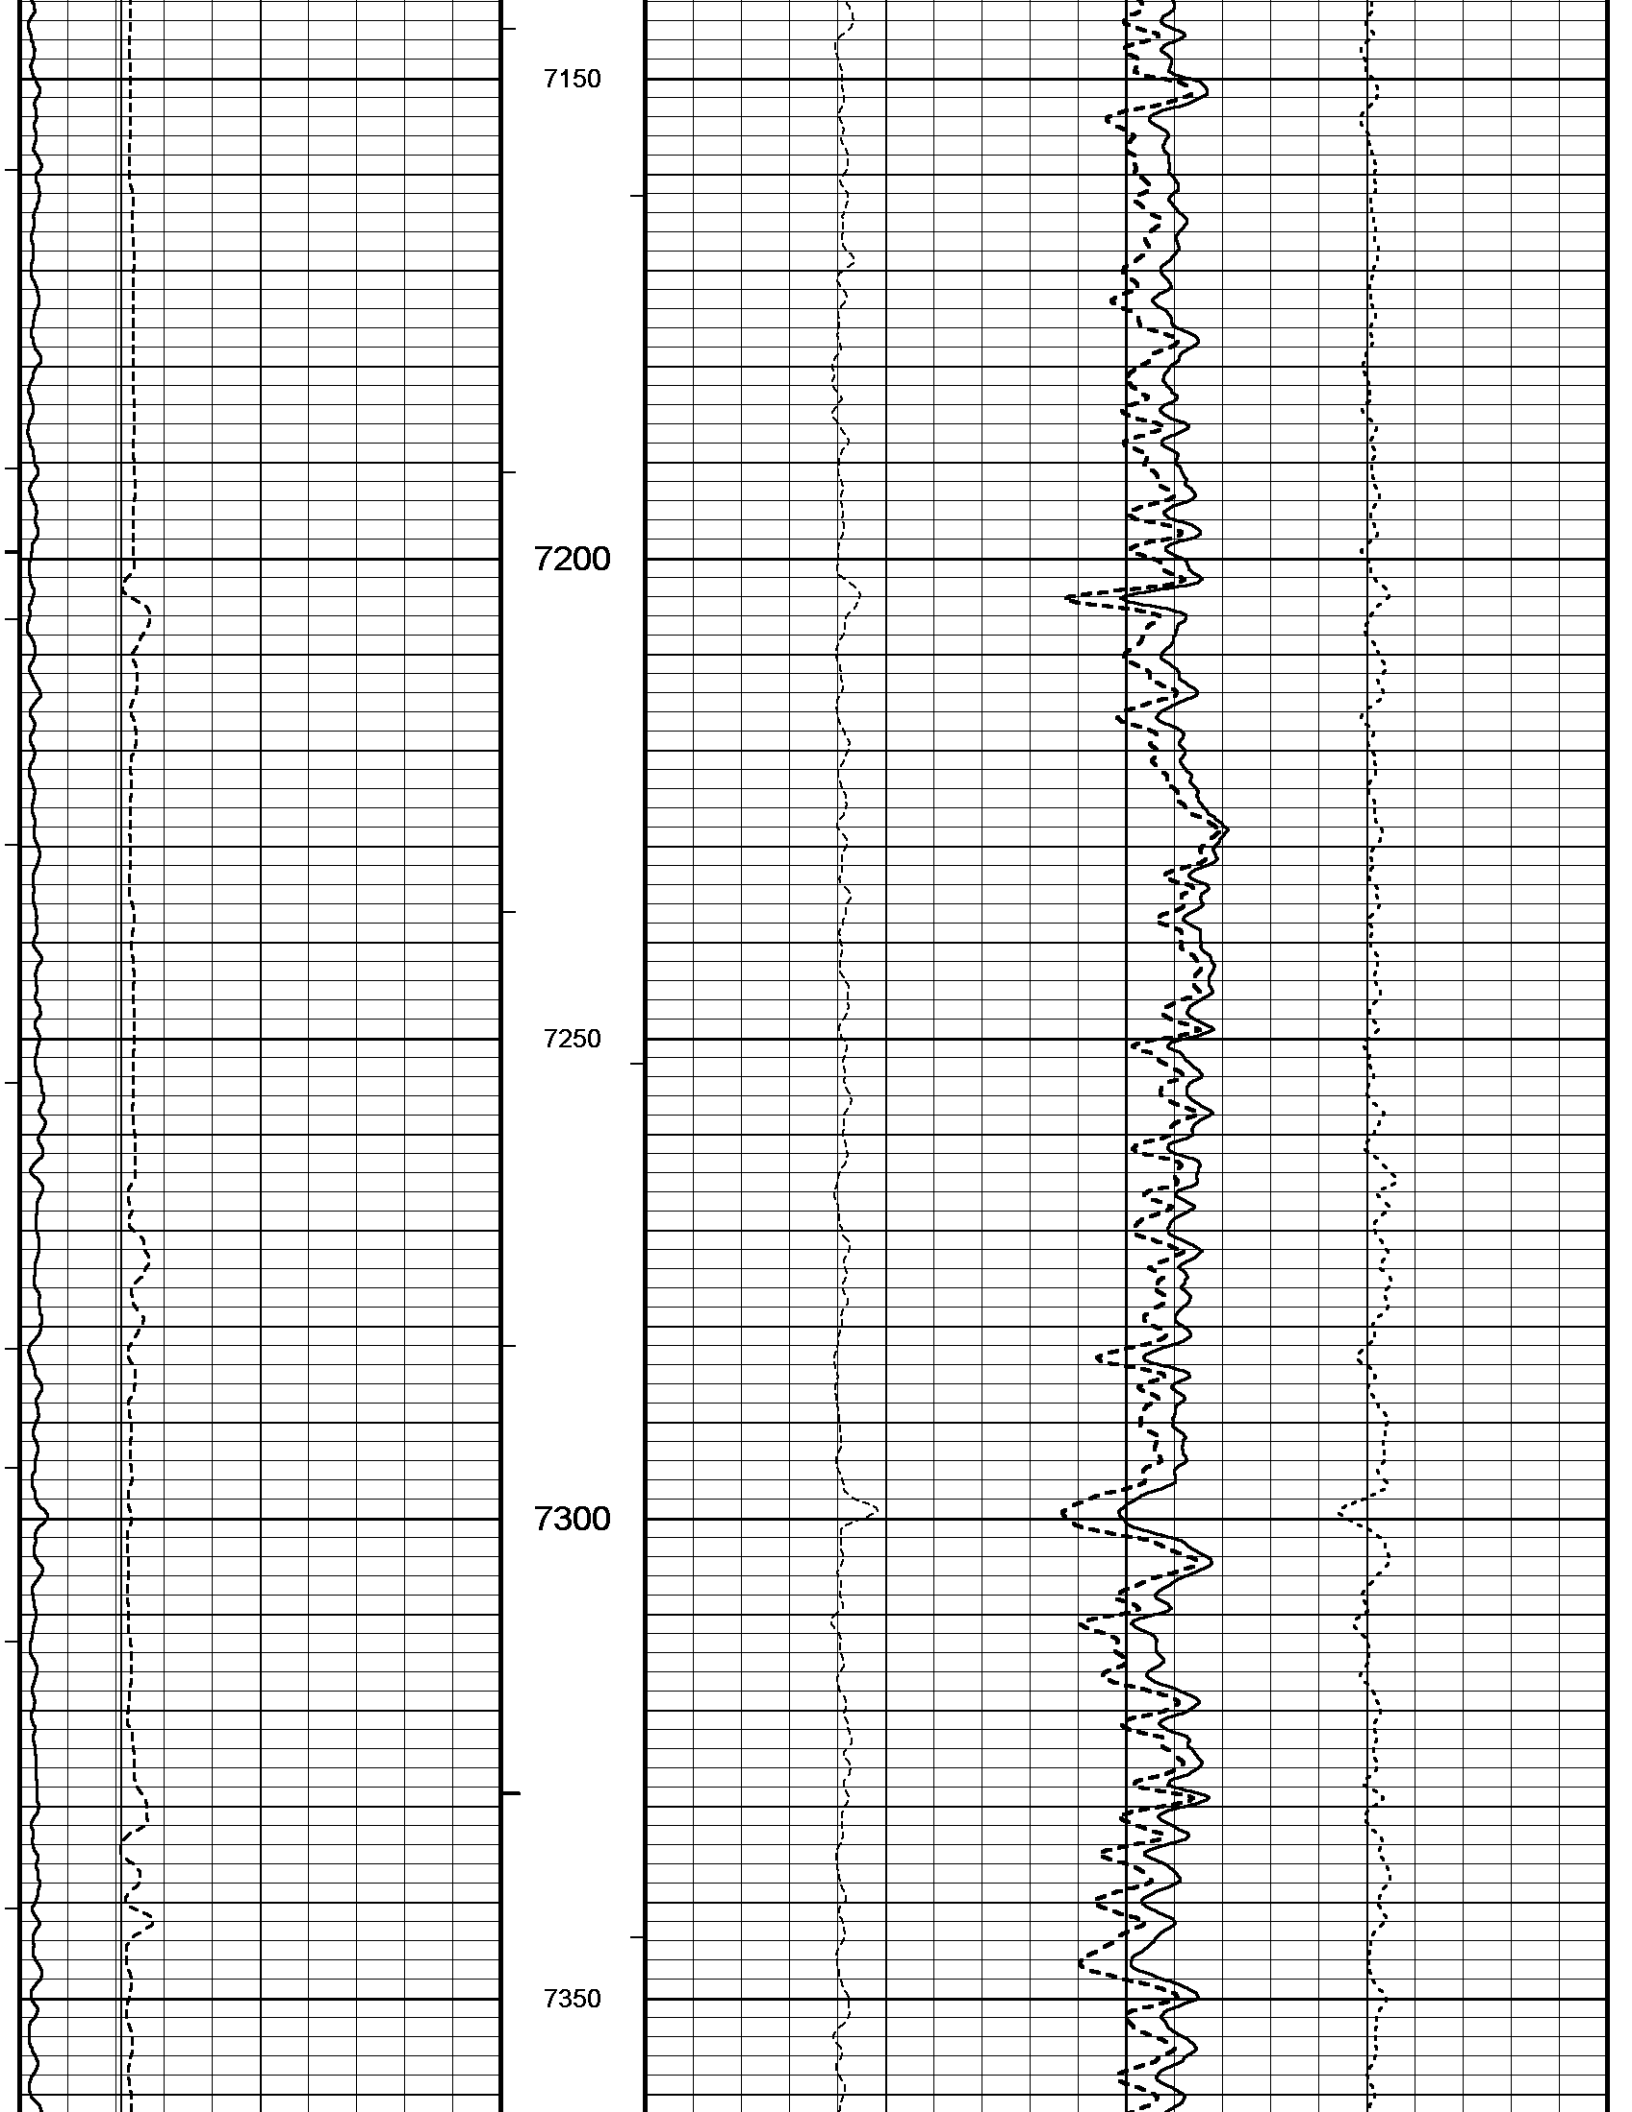


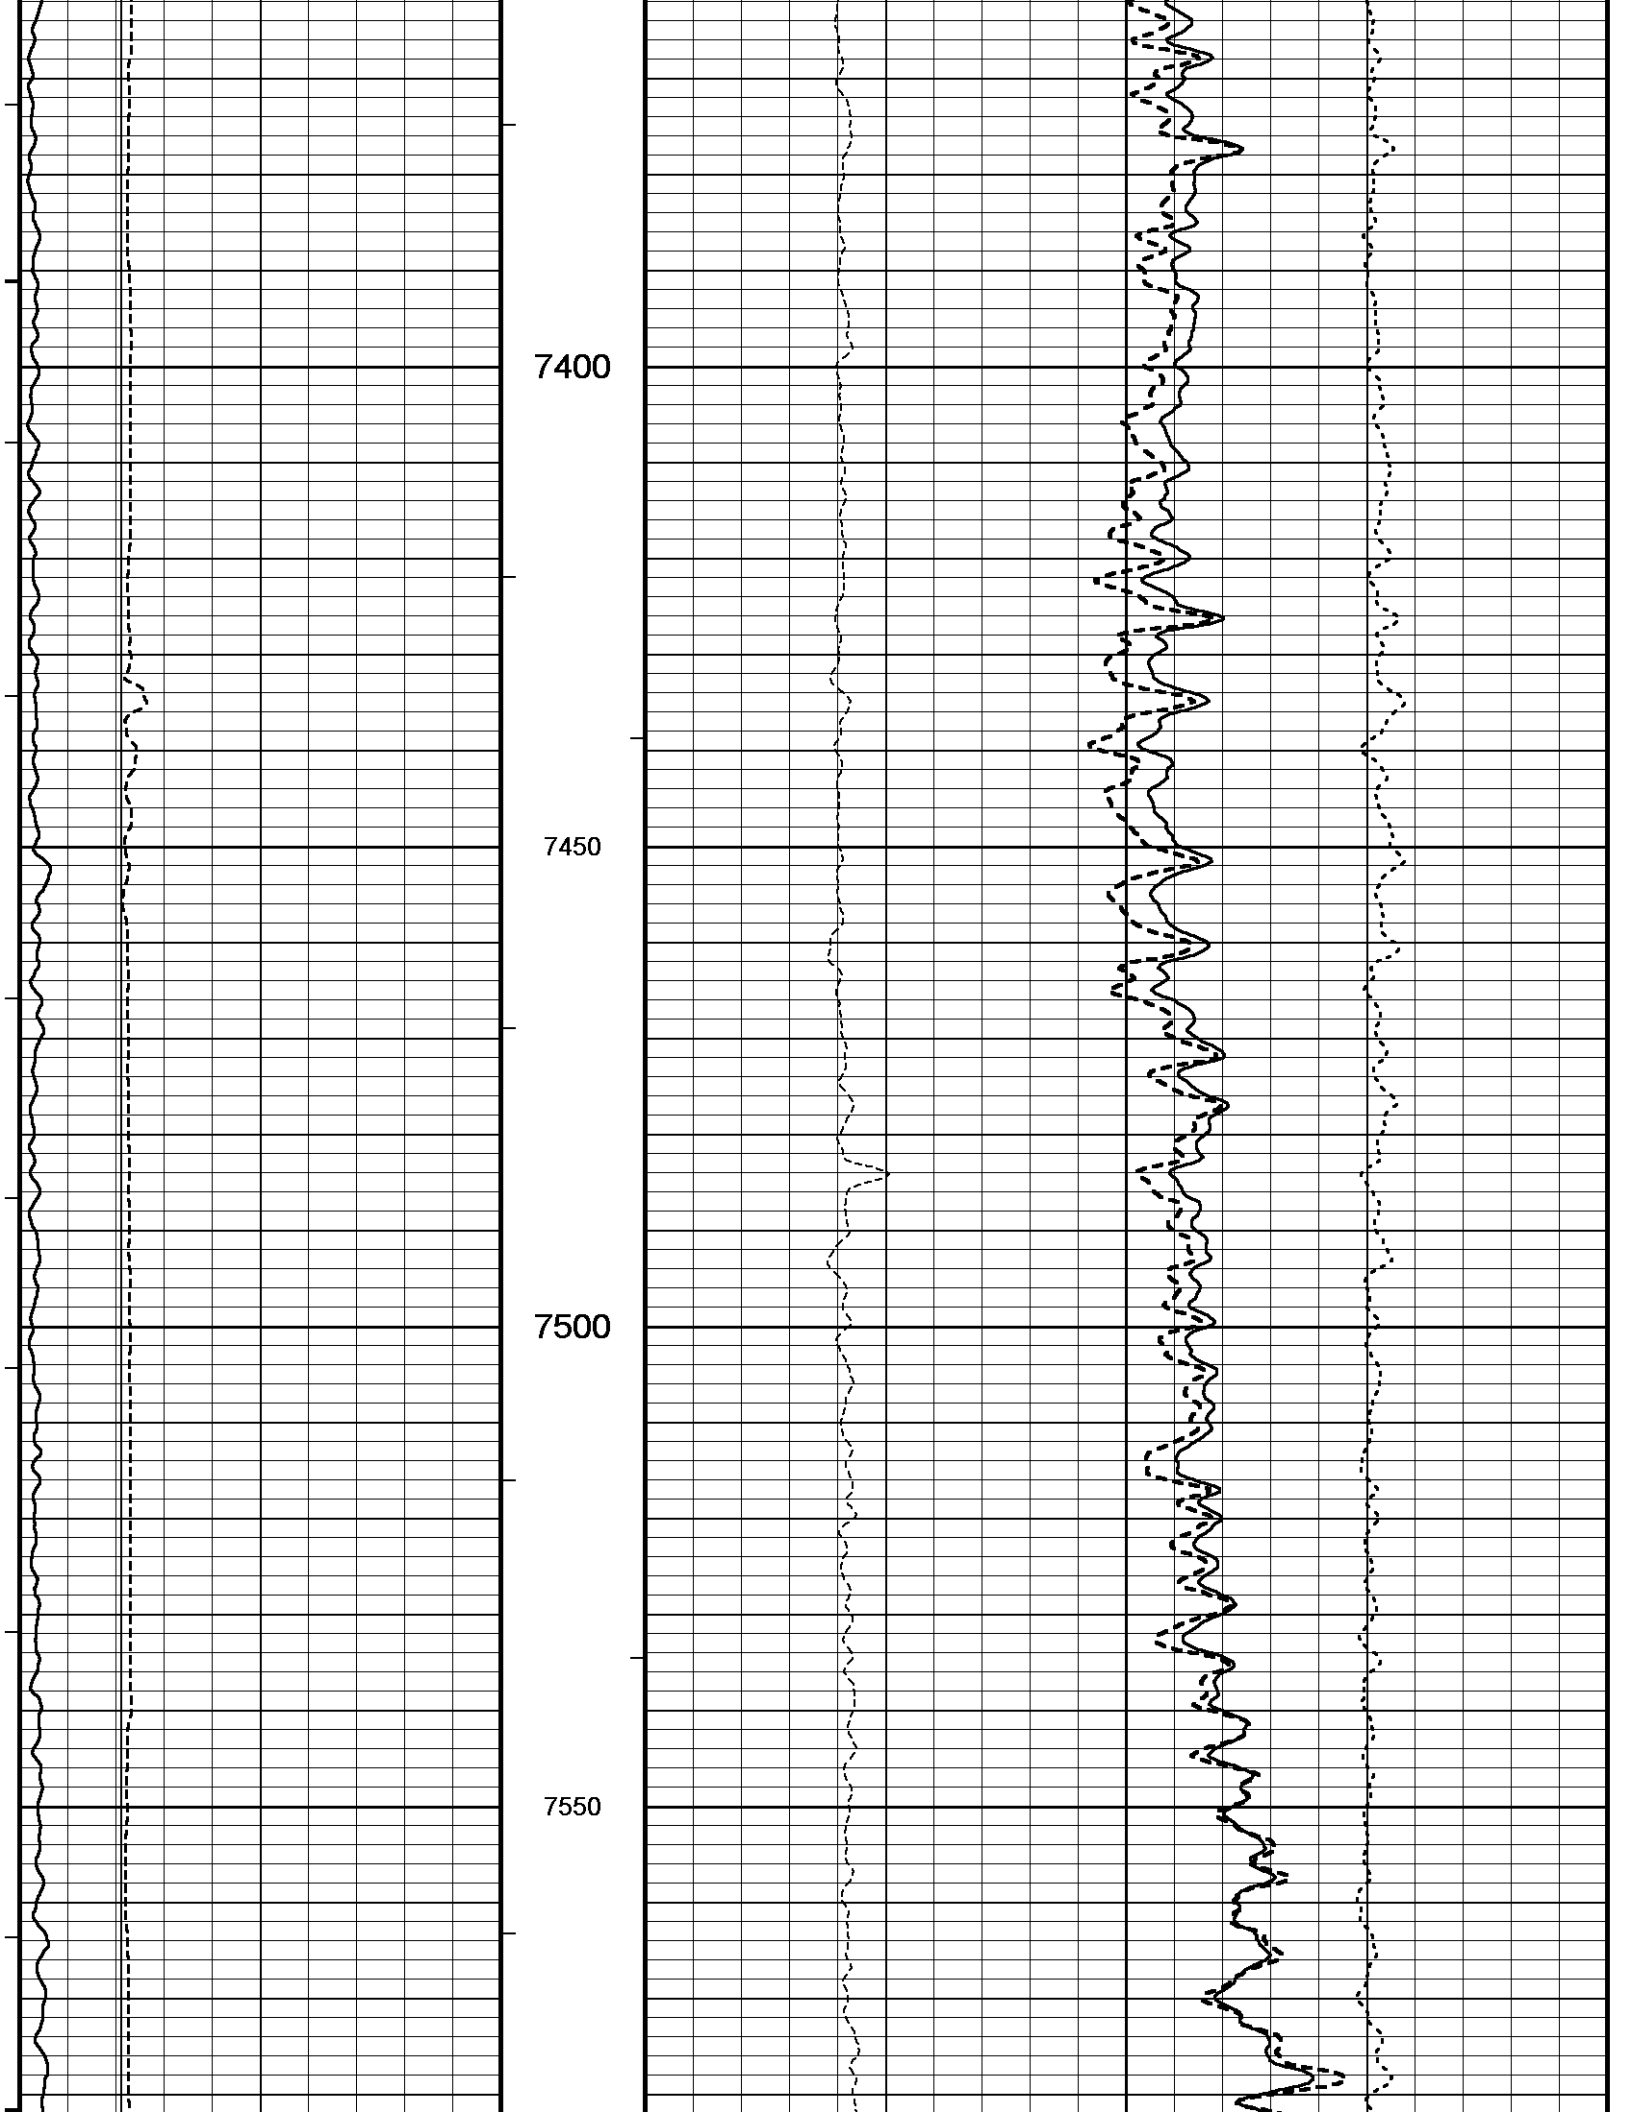


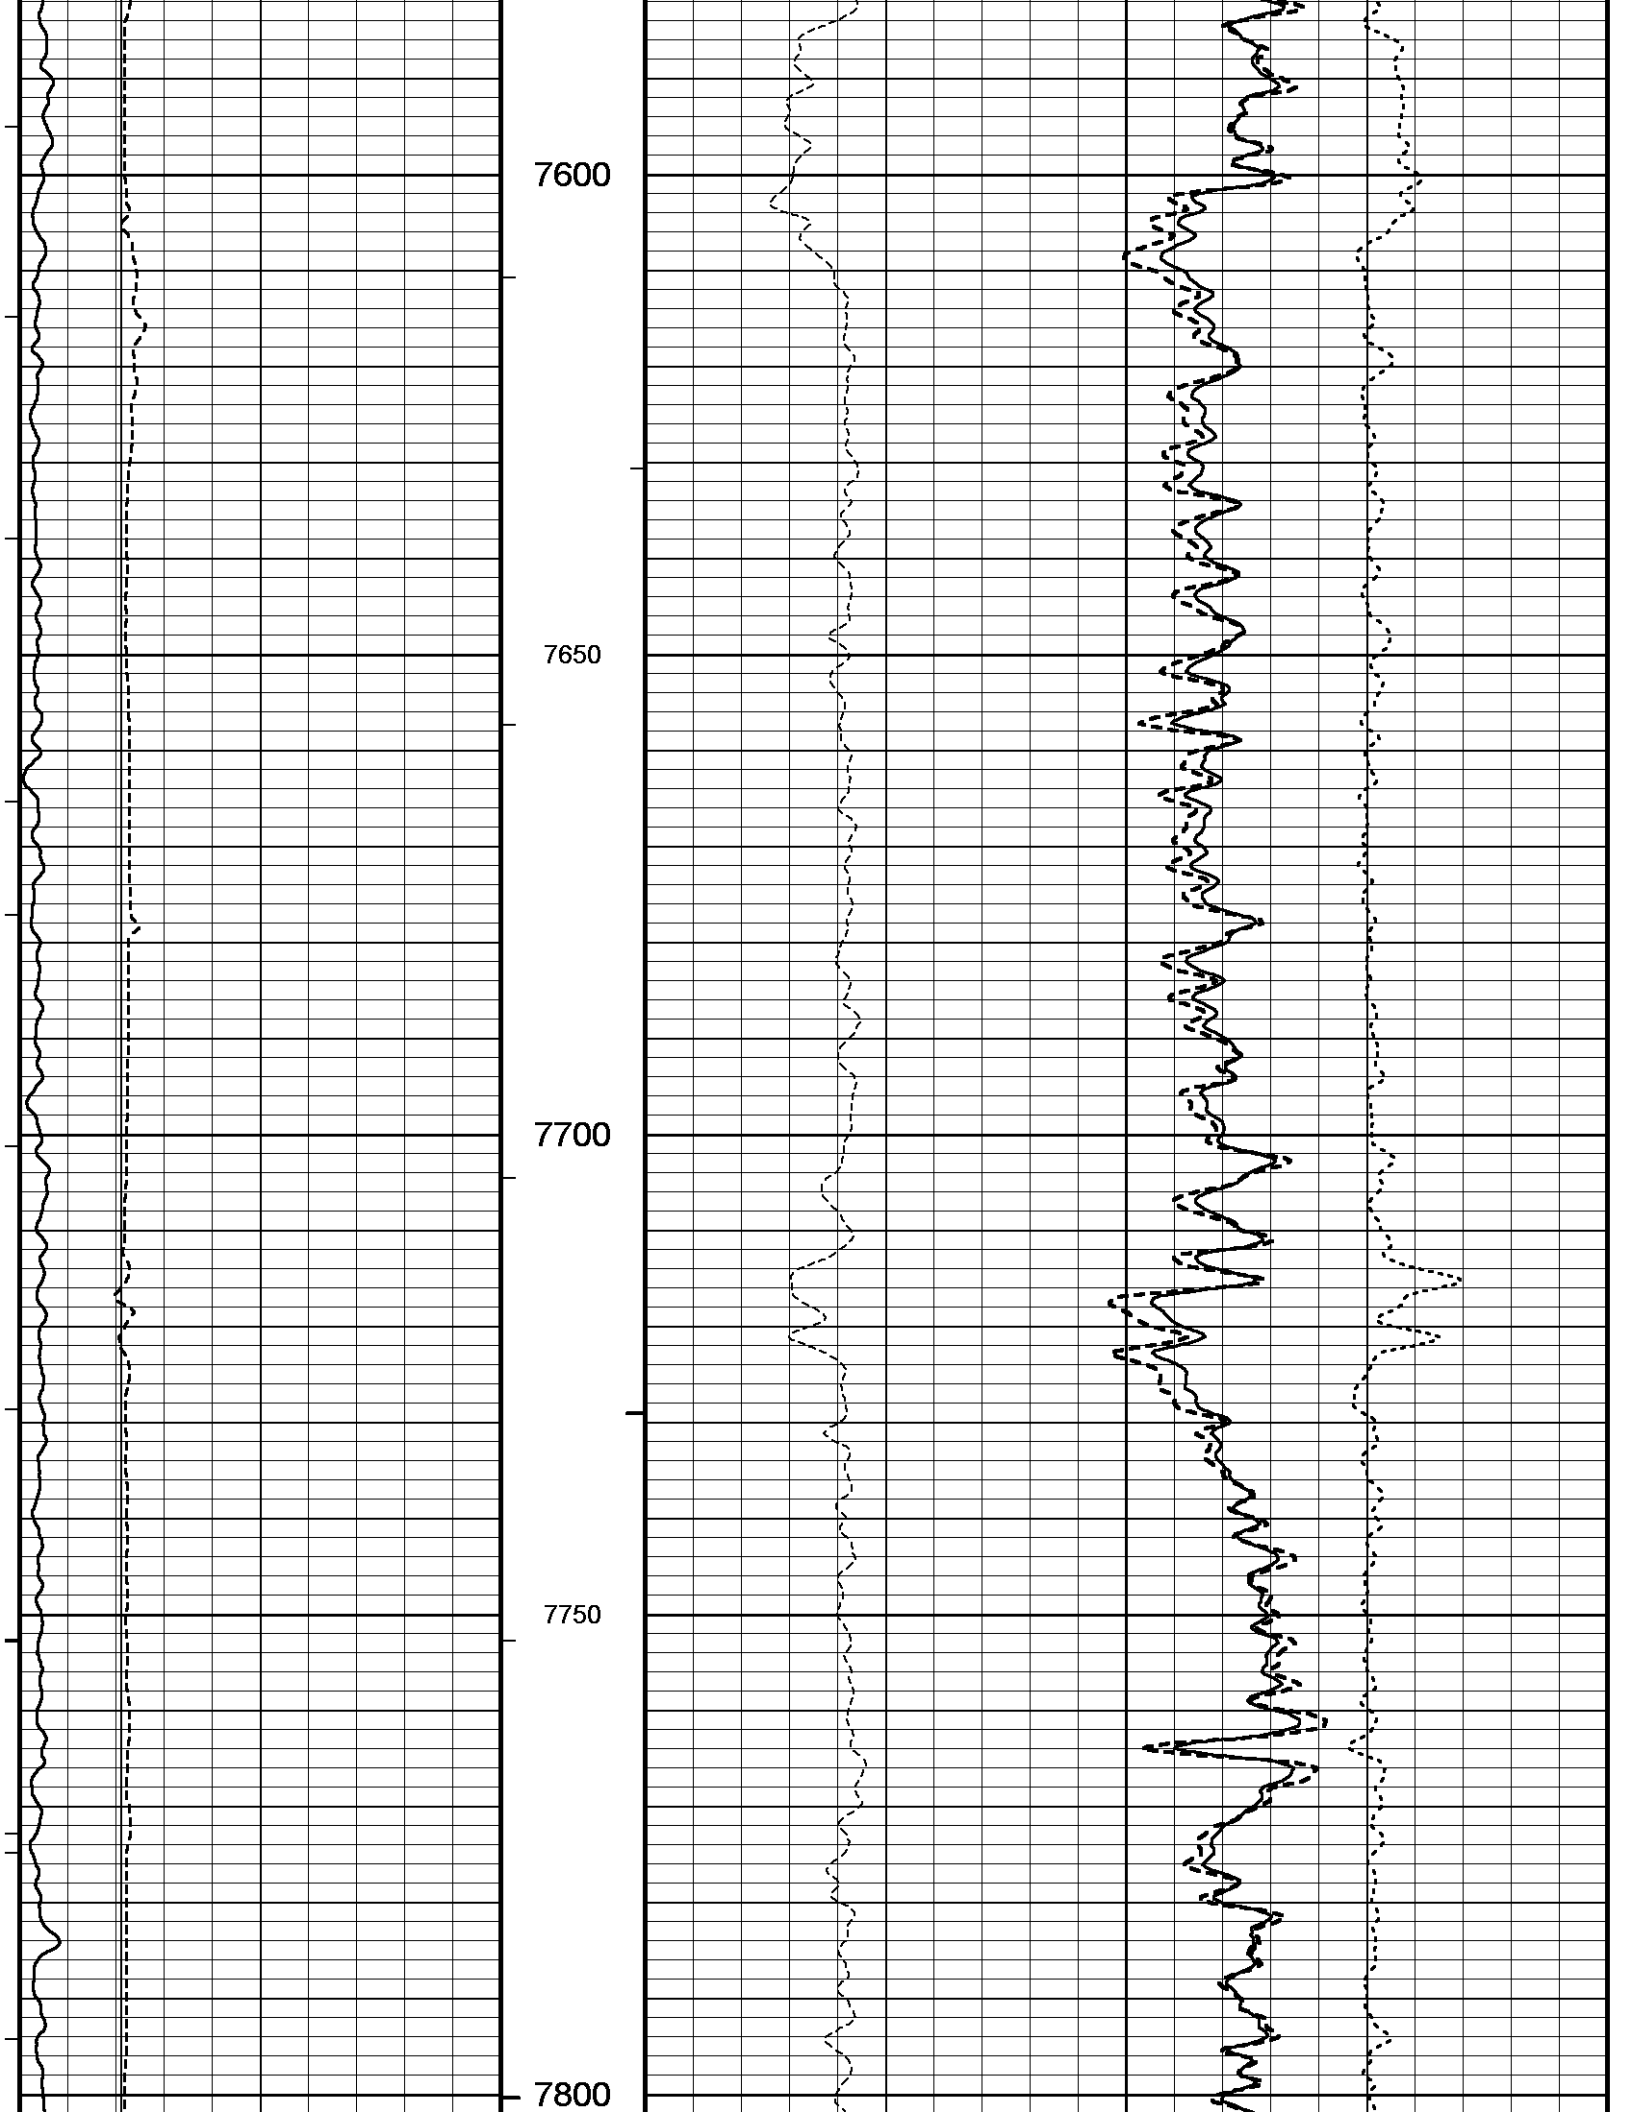


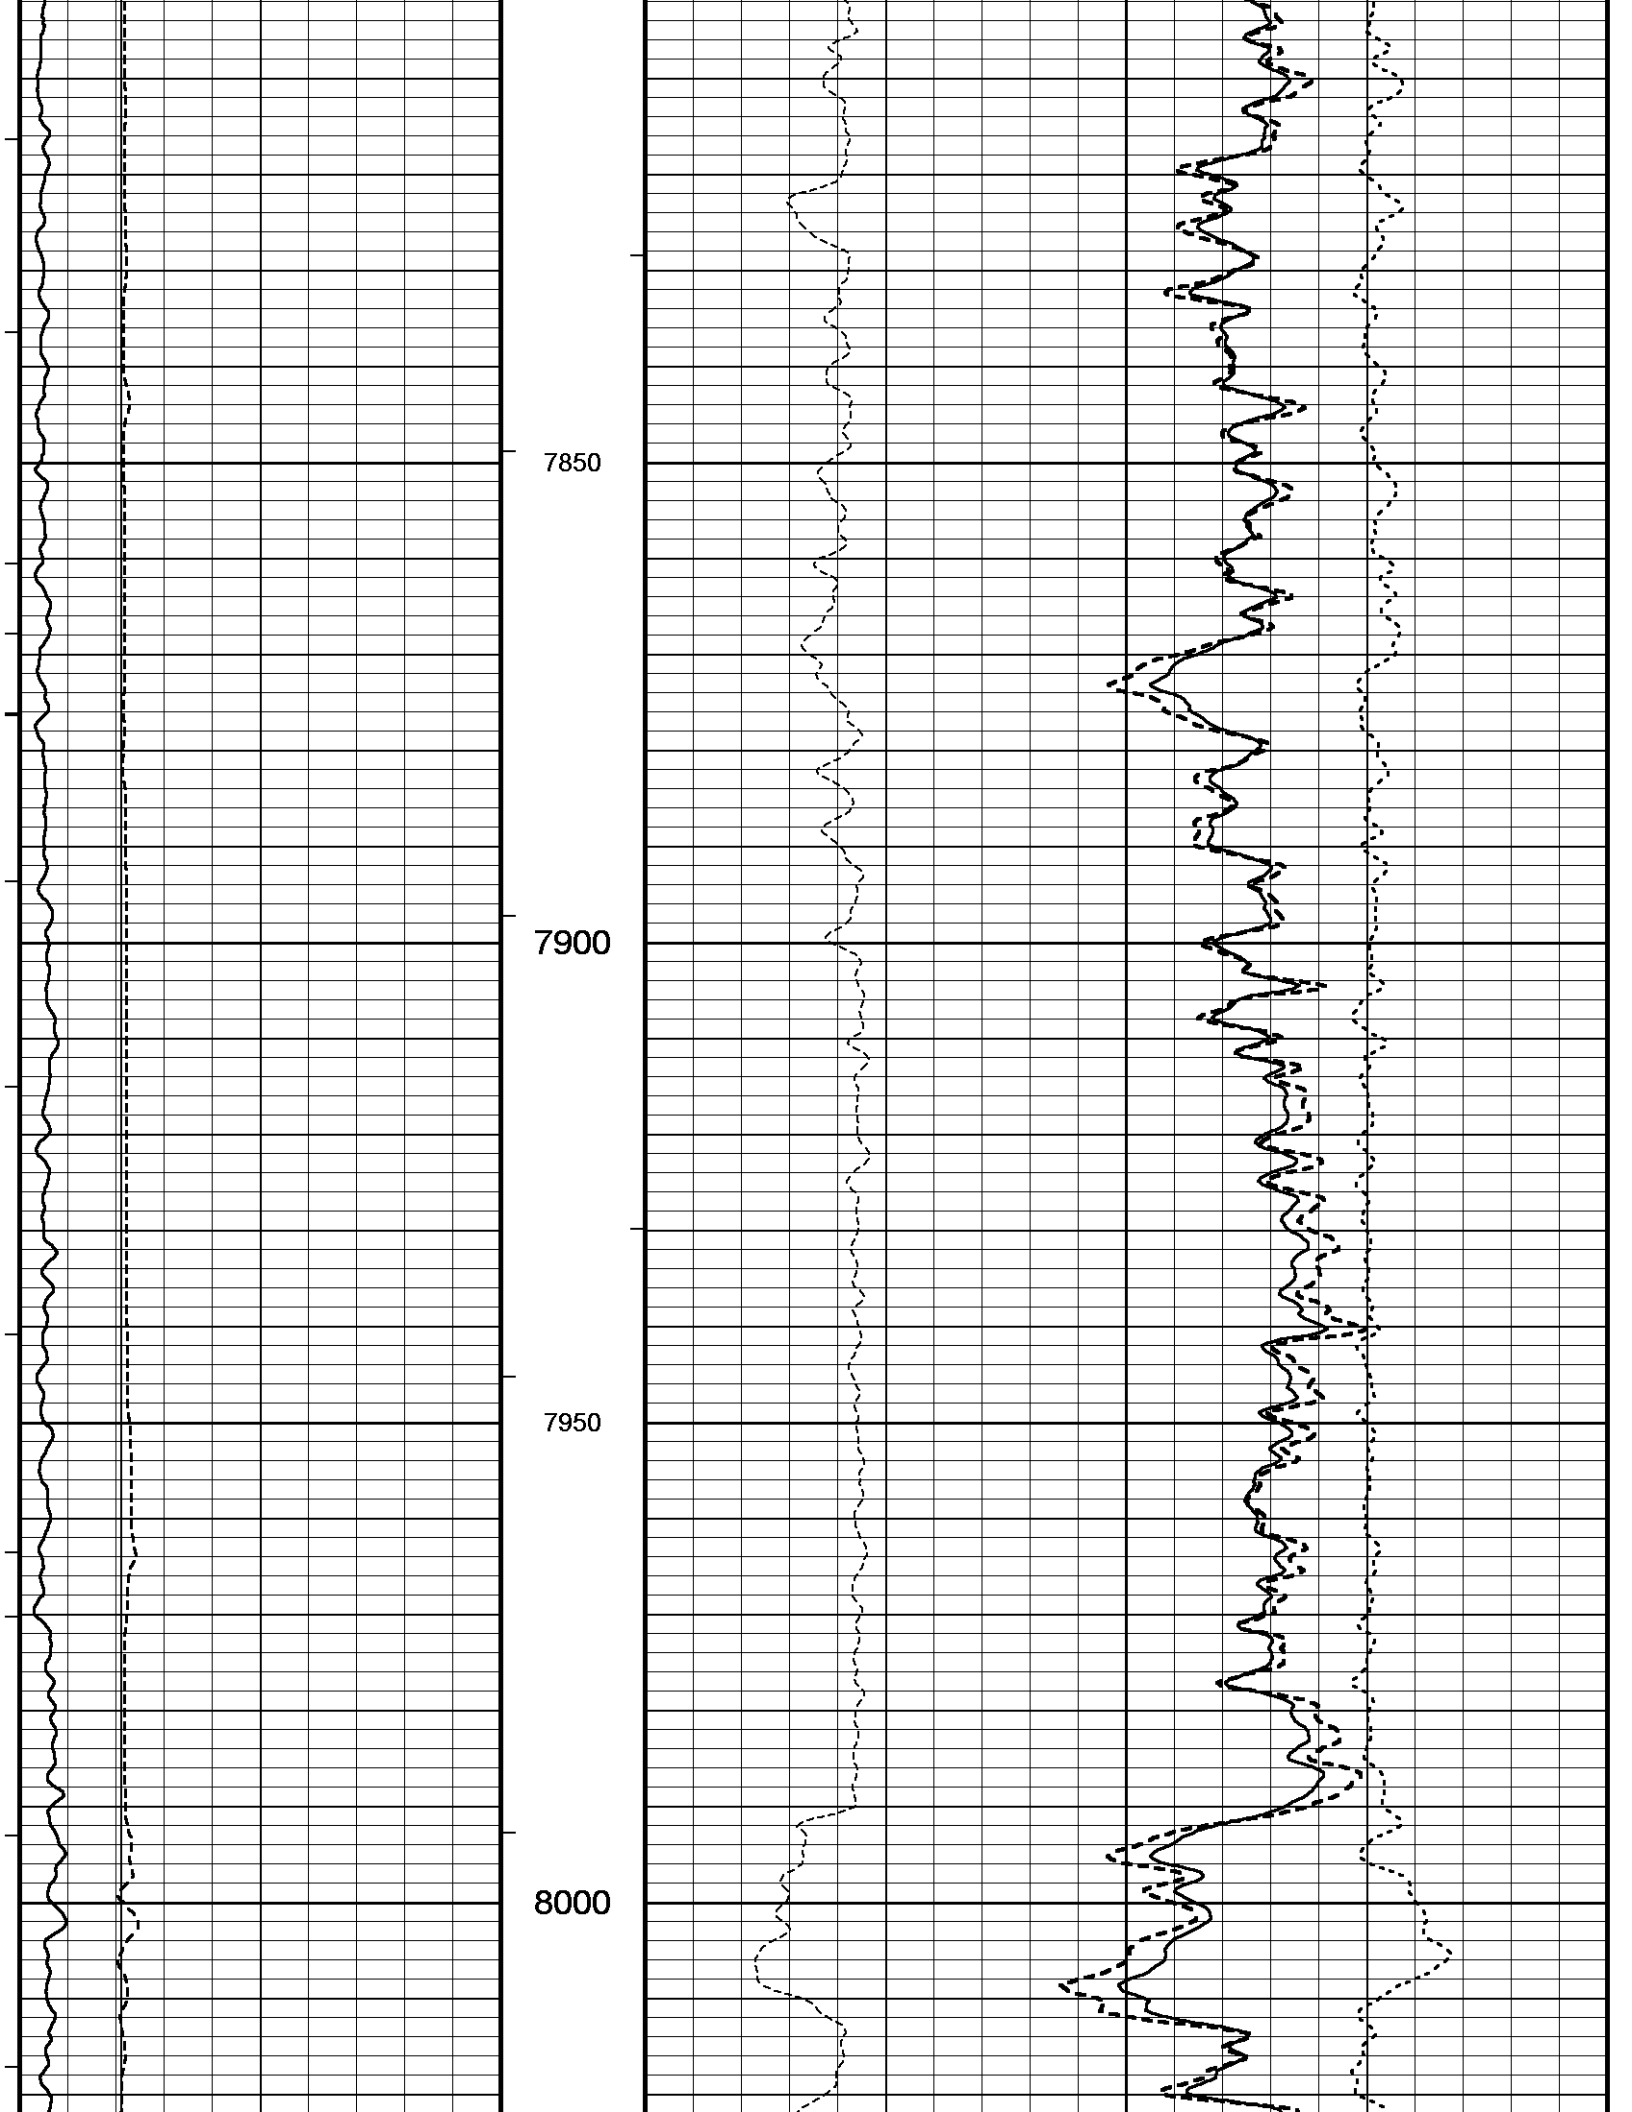



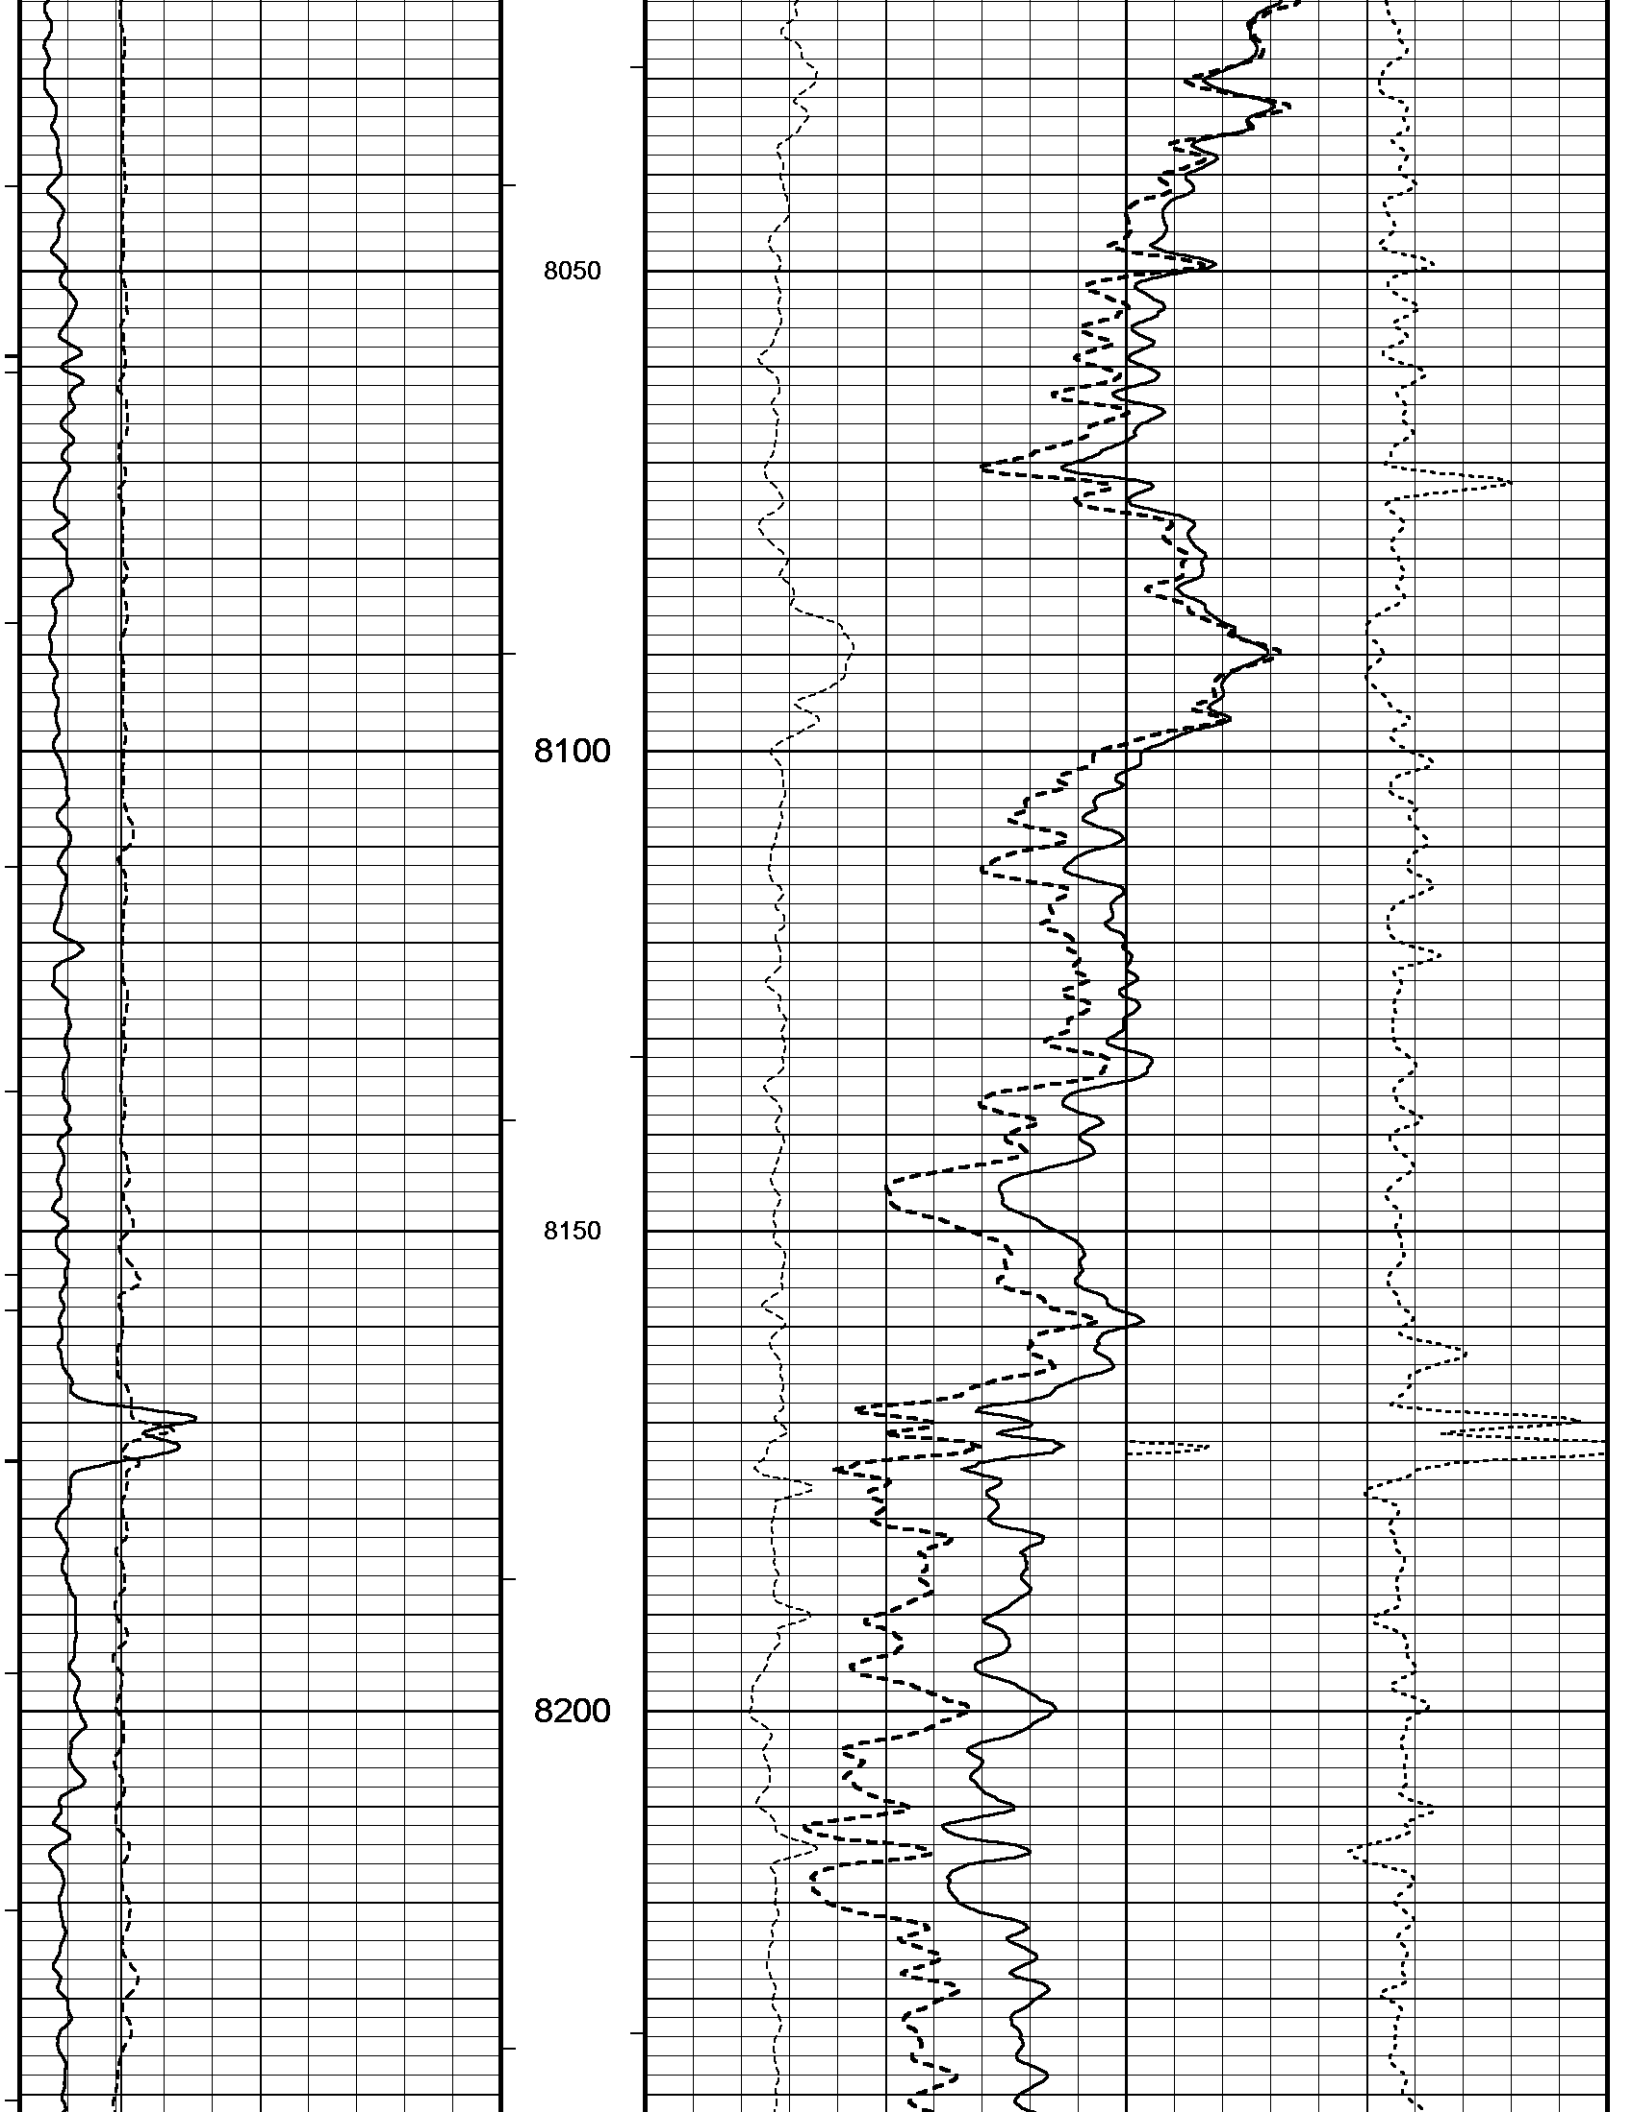


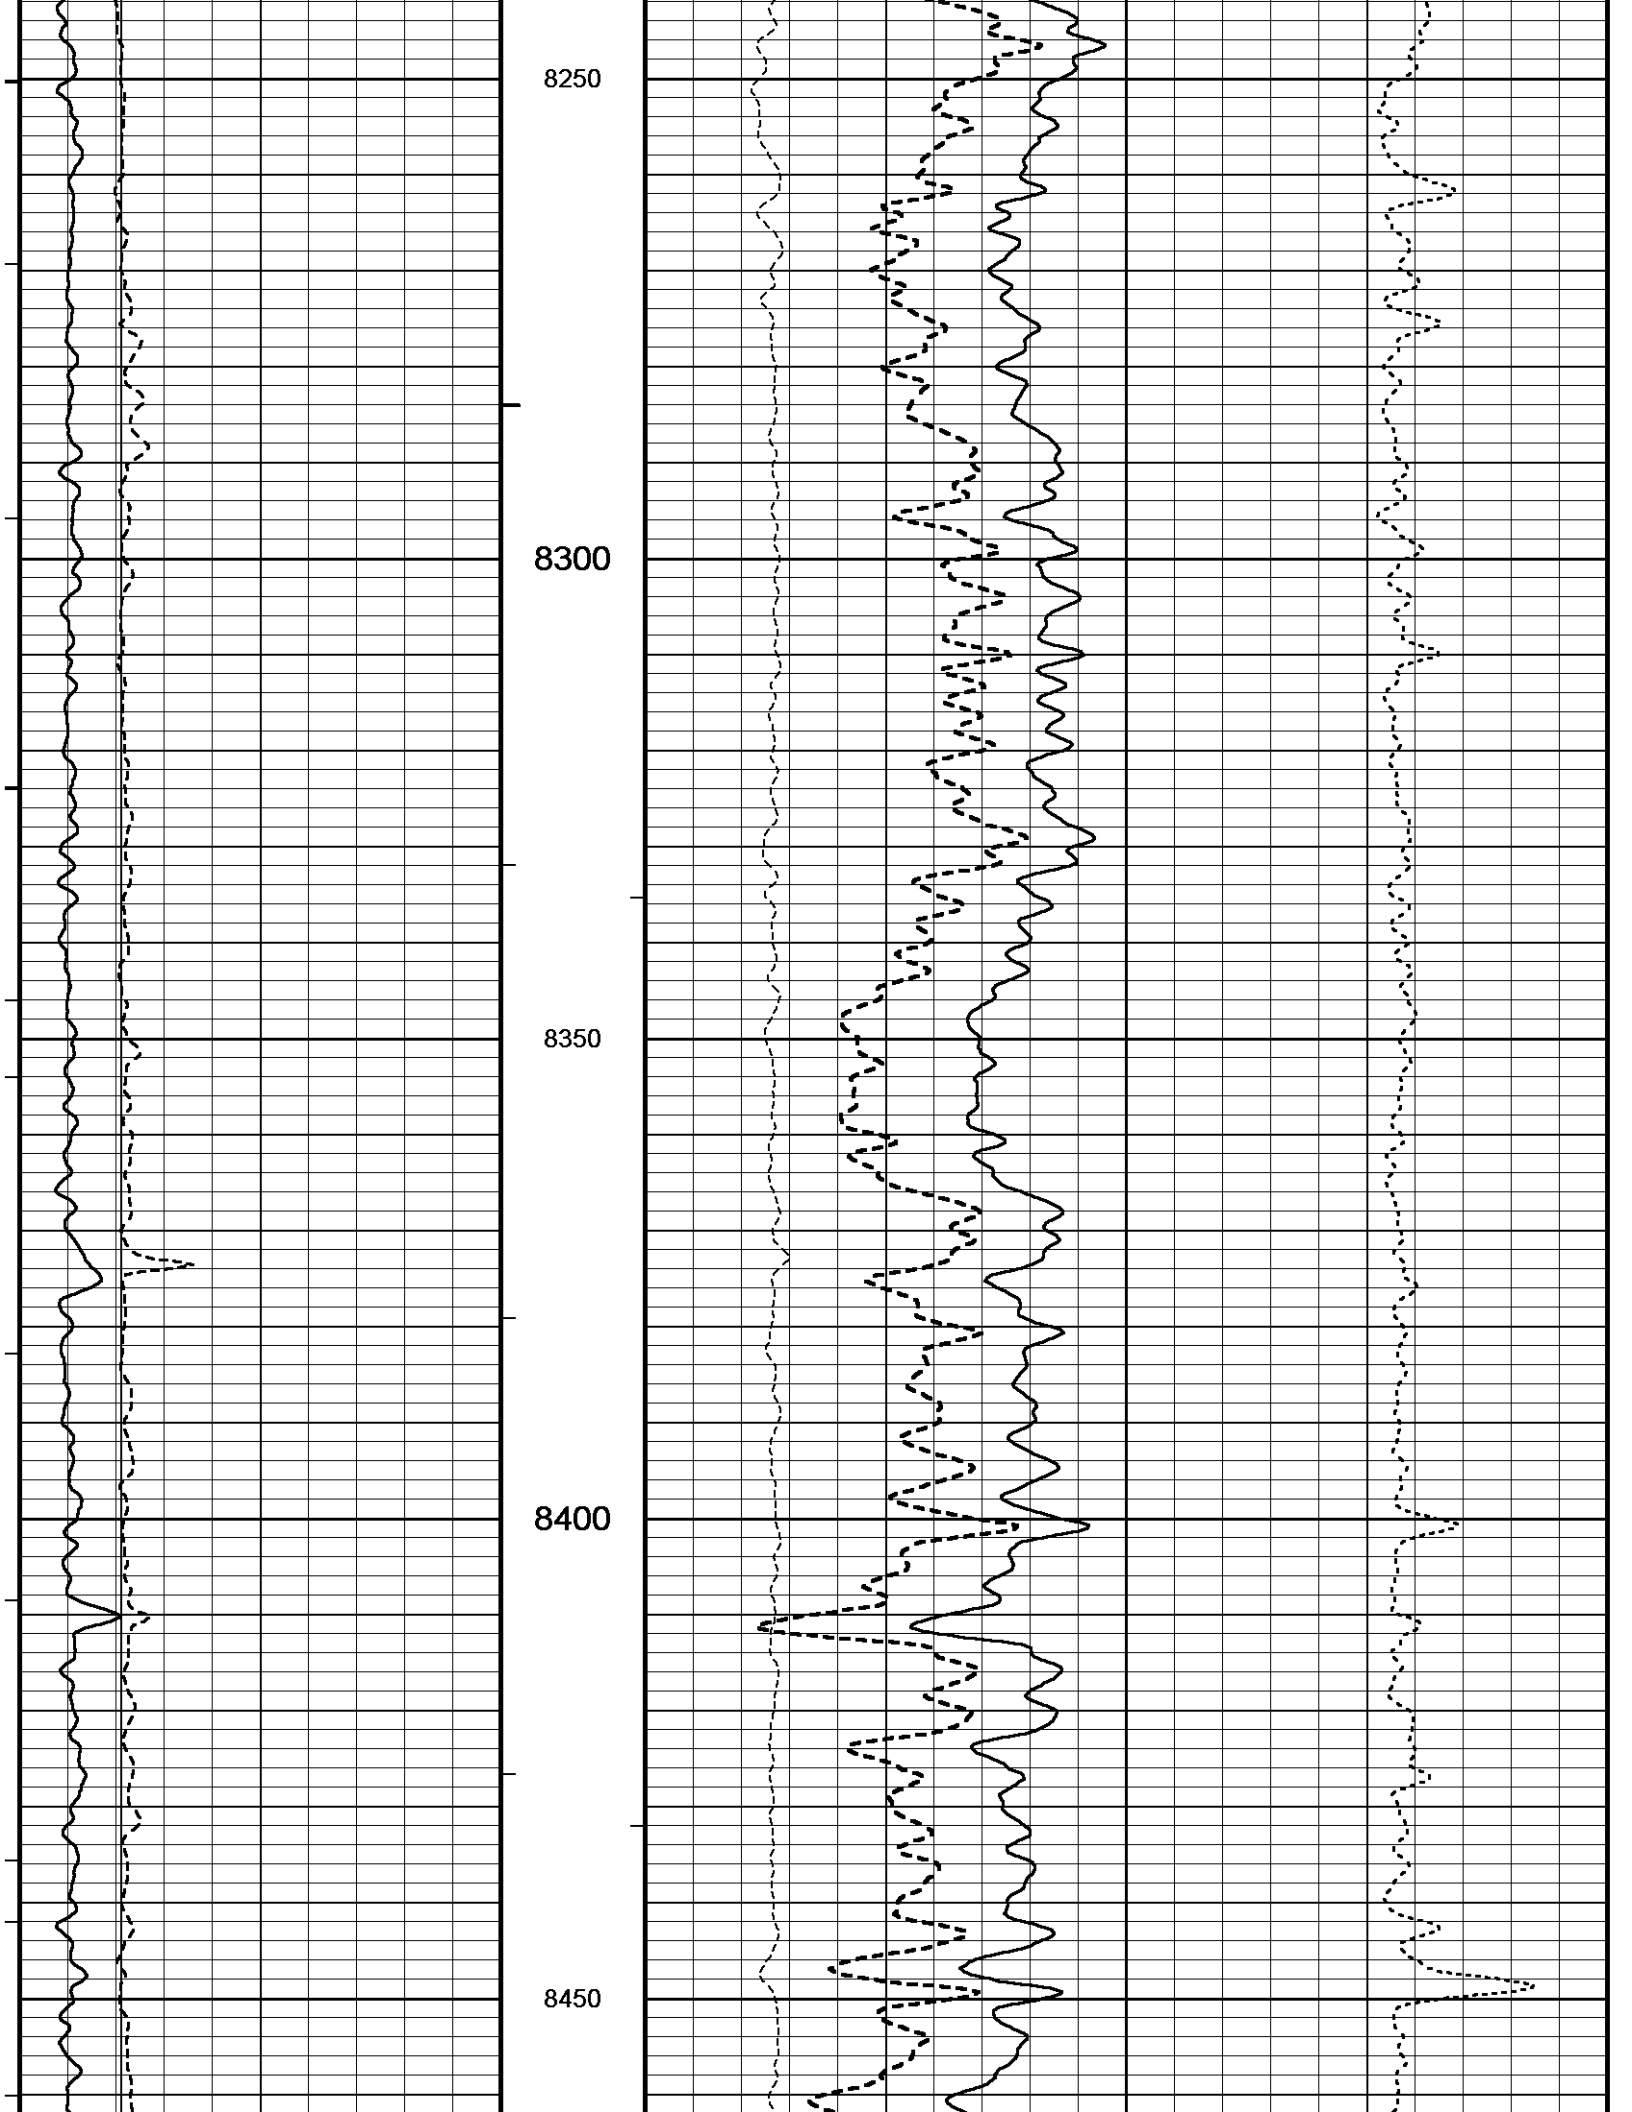


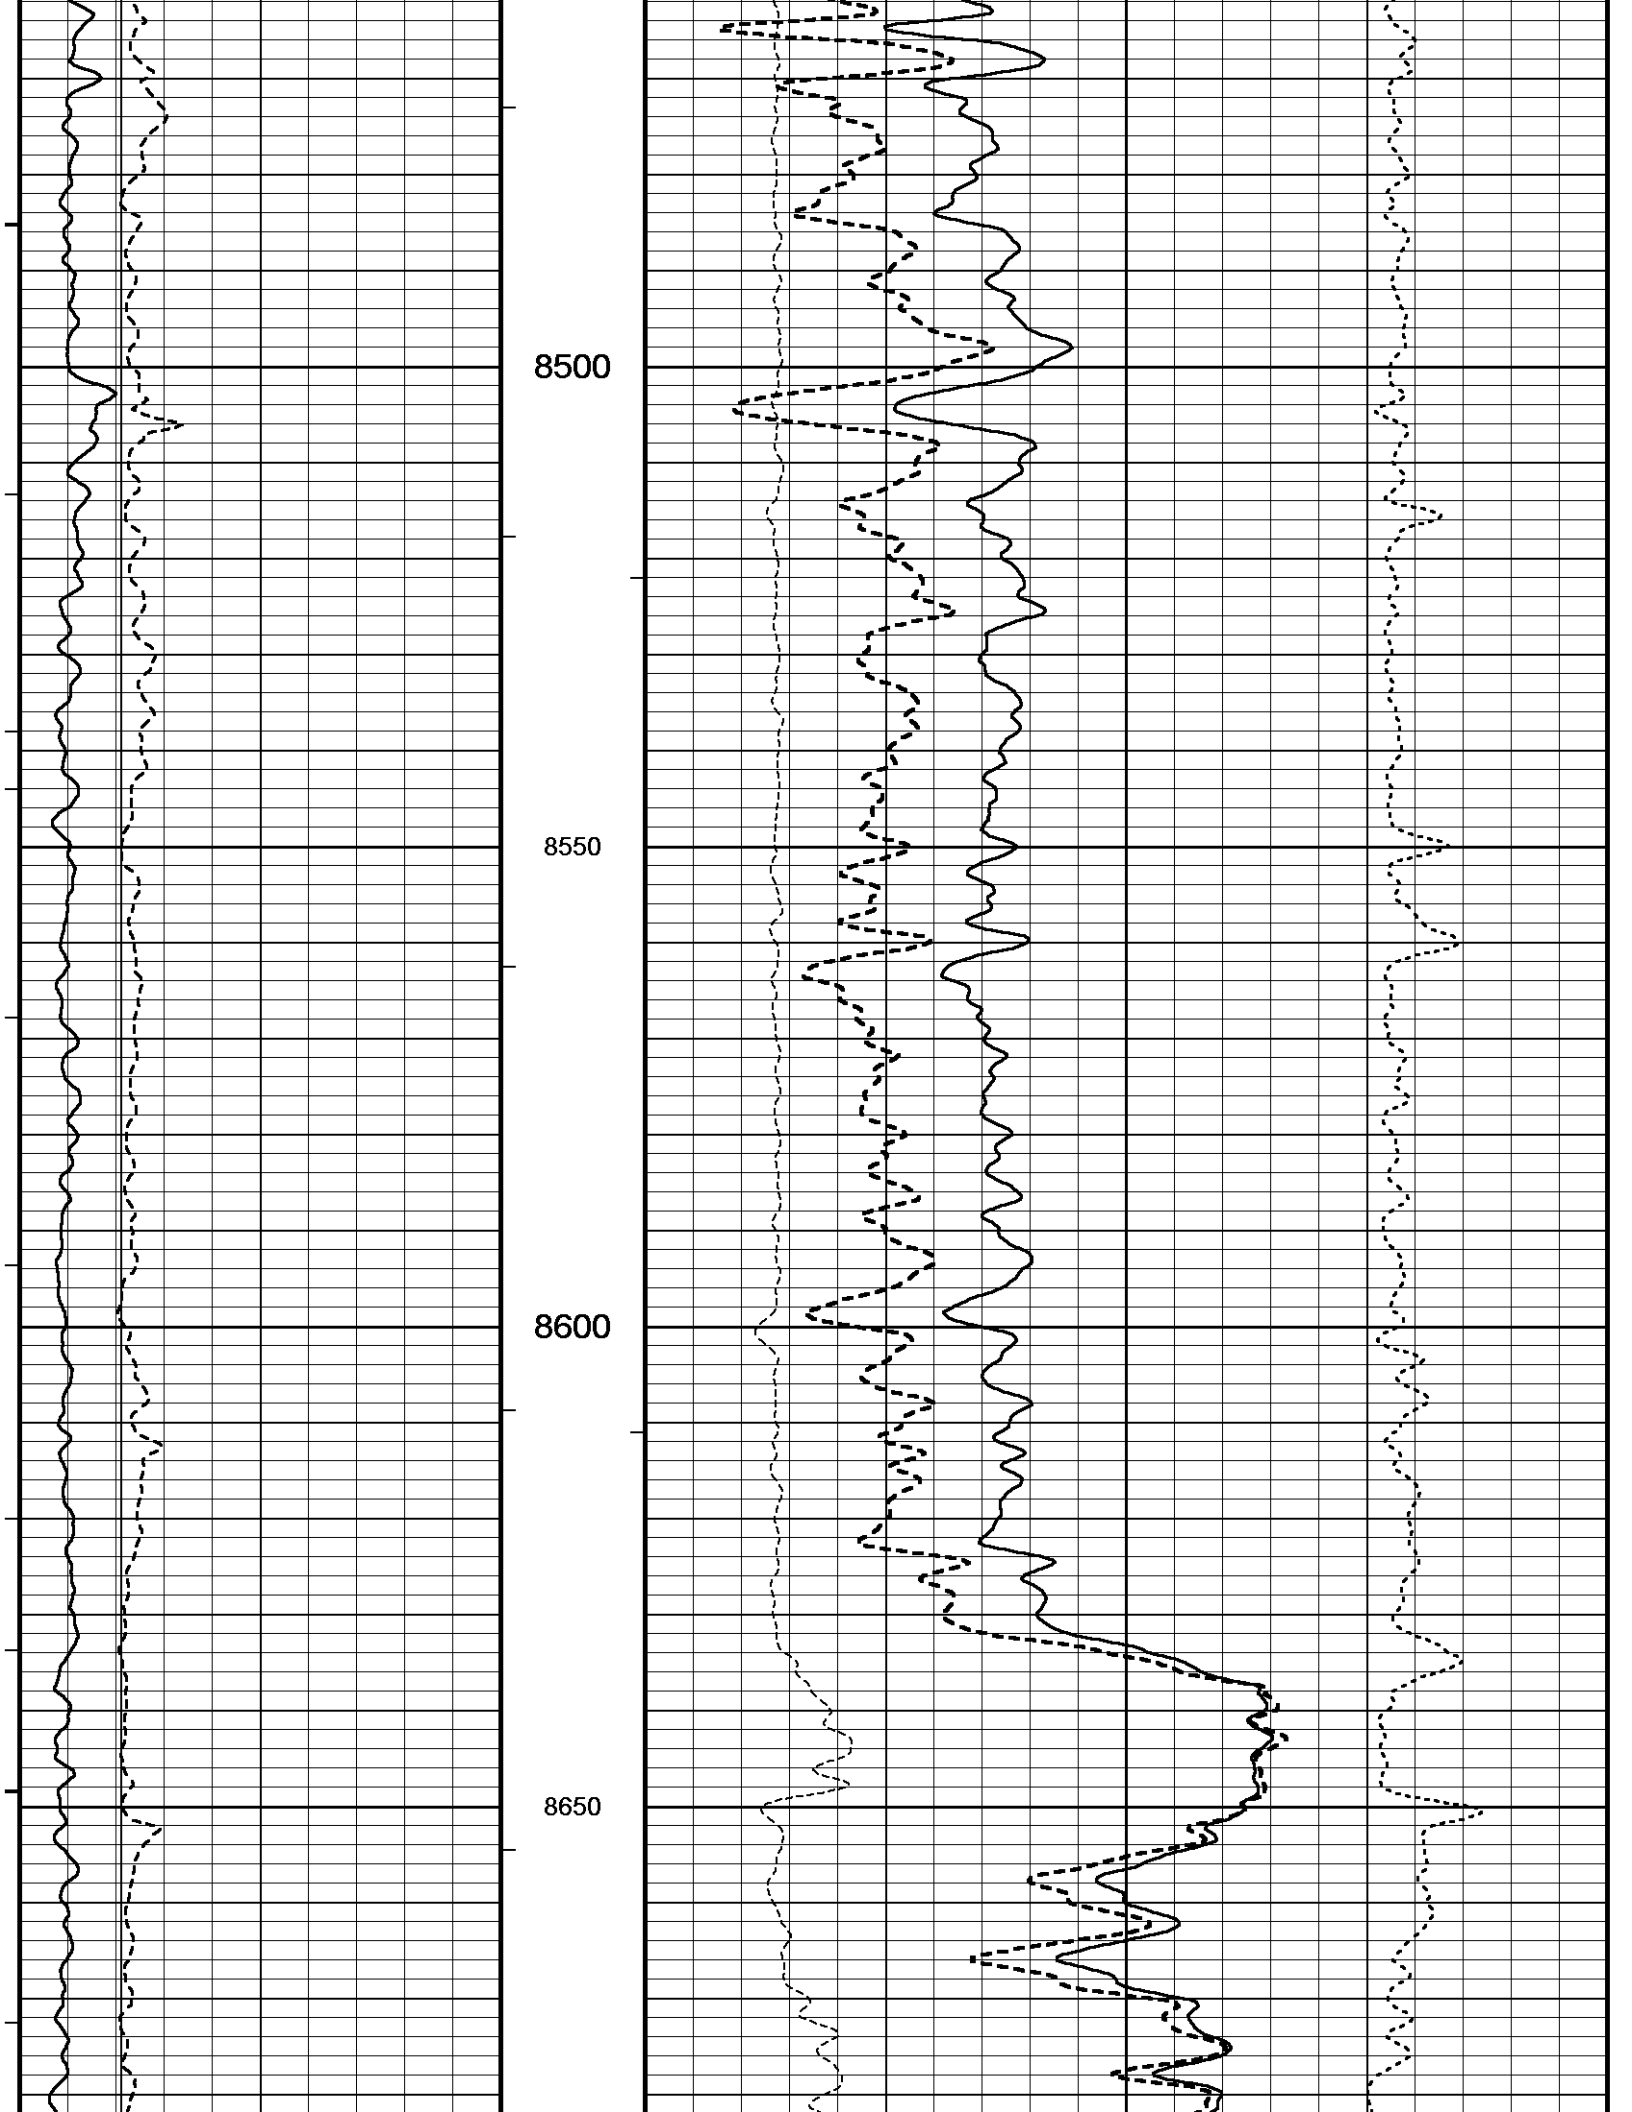


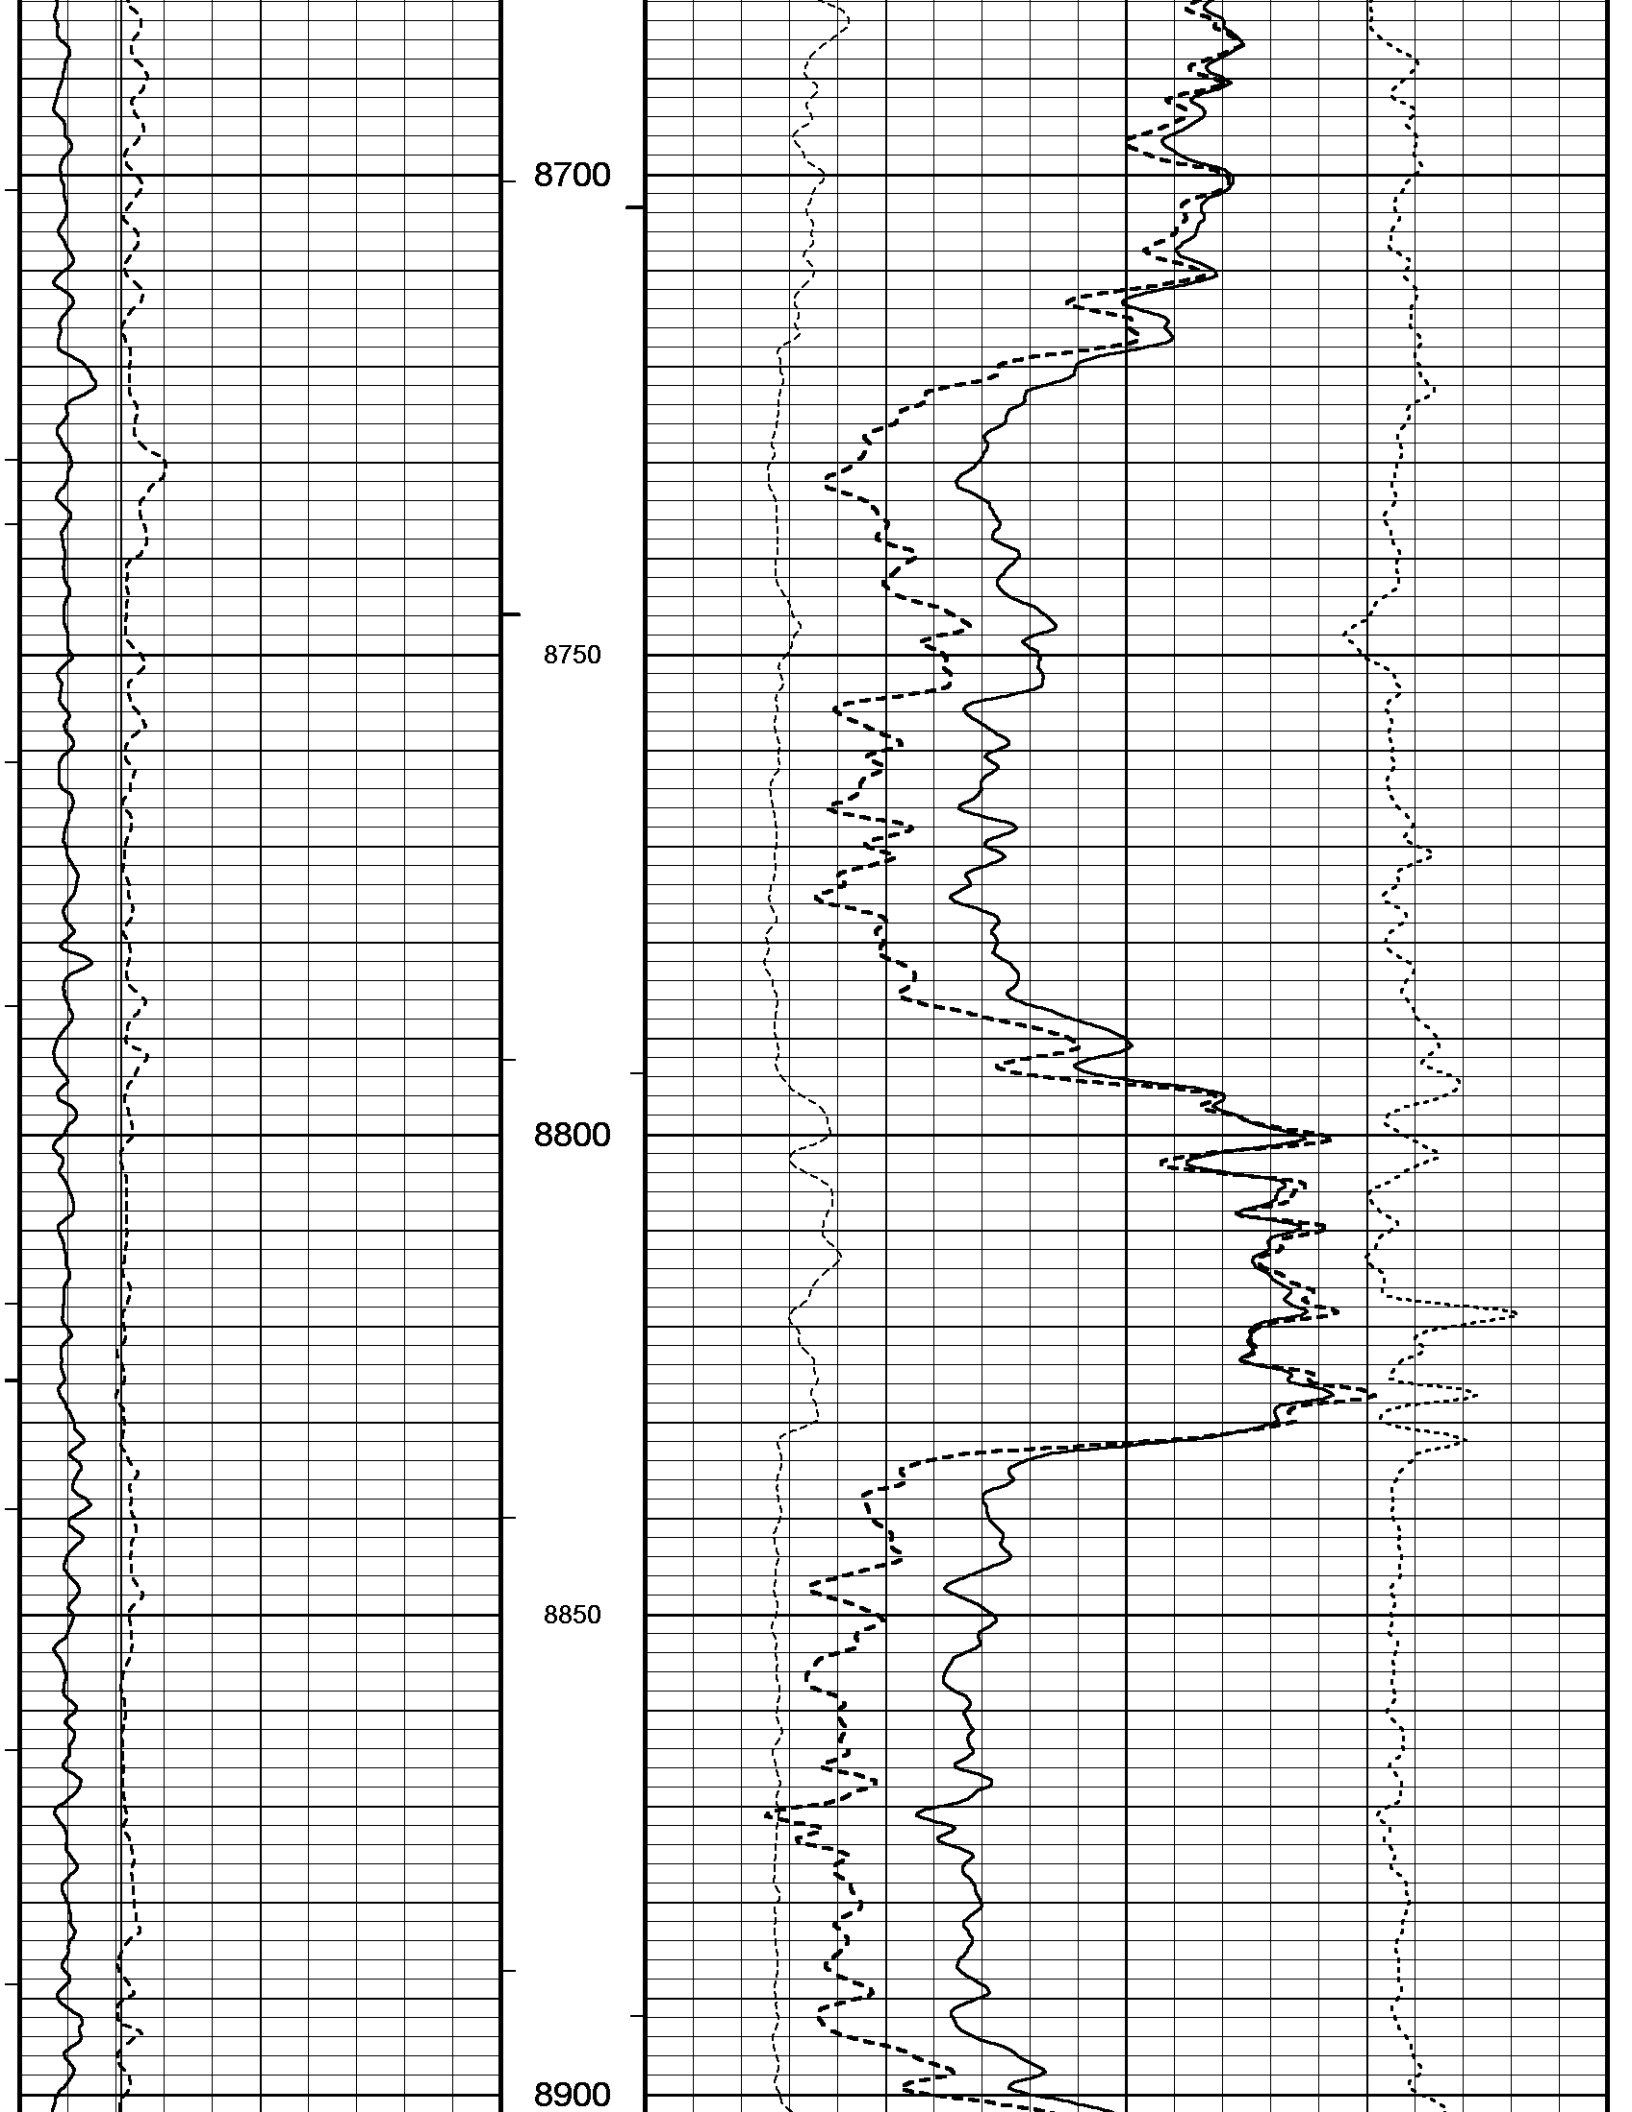


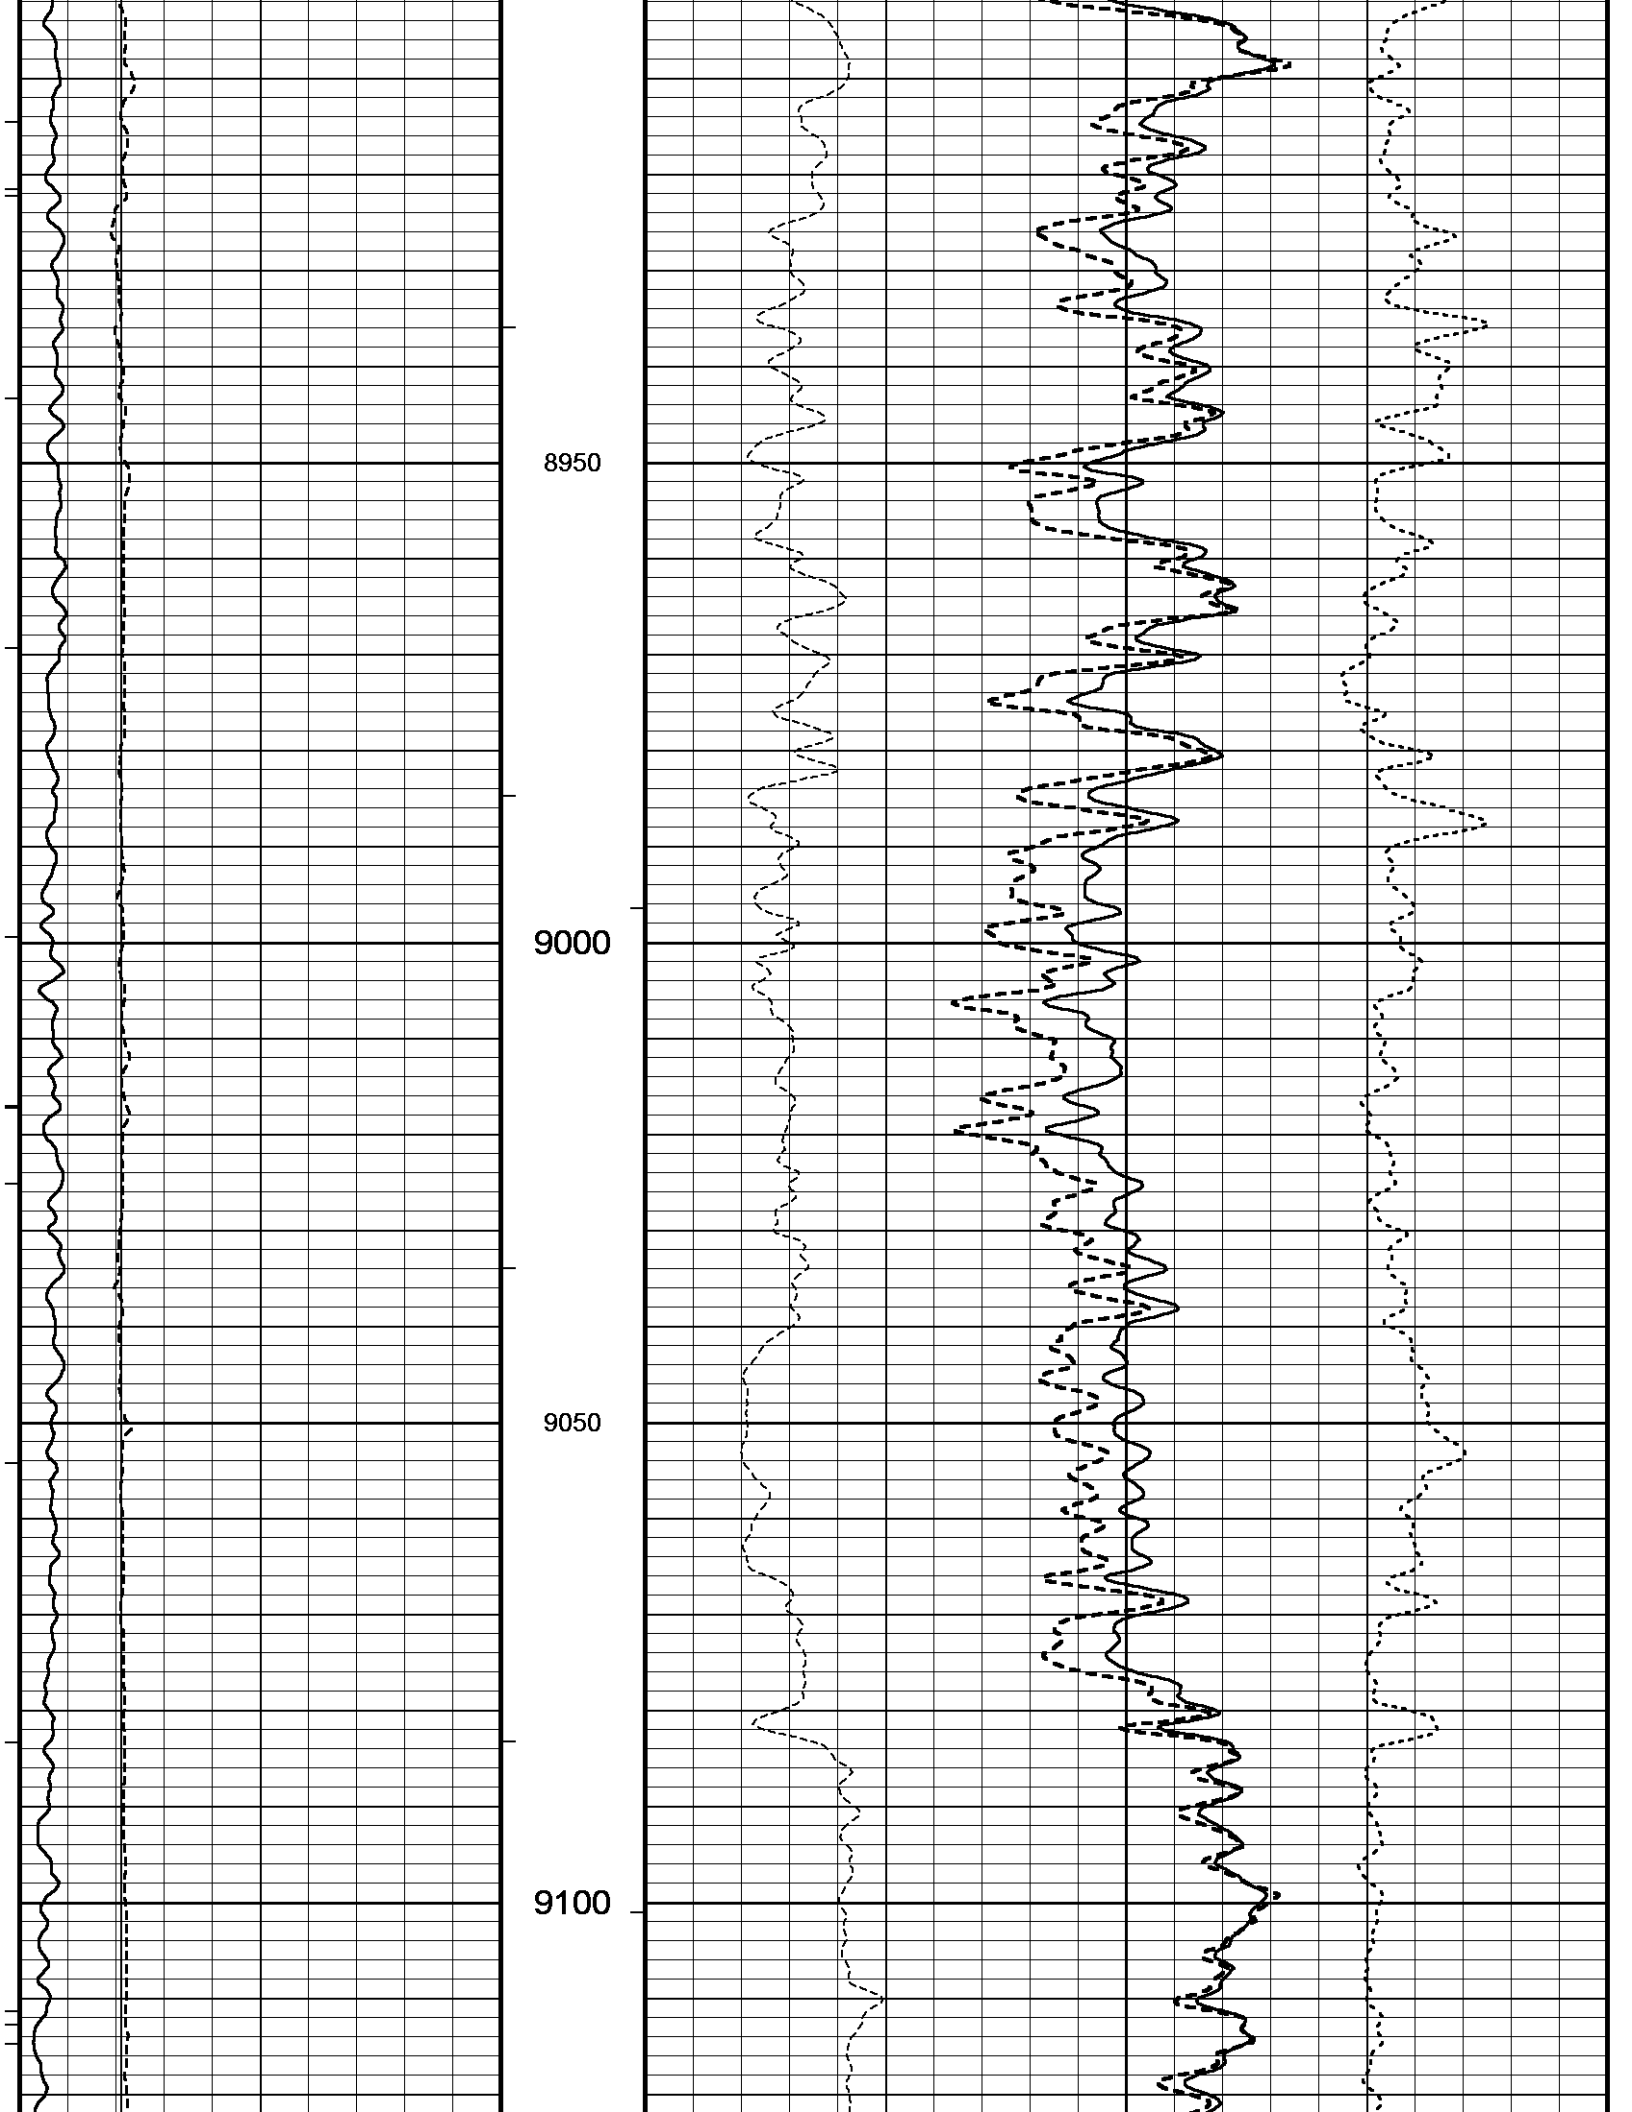

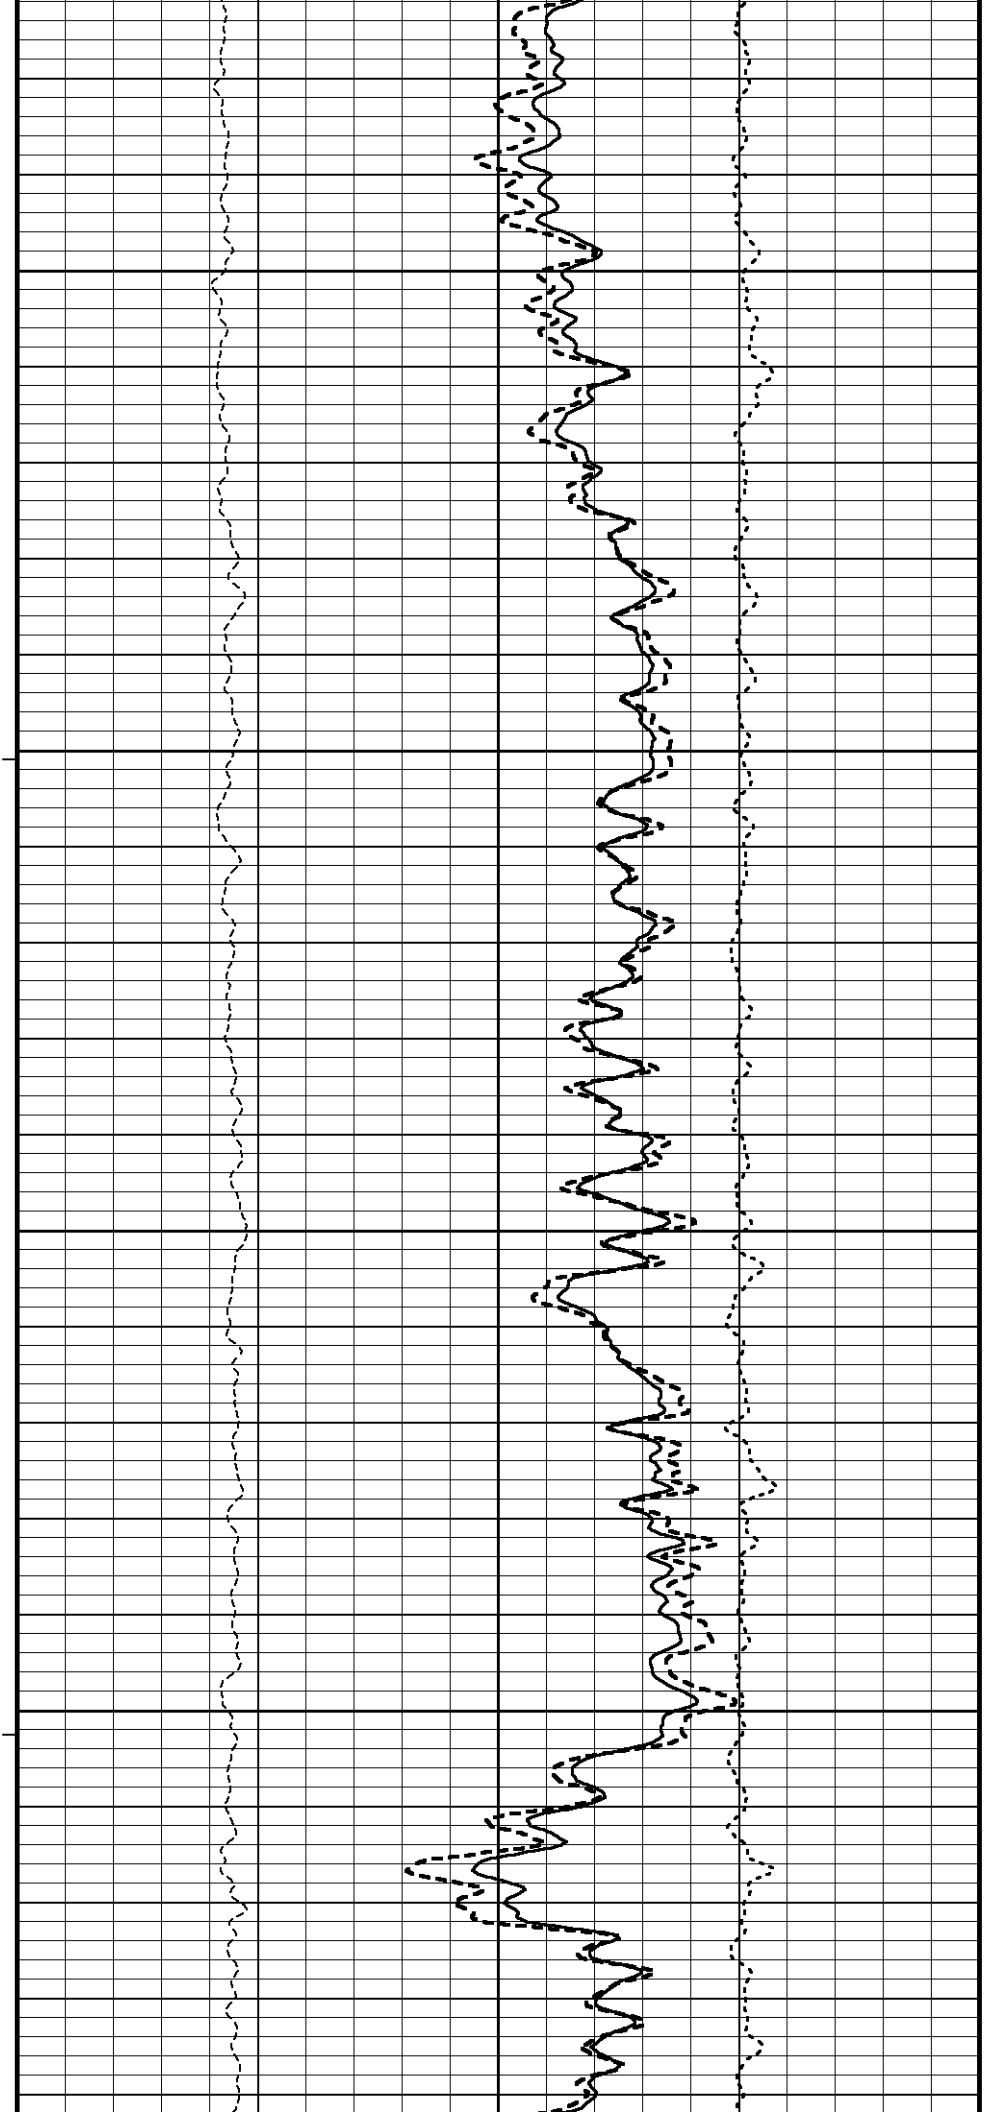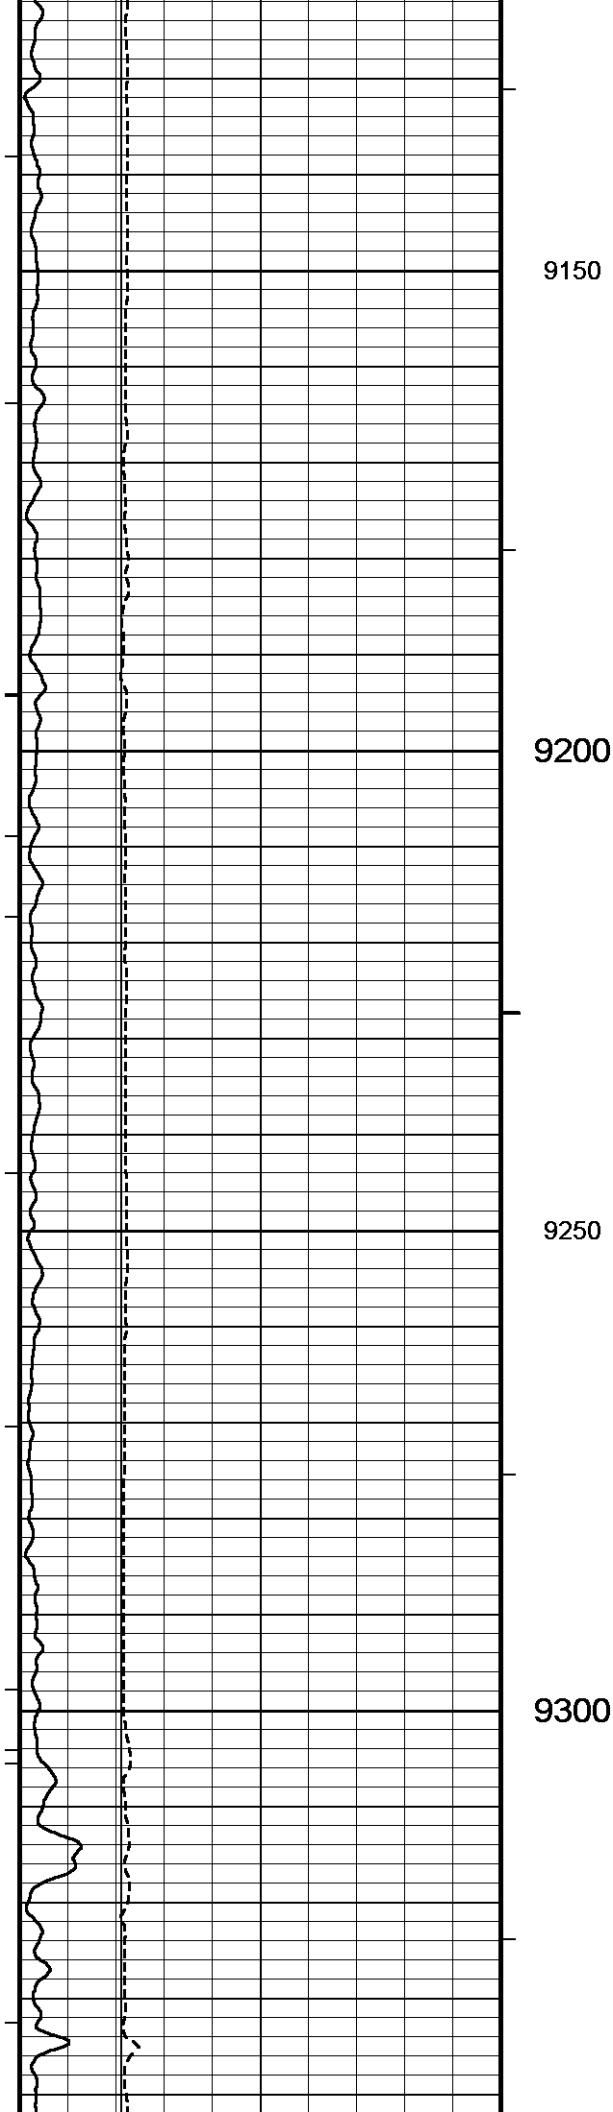

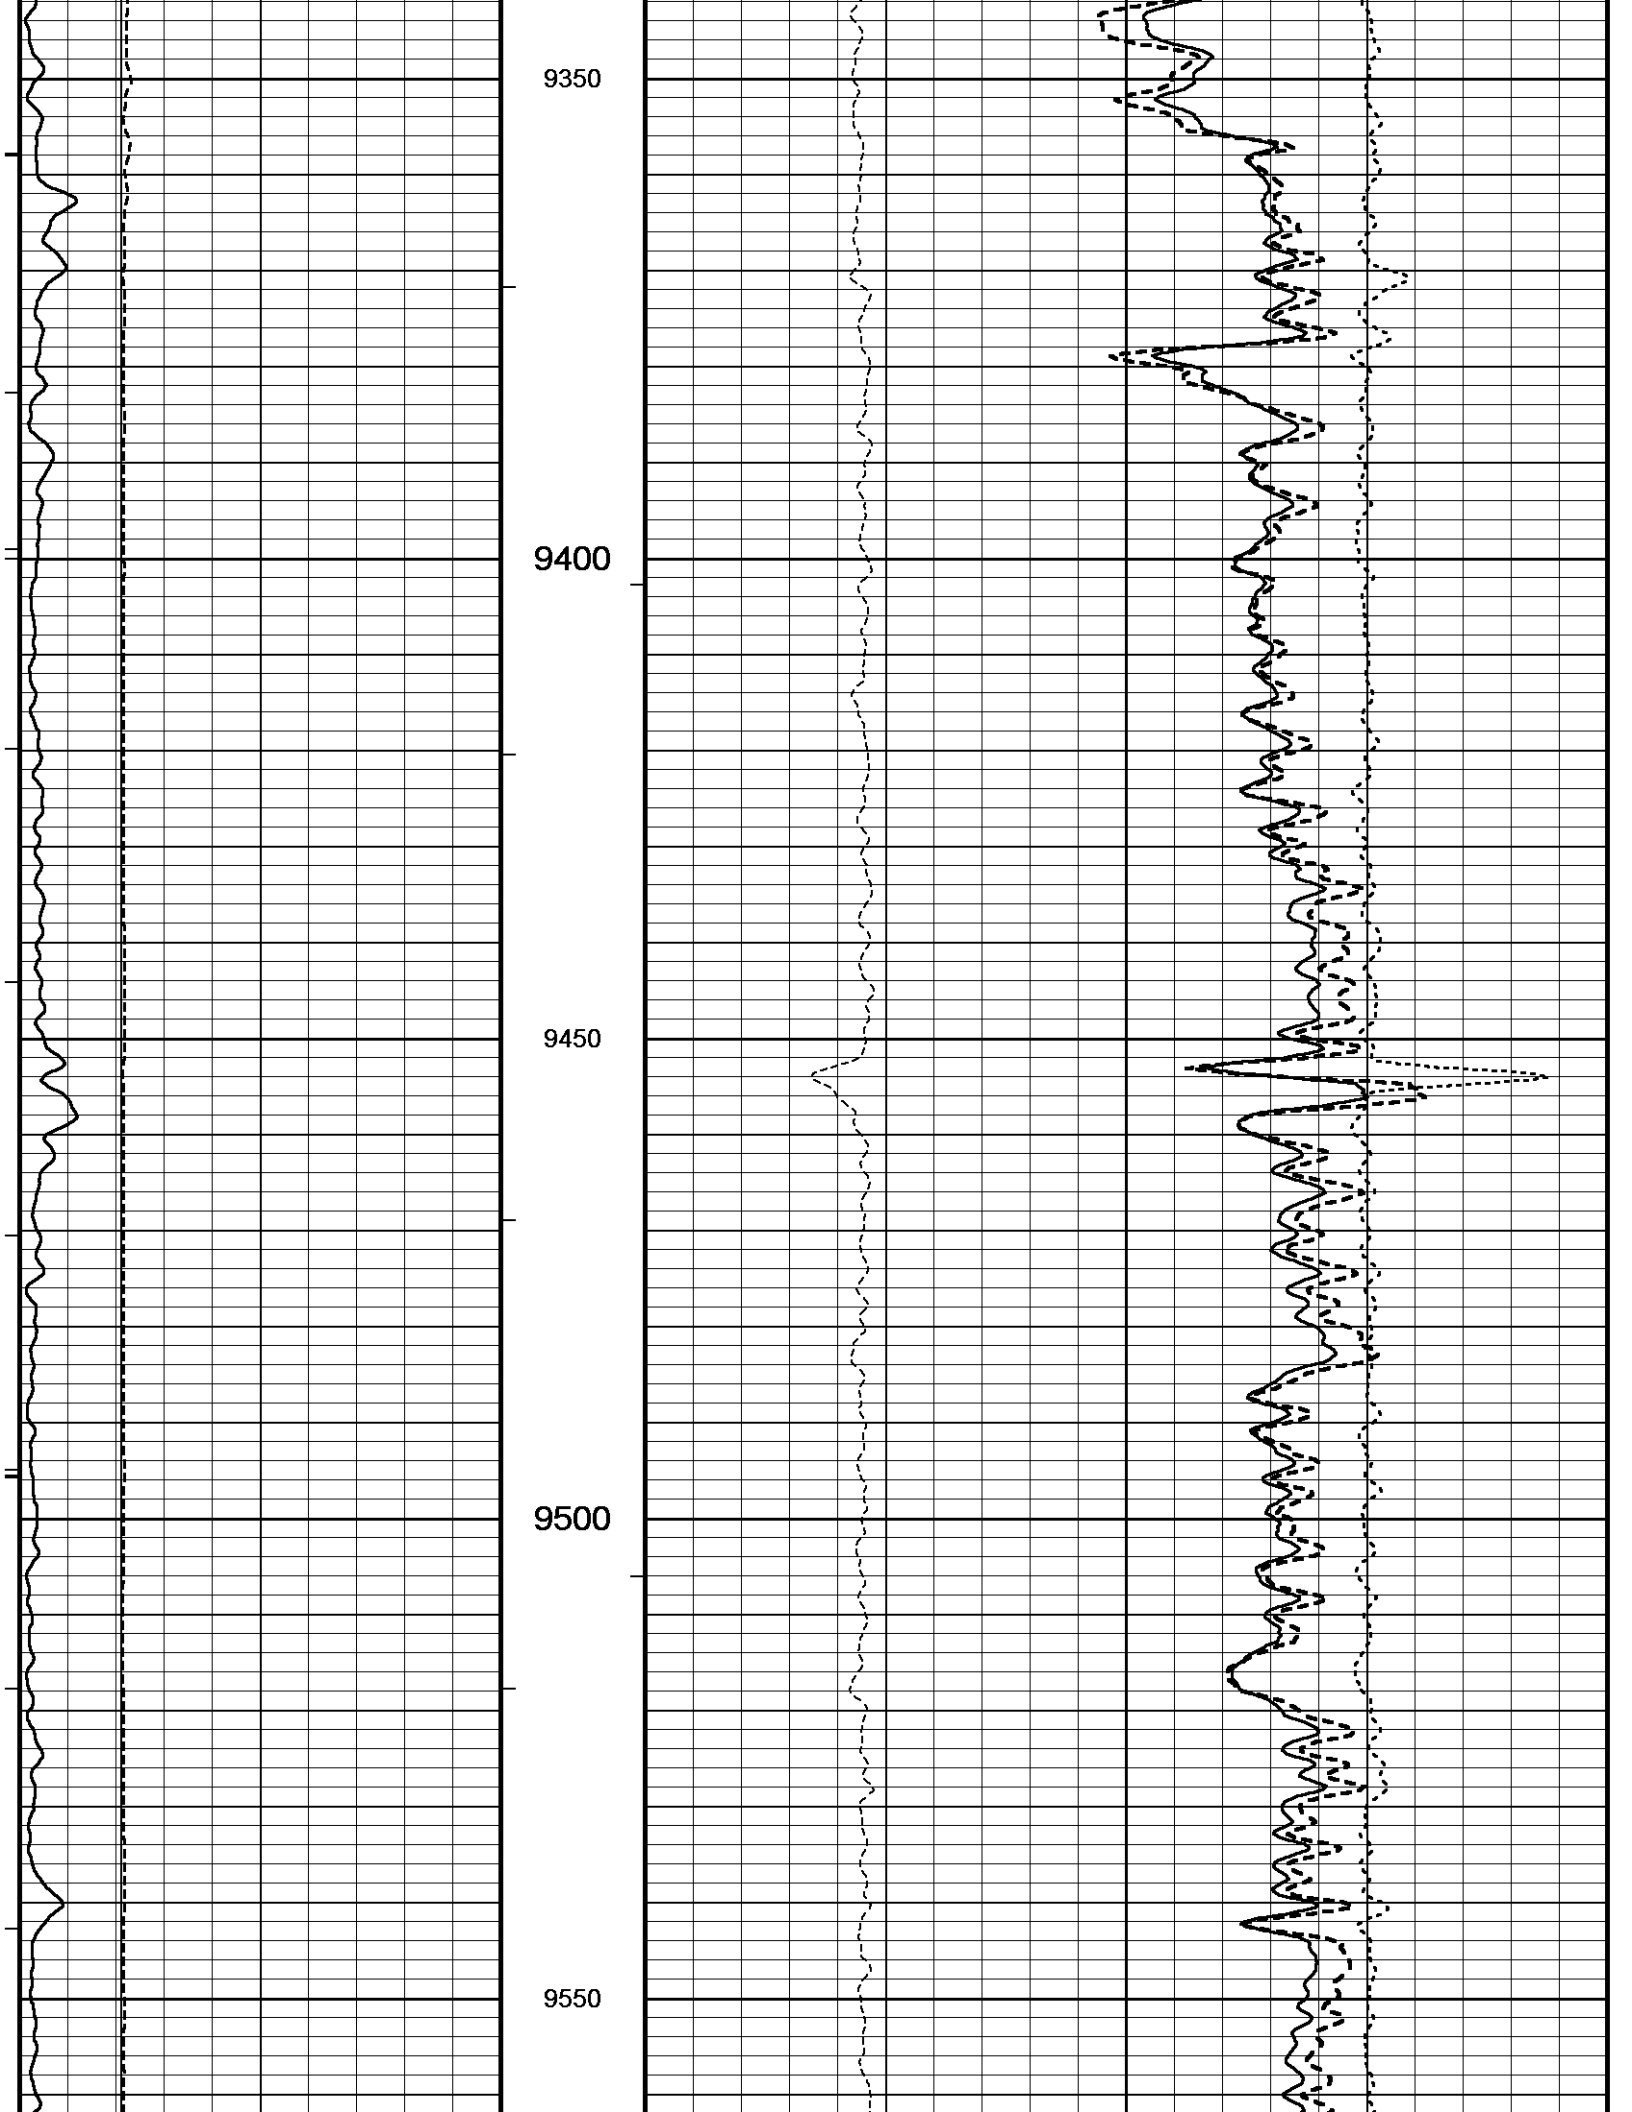

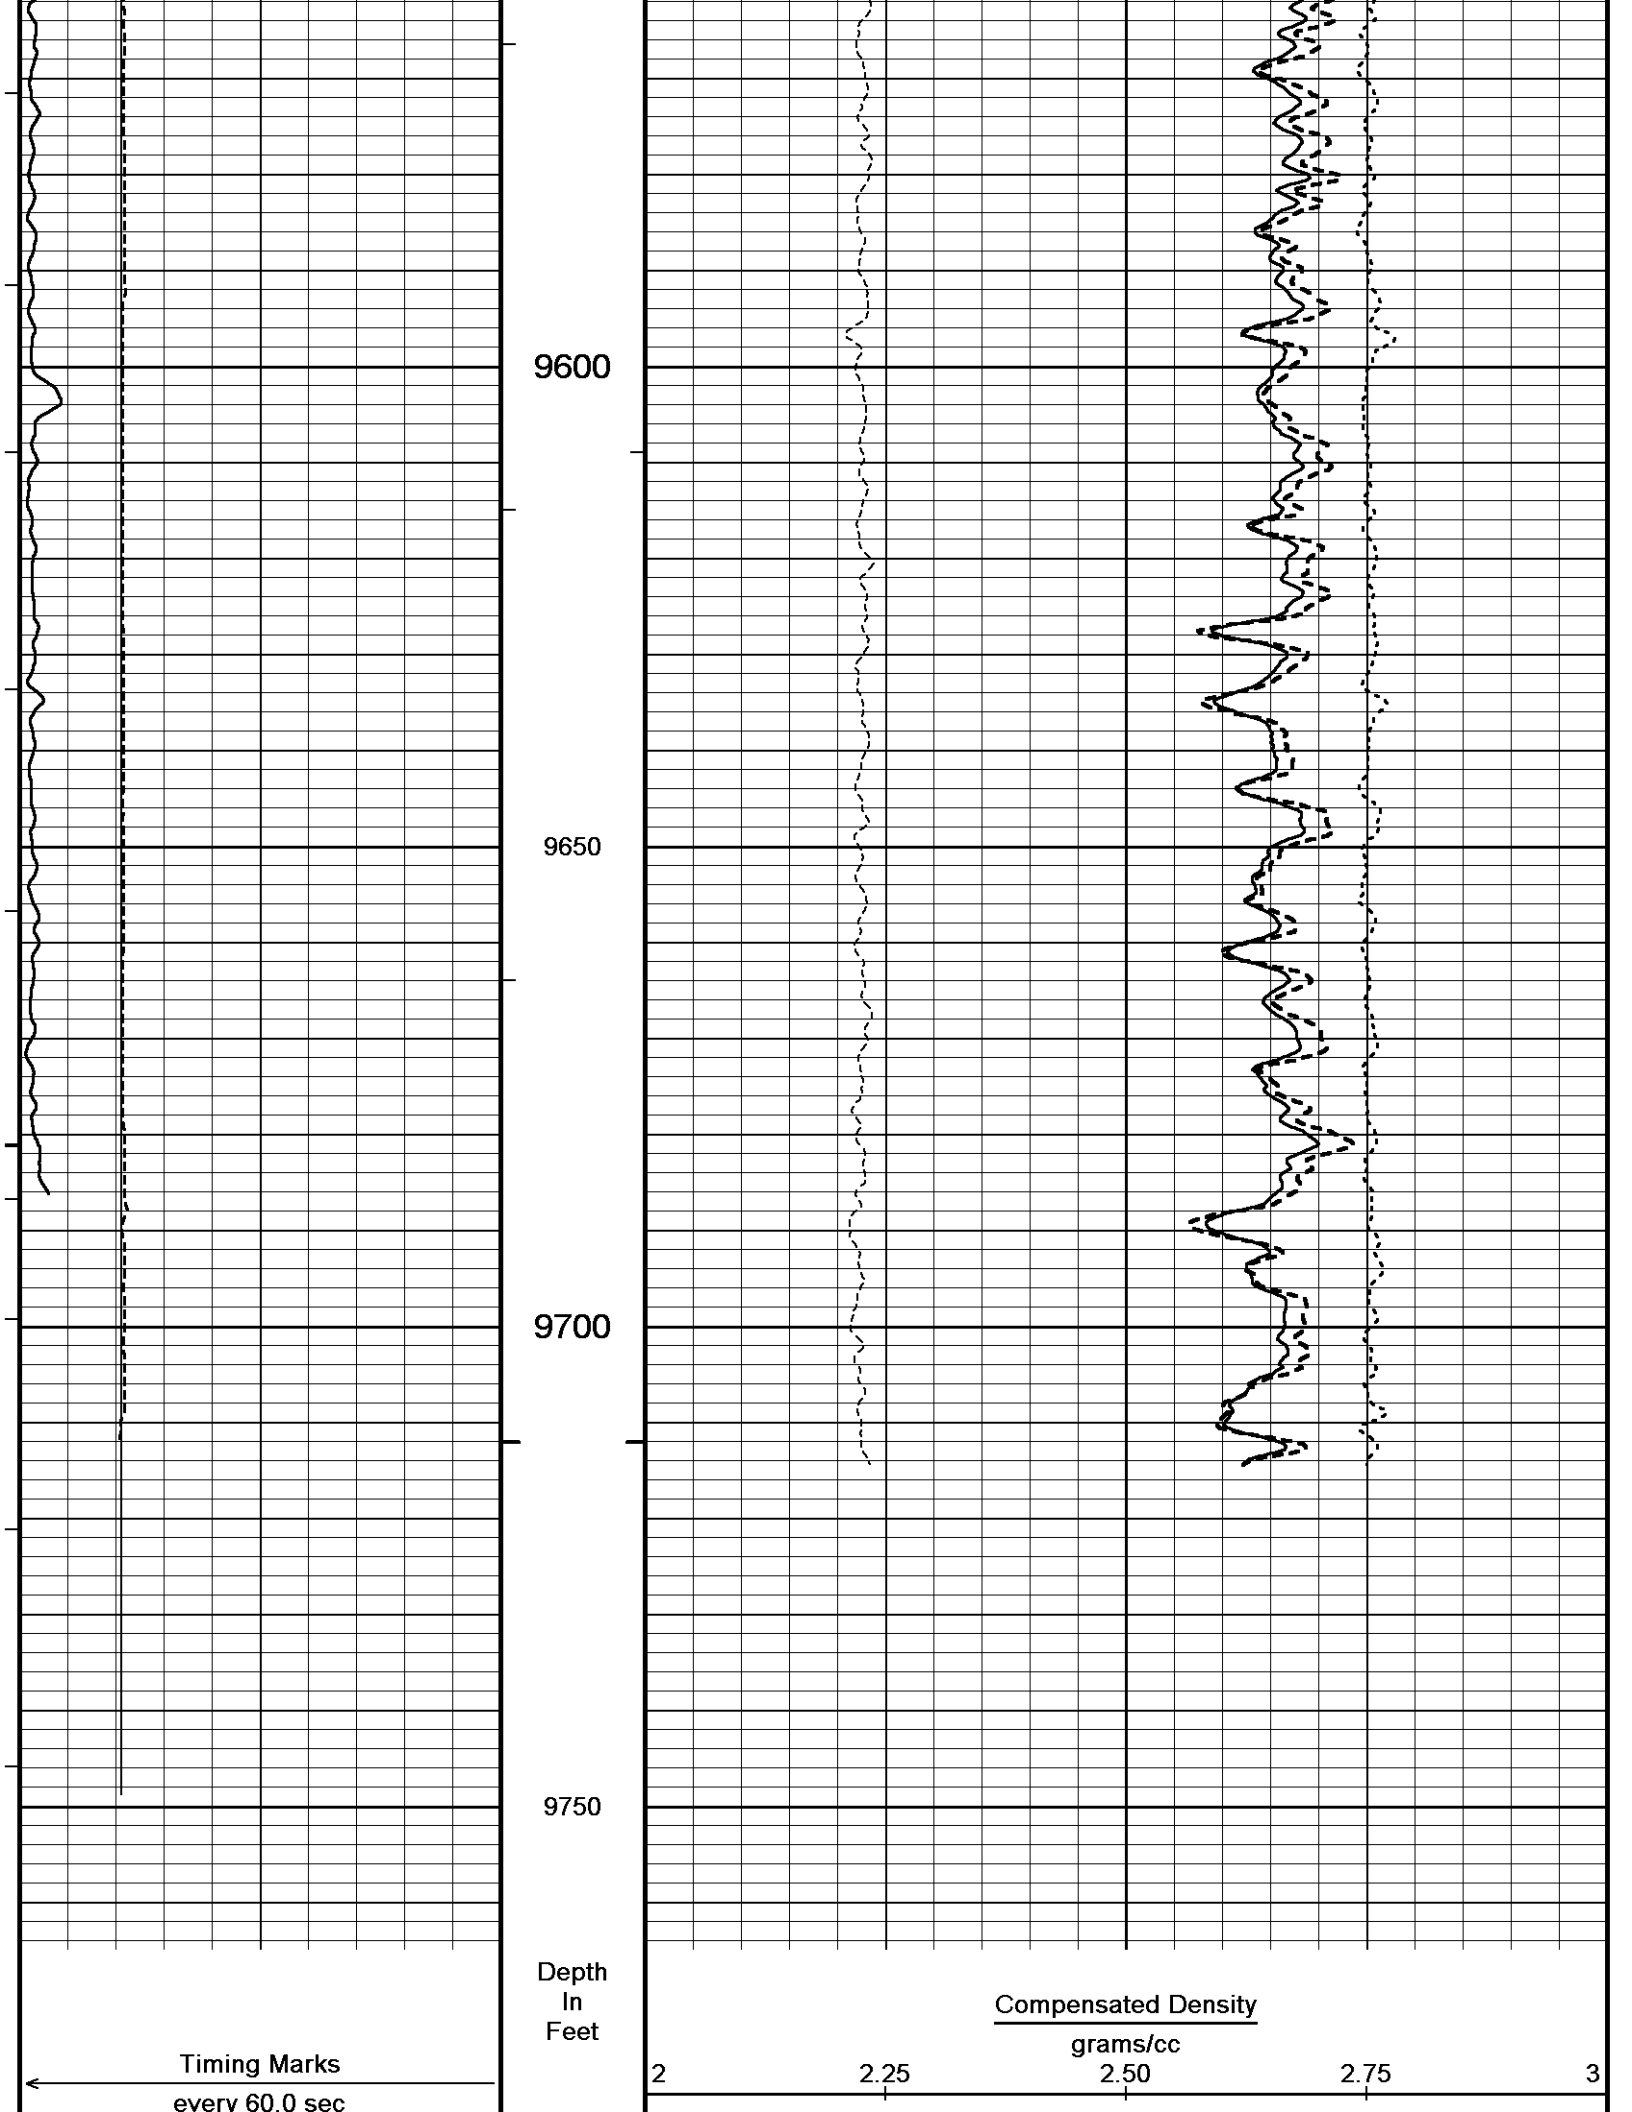

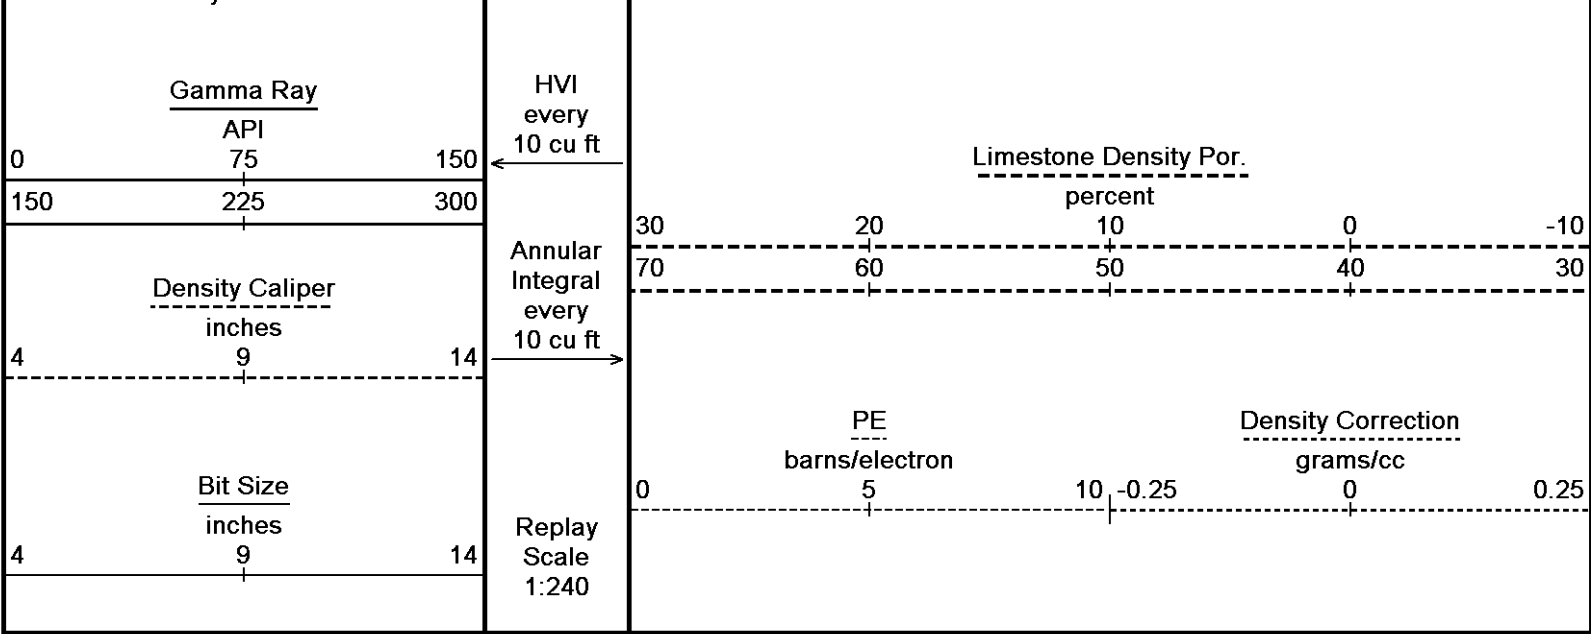

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 24-AUG-2012 01:39  
 Filename: C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta Recorded on 24-AUG-2012 00:00  
 System Versions: Processed with 13.02.6600 Plotted with 13.02.6600

**5 INCH MAIN LOG**

**BEFORE SURVEY CALIBRATION**  
 C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta

**General Constants All 000** Last Edited on 24-AUG-2012,01:09

**General Parameters**

Mud Resistivity	0.300	ohm-metres
Mud Resistivity Temperature	80.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

**Hole/Annular Volume and Differential Caliper Parameters**

HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	Density Caliper	

**Rwa Parameters**

Porosity used	Base Density Porosity
Resistivity used	Array Ind. One Res Rt
RWA Constant A	0.610
RWA Constant M	2.150

**Strain Gauge Constants SER-B.A 189** Last Edited on 23-AUG-2012,00:24

Atmospheric Pressure 14.70 psi

Serial Number 266583

Calibration Date 17-Aug-2011

Base Check Date

Dead Weight Serial Number 0

Dead Weight Gravitational Correction 1.0

Temperature	75.0	150.0	250.0	350.0	degrees F
Pressure psia	Inc. Dec.	Inc. Dec.	Inc. Dec.	Inc. Dec.	
0.0	0.026 0.026	0.029 0.029	0.029 0.029	0.025 0.024	
3000.0	5.206 5.208	5.209 5.210	5.207 5.209	5.200 5.202	
6000.0	10.396 10.399	10.399 10.402	10.397 10.400	10.387 10.391	
9000.0	15.596 15.600	15.600 15.604	15.597 15.601	15.586 15.591	
12000.0	20.808 20.812	20.813 20.816	20.810 20.814	20.798 20.801	
15000.0	26.033 26.039	26.039 26.039	26.037 26.037	26.023 26.023	

**Strain Gauge Constants MMS-E.B 166** Last Edited on 23-AUG-2012,00:24

Atmospheric Pressure	14.70	psi
Serial Number	262005	
Calibration Date	04-Jan-2011	
Base Check Date		
Dead Weight Serial Number	0	
Dead Weight Gravitational Correction	1.0	
Temperature	75.0	150.0
		250.0
		350.0
		degrees F
Pressure psia	Inc.	Dec.
	Inc.	Dec.
0.0	0.096	0.097
3000.0	5.275	5.280
6000.0	10.464	10.472
9000.0	15.664	15.672
12000.0	20.876	20.882
15000.0	26.101	26.111
		0.113
		0.113
		0.129
		0.129
		0.138
		0.139
		5.290
		5.294
		5.303
		5.306
		5.307
		5.310
		10.478
		10.485
		10.488
		10.494
		10.487
		10.494
		15.676
		15.684
		15.683
		15.691
		15.679
		15.687
		20.888
		20.893
		20.892
		20.898
		20.885
		20.890
		26.114
		26.103

MMS Parameters MMS-E.B 166

Last Edited on 23-AUG-2012 00:26

Logging Parameters

Firmware Version	2v40	
Caliper Open On	MAI	
Caliper Open Delay	0.0	minutes
Caliper Closed On	Unknown	
Caliper Closed Delay	N/A	minutes
Sample Rate	1.00	seconds
Use Deep Sleep	No	
Delay Deep Sleep	N/A	
Deep Sleep Wake Time	N/A	minutes
Deep Sleep Wake on Temperature	N/A	
Deep Sleep Wake Temperature	N/A	degrees C
Deep Sleep Wake on Pressure	N/A	
Deep Sleep Wake Pressure	N/A	psi
MMI Pad Pressure	0.0	

Release Parameters

Pulse Duration Base Level	10.0	seconds
Pulse Duration Transition Time	60.0	seconds
Pulse Duration Status Pulse From	20.0	seconds
Pulse Duration Caliper Close From	145.0	seconds
Pulse Duration Caliper Open From	150.0	seconds
Pulse Duration Release Pulse From	215.0	seconds
Pulse Duration Release Pulse To	280.0	seconds
Pulse Release Duration	240.0	seconds
Pulse Discriminator Pressure Band	96.0	seconds
Pulse Pressure Discriminator	213.0	seconds
Use Negative Pulsing	No	
Good Status Reply Open Hole	65535.0	seconds
Good Status Reply Cased Hole	20.0	seconds
Bad Status Reply	60.0	seconds
Status Pulse To	80.0	seconds
Caliper Close To	0.0	seconds
Caliper Open To	210.0	seconds

Configuration

SER,MMS,MGS,MDN,MPD,MPD,MFE,MAI

High Resolution Temperature Calibration MGS-C.J 142

Field Calibration on 06-AUG-2012,04:44

	Measured	Calibrated(Deg F)
Lower	0.00	0.00
Upper	0.00	0.00

High Resolution Temperature Constants MGS-C.J 142

Last Edited on

Pre-filter Length	11
-------------------	----

SP Calibration MGS-C.J 142

Field Calibration on 06-AUG-2012,04:44

	Measured	Calibrated (mV)
Reference 1	100.0	100.0

Reference 2	-100.0	-100.0	
Gamma Calibration MGS-C.J 142			Field Calibration on 09-AUG-2012,02:02
	Measured	Calibrated (API)	
Background	39	27	
Calibrator (Gross)	1048	723	
Calibrator (Net)	1009	696	

Gamma Constants MGS-C.J 142			Last Edited on 23-AUG-2012,05:22
Gamma Calibrator Number	036		
Mud Density	1.04	gm/cc	
Caliper Source for Processing	Density Caliper		
Tool Position	Eccentred		
Concentration of KCl	0.00	kppm	

Neutron Calibration MDN-B.J 391			Base Calibration on 02-FEB-2012 17:34	Field Check on 07-AUG-2012,15:49
Base Calibration				
	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	3186	96	3714	110
Ratio	33.156		33.764	
Field Calibrator at Base			Calibrated (cps)	
			2267	3463
Ratio			0.655	
Field Check			Calibrated (cps)	
			2268	3414
Ratio			0.664	

Neutron Constants MDN-B.J 391			Last Edited on 22-AUG-2012,23:24
Neutron Source Id	N1055		
Neutron Jig Number	N639		
Epithermal Neutron	No		
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	Constant Value		
Formation Pressure	1.80	kpsi	
Temperature Source	MGS External Temperature		
Temperature	N/A		degrees F
Mud Salinity	3.67	kppm	
Salinity Correction	Applied		
Formation Fluid Salinity Source	Constant Value		
Formation Fluid Salinity	140.00	kppm	
Barite Mud Correction	Not Applied		

FE Calibration MFE-B.J 363			Base Calibration on 29-JUN-2012 13:12	Field Check on 22-AUG-2012 23:17
Base Calibration				
	Measured		Calibrated (ohm-m)	
Reference 1	0.0		0.0	
Reference 2	963.1		126.8	
Base Check			281.8	
Field Check			282.0	

FE Constants MFE-B.J 363			Last Edited on 07-AUG-2012,15:08
Running Mode	No Sleeve		
MFE K Factor	0.1268		
Caliper Source for FE correction	Density Caliper		
Caliper Value for FE correction	N/A		inches
Rm Source for FE correction	Temperature Corr		
Temp. for Rm Corr	MGS External Temperature		

Temp. for Rm Corr. MGS External Temperature 0.5 inches

Induction Calibration MAI-B.J 427

Base Calibration on 20-AUG-2012,13:38  
Field Check on 22-AUG-2012 23:15

Base Calibration

Test Loop Calibration

Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	14.4	434.9	9.3	966.2
2	5.8	355.4	7.6	821.4
3	2.7	244.4	5.2	566.0
4	1.8	129.3	2.6	279.2

Array Temperature 75.0 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	19.5	4141.3
2	0.0	0.0	32.3	3769.7
3	0.0	0.0	31.4	3209.4
4	0.0	0.0	20.1	2123.0
Deep	0.0	0.0	19.7	2019.4
Medium	0.0	0.0	45.5	4288.6
Shallow	0.0	0.0	47.6	5678.1

Array Temperature 0.0 78.4 Deg F

Induction Constants MAI-B.J 427

Last Edited on 24-AUG-2012,01:09

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.00	inches	
Number of Fins on Stand-off	6.0000		
Stand-off Fin Angle	60.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Temperature Corr		
Temp. for Rm Corr.	MGS External Temperature		
Squasher Start	0.0080	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	
Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-B.J 427

Field Calibration on 20-AUG-2012,14:27

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00



# DOWNHOLE EQUIPMENT

C:\Data\15033216540100\_SDRGE WARREN 3317 1-26H\31828rtap1.dta

Shuttle Mechanical Release (SMR A)  
SMR-A 173 LG: 8.53 ft WT: 77.2 lb OD: 2.52 in



Shuttle Electrical Release  
SER-B.A 189 LG: 6.90 ft WT: 50.7 lb OD: 2.24 in




MBS-F.A 200v Compact Battery Sub  
MBS-F.A 135 LG: 10.61 ft WT: 70.5 lb OD: 2.24 in



Compact Memory Sub E.B  
MMS-E.B 166 LG: 5.20 ft WT: 37.5 lb OD: 2.24 in



Compact Tool Isolator sub.  
MTI-B.A 68 LG: 1.54 ft WT: 13.2 lb OD: 2.24 in



Compact Short Gamma  
MGS-C.J 142 LG: 3.41 ft WT: 24.3 lb OD: 2.24 in

Compact Collar Locator  
MCL-B.J 63 LG: 3.17 ft WT: 26.5 lb OD: 2.24 in


SKJ-E.B Compact Knuckle Joint  
SKJ-E.B 479 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor  
SHA-J.A 431 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

MIS-D.A Compact Inline Bowspring sub  
MIS-D.A 310 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact Neutron  
MDN-B.J 391 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper  
MPD-B 166 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

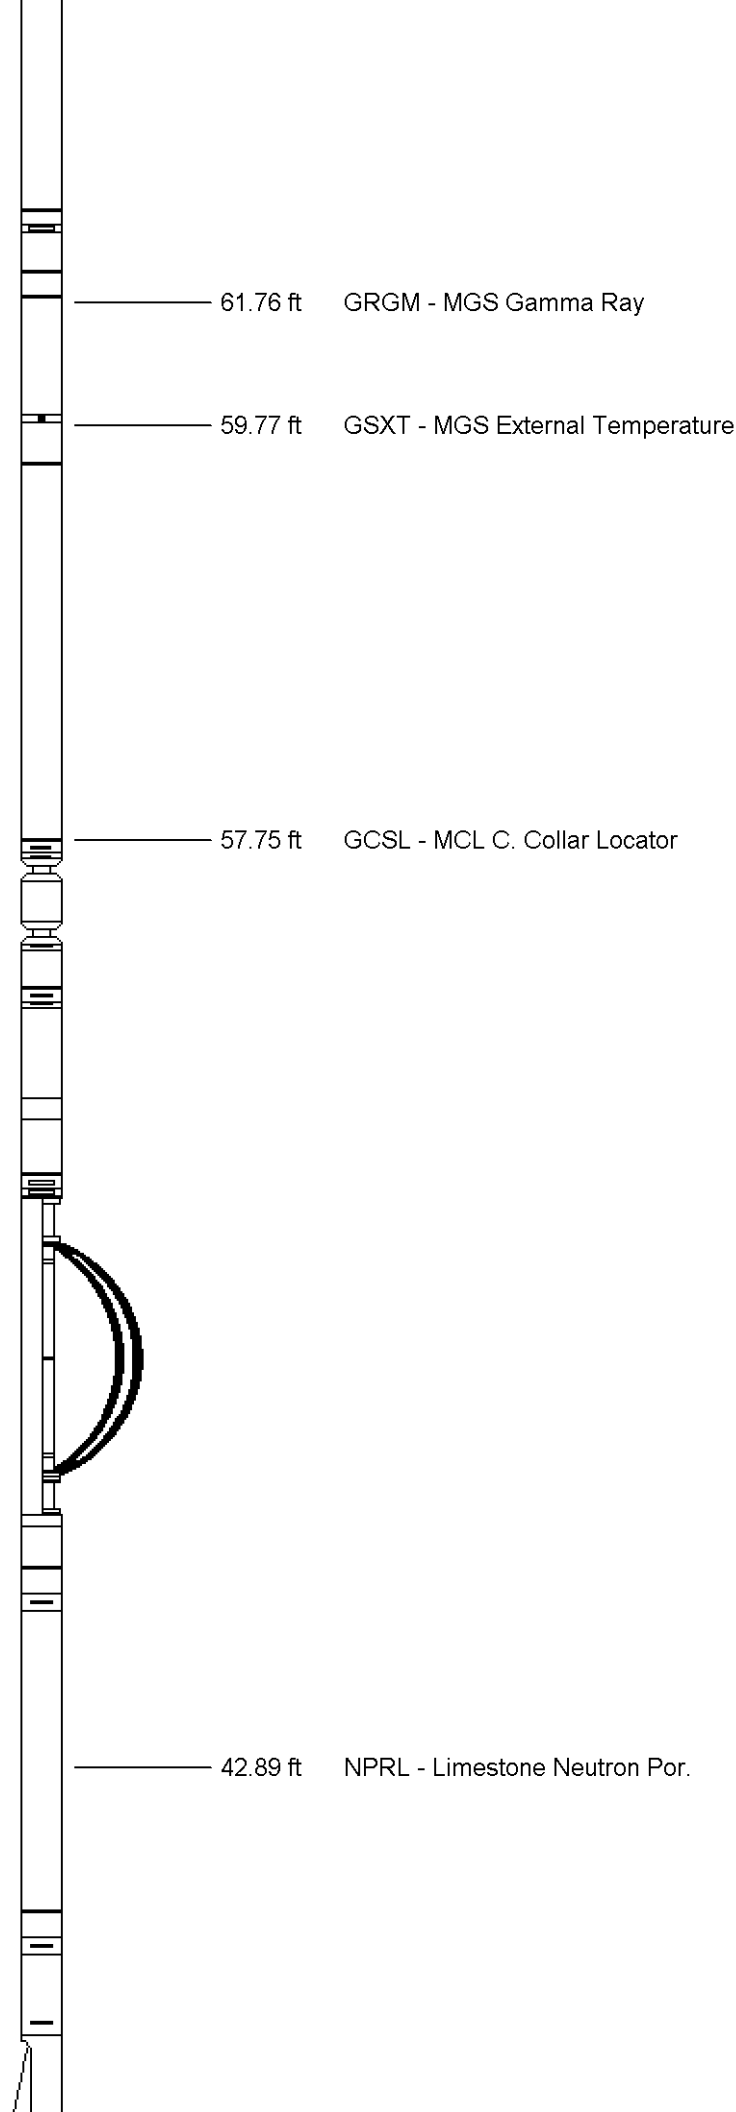


61.76 ft GRGM - MGS Gamma Ray

59.77 ft GSXT - MGS External Temperature

57.75 ft GCSL - MCL C. Collar Locator

42.89 ft NPRL - Limestone Neutron Por.

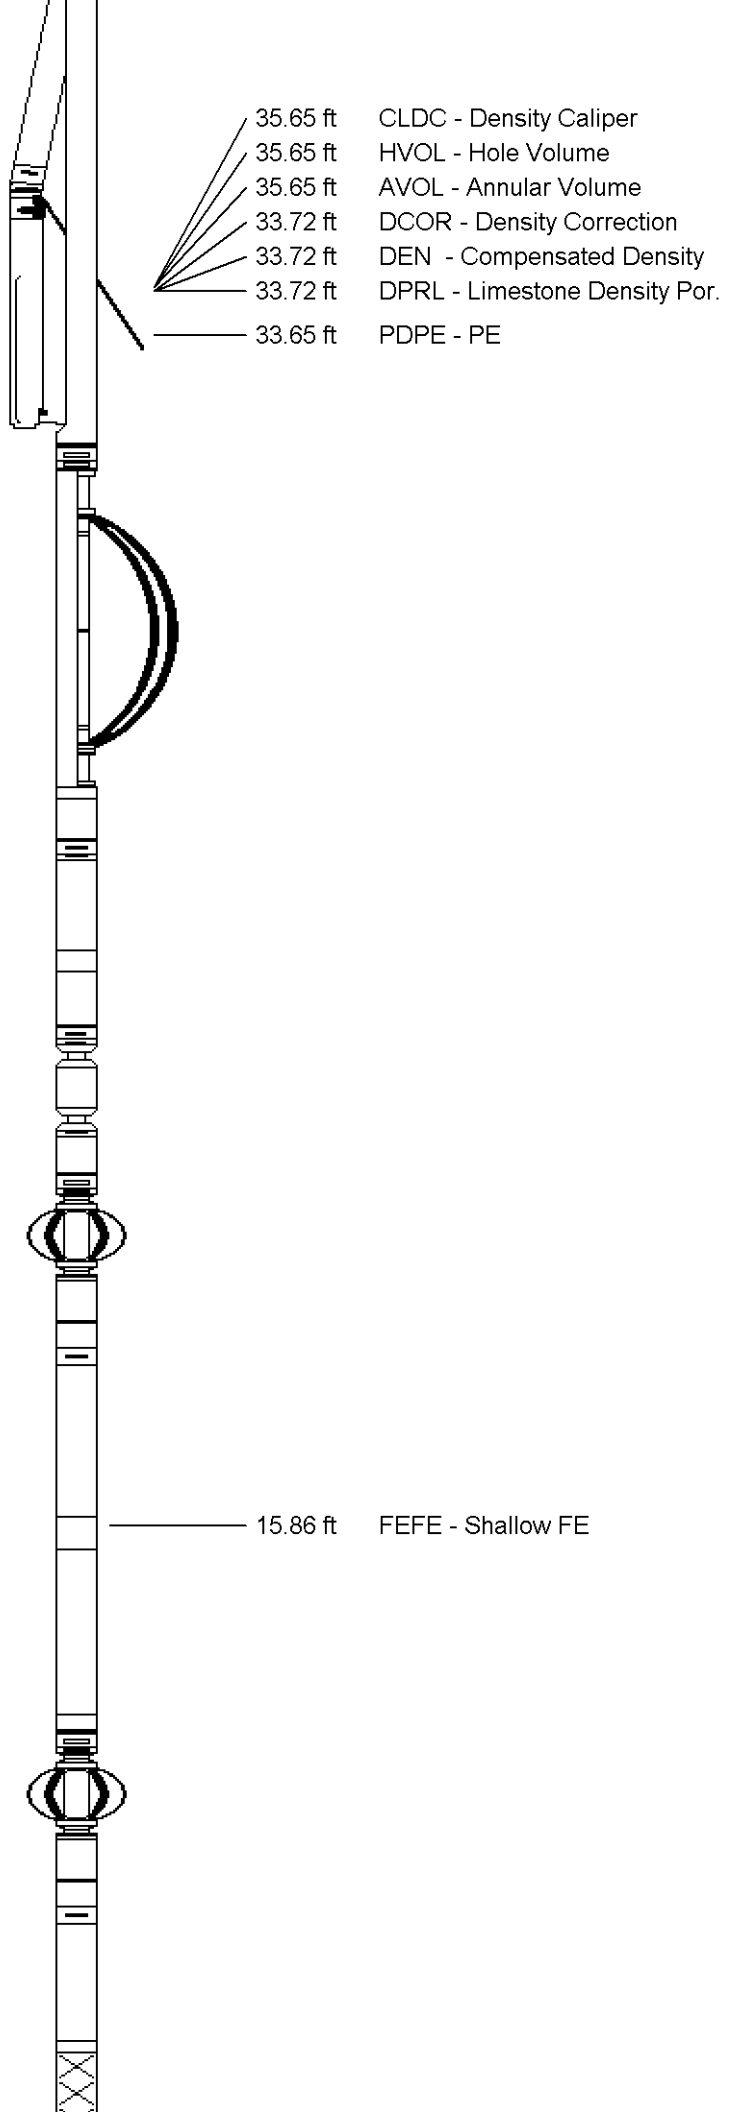

MIS-A.A Compact Inline Bowspring sub  
 MIS-A.A 275 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor  
 SHA-J.A 434 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint  
 SKJ-E.B 474 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in


MIS-E.B Compact Inline Standoff sub  
 MIS-E.B 597 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Focused Electric  
 MFE-B.J 363 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

15.86 ft FEFE - Shallow FE


MIS-E.A Compact Inline Standoff sub  
 MIS-E.A 337 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Induction  
 MAI-B.J 427 LG: 12.52 ft WT: 48.5 lb OD: 2.24 in

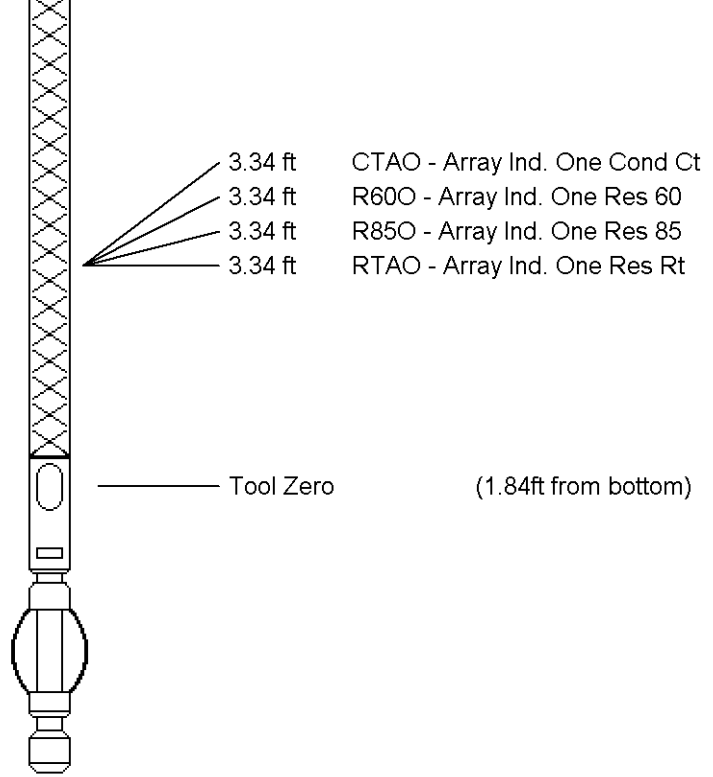

Total Length: 97.17 ft Weight: 727.5 lb

All measurements relative to tool zero.

COMPANY	SANDRIDGE ENERGY				
WELL	WARREN 3317 1-26H				
FIELD	SHIMMER SOUTH				
PROVINCE/COUNTY	COMANCHE				
COUNTRY/STATE	USA \ KANSAS				
Elevation Kelly Bushing	1818.00	feet	First Reading	9711.00	feet
Elevation Drill Floor	1818.00	feet	Depth Driller	9786.00	feet
Elevation Ground Level	1797.00	feet	Depth Logger	9786.00	feet
	CML IMPULSE SHUTTLE COMPACT PHOTO DENSITY COMPENSATED NEUTRON LOG				