

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-00077-00-00
Spot: SENESW Sec/Twnshp/Rge: 33-21S-33W
1700 feet from S Section Line, 2325 feet from W Section Line
Lease Name: BROWN Well #: 1
County: FINNEY Total Vertical Depth: 4818 feet

Operator License No.: 30535
Op Name: HARTMAN OIL CO., INC.
Address: 12950 E. 13TH
WICHITA, KS 67230

CIBP Size: feet: 1250
CIBP Size: feet: 2500 WITH 2 SX CMT
PROD Size: 5.5 feet: 2772 WITH 300 SX CMT
SURF Size: 8.625 feet: 404 WITH 275 SX CMT

#156⁵⁹

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/22/2005 9:30 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: STAN MITCHELL Company: HARTMAN OIL Phone: (620) 636-2090

Proposed Plugging Method: PROPOSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/22/2005 1:15 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG RAN BIT & SCAPER TO T.D. SET CIBP @ 2500' & 2 SX CMT. 2ND PLUG SET CIBP @ 1250'. PRESSURE TESTED CASING TO 500#. PERFORATE CASING AT 1200'. ESTABLISH RATE. PUMPED 200 SX CMT DOWN CASING. MAXIMUM PRESSURE 1100#. SHUT IN PRESSURE 150#. 3RD PLUG MIX & PUMP 200 SX CMT DOWN ANNULUS. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 100#.

Perfs:


Top	Bot	Thru	Comments
2574	2583		
2558	2563		
2524	2526		

INVOICED
DATE 6-30-05
INV. NO. 2105061891

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

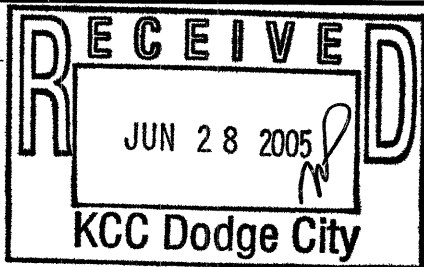

Signed Steve Durrant
(TECHNICIAN)

RECEIVED
JUN 30 2005
KCC WICHITA