

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21152-00-00
Spot: S2N2NW Sec/Twnshp/Rge: 25-31S-32W
4290 feet from S Section Line, 3960 feet from E Section Line
Lease Name: MCCOY Well #: 1-25
County: SEWARD Total Vertical Depth: 5900 feet

Operator License No.: 6044
Op Name: STELBAR OIL CORPORATION, INC.
Address: 155 N. MARKET, STE 500
WICHITA, KS 67202

COND Size: 20 feet: 40
PROD Size: 4.5 feet: 5895 WITH 710 SX CMT
SURF Size: 8.625 feet: 1673 WITH 650 SX CMT **\$191⁷⁵**

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/09/2005 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Revd. from: JOHN Company: SARGENT AND HORTON PLUGGI Phone: (580) 864-6515

Proposed Plugging Method: PUMP 200# HULLS & 20 SX CMT THROUGH TUBING. PLUG AT 1700' WITH 50 SX CMT. PLUG AT 550' WITH 30 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 06/10/2005 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 200# HULLS WITH 20 SX CMT THROUGH 2 3/8" TUBING AT 5360'. DISPLACE WITH 15 BBL MUD. 1ST PLUG PULL OUT OF HOLE TO 1720'. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. DISPLACE WITH 24 BBL MUD. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE TO 550'. LOAD HOLE WITH MUD & PUMP 30 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE & PUMP 10 SX CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
5494	5505		
5414	5418		

INVOICED
DATE 6-21-05
INV. NO. 2005061848

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1970' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

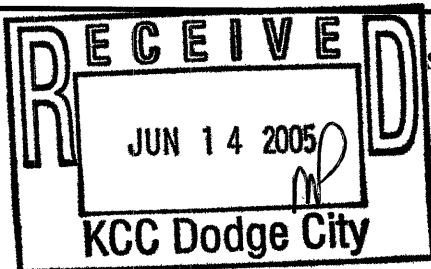

Signed

Steve Klumpp

(TECHNICIAN)

RECEIVED
JUN 21 2005
KCC WICHITA