

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-30079-00-01  
Spot: SWSW Sec/Twnshp/Rge: 7-16S-26W  
660 feet from S Section Line, 4620 feet from E Section Line  
Lease Name: ARMSTRONG Well #: 1  
County: NESS Total Vertical Depth: 4604 feet

Operator License No.: 5086  
Op Name: PINTAIL PETROLEUM, LTD.  
Address: 225 NORTH MARKET, STE 300  
WICHITA, KS 67202

PROD Size: 5.5 feet: 4600  
SURF Size: 8.625 feet: 126

\$149<sup>63</sup>

Well Type: EOR UIC Docket No: E17417.1 Date/Time to Plug: 05/23/2005 9:00 AM  
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC  
Proposal Rcvd. from: GARY Company: WHITETAIL CRUDE Phone: (785) 798-3641

Proposed Plugging Method: PRESSURE CASING TO 600# FROM 1675' TO 0'. PUMP 20 SX AT 1675'. PERFORATE AT 1250' PUMP 100 SX CMT. PERFORATE AT 800'. PUMP 100 SX CMT. CHECK BACKSIDE.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 05/23/2005 3:45 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

1ST PLUG PUMP 20 SX CMT @ 1600'. TUBING FISH @ 1675'. 2ND PLUG PERFORATE @ 1250' & PUMP 100 SX CMT. DISPLACE TO 1000'. WAIT 2 HOURS & PRESSURE TO 1000#. 3RD PLUG PERFORATE @ 800' & PUMP 170 SX CMT. MAXIMUM PRESSURE 1200#. SHUT IN PRESSURE 400#. PUMP 200 SX CMT DOWN BACKSIDE. MAXIMUM PRESSURE 300#. SHUT IN PRESSURE 100#.

Perfs:


Top	Bot	Thru	Comments
4008	4158		

INVOICED  
DATE 6-21-05  
INV. NO. 2005061846

Remarks: USED 60/40 POZMIX 2% GEL 3% CC BY ALLIED. NO CASING RECOVERED.

Plugged through: TBG

District: 01

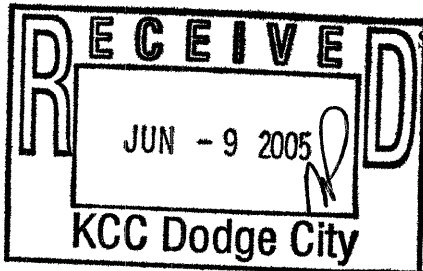

Signed

Michael Maier  
(TECHNICIAN)

RECEIVED  
JUN 21 2005  
KCC WICHITA

[Signature]  
Form CP 3/3