

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21879-00-00
Spot: S2S2 Sec/Twnshp/Rge: 2-16S-28W
660 feet from S Section Line, 2630 feet from W Section Line
Lease Name: DAVIS UNIT Well #: 1
County: LANE Total Vertical Depth: 4415 feet

Operator License No.: 6569
Op Name: SCHMITT, CARMEN, INC.
Address: PO BOX 47
GREAT BEND, KS 67530

SURF Size: 8.625 feet: 219

#143⁴⁹

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/30/2005 2:00 AM
Plug Co. License No.: 5184 Plug Co. Name: SHIELDS OIL PRODUCERS INC
Proposal Rcvd. from: BURT BEERY Company: SHIELDS OIL PRODUCERS INC Phone: (785) 483-3141

Proposed Plugging Method: 1ST PLUG AT 1980' WITH 50 SX CMT. 2ND PLUG AT 1320' WITH 80 SX CMT. 3RD PLUG AT 760' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: GREG PATTERSON WitnessType: NONE
Date/Time Plugging Completed: 06/30/2005 4:45 AM KCC Agent: GREG PATTERSON

Actual Plugging Report:

1ST PLUG AT 1980' WITH 50 SX CMT. 2ND PLUG AT 1320' WITH 80 SX CMT. 3RD PLUG AT 760' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

INVOICED
DATE 7-8-05
INV. NO. 2006060024

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

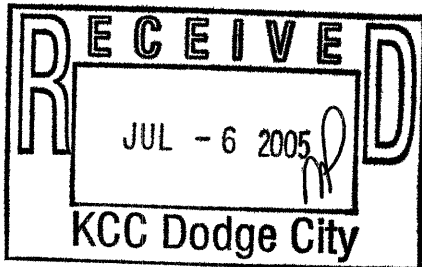

Signed

Greg Patterson
(TECHNICIAN)

RECEIVED
JUL 08 2005
KCC WICHITA

Form CR-28