

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING RECORD**  
K.A.R. 82-3-117

Form CP-4  
December 2003  
Type or Print on this Form  
Form must be Signed  
All blanks must be Filled

Lease Operator: Rosewood Resources Inc.  
Address: 2711 N. Haskell Ave., Ste. 2800, Dallas, TX 75204  
Phone: (214) 756-6600 Operator License #: 33019  
Type of Well: Oil Docket #: \_\_\_\_\_  
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)  
The plugging proposal was approved on: 5/24/2005 (Date)  
by: DARREL DIPMAN (KCC District Agent's Name)  
Is ACO-1 filed?  Yes  No If not, is well log attached?  Yes  No  
Producing Formation(s): List All (if needed attach another sheet)  
Lansing Kansas City Depth to Top: 4665 Bottom: 4669 T.D. 4775  
\_\_\_\_\_  
Depth to Top: \_\_\_\_\_ Bottom: \_\_\_\_\_ T.D. \_\_\_\_\_  
\_\_\_\_\_  
Depth to Top: \_\_\_\_\_ Bottom: \_\_\_\_\_ T.D. \_\_\_\_\_

API Number: 15-023-20023-00-00  
Lease Name: Rudolph Walter  
Well Number: #2  
Spot Location (QQQQ): NE - NE - NE - 4  
4950 Feet from  North /  South Section Line  
330 Feet from  East /  West Section Line  
Sec. 9 Twp. 3 S. R. 41  East  West  
County: CHEYENNE  
Date Well Completed: 11/04/1976  
Plugging Commenced: 5/24/2005  
Plugging Completed: 5/24/2005

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface Conductor & Production)				
Formation	Content	From	To	Size	Put In	Pulled Out
Ogalalla Aquifer	WATER	0	200'	8-5/8"	300'	
Niobrara Gas	gas	1430	3482	4-1/2"	4775'	
Lansing Kansas City	OIL	4522	4664	4-1/2"	4775'	

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Ordered 275 sks common cmt, 10% Gel & 250 lbs. hulls and plug through csg.

Connect to 4 1/2" csg, pumped 208 sx cmt & 200# hulls, Max PSI 725#, SiP 725#. Connect to 8 5/8" Surf Csg, pumped 58 sx cmt & 50# Hulls, Max PSI 300#, SiP 300#.

Cut csg off 5' below ground level.

RECEIVED  
KANSAS CORPORATION COMMISSION

JUL 25 2005

All activities witnessed by KCC agent: Darrel Dipman.

Name of Plugging Contractor: Longhorn Cementers TR Service & Rental Inc License #: 33532 33346

Address: P.O. Box 203 Yuma, CO 80759

Name of Party Responsible for Plugging Fees: Rosewood Resources, Inc. 2711 N. Haskell Ave., Ste. 2800 Dallas, TX 75204

State of Texas County, Dallas, ss.


Tom W. Roelfs

(Employee of Operator) or (Operator) on above-described well, being first duly

sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above described well is as filed, and the same are true and correct, so help me God.

(Signature) Tom W Roelfs

(Address) RR 1, Box 206 St. Francis, KS 67756




Subscribed and SWORN TO before me this 21<sup>st</sup> day of July, 2005

Tom Keller My Commission Expires: 8/23/2006  
Notary Public

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

*B...*

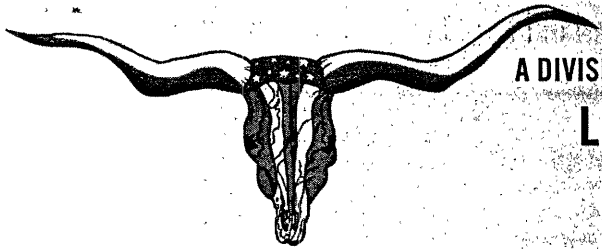

A DIVISION OF ADVANCED DRILLING TECHNOLOGIES, LLC.

FIELD SERVICE TICKET AND INVOICE

LONGHORN CEMENTING CO.

P.O. BOX 203 YUMA, COLORADO 80759
Phone: 970-848-0799 Fax: 970-848-0798

DATE 5/24/05 TICKET NO. 253

Form with fields for DATE OF JOB (5/24/05), CUSTOMER (ROSEWOOD RESOURCES), ADDRESS, CITY, STATE, SERVICE CREW (MARN-MIKE-MARK), TYPE JOB, CEMENT DATA, SAND DATA, TRUCK CALLED, and various depth/pressure measurements.

CONTRACT CONDITIONS: (This contract must be signed before the job is commenced or merchandise is delivered).

The undersigned is authorized to execute this contract as an agent of the customer. As such, the undersigned agrees and acknowledges that this contract for services, materials, products, and/or supplies includes all of and only these terms and conditions appearing on the front and back of this document.

SIGNED: [Signature] (WELL OWNER, OPERATOR, CONTRACTOR OR AGENT)

Table with 6 columns: ITEM / PRICE REF. NUMBER, MATERIAL, EQUIPMENT AND SERVICES USED, UNIT QUANTITY, UNIT PRICE, \$ AMOUNT. Includes rows for Pump Charge, Mtage, Cement, Slurry Mix, and Cotton Seed Hulls.

RECEIVED KANSAS CORPORATION COMMISSION JUL 25 2005 CONSERVATION DIVISION WICHITA, KS

ACID DATA table with columns GALLONS, %, ADDITIVES. Includes rows for HCL.

Summary table with columns SERVICE & EQUIPMENT, MATERIALS, %TAX ON \$, TOTAL (6552 14).

SERVICE REPRESENTATIVE (Marn Adles) THE ABOVE MATERIAL AND SERVICE ORDERED BY CUSTOMER AND RECEIVED BY: (Marn Adles)