



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**DUAL INDUCTION
LOG**

Company	DREILING OIL COMPANY, INC.		
Well	GRABBE "B" #3		
Field	SCHOENCHEN WEST		
County	ELLIS	State	KANSAS
Location:	API # : 15-051-26545-0000		Other Services CDL/CNL/MEI BGR/CCL
Permanent Datum	GROUND LEVEL	Elevation	1985
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	7/27/13		
Run Number	ONE		
Depth Driller	3650		
Depth Logger	3648		
Bottom Logged Interval	3646		
Top Log Interval	00		
Casing Driller	8 5/8" @ 1140'		
Casing Logger	1140		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,000 PPM	
Density / Viscosity	8.9/48		
pH / Fluid Loss	10.0/8.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.800 @ 85F		
Rmf @ Meas. Temp	.600 @ 85F		
Rmc @ Meas. Temp	.960 @ 85F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.602 @ 113F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	10:30 A.M.		
Maximum Recorded Temperature	113F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROGER FISHER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS

HAYS, KS. 10S. ON HWY 183 TO HAYS MACK, 1W. TO "T" CONTINUE WEST INTO PASTURE THEN SOU



NABORS

**COMPLETION
& PRODUCTION**

MAIN SECTION

Database File:

011194ddn.db

Dataset Pathname:

pass3.4

Presentation Format:

dil2


Dataset Creation:


Sat Jul 27 11:38:05 2013 by Calc SOC 120430

Charted by:

Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
-100	SP (mV)	100	0	RILD (Ohm-m)	50	
-----			-----			
			1000		CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

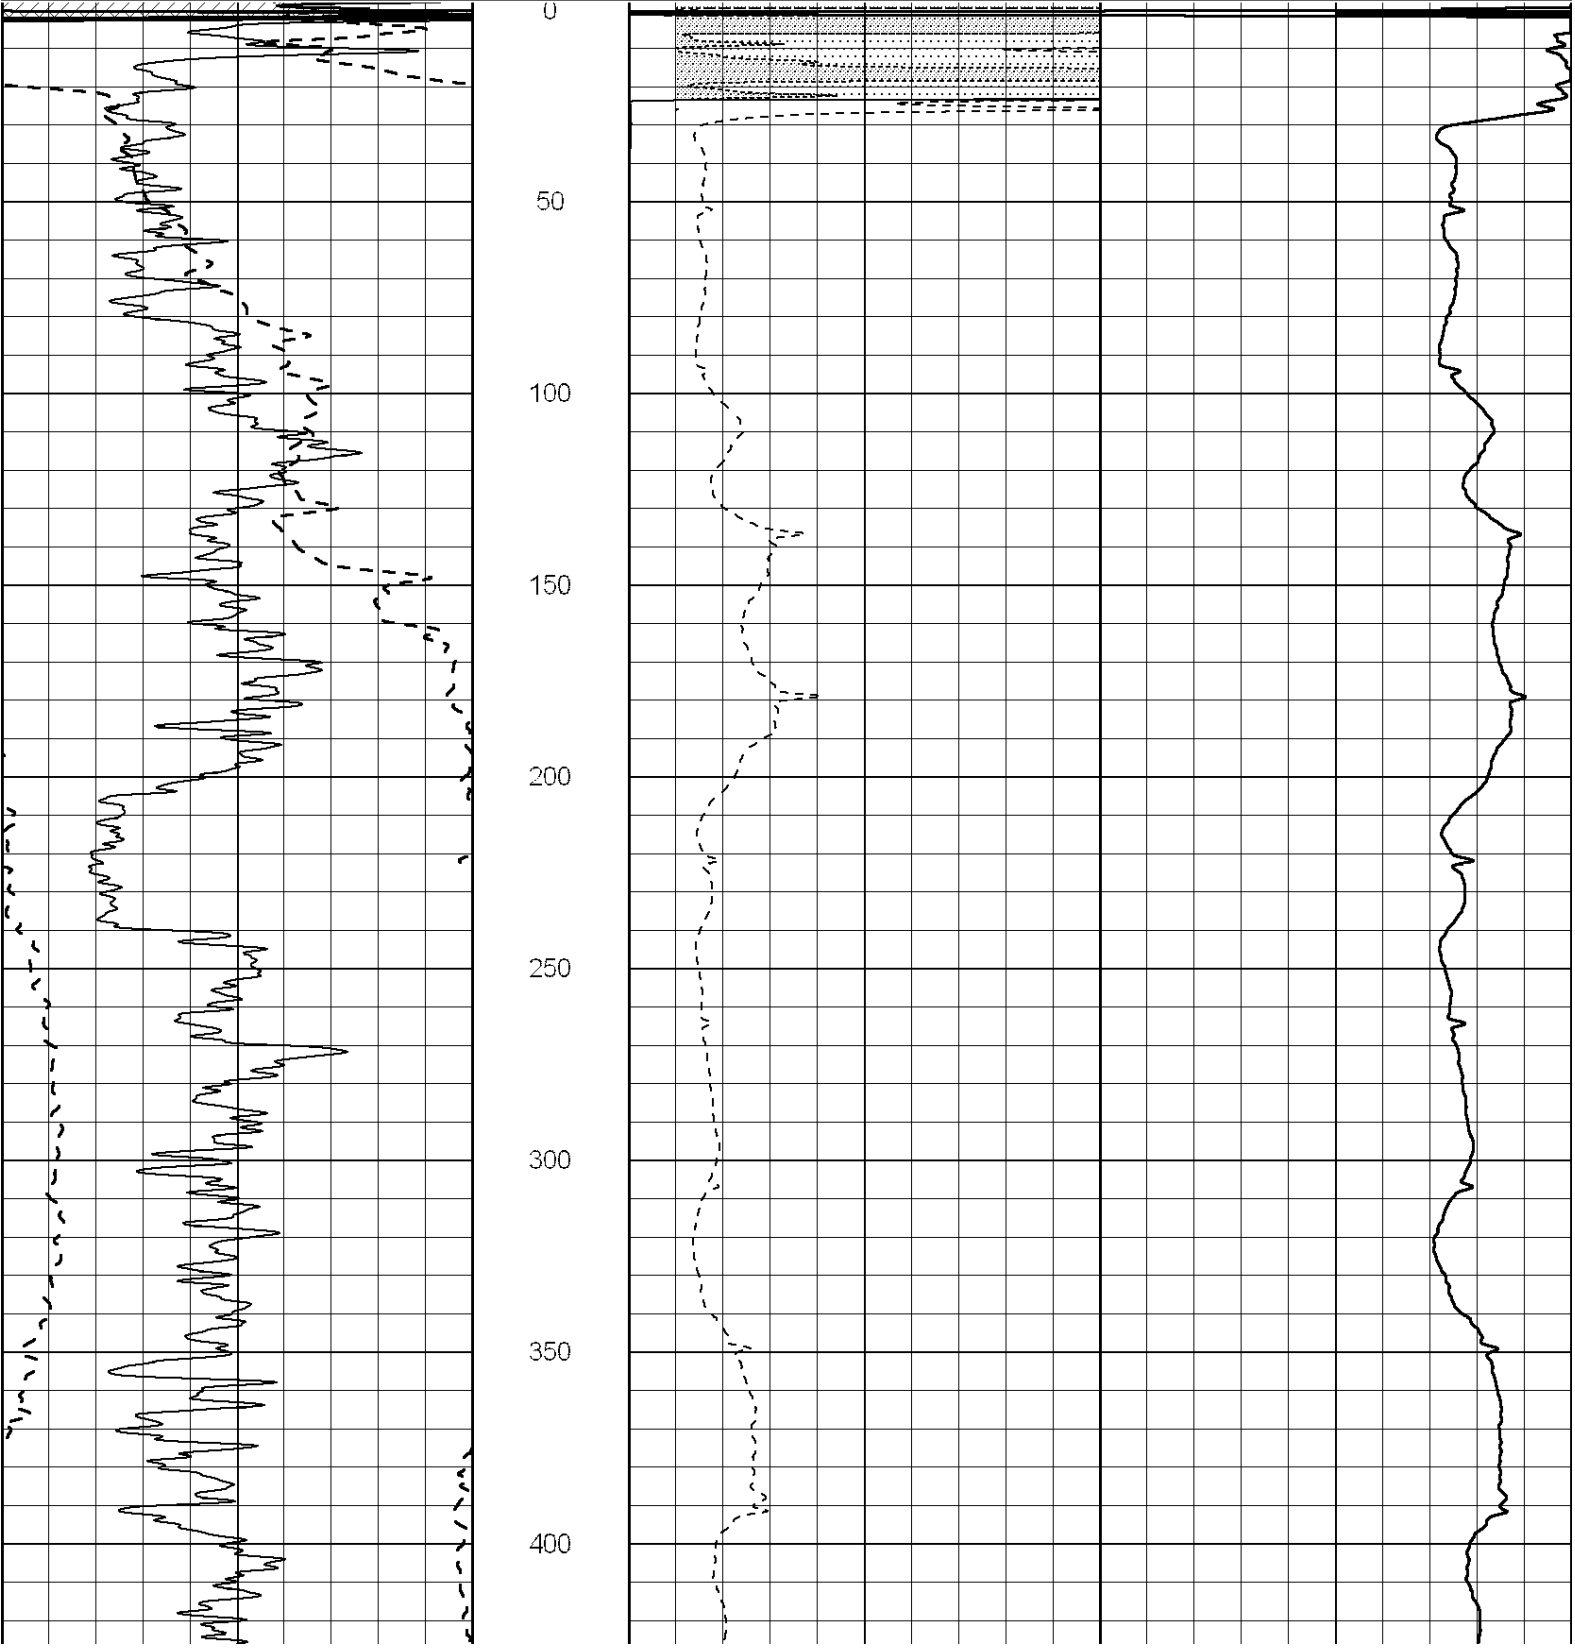

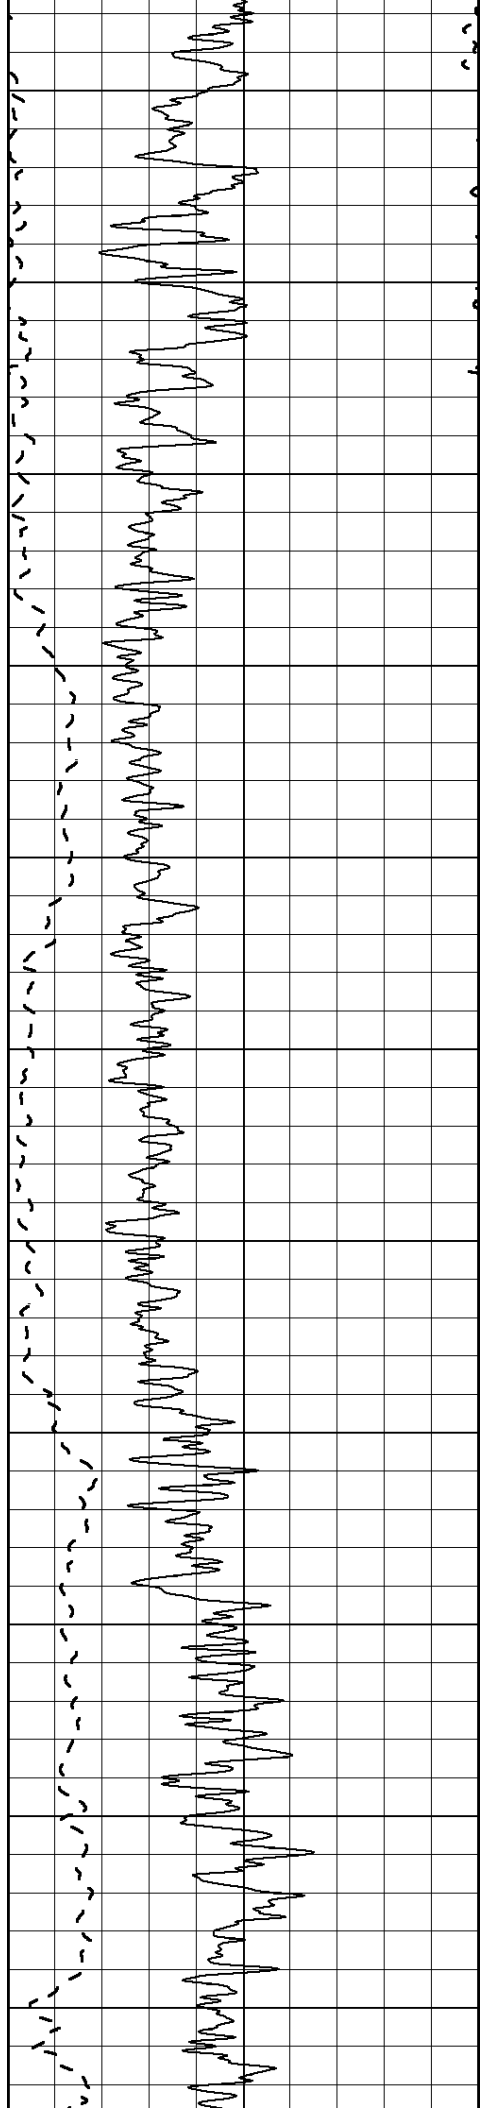

450

500

550

600

650

700


750


800

850


900


950

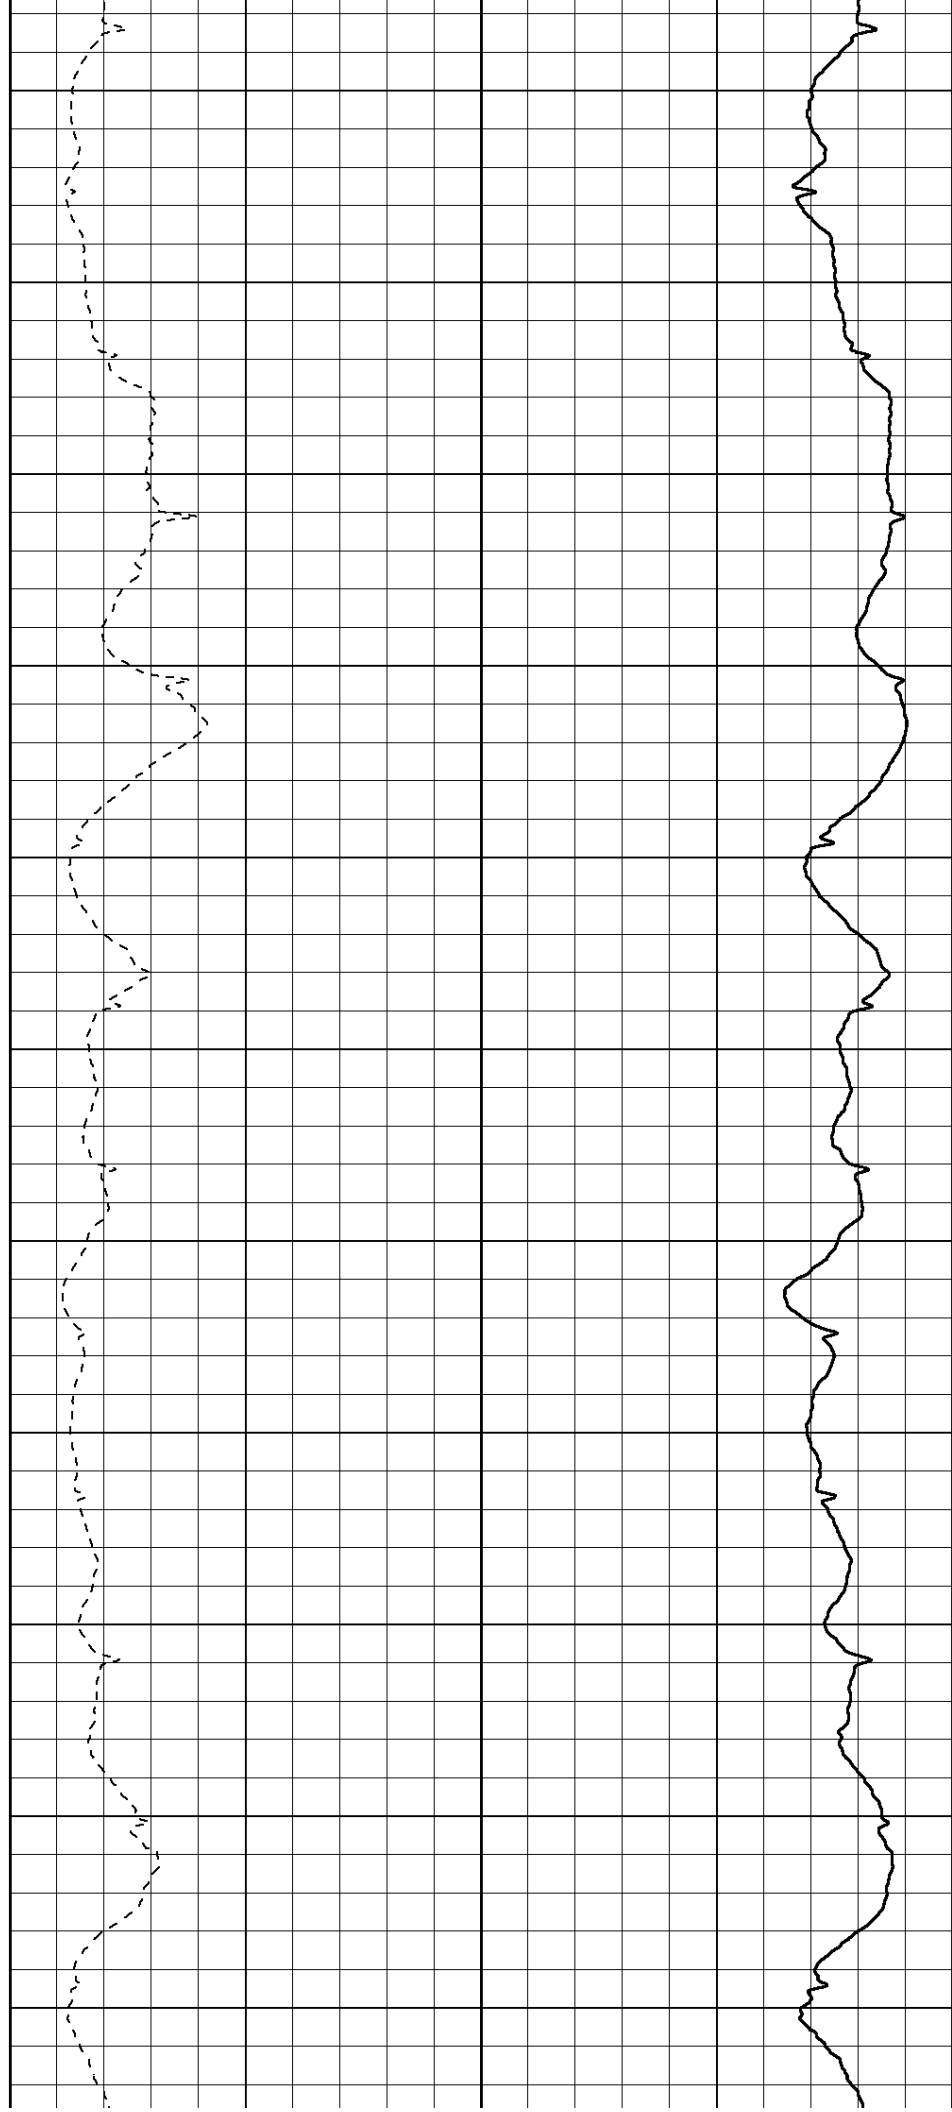

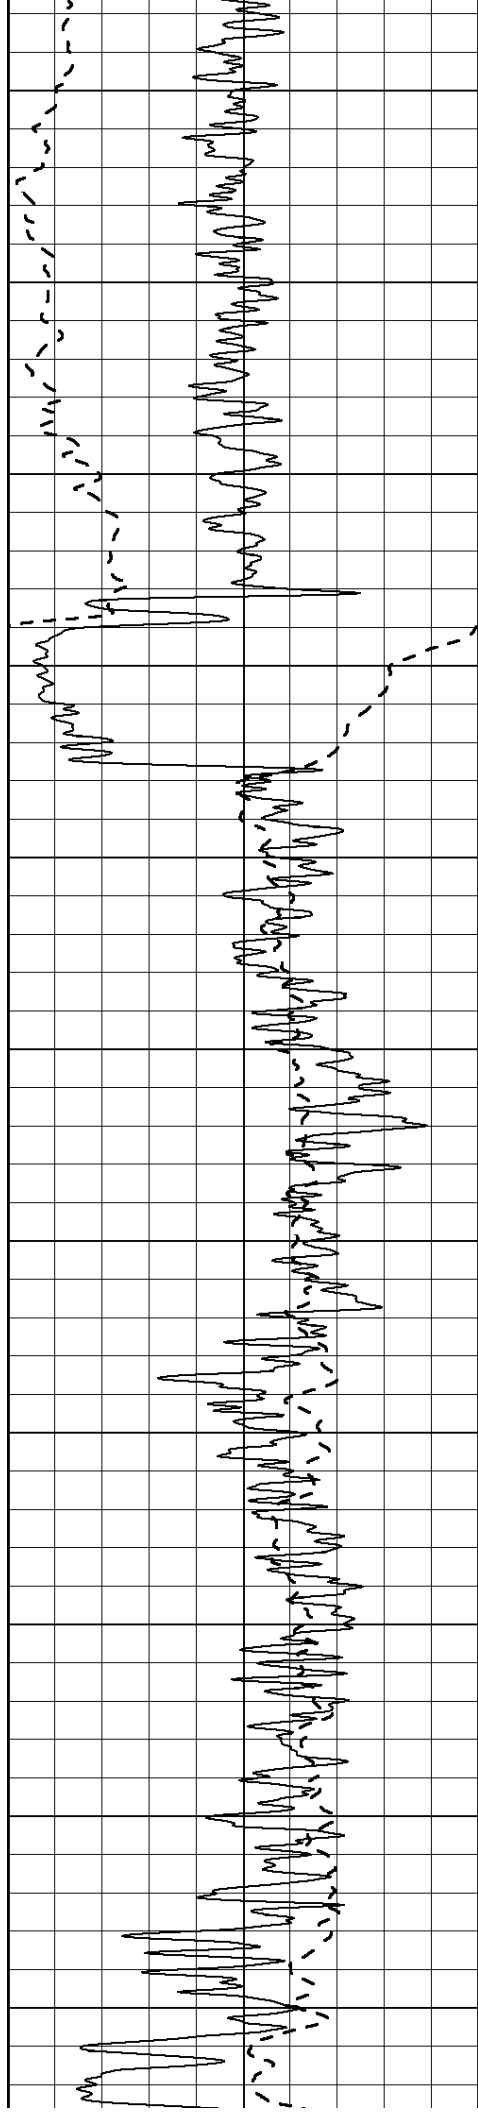

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

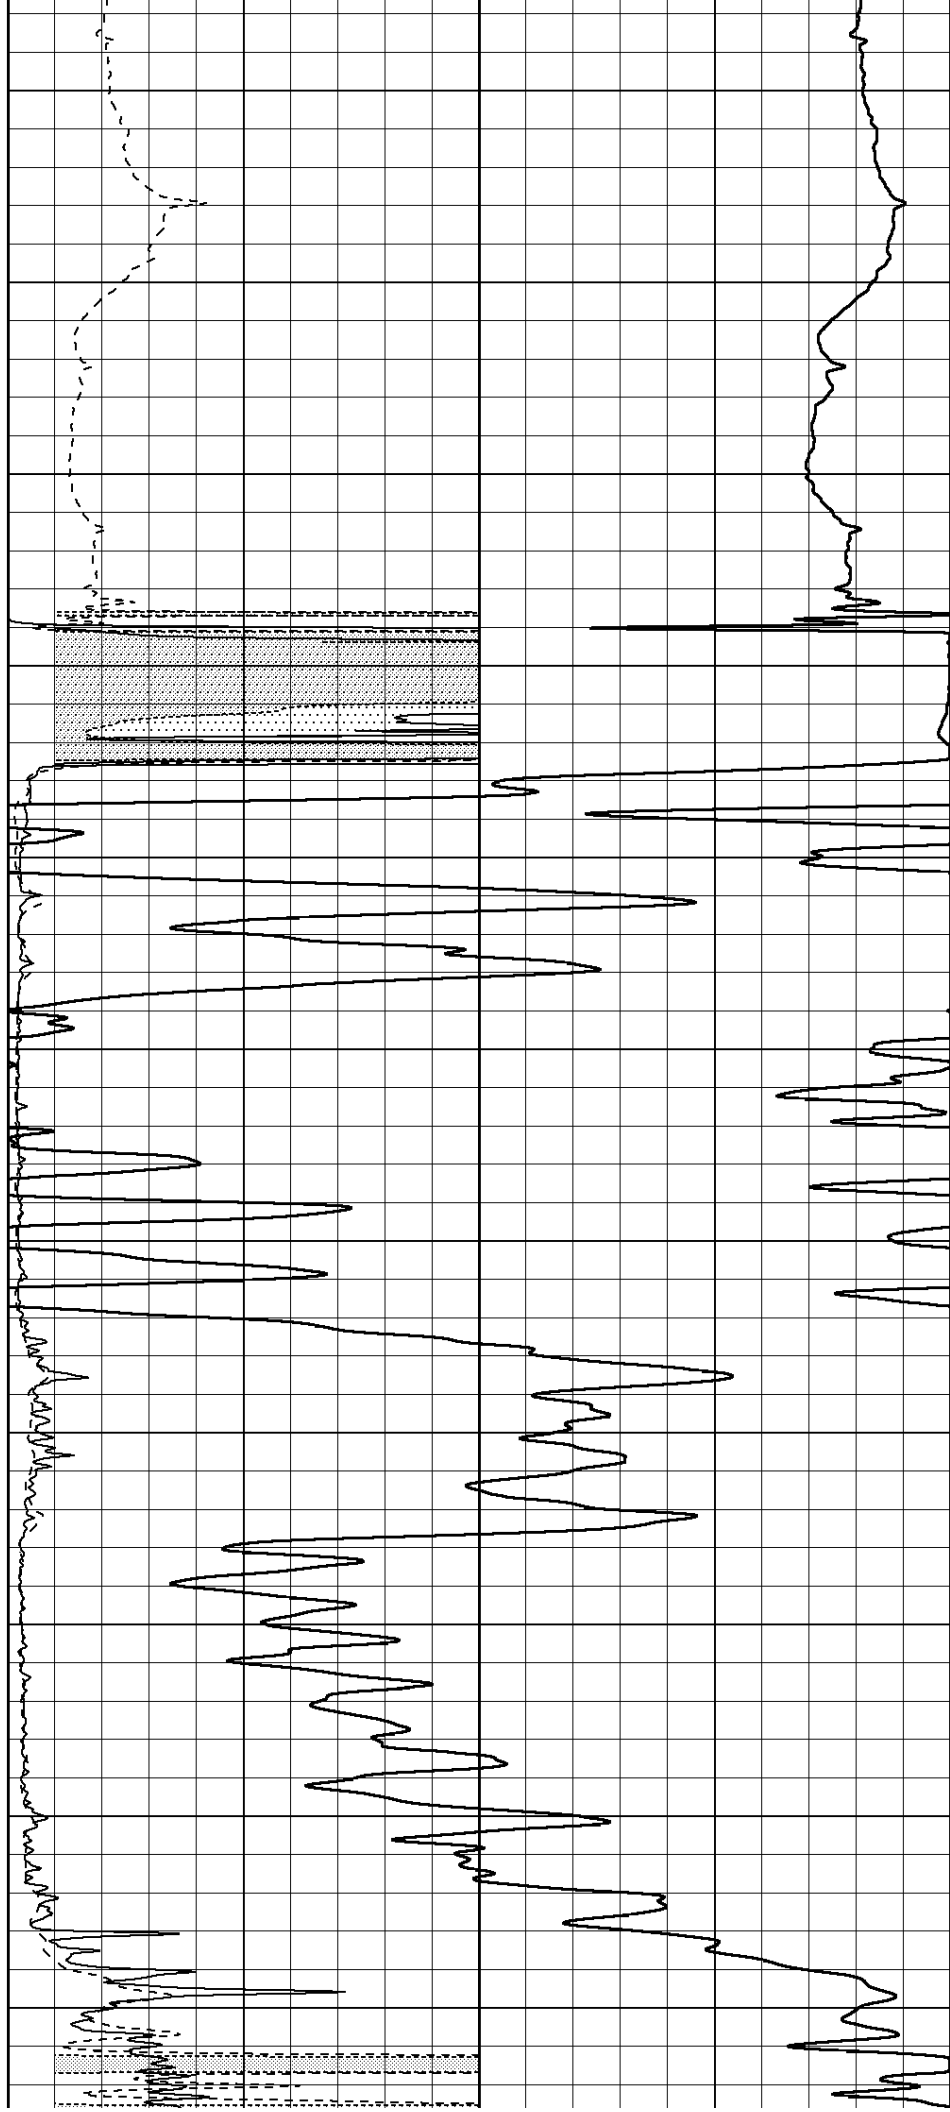

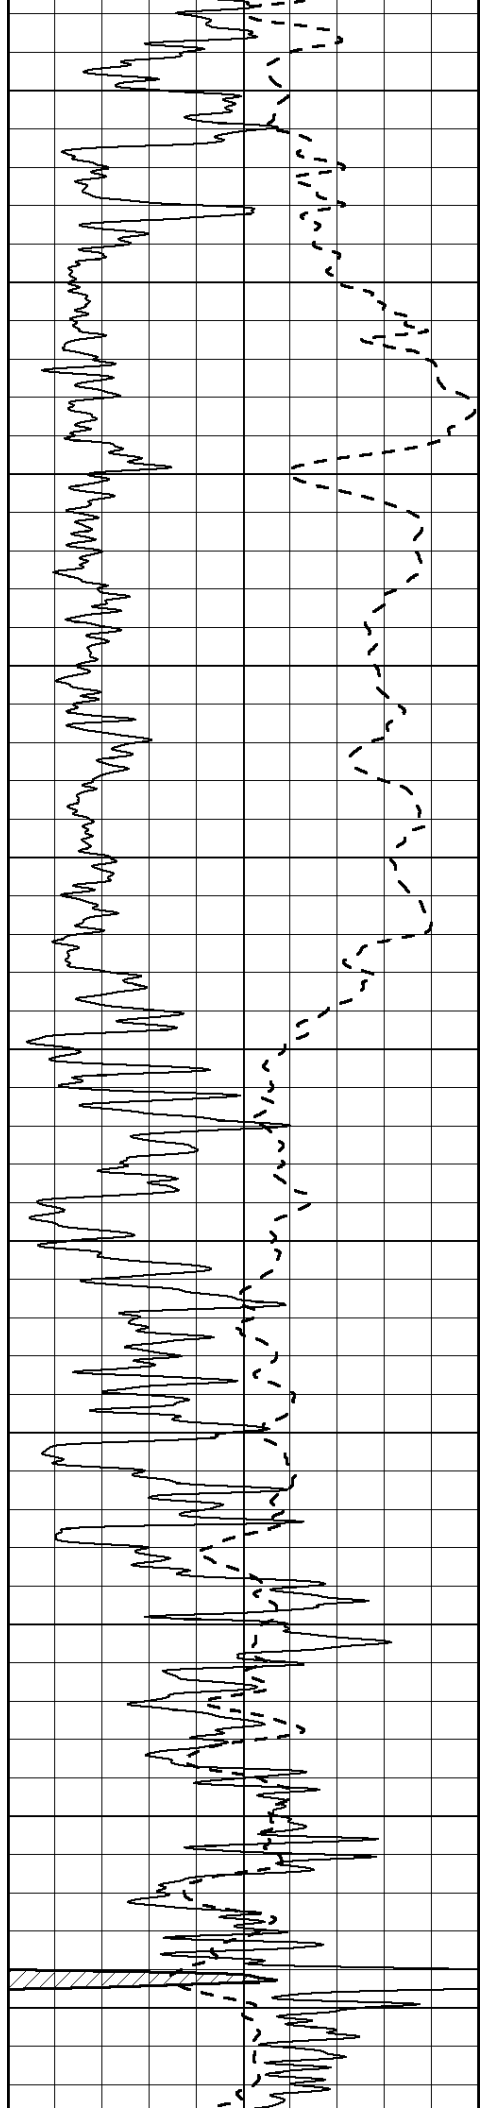

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

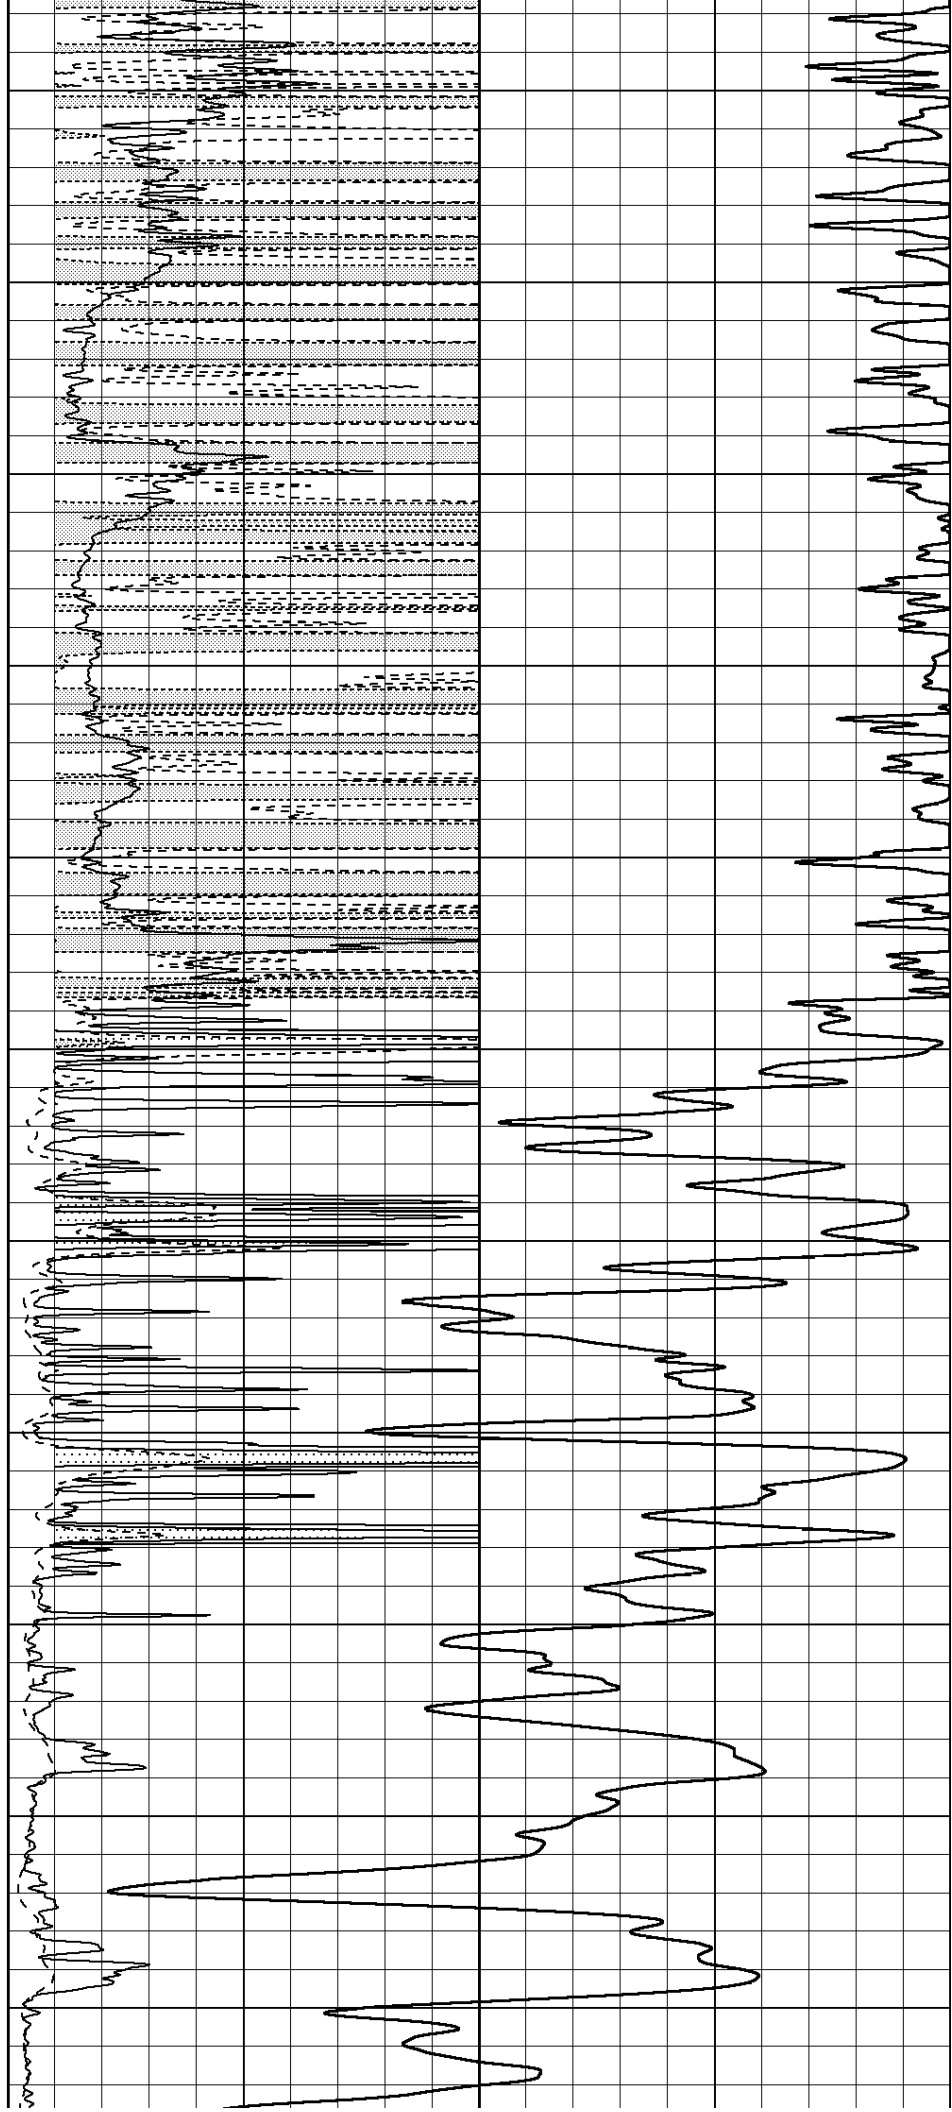

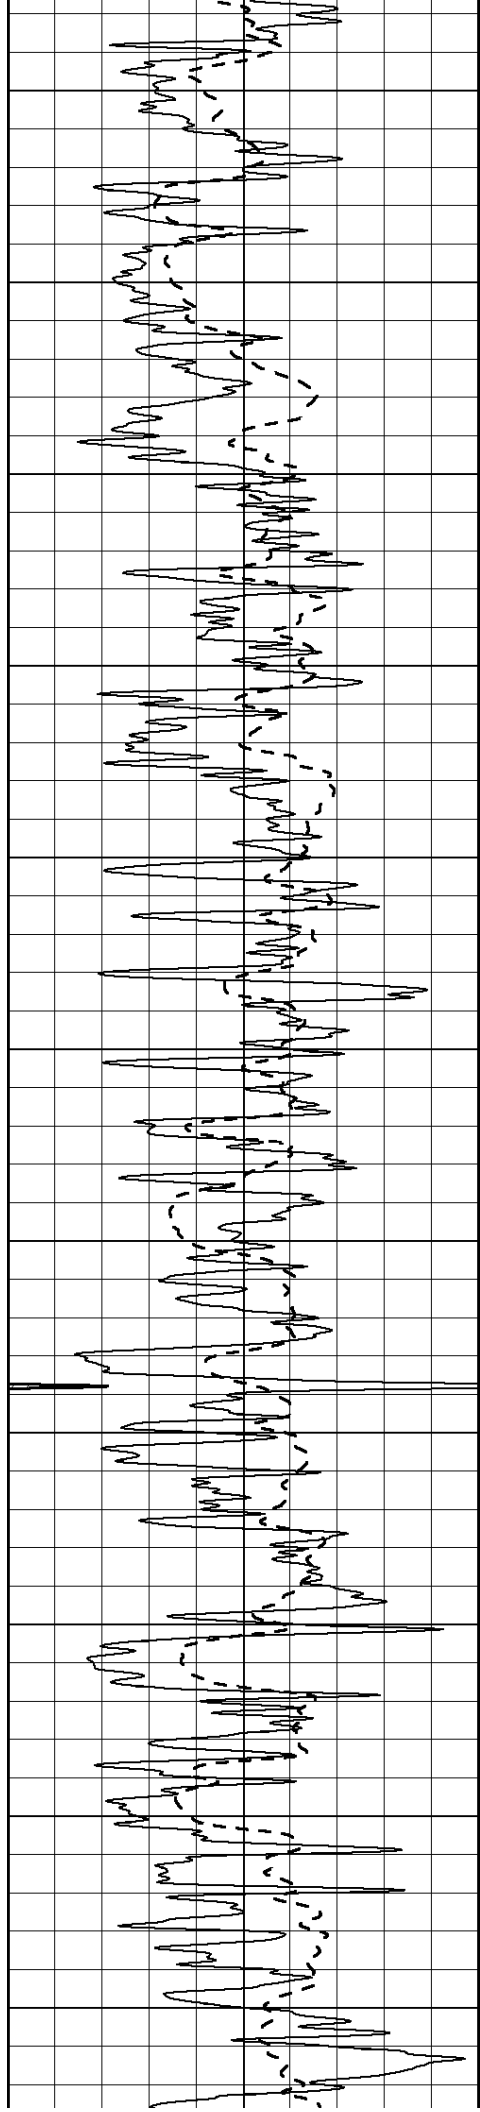

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

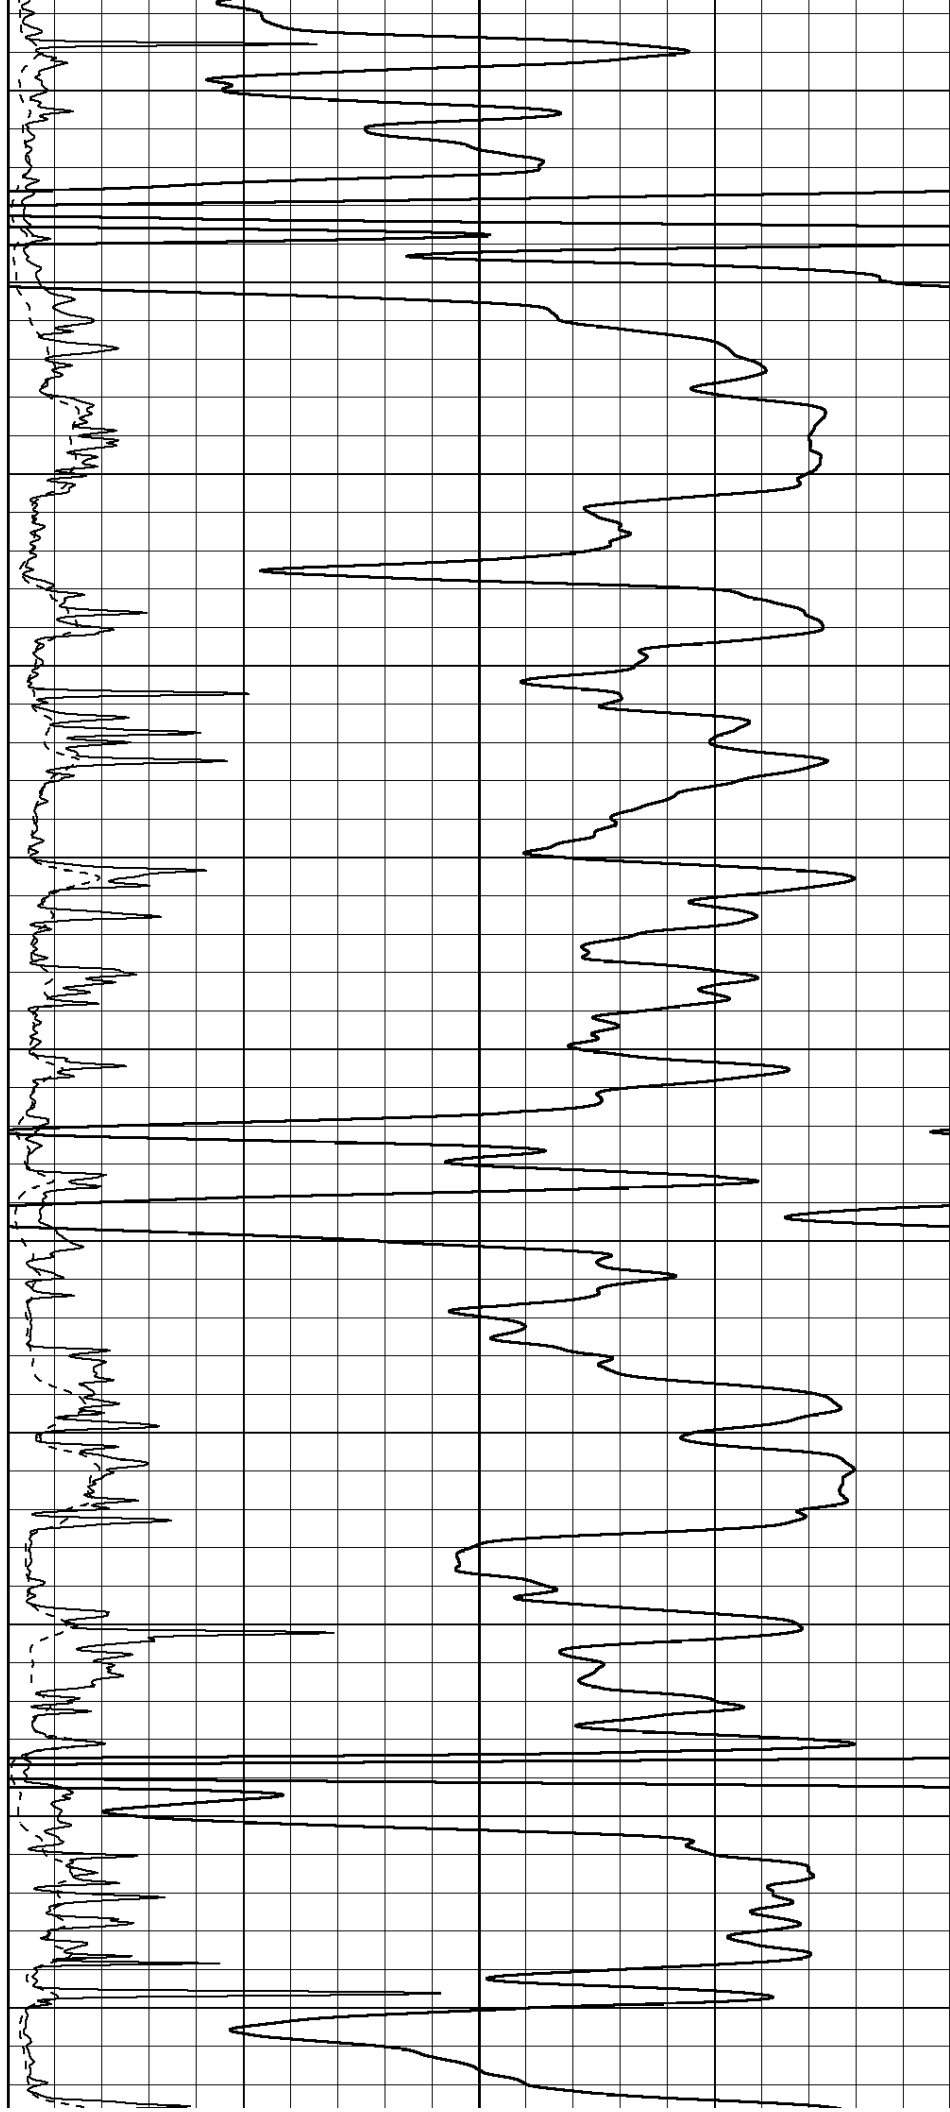

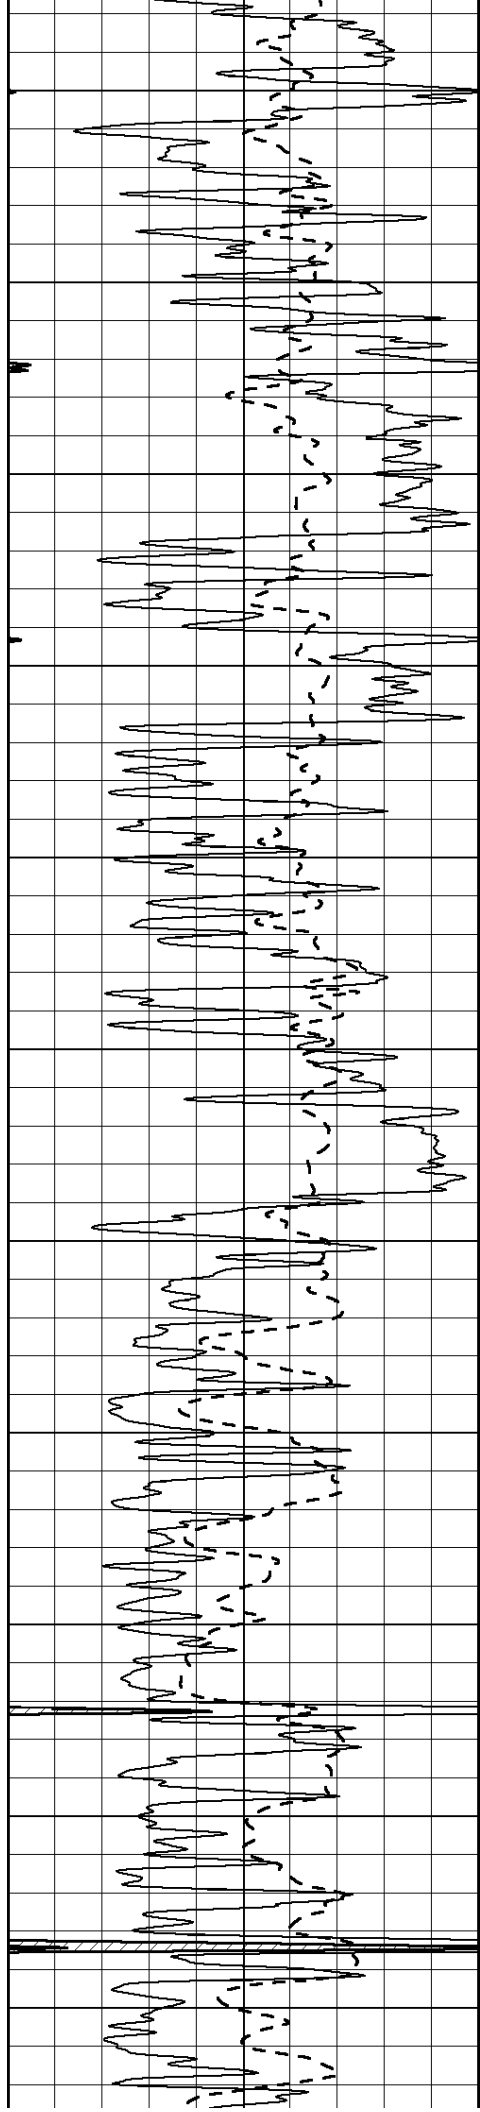

2650

2700

2750

2800

2850

2900


2950


3000

3050


3100

3150

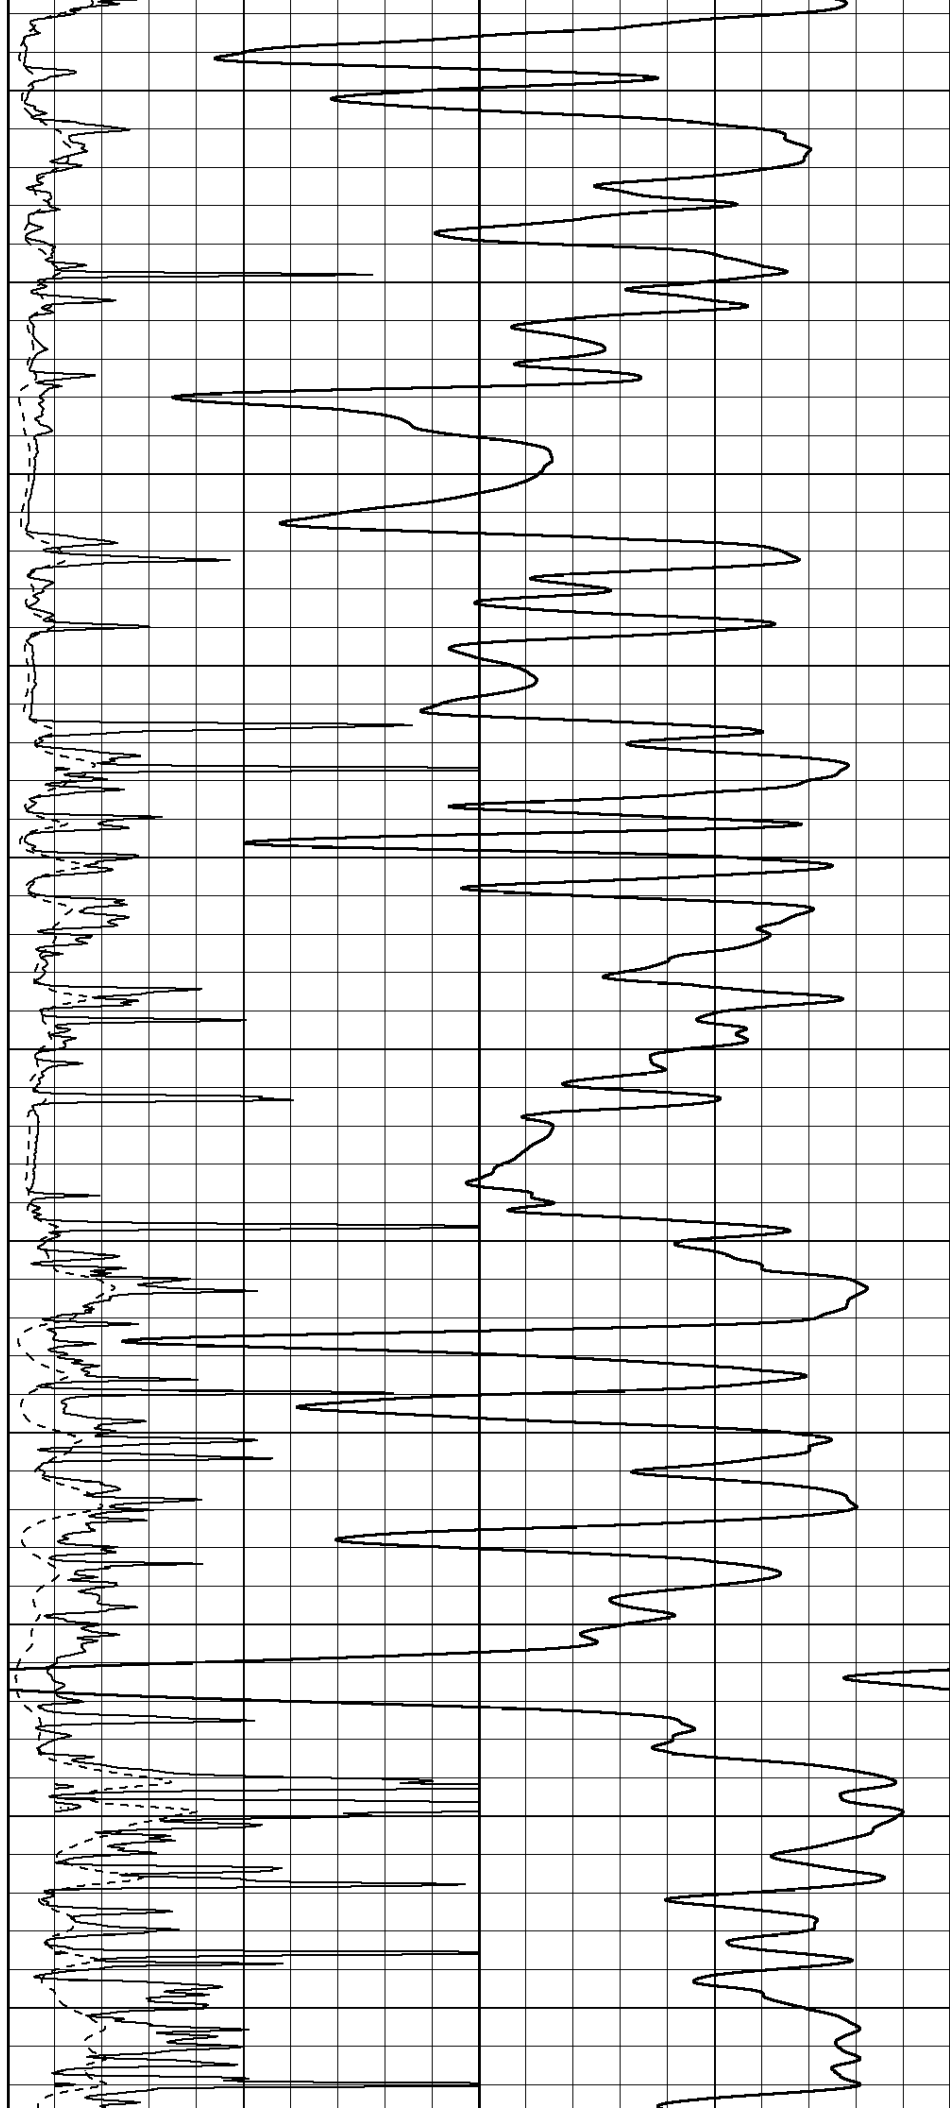

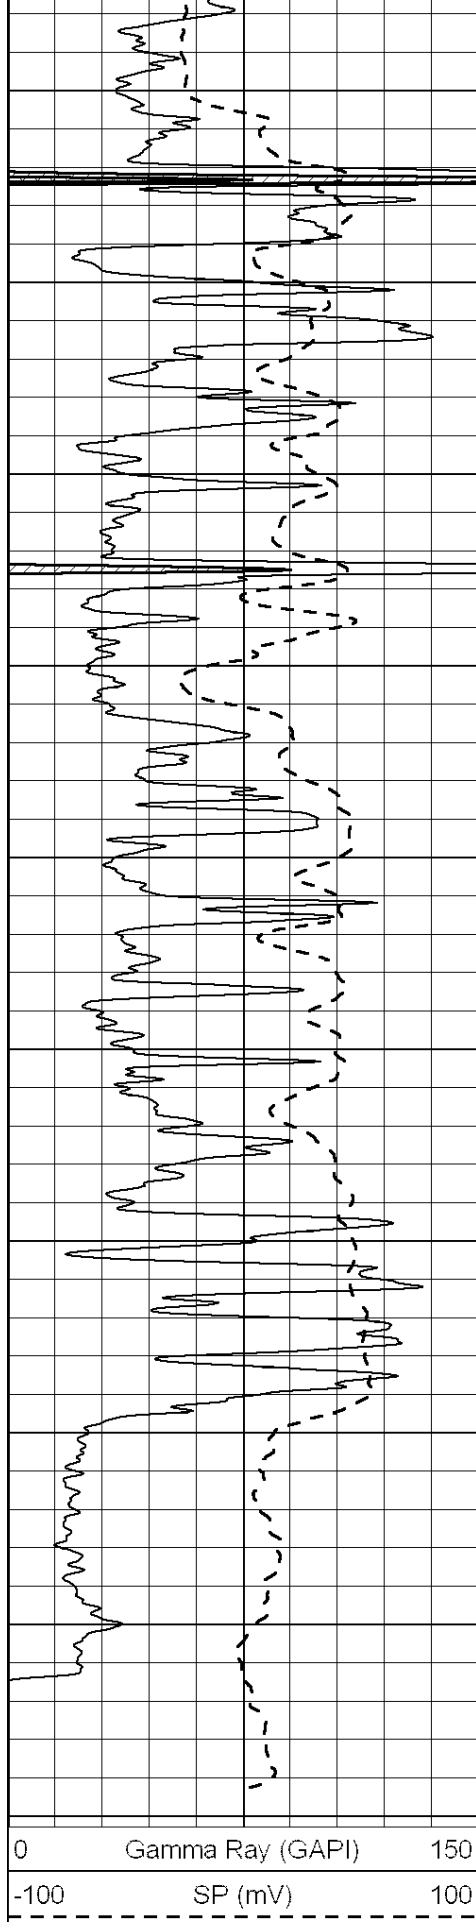

3200
3250
3300
3350
3400
3450
3500
3550
3600
3650

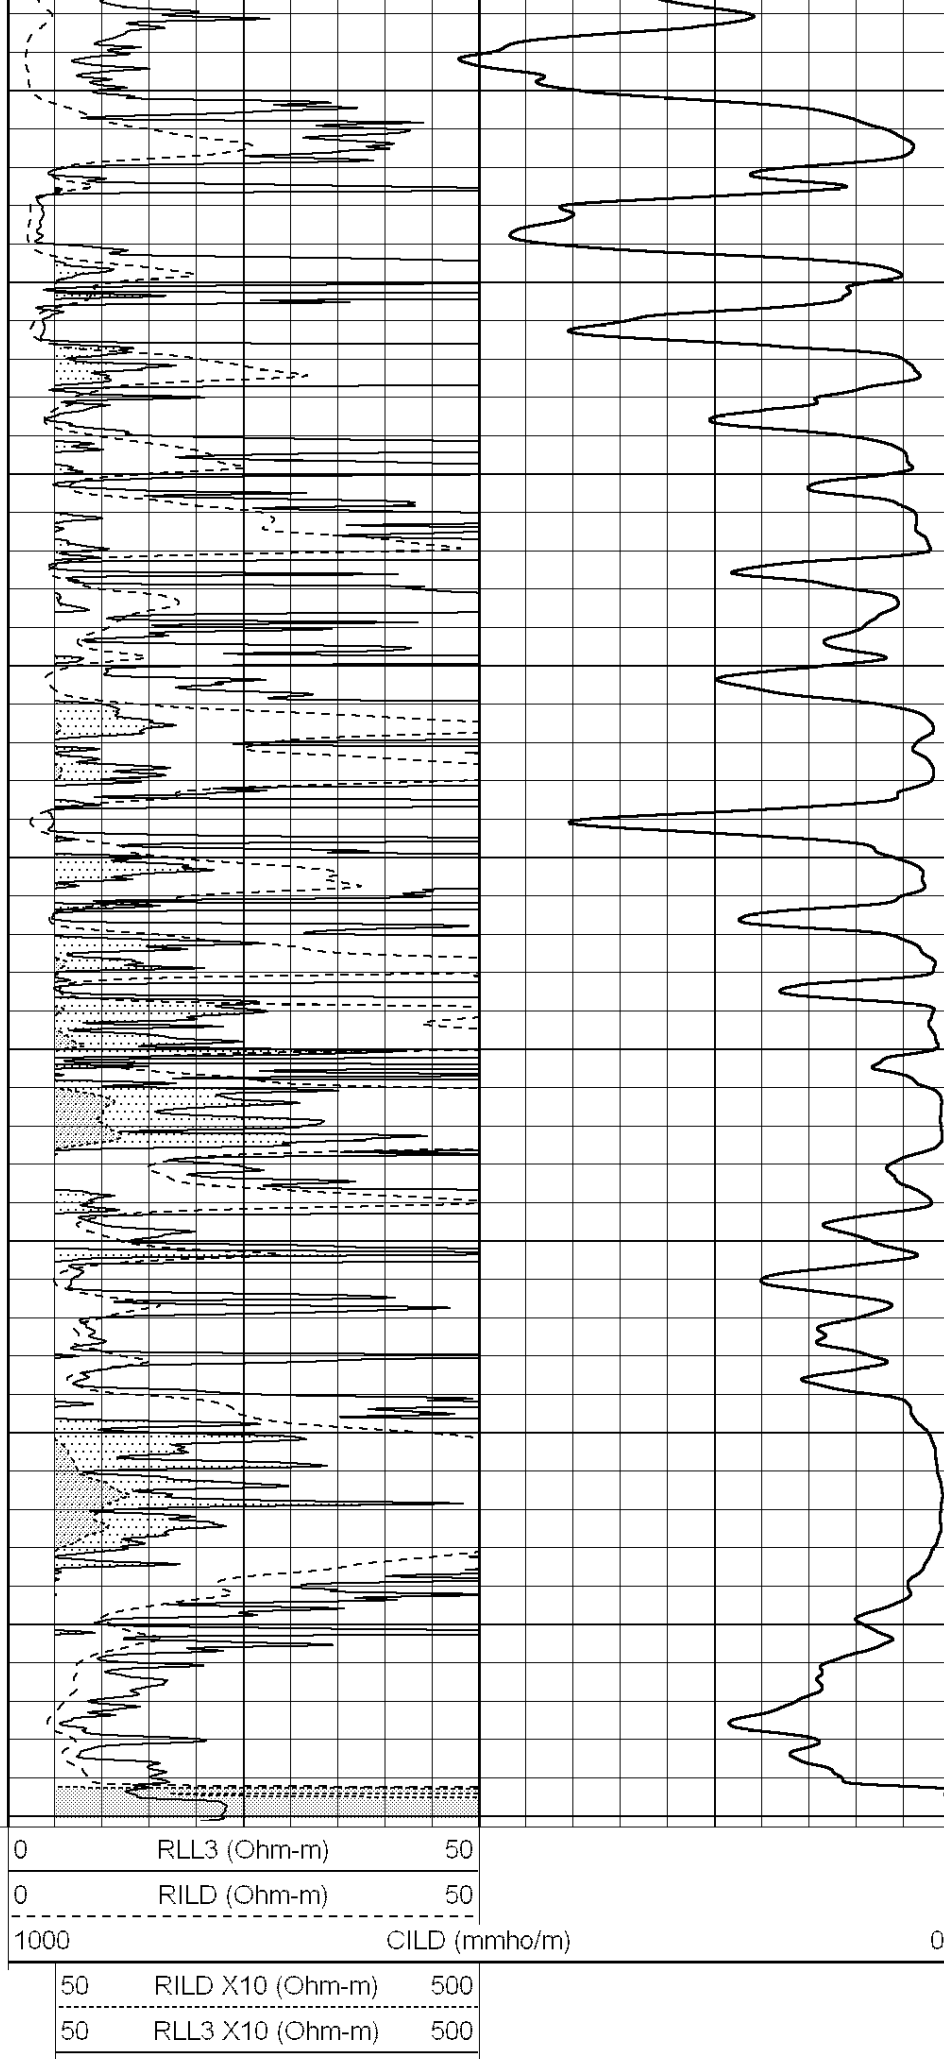


ANHYDRITE

Database File: 011194ddn.db
 Dataset Pathname: pass3.5
 Presentation Format: dil
 Dataset Creation: Sat Jul 27 11:38:19 2013 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

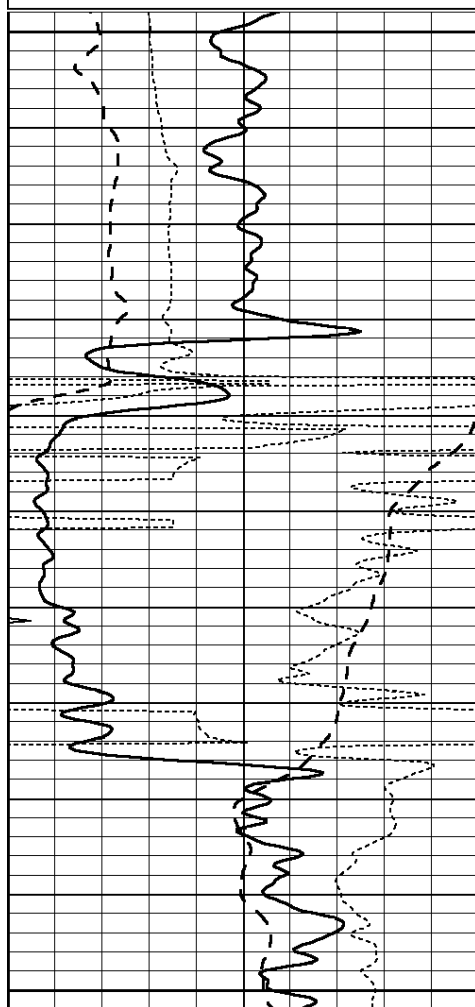


1100

1150

1200

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

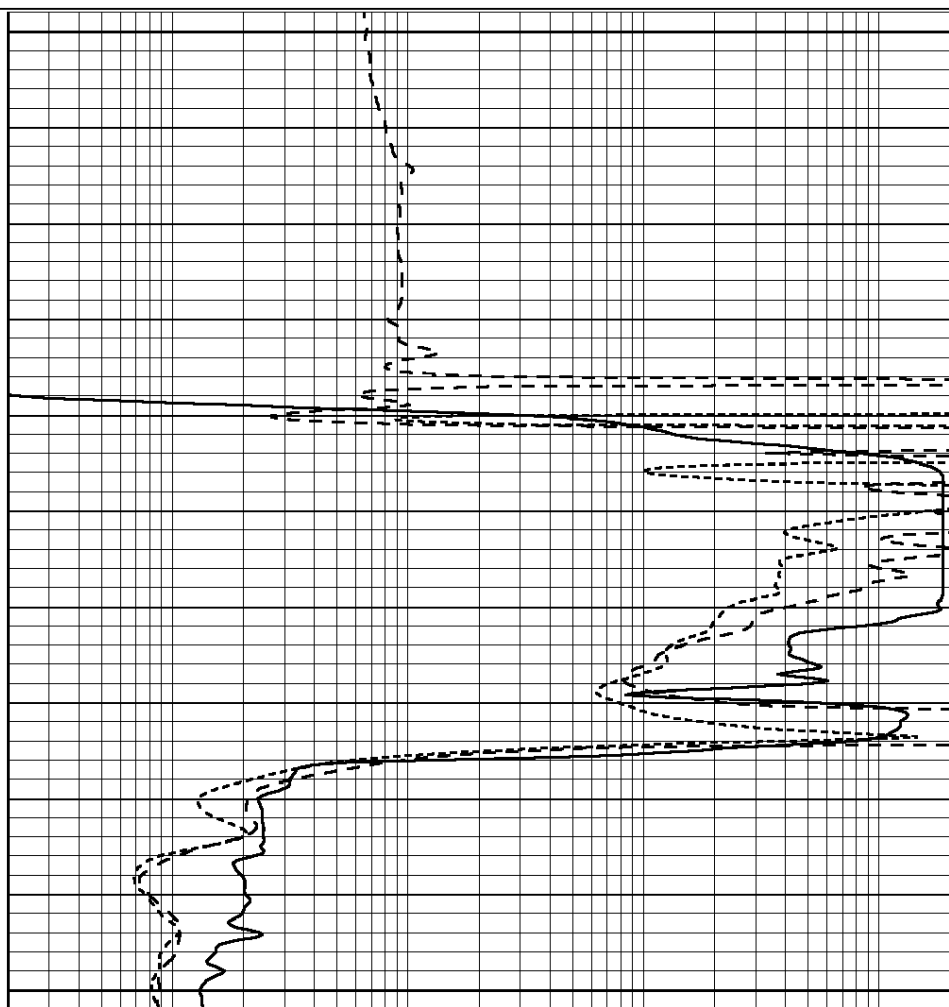


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

MAIN SECTION

Database File: 011194ddn.db
Dataset Pathname: pass3.4
Presentation Format: dil
Dataset Creation: Sat Jul 27 11:38:05 2013 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

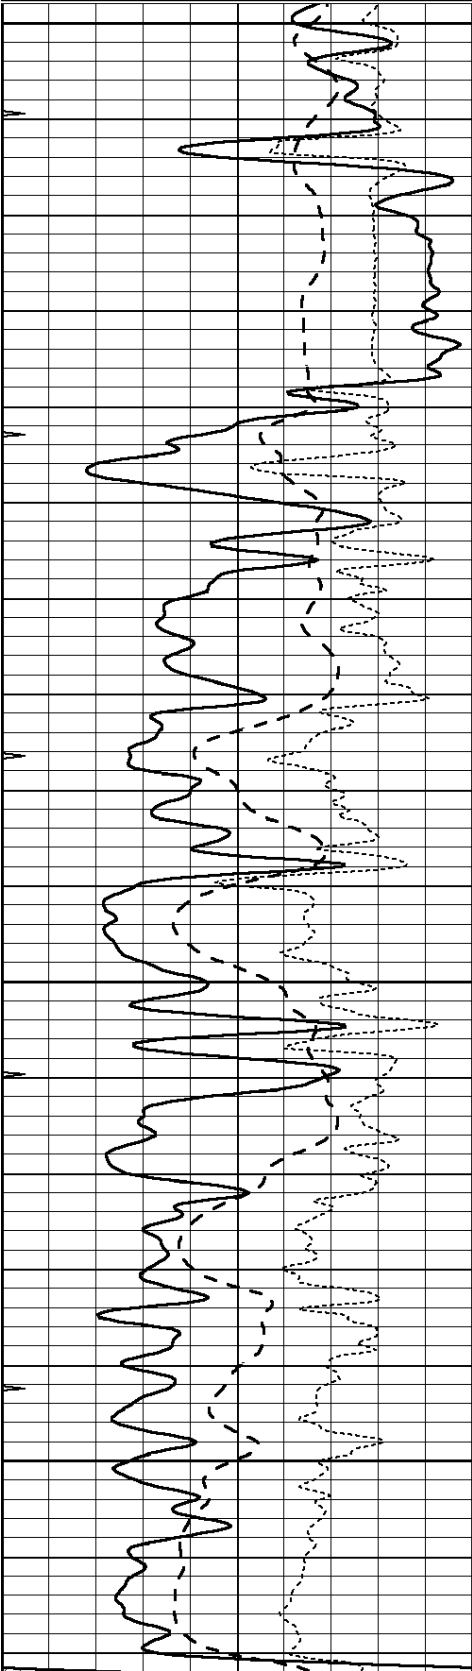



2900

2950

3000

3050

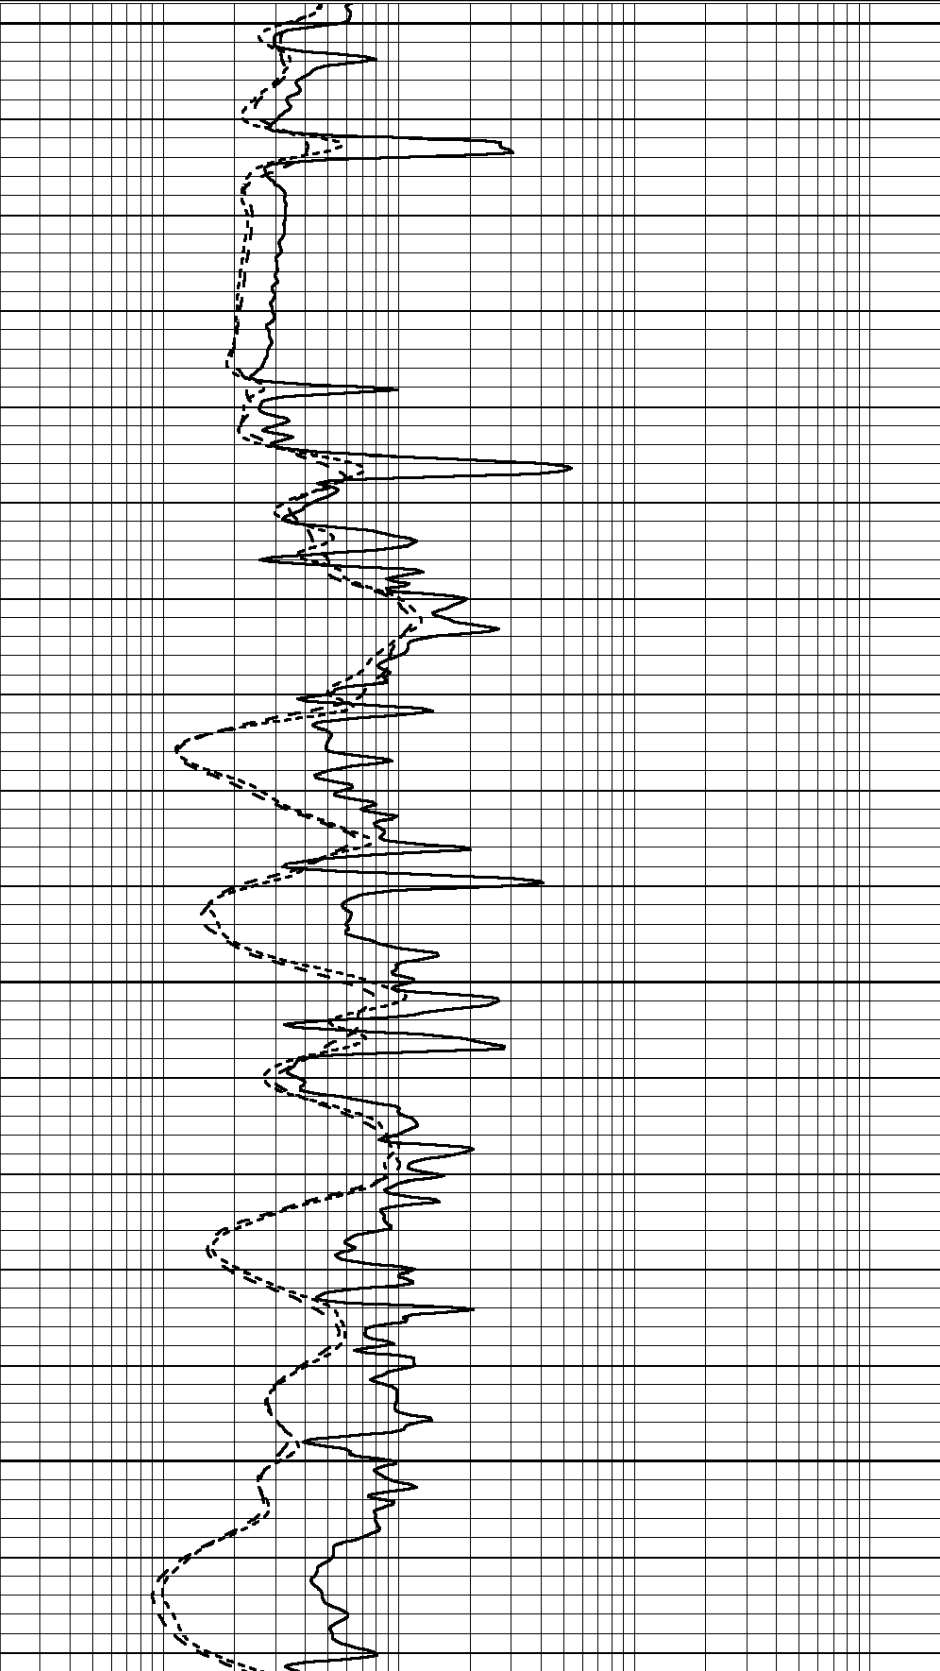

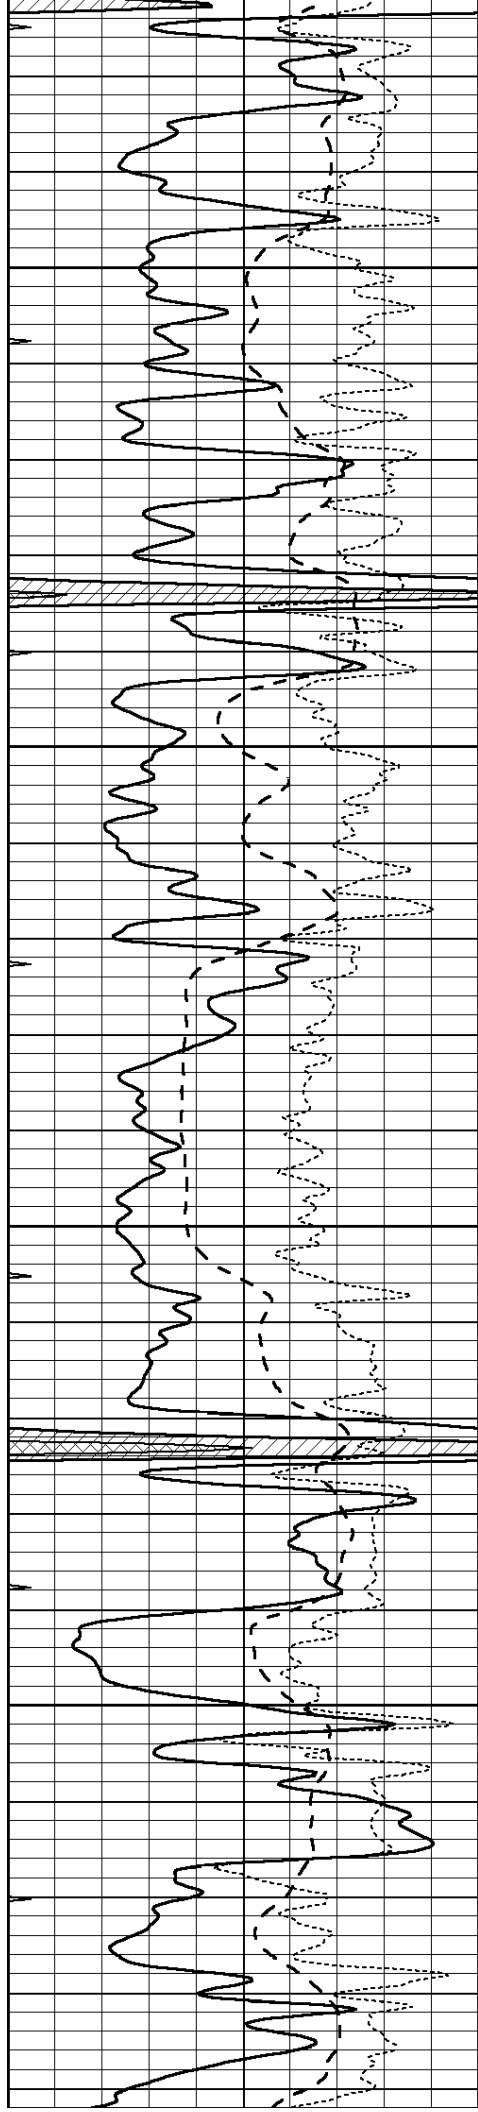



3100

3150

3200

3250

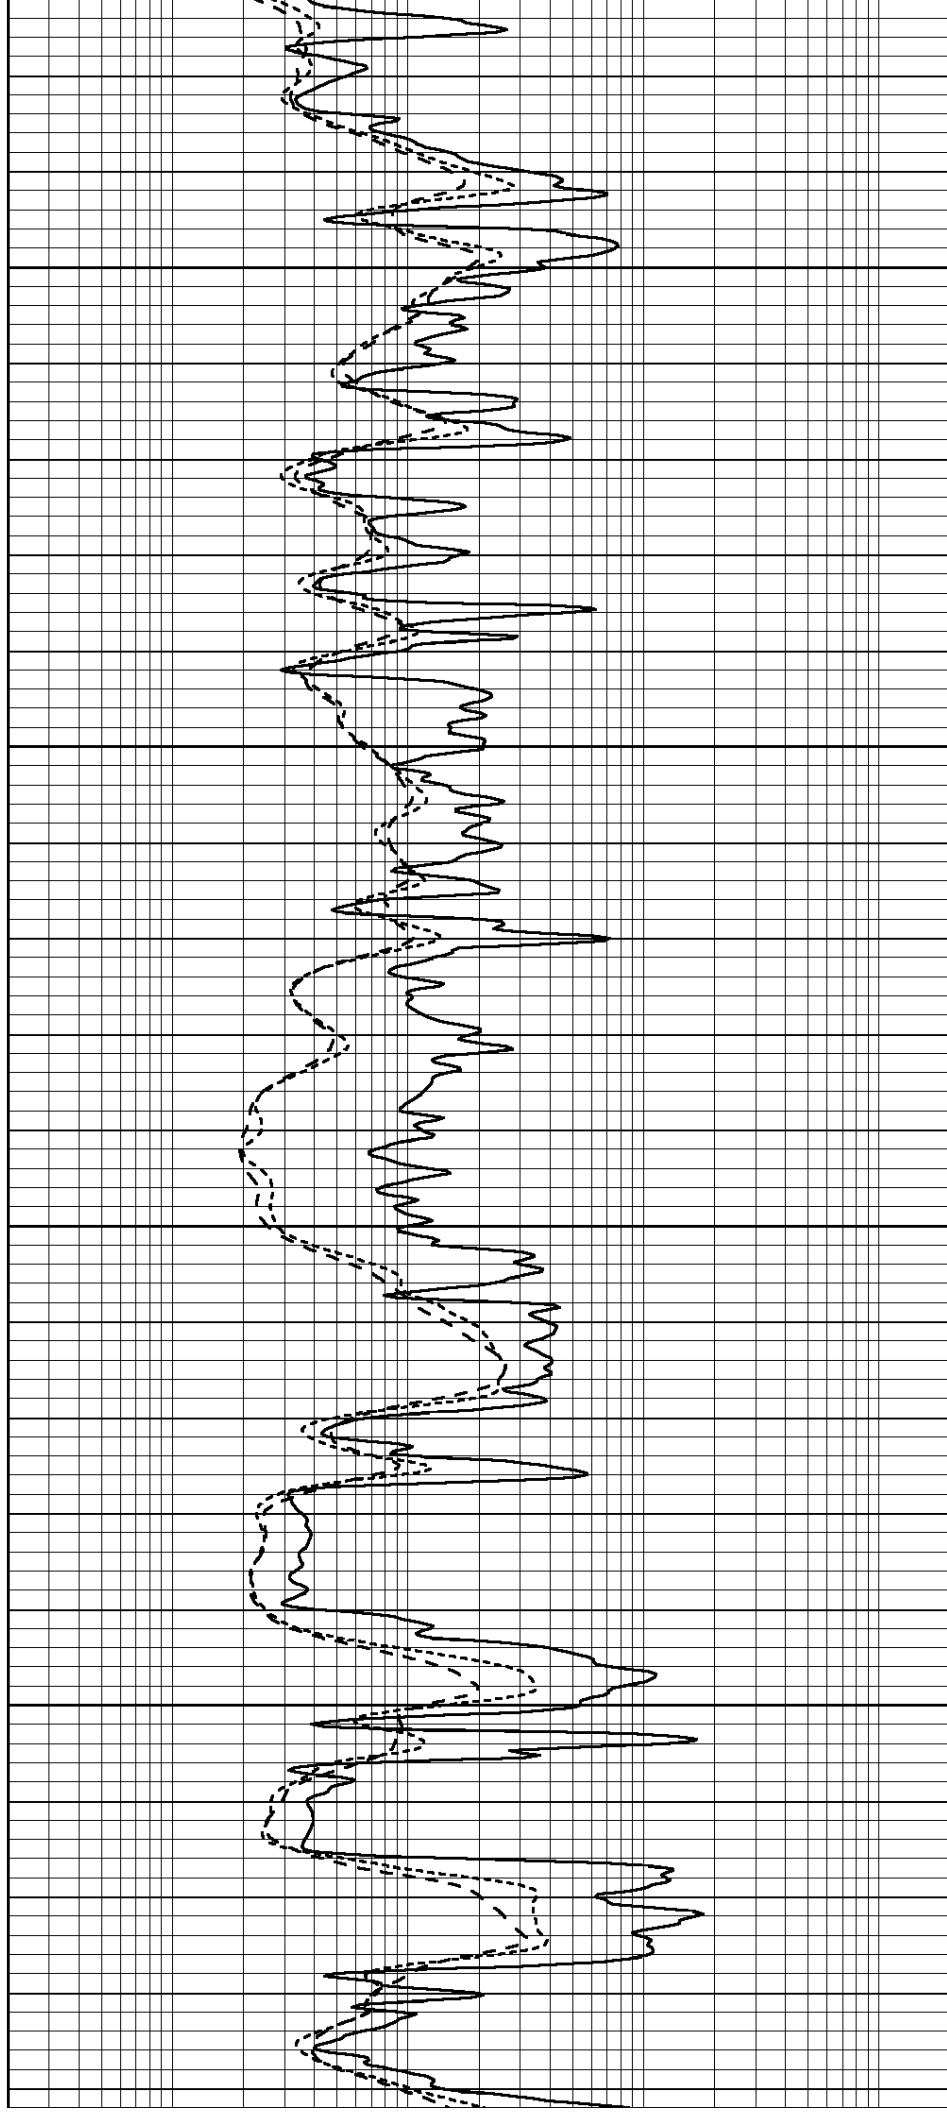

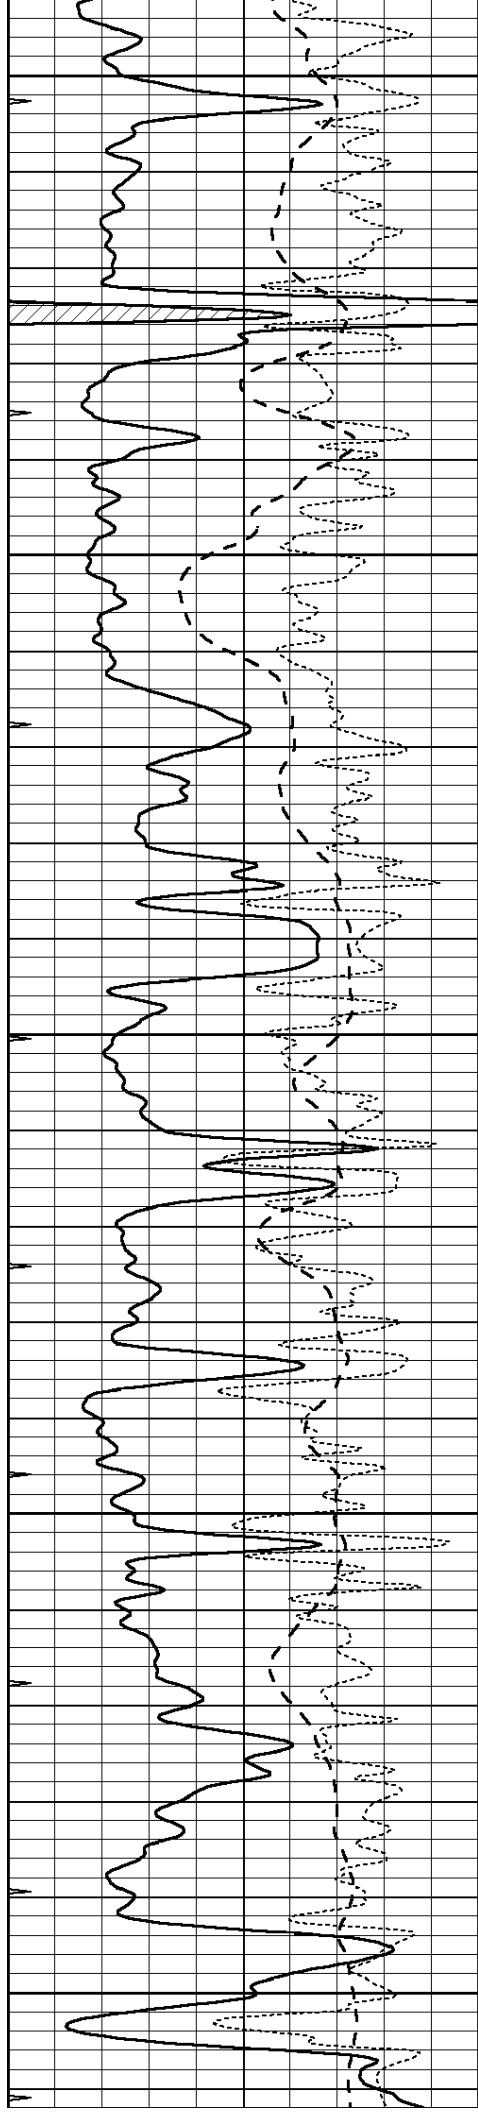


3300


3350

3400

3450

3500

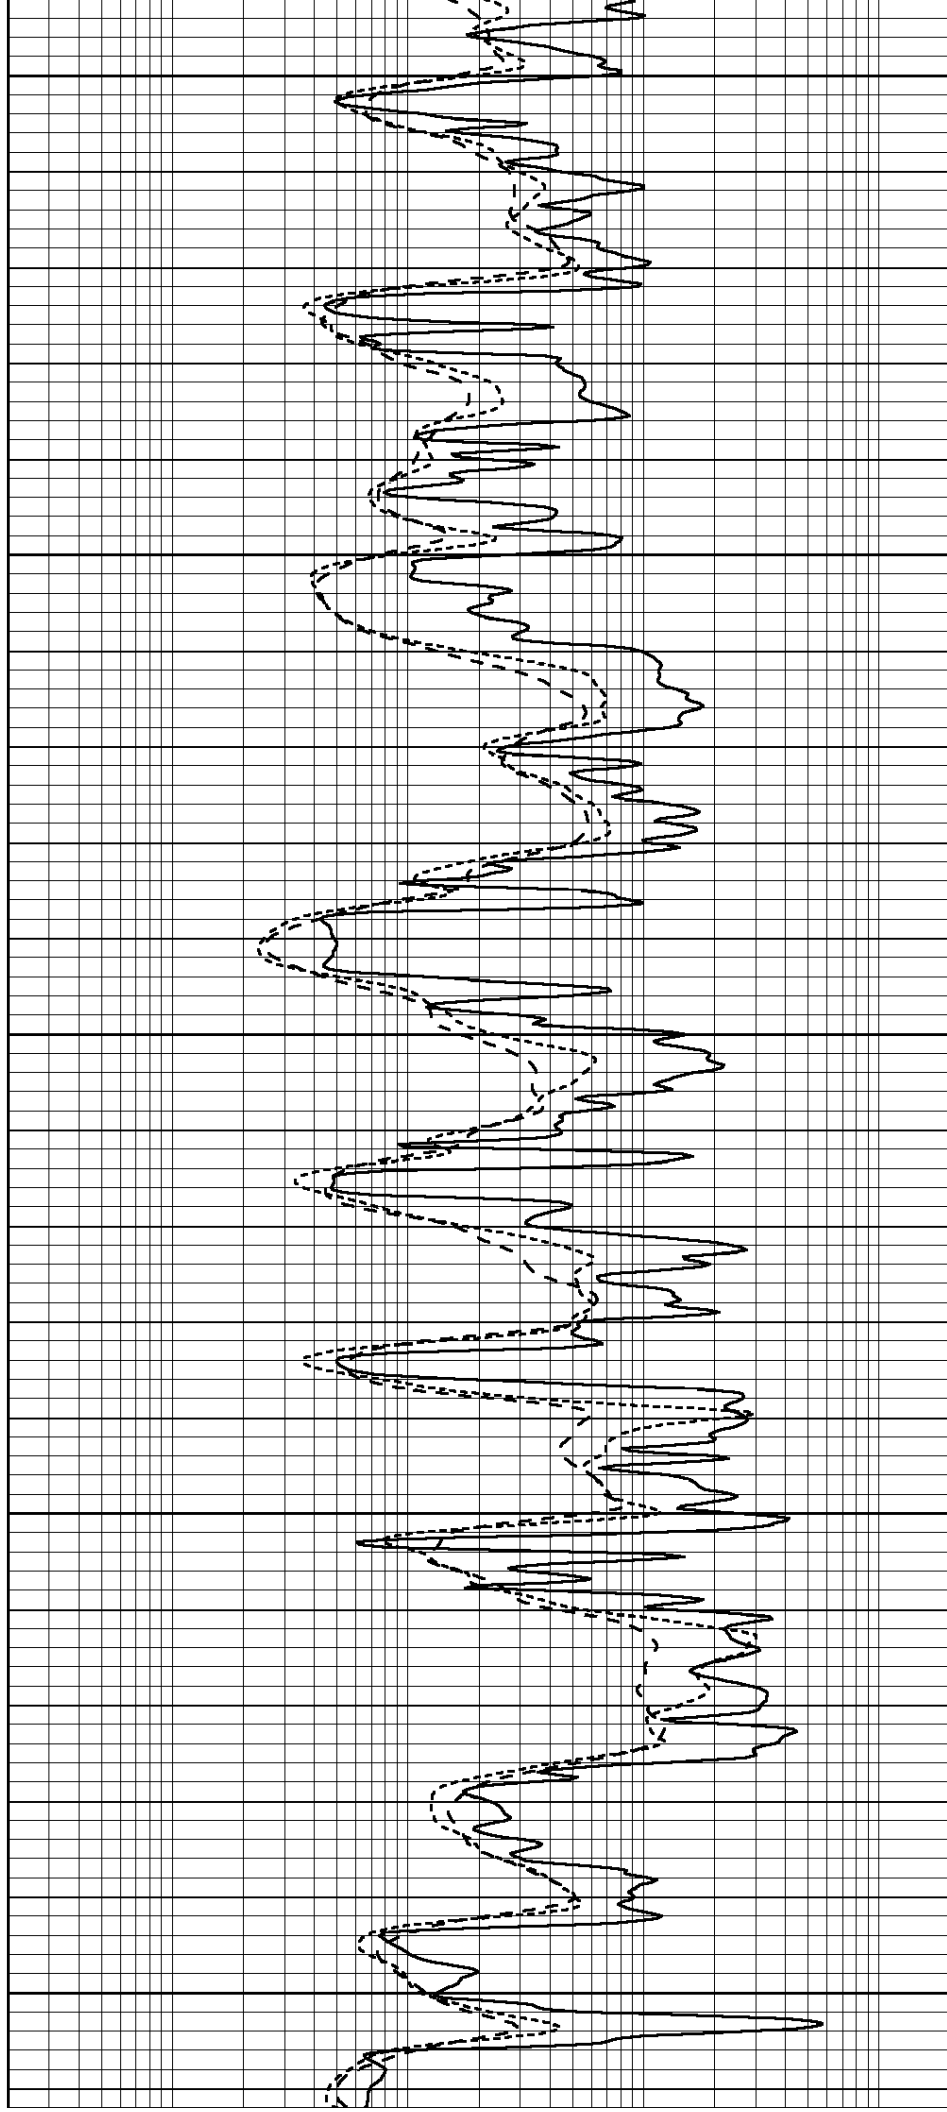

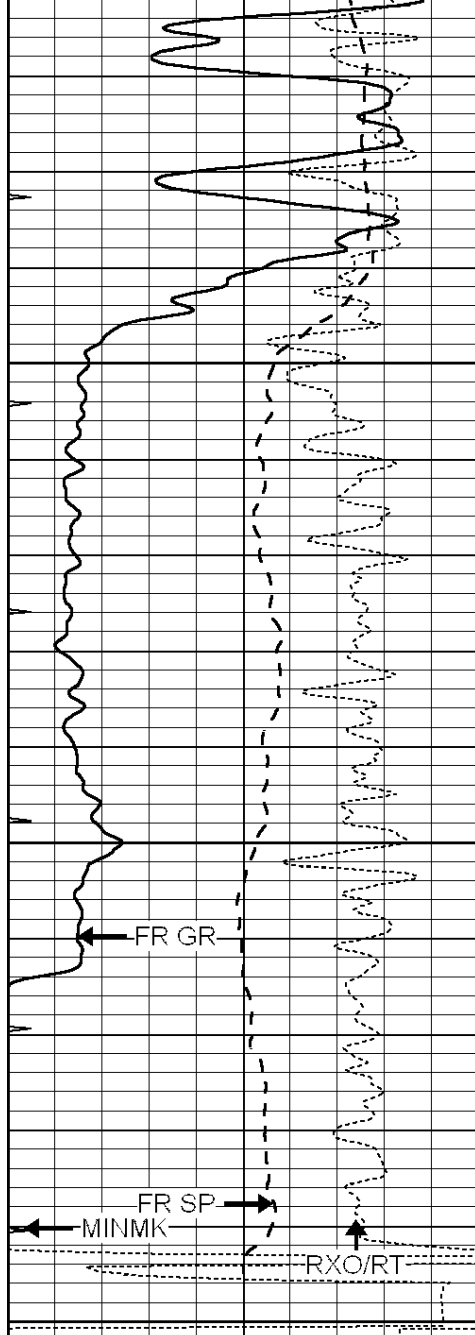


3550

3600

LTD 3648
3650

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

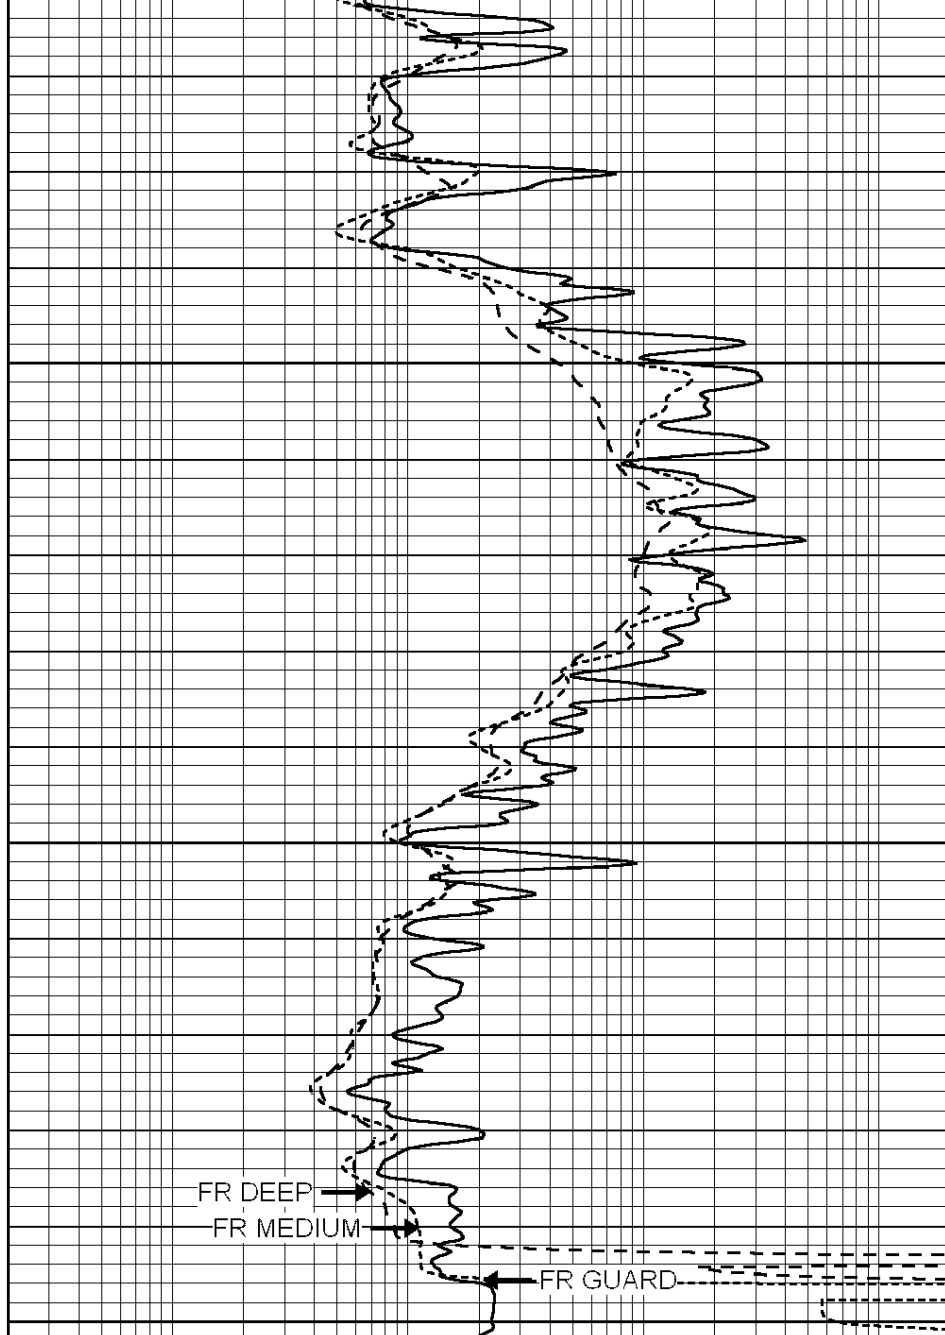

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



NABORS
COMPLETION
& PRODUCTION
SERVICES CO.


REPEAT SECTION

Database File: 011194ddn.db
Dataset Pathname: pass2.4
Presentation Format: dil
Dataset Creation: Sat Jul 27 10:43:47 2013 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

-250	Rxo/Rt	50
0	MINMK	20

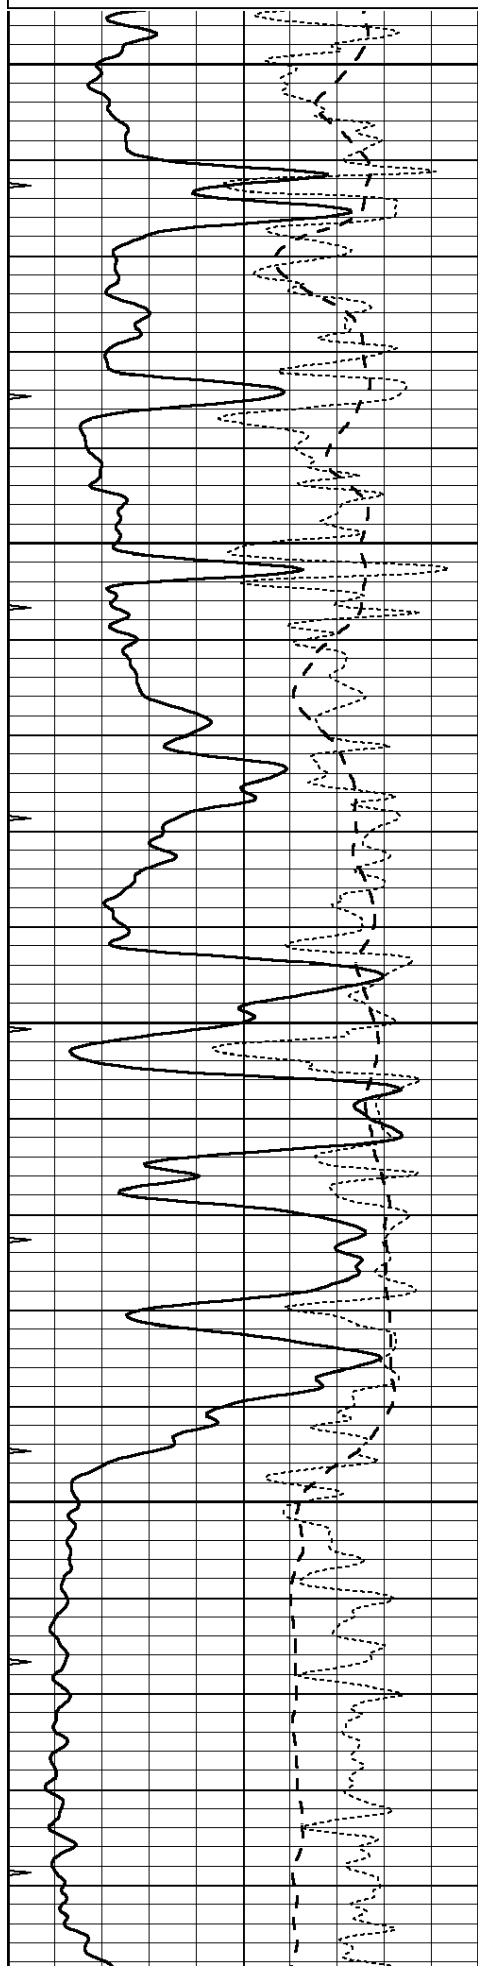

0.2	MEDIUM INDUCTION (Ohm-m)	2000
-----	--------------------------	------

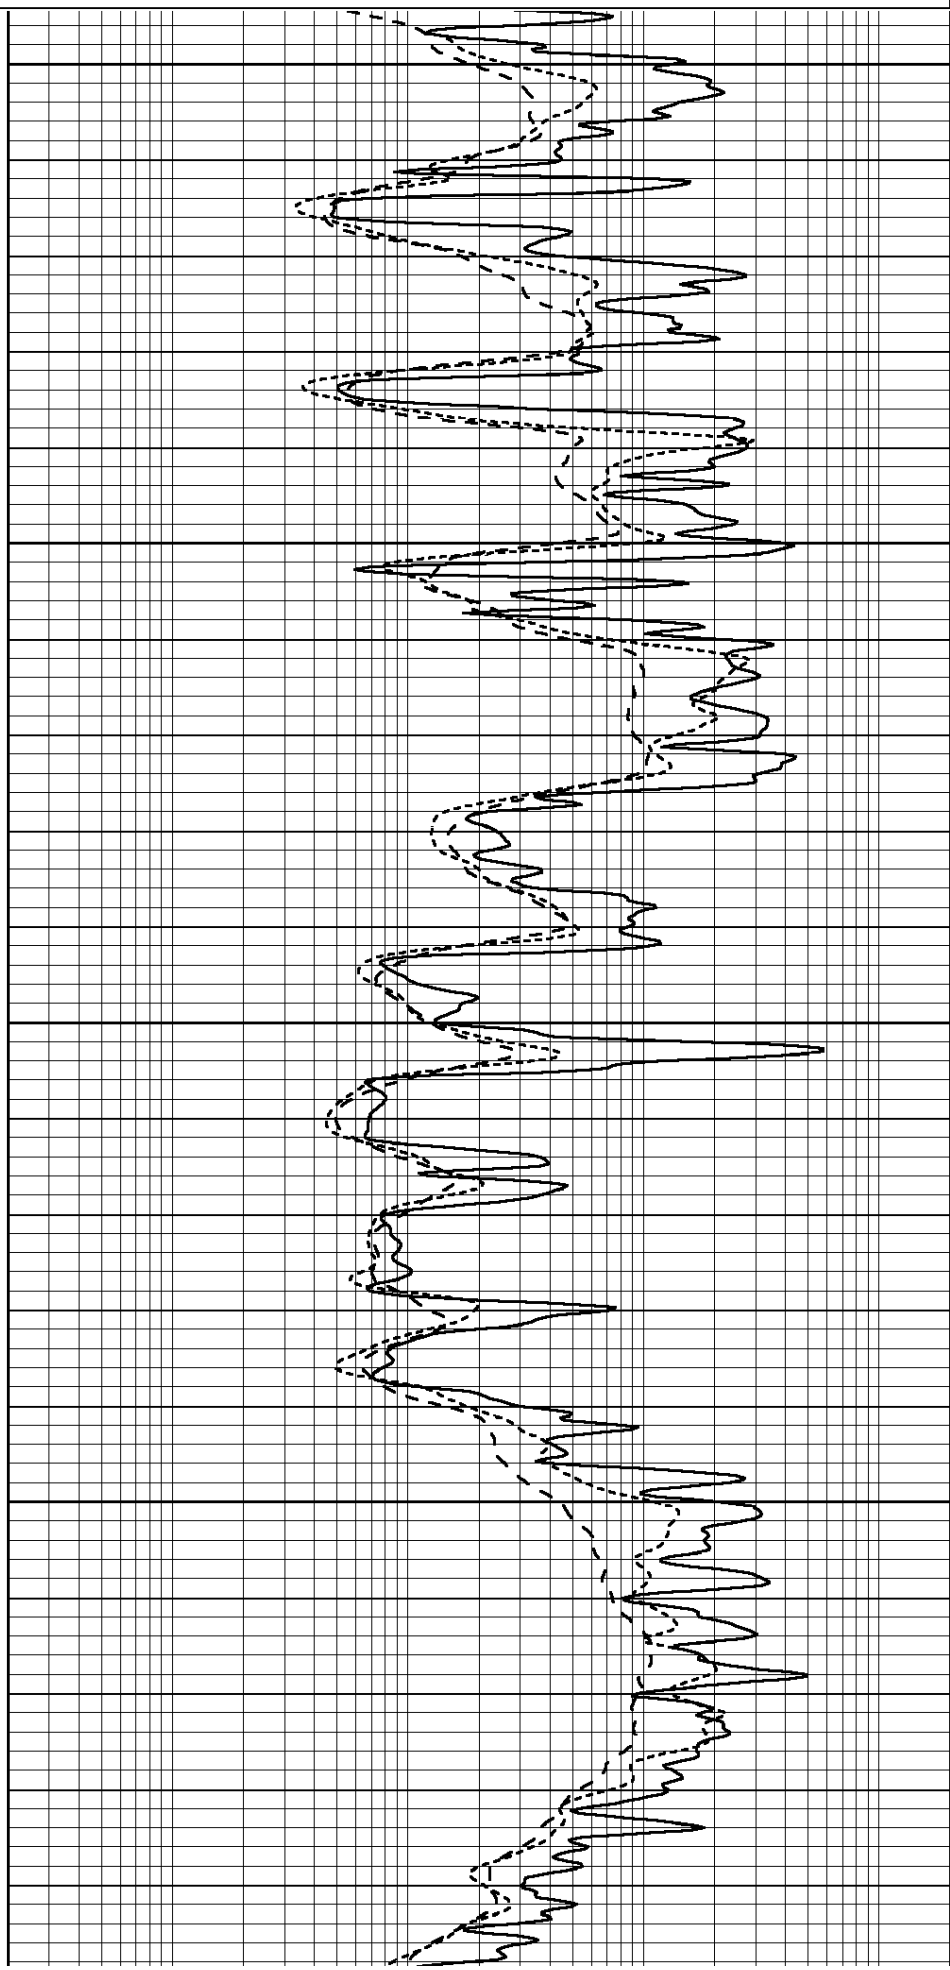

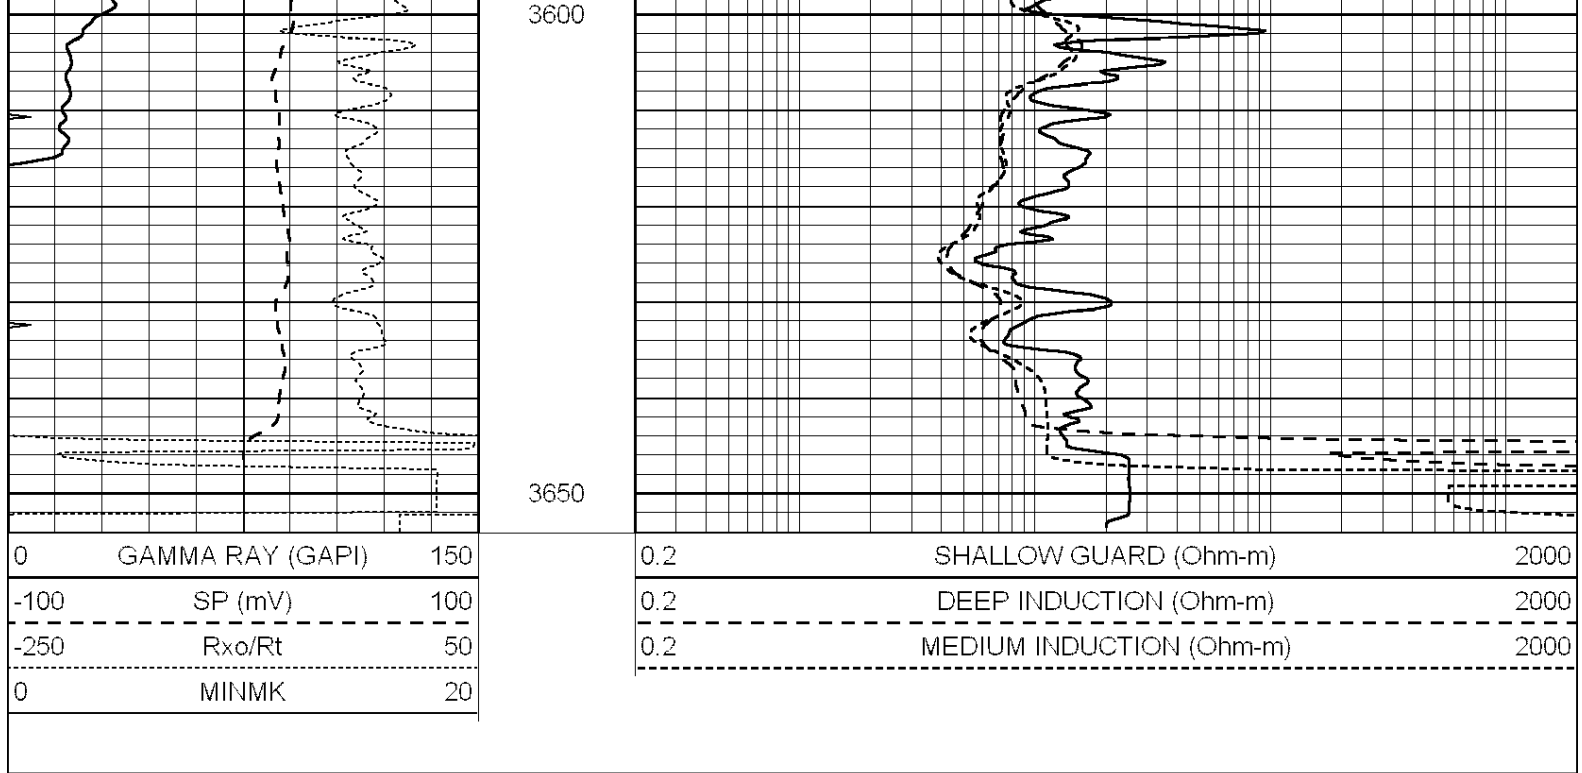

Calibration Report		
Database File:	011194ddn.db	
Dataset Pathname:	pass3.4	
Dataset Creation:	Sat Jul 27 11:38:05 2013 by Calc SOC 120430	

Dual Induction Calibration Report		
Serial-Model:	PROBE9-DILG	
Surface Cal Performed:	Thu Jul 11 13:14:55 2013	
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008	
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008	

Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	-9.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-13.500
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000

Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 001 Model: PRB

Master Calibration			Performed Tue May 28 08:54:22 2013					
	Background		Magnesium		Aluminum		Sandstone	
Window 1	1890.3		12786.5		4236.7		13497.2	cps
Window 2	1764.1		11051.7		3765.5		11456.4	cps
Window 3	1442.8		5894.4		2376.2		5911.4	cps
Window 4	428.0		428.9		420.8		426.5	cps
Long Space	0.0		9287.6		2001.3		9692.3	cps
Short Space	3.2		3351.1		2186.8		3398.0	cps
Rho			1.7100		2.5900		1.3800	g/cc
Pe			0.0000		2.5700		1.5500	
Rib Angle	: 44.5		Rib Slope	: 0.981	Density/Spine Ratio		: 0.552	
Spine Angle	: 74.5		Spine Slope	: 3.596	Spine Intercept		: -20.1	

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0		0.0		0.0		0.0	cps
Window 2	0.0		0.0		0.0		0.0	cps
Window 3	0.0		0.0		0.0		0.0	cps
Window 4	0.0		0.0		0.0		0.0	cps
Long Space	0.0		0.0		0.0		0.0	cps
Short Space	0.0		0.0		0.0		0.0	cps
Measured Rho			0.0000		0.0000		0.0000	g/cc
Measured Correction			0.0000		0.0000		0.0000	g/cc
Measured Pe					0.0000		0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0		0.0		0.0		0.0	cps
Window 2	0.0		0.0		0.0		0.0	cps
Window 3	0.0		0.0		0.0		0.0	cps
Window 4	0.0		0.0		0.0		0.0	cps
Long Space	0.0		0.0		0.0		0.0	cps
Short Space	0.0		0.0		0.0		0.0	cps
Measured Rho			0.0000		0.0000		0.0000	g/cc
Measured Correction			0.0000		0.0000		0.0000	g/cc
Measured Pe					0.0000		0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector		Readings	Measured	Target
Short Space		cps		
Long Space		cps	pu	pu
Gamma Ray Calibration Report				
Serial Number:		070559		
Tool Model:		OPEN_GR		
Performed:		Wed Jun 12 18:25:42 2013		
Calibrator Value:		1.0	GAPI	
Background Reading:		0.0	cps	
Calibrator Reading:		1.0	cps	
Sensitivity:		0.3500	GAPI/cps	