

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-00076-00-00
Spot: NWNWNWSE Sec/Twnshp/Rge: 8-23S-35W
2490 feet from S Section Line, 2490 feet from E Section Line
Lease Name: URIE Well #: 1
County: KEARNY Total Vertical Depth: 2642 feet

Operator License No.: 5952
Op Name: BP AMERICA PRODUCTION COMPANY
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2500		WITH 4 SX CMT
PROD	7	2568	0	WITH 700 SX CMT # 85
SURF	10.75	270		WITH 175 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/12/2005 8:00 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: KEVIN STRUBE Company: BP AMERICA PRODUCTION Phone: (620) 356-6981

Proposed Plugging Method: SET CIBP @ 2500' & 4 SX CMT. PEFORATE AND CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/19/2005 8:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

SET CIBP @ 2500' WITH 4 SX CMT. RAN BOND LOG ON 7/12/05. NO CMT FROM 1000' TO SURFACE. PERFORATE AT 950'. NO BLOW ON ANNULUS. 7/19/05: PUMPED 170 SX CMT DOWN 7" CASING. (32 SX CMT ON OUTSIDE OF CASING) PRESSURE HELD AT 200#. PUMPED 60 SX CMT DOWN 7" X 10 3/4" ANNULUS. PRESSURE HELD AT 100#.


Perfs:

Top	Bot	Thru	Comments
2568	2642		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

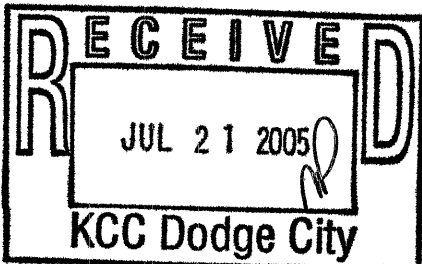

Signed

Ken Jehlik
(TECHNICIAN)

INVOICED

DATE 7.26.05

NO. 2006060141

RECEIVED

JUL 26 2005

KCC WICHITA

Form SP-215