

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-00116-00-00  
Spot: NWNWNWSE Sec/Twnshp/Rge: 8-23S-36W  
2490 feet from S Section Line, 2490 feet from E Section Line  
Lease Name: SIEBERT GAS UNIT Well #: 1  
County: KEARNY Total Vertical Depth: 2715 feet

Operator License No.: 5952  
Op Name: BP AMERICA PRODUCTION COMPANY  
Address: 2225 WEST OKLAHOMA AVENUE  
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		800		WITH 2 SX CMT
CIBP		2500		WITH 2 SX CMT
PROD	5.5	2702	0	WITH 1000 SX CMT
SURF	8.625	730		WITH 500 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/12/2005 9:30 AM  
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES  
Proposal Rcvd. from: KEVIN STRUBE Company: BP AMERICA PRODUCTION Phone: (620) 356-6981

Proposed Plugging Method: SET CIBP @ 2500' WITH 2 SX CMT. RUN BOND LOG. SET CIBP @ 800' WITH 2 SX CMT. FILL CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/19/2005 10:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 2500' WITH 2 SX CMT. RAN BOND LOG. EXCELLENT BONDING TO 350' WHERE TOP OF FLUID WAS, UNABLE TO VERIFY BOND ABOVE 350' DUE TO NO FLUID IN HOLE FROM 350' TO SURFACE. SET CIBP @ 800' WITH 2 SX CMT. PUMP 25 SX CMT IN 5 1/2" CASING FROM 350' - 0'. PRESSURED TO 480#. PUMPED 75 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS. MAXIMUM PRESSURE 200#. SHUT IN PRESSURE 200#. CMT CAME TO SURFACE AROUND WELL HEAD. PROBABLE HOLE IN SURFACE CASING.


Perfs:

Top	Bot	Thru	Comments
2540	2673		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

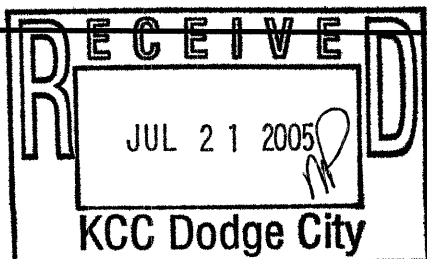

Signed

*Ken Jehlik*

INVOICED RECEIVED  
JUL 26 2005

DATE

7.26.05

UV NO

2006060141

KCC WICHITA

Form CP-2/3