



MIDWEST SURVEYS
LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 68, Osawatomie, KS 66064
913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

File No.	Company Blue Diamond Holdings, LLC									
	Well Mosher No. BI-10									
	Field Paola - Rantoul									
	County	Miami				State	Kansas			
API # 15-121-29,492	Location	3325' FSL & 4945' FEL SE-NW-SW-NW						Other Services		Perforate
	Sec. 1	Typ.	16s		Rge.	21e		Elevation		
	Permanent Datum	GL		GL		N/A		K.B. NA		
	Log Measured From	GL						D.F. NA		
	Drilling Measured From	GL						G.L. NA		
Date			07-28-2013							
Run Number			One							
Depth Drier			745.0							
Depth Logger			702.8							
Bottom Logged Interval			701.8							
Top Log Interval			20.0							
Fluid Level			Full							
Type Fluid			Water							
Density / Viscosity			NA							
Salinity - PPM Cl			NA							
Max Recorded Temp			NA							
Estimated Cement Top			0.0							
Equipment No.	107		Osawatomie							
Recorded By	Steve Windisch									
Witnessed By	Doug Evans									
RUN	BORE-HOLE RECORD				CASING RECORD					
No.	BIT	FROM	TO	SIZE	WGT.	FROM	TO			
One	9.875"	0.0	22.5	7.00"	17.0 #	0.0	22.6			
Two	5.625"	22.5	745.0	2.875"	6.5 #	0.0	740.0			
				Baffle	Set	At	708.0			


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
Hat Drilling

Database File: moshier10bi.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Sun Jul 28 11:23:53 2013 by Log SCH 111116
Charted by: Depth in Feet scaled 1:240

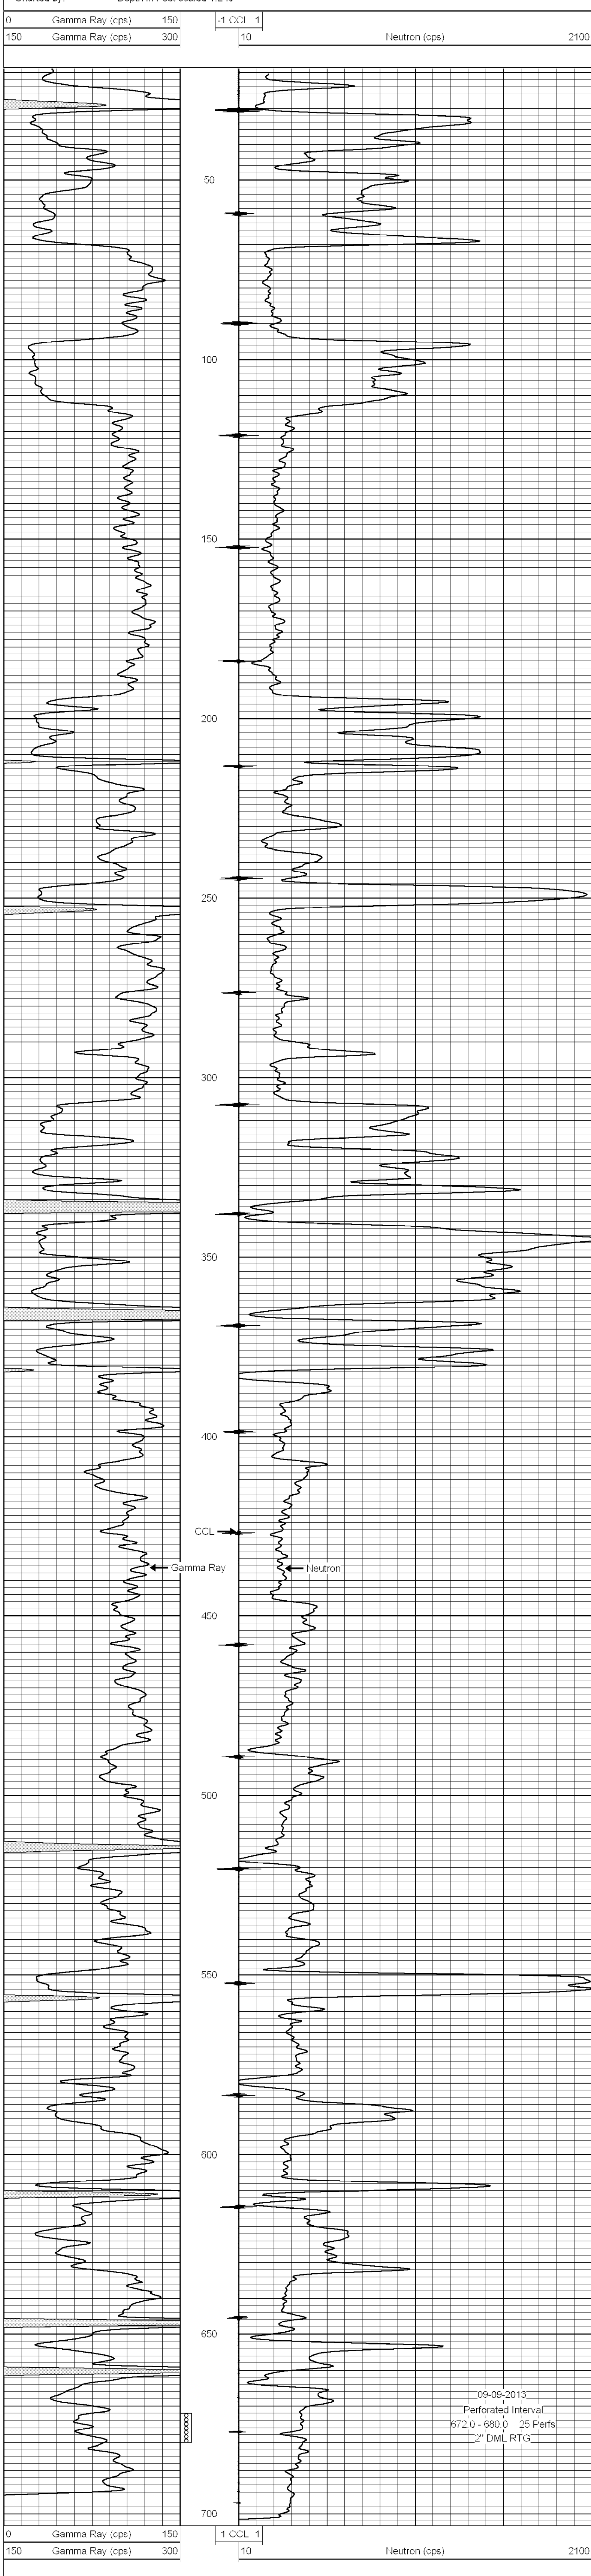

09-09-2013
Perforated Interval
672.0 - 680.0 25 Perfs
2" DML RTG