PIONEER

Pioneer Energy Services

Microresistivity Log

API No. 15-163-24,117-00-00

Company Venture Resources, Inc.

Well Kempe "A" North #8

Field Bemis-Shutts

County Rooks State Kansas

Location 1650' FSL & 1980' FWL

Sec: 31 Twp: 10S Rge: 17W

Other Services
CNL/CDL
DIL/BHCS

Elevation
K.B. 2079
D.F.
G.L. 2072

Permanent Datum Ground Level Elevation 2072
Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Date	5/23/2013			
Run Number	Two			
Depth Driller	3631			
Depth Logger	3629			
Bottom Logged Interval	3628			
Top Log Interval	2900			
Casing Driller	8.625 @ 222			
Casing Logger	220			
Bit Size	7.875			
Type Fluid in Hole	Chemical			
Salinity,ppm CL	2900			
Density / Viscosity	9.0 62			
pH / Fluid Loss	10.5 7.8			
Source of Sample	Flowline			
Rm @ Meas. Temp	0.95 @ 86			
Rmf @ Meas. Temp	0.71 @ 86			
Rmc @ Meas. Temp	1.28 @ 86			
Source of Rmf / Rmc	Charts			
Rm @ BHT	0.73 @ 112			
Operating Rig Time	4 1/2 Hours			
Max. Rec. Temp. F	112			
Equipment Number	10			
Location	Hays			
Recorded By	D.Kerr			
Witnessed By	Brad Rine			

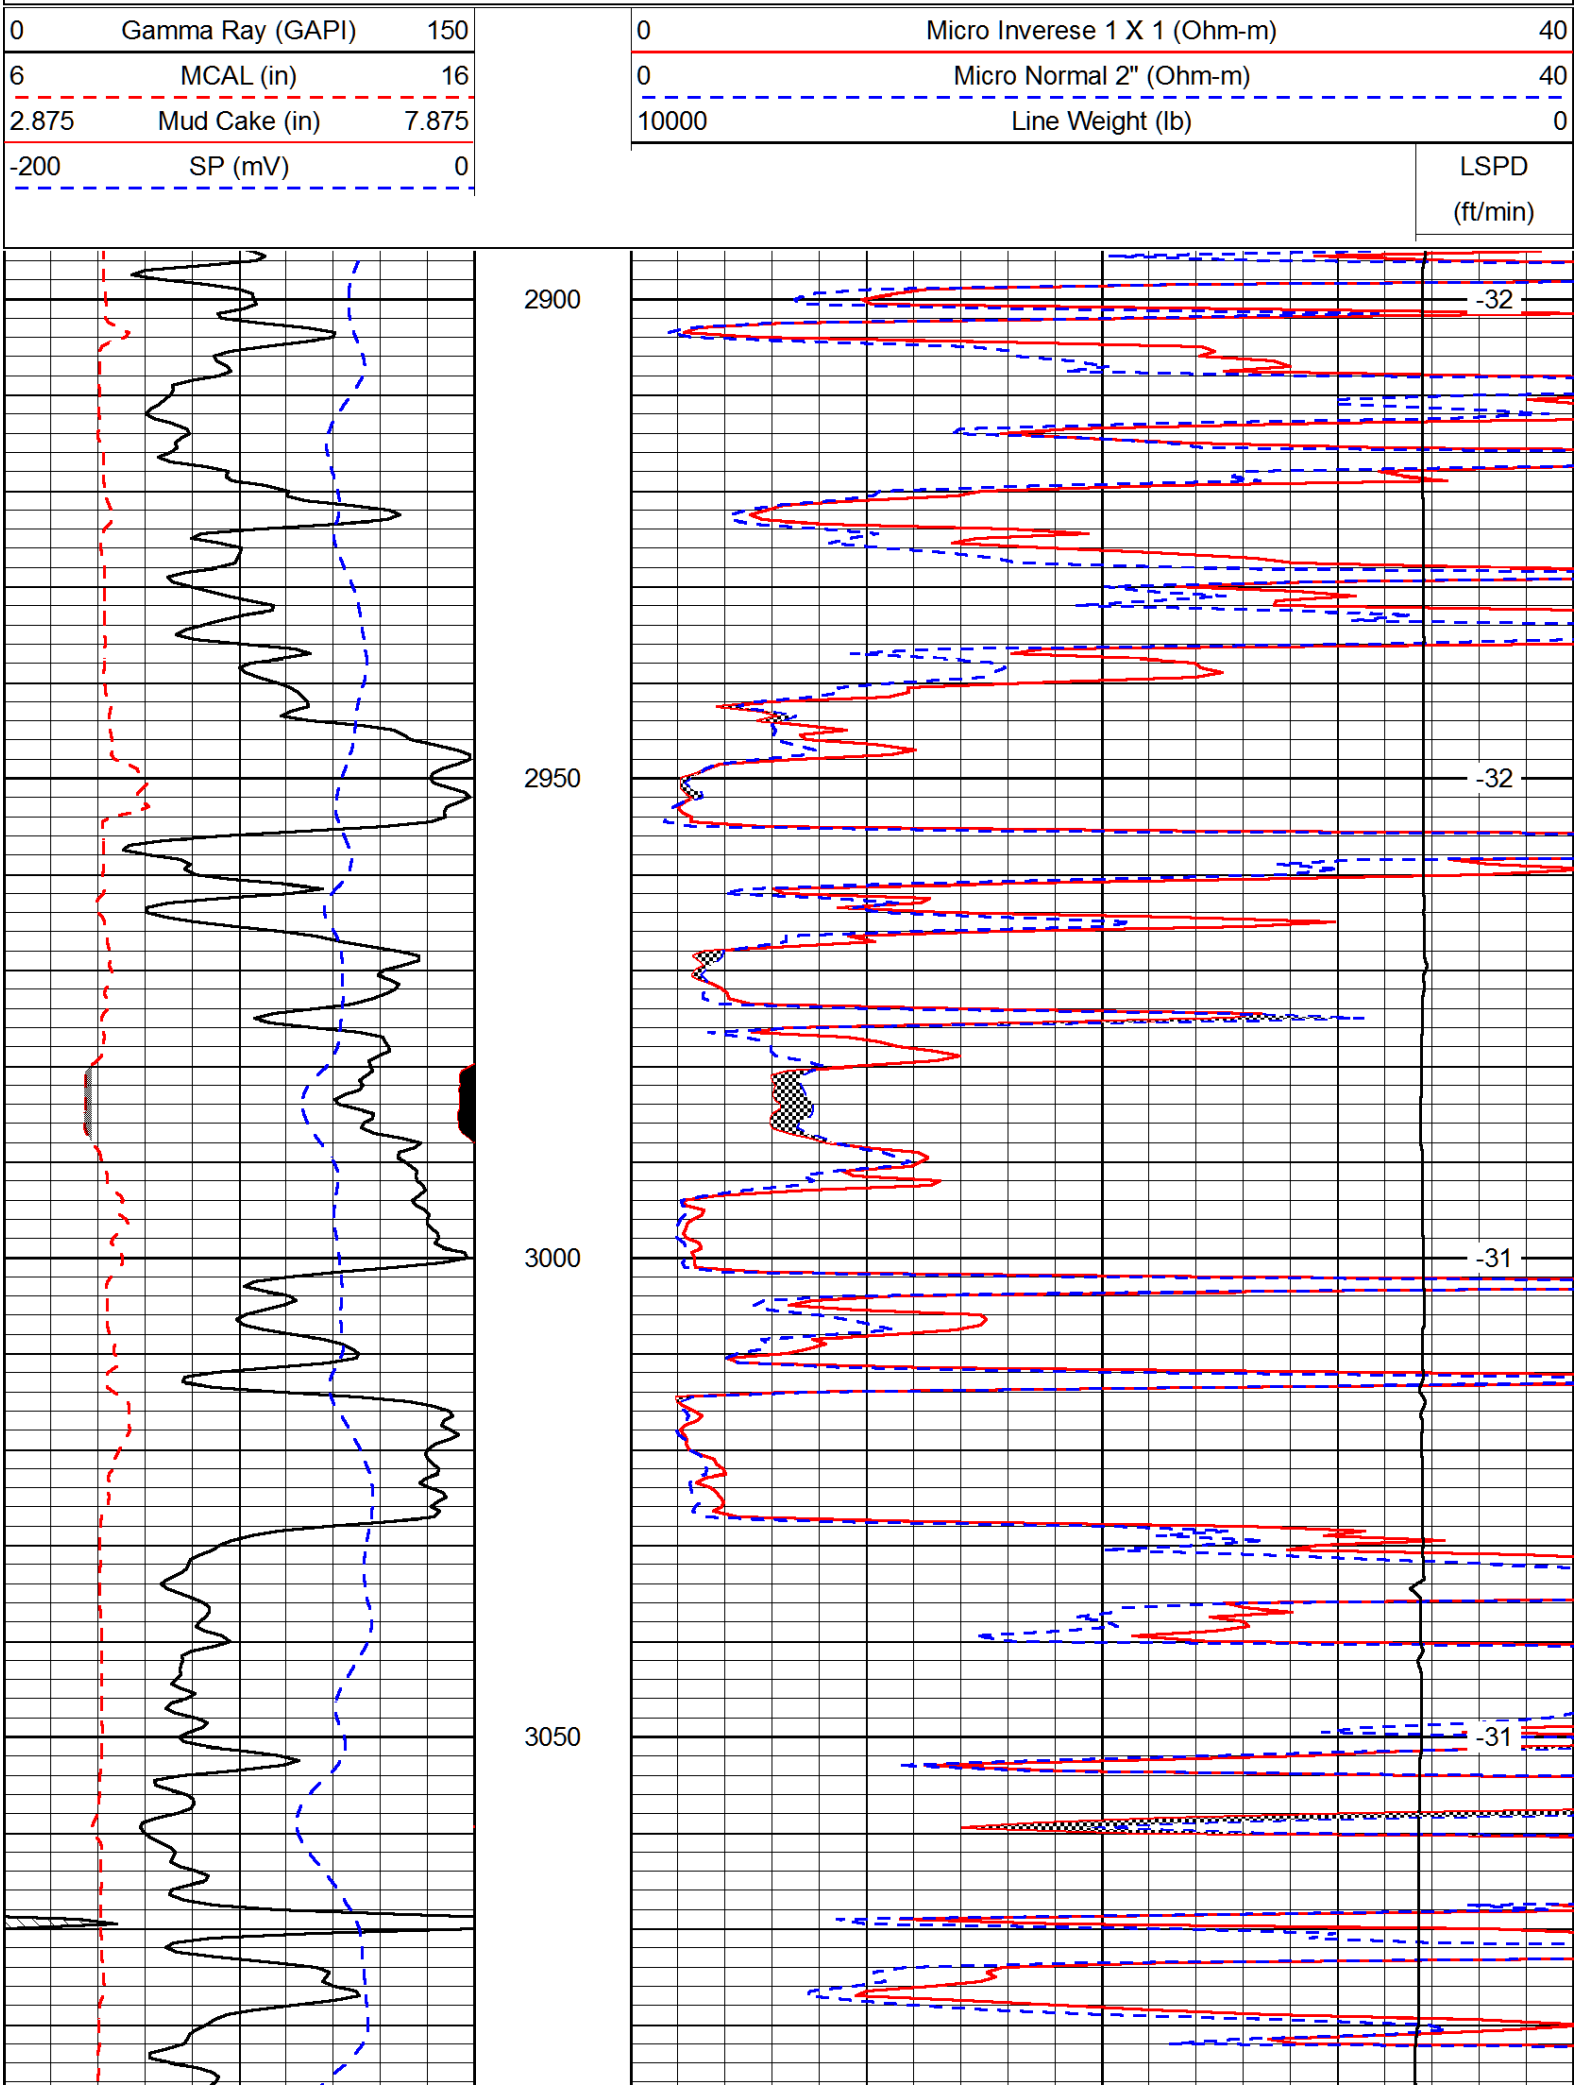
<<< Fold Here >>>

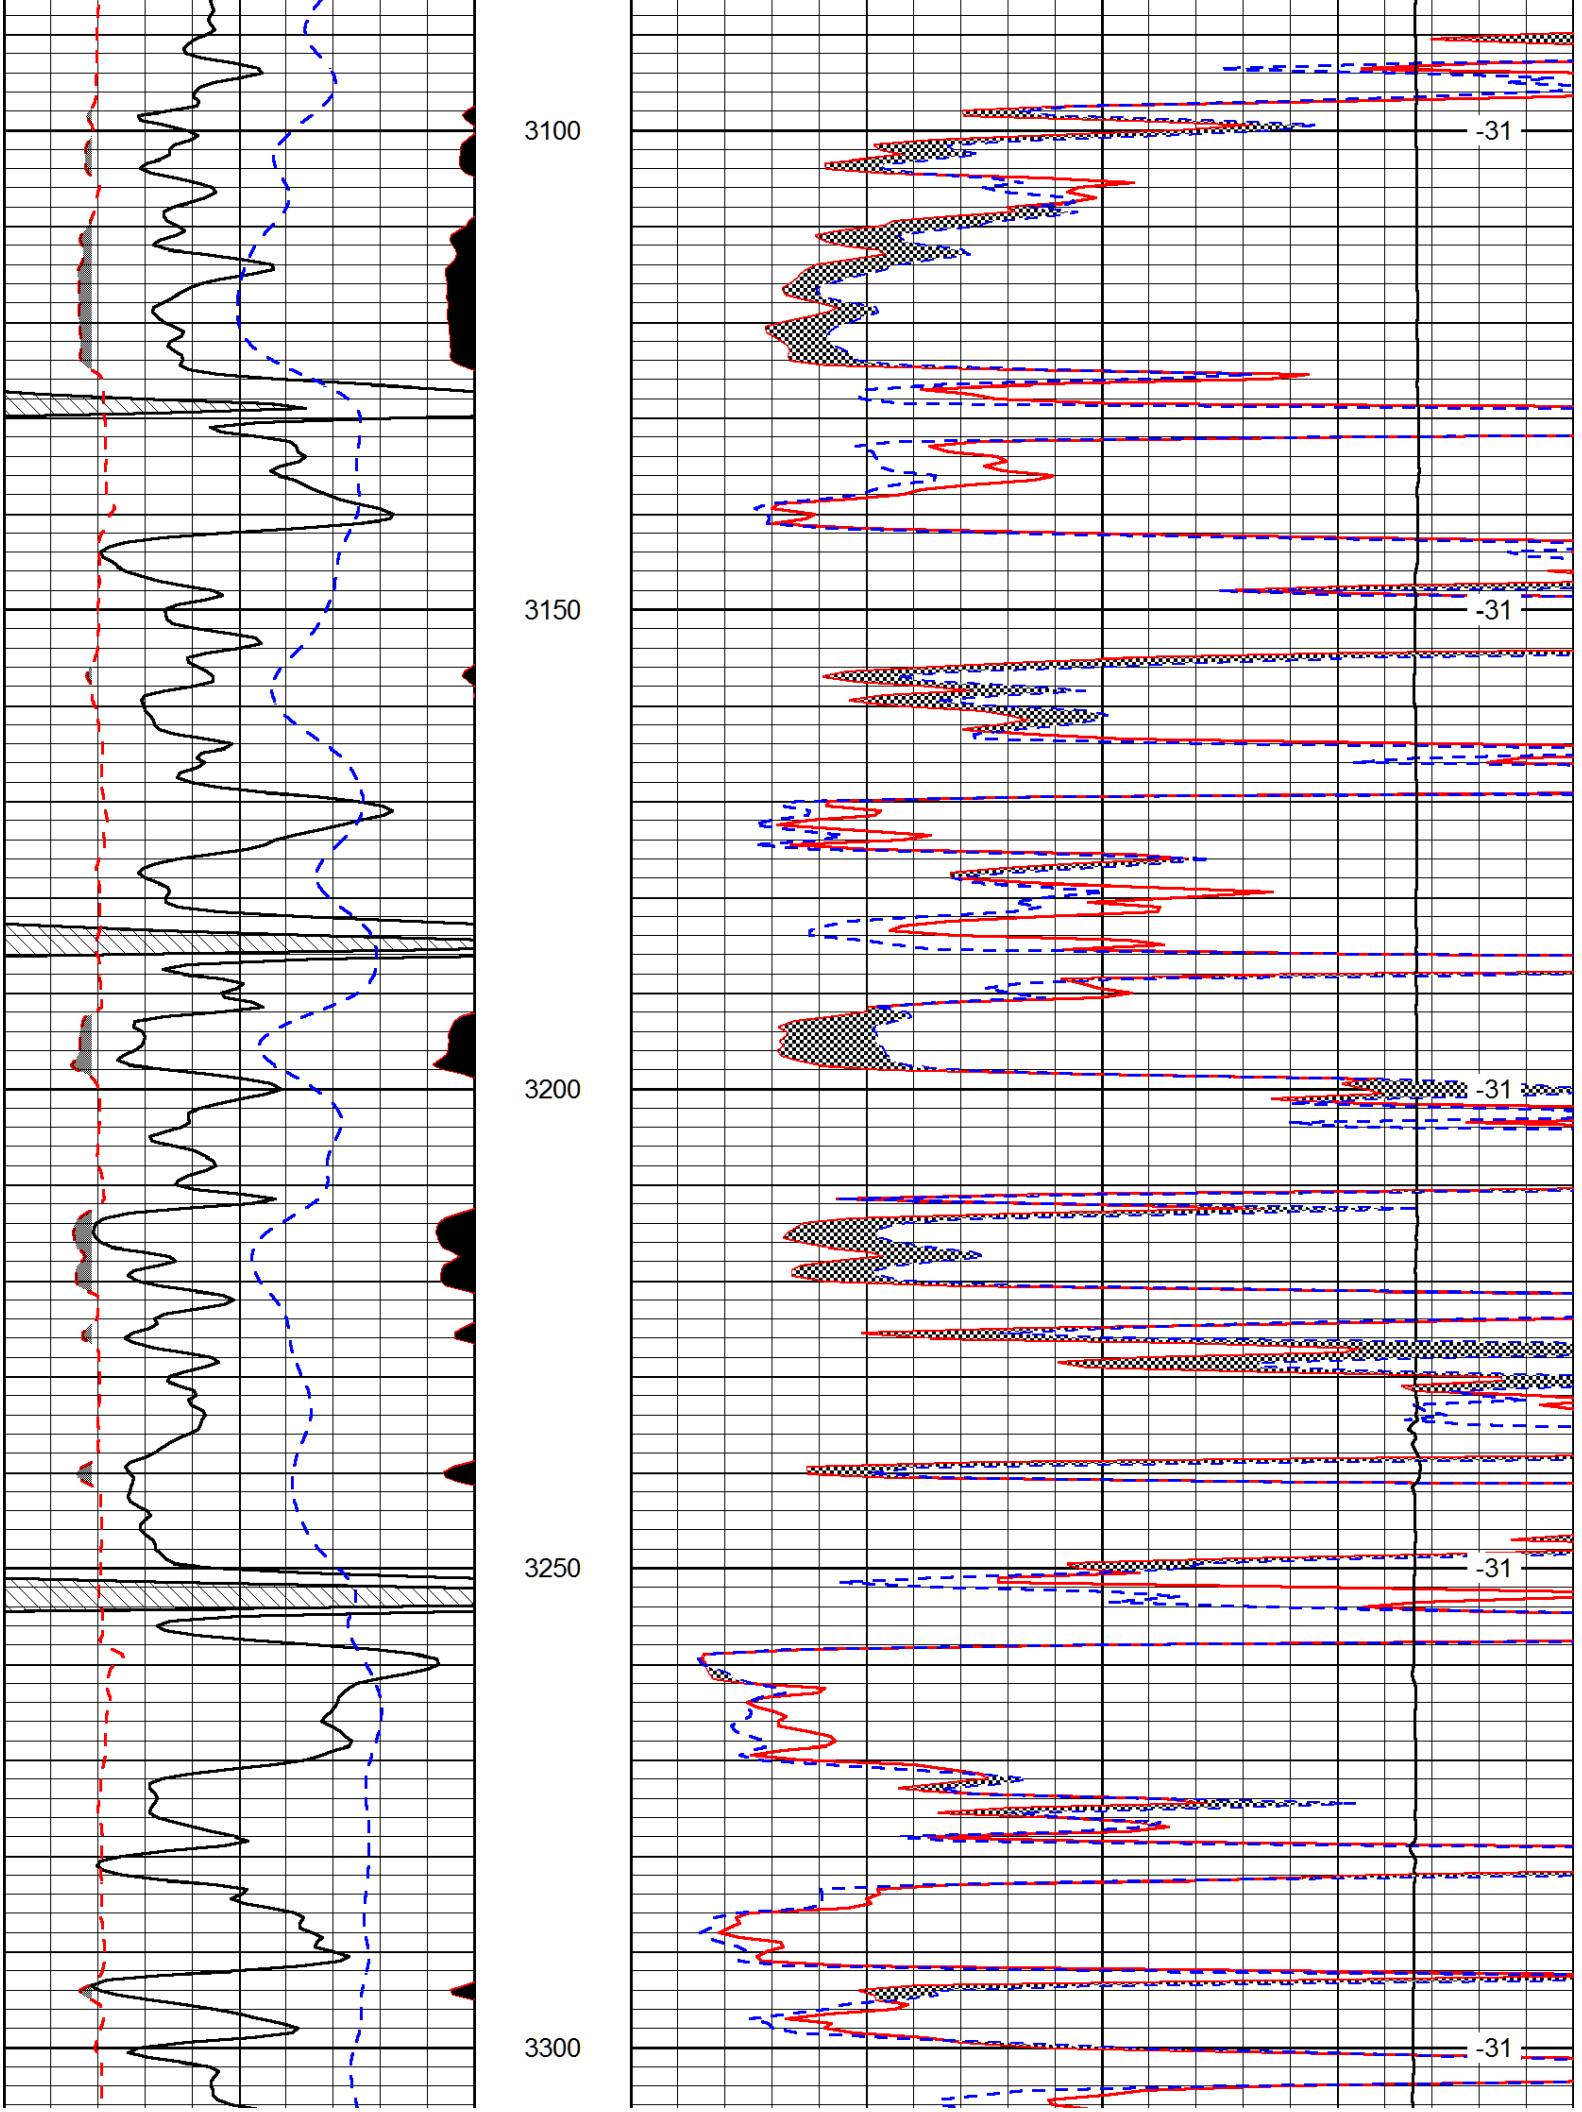
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

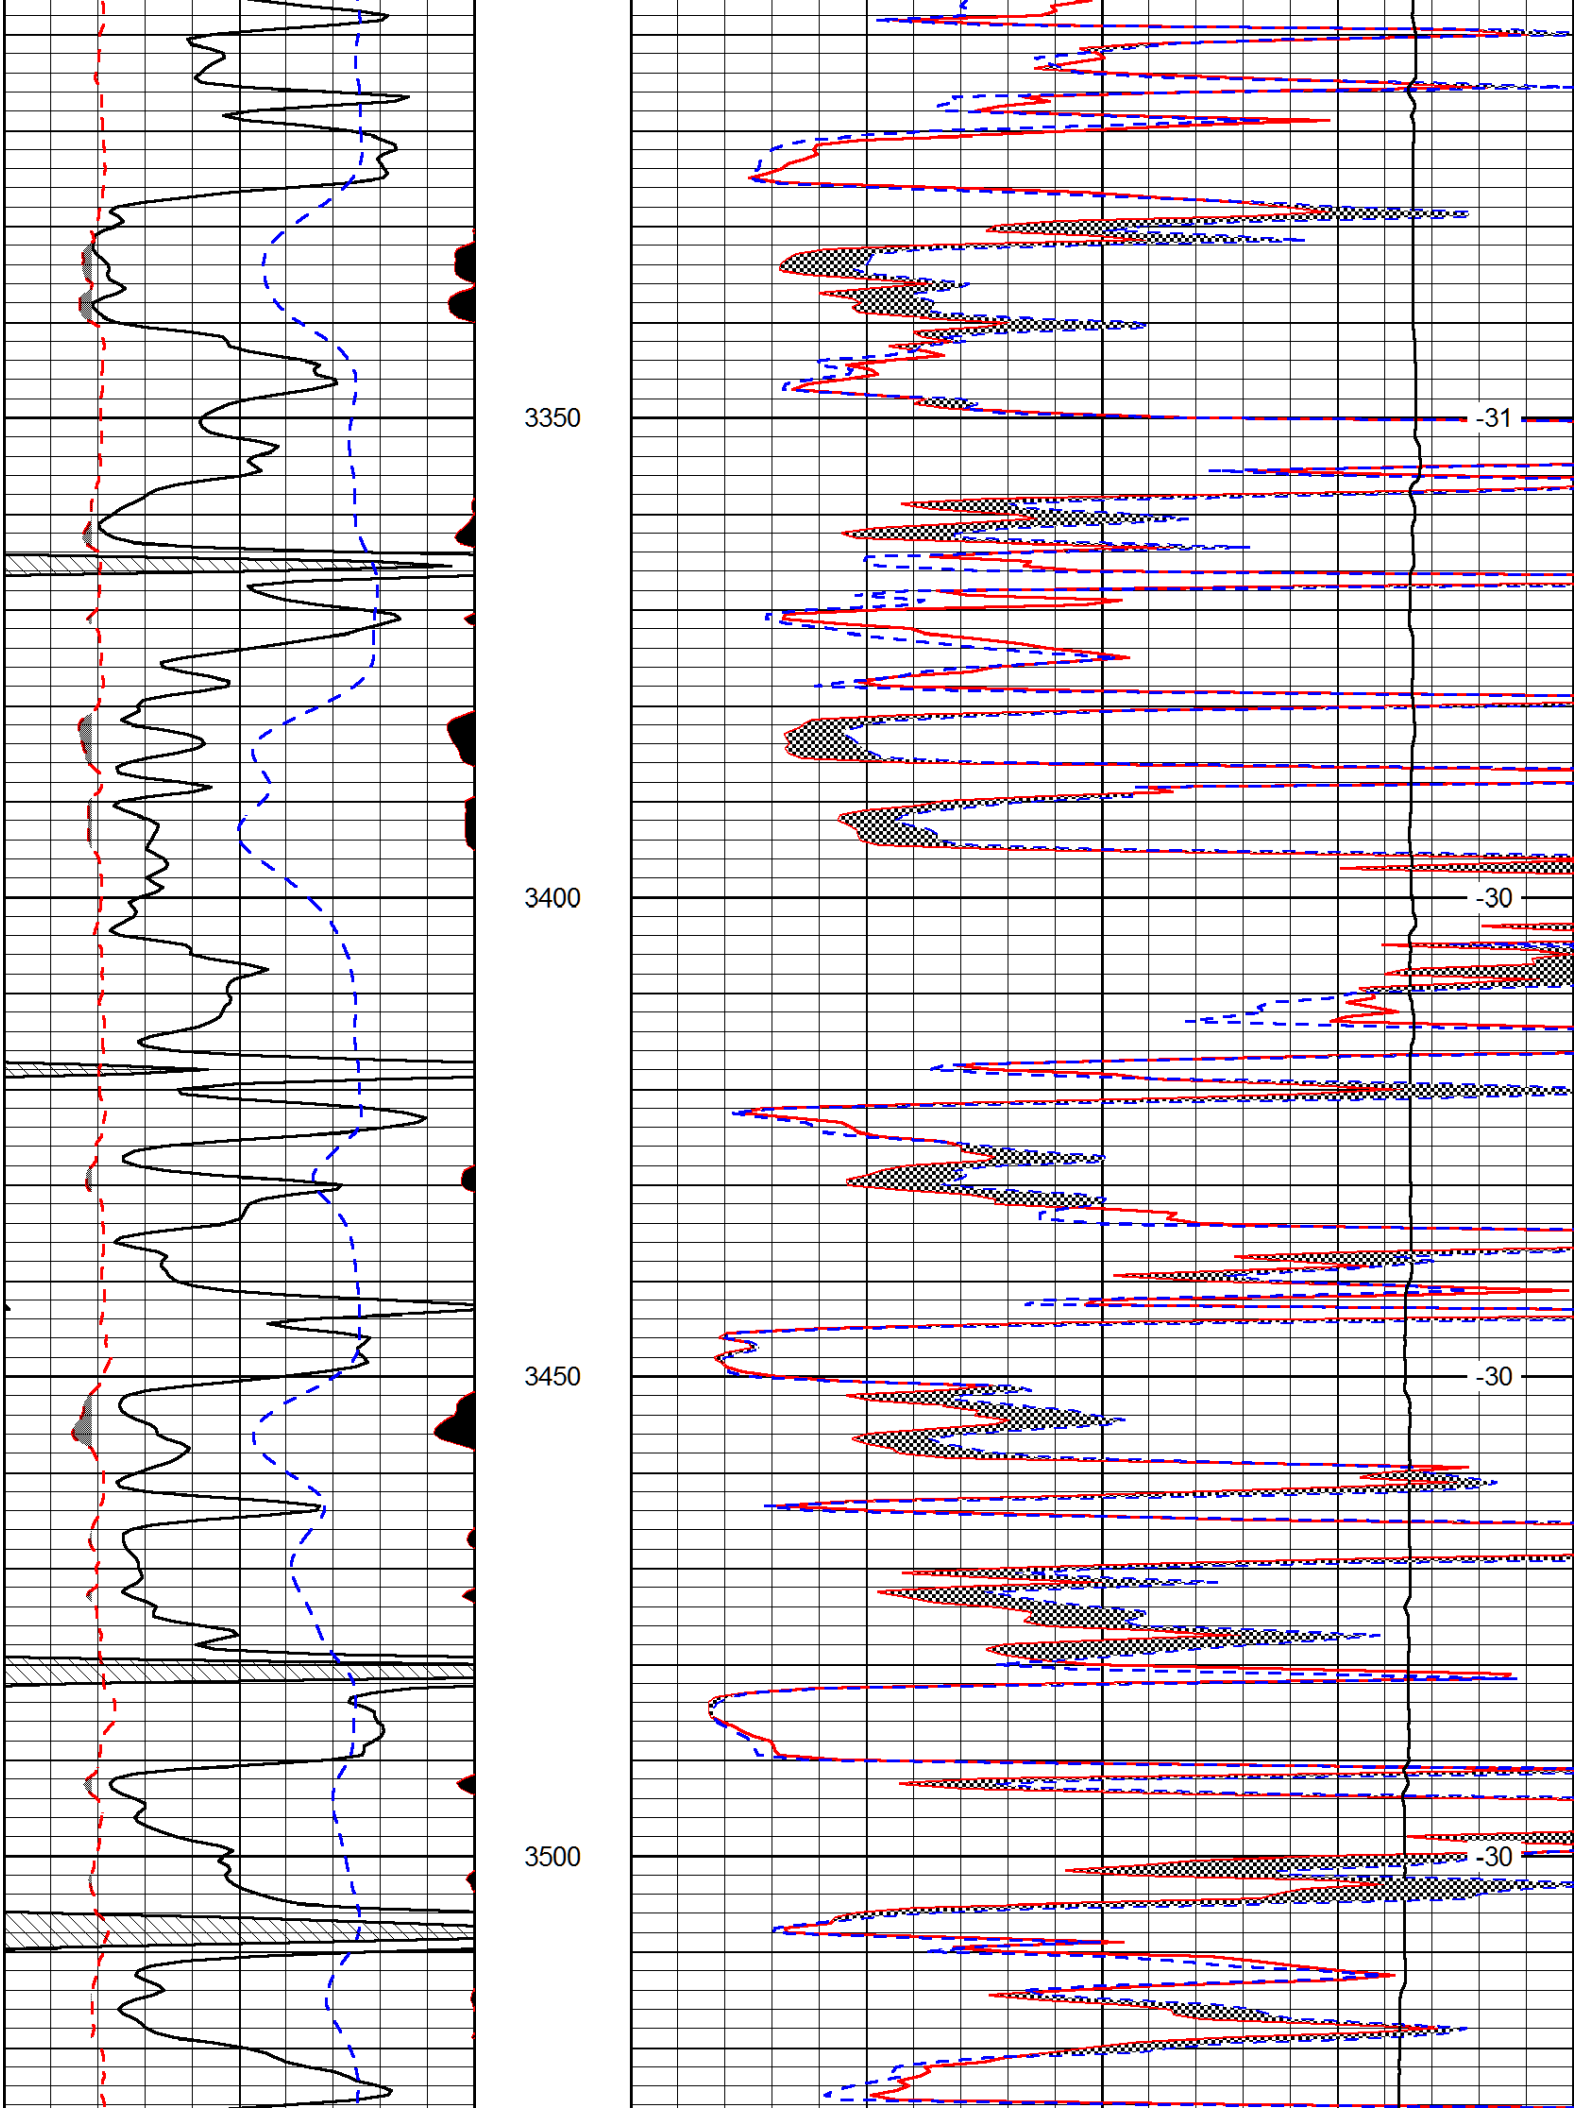
Comments

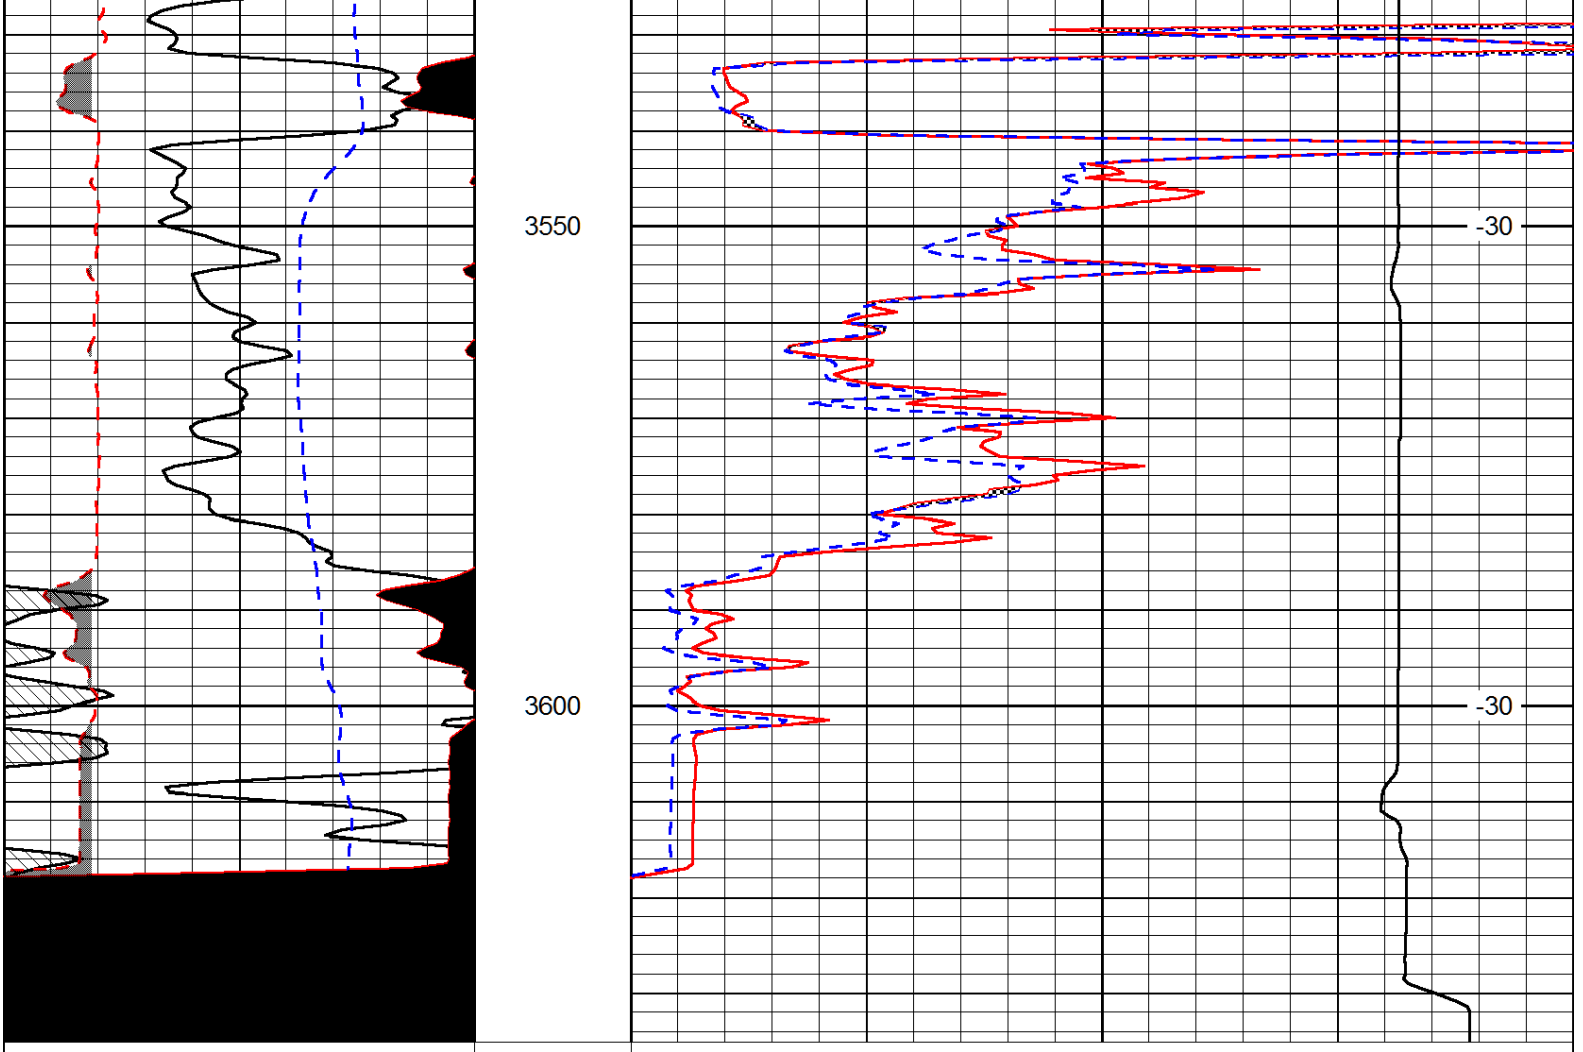
Thank you for using Log-Tech, Inc.
(785) 625-3858

Database File: venture_kempenorth_8hd.db
Dataset Pathname: DIL/venstk
Presentation Format: micro
Dataset Creation: Thu May 23 15:16:47 2013
Charted by: Depth in Feet scaled 1:240


0 Gamma Ray (GAPI) 150
6 MCAL (in) 16
2.875 Mud Cake (in) 7.875
-200 SP (mV) 0
0 Micro Inverese 1 X 1 (Ohm-m) 40
0 Micro Normal 2" (Ohm-m) 40
10000 Line Weight (lb) 0
LSPD (ft/min)
2900
2950
3000
3050
-32
-32
-31
-31


3100
3150
3200
3250
3300
-31
-31
-31
-31
-31


3350
3400
3450
3500
-31
-30
-30
-30



0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
-200	SP (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)