



**Weatherford**<sup>®</sup>

**COMPACT PHOTO DENSITY  
COMPENSATED NEUTRON  
MICRORESISTIVITY LOG**

COMPANY GRAND MESA OPERATING COMPANY  
 WELL DBY #4-16  
 FIELD WILDCAT  
 PROVINCE/COUNTY SCOTT  
 COUNTRY/STATE U.S.A. / KANSAS  
 LOCATION 1370' FSL & 1840' FWL

SEC TWP RGE Other Services  
 16 16S 33W MAI/MFE  
 API Number 15-171-20922  
 Permit Number  
 Permanent Datum G.L., Elevation 3071 feet  
 Log Measured From KB  
 Drilling Measured From K.B.

Date	08-JAN-2013	Elevations:	feet
Run Number	ONE	KB	3076.00
Service Order	3538968	DF	3075.00
Depth Driller	4756.00	GL	3071.00
Depth Logger	4756.00		
First Reading	4736.00		
Last Reading	3700.00		
Casing Driller	262.00		
Casing Logger	261.00		
Bit Size	7.875		
Hole Fluid Type	CHEMICAL		
Density / Viscosity	9.20 lb/USg		68.00 CP
PH / Fluid Loss	11.00		11.00
Sample Source	FLOWLINE		
Rm @ Measured Temp	0.74 @ 77.0		ohm-m
Rmf @ Measured Temp	0.59 @ 77.0		ohm-m
Rmc @ Measured Temp	0.89 @ 77.0		ohm-m
Source Rmf / Rmc	CALC		CALC
Rm @ BHT	0.53 @108.0		ohm-m
Time Since Circulation	4 HOURS		
Max Recorded Temp	108.00		deg F
Equipment / Base	13057		LIB
Recorded By	LYNN SCOTT		
Witnessed By	JOHN GOLDSMITH		
JOB#	LB13-006		


BOREHOLE RECORD			Last Edited: 08-JAN-2013 08:55	
Bit Size inches	Depth From feet	Depth To feet		
7.875	261.00	4756.00		
CASING RECORD				
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	261.00	24.00


**REMARKS**

Tools Ran: MCG, MML, MDN, MPD, MFE, MAI ran in combination.  
 Hardware Used: MPD: 8 inch profile plate used. MAI and MFE: 0.5 inch standoffs used. MDN: Dual Bowspring used.  
 2.71 G/CC Limestone Density porosity used to calculate porosity.  
 Borehole Rugosity, Tight pulls, and washouts will affect data quality.  
 All intervals logged and scaled per customer's request.  
 Total hole volume from TD to Surface casing= 2173 cubic feet  
 Annular hole volume with 5.5 Inch casing from TD to 3700 ft.=225 cubic feet  
 Service order: 3538968  
 Rig: Murfin #24  
 Engineer: L. Scott  
 Operator(s): R. Venegas

Software duplicates the pH value and the fluid loss value. The fluid loss is 7.6.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or

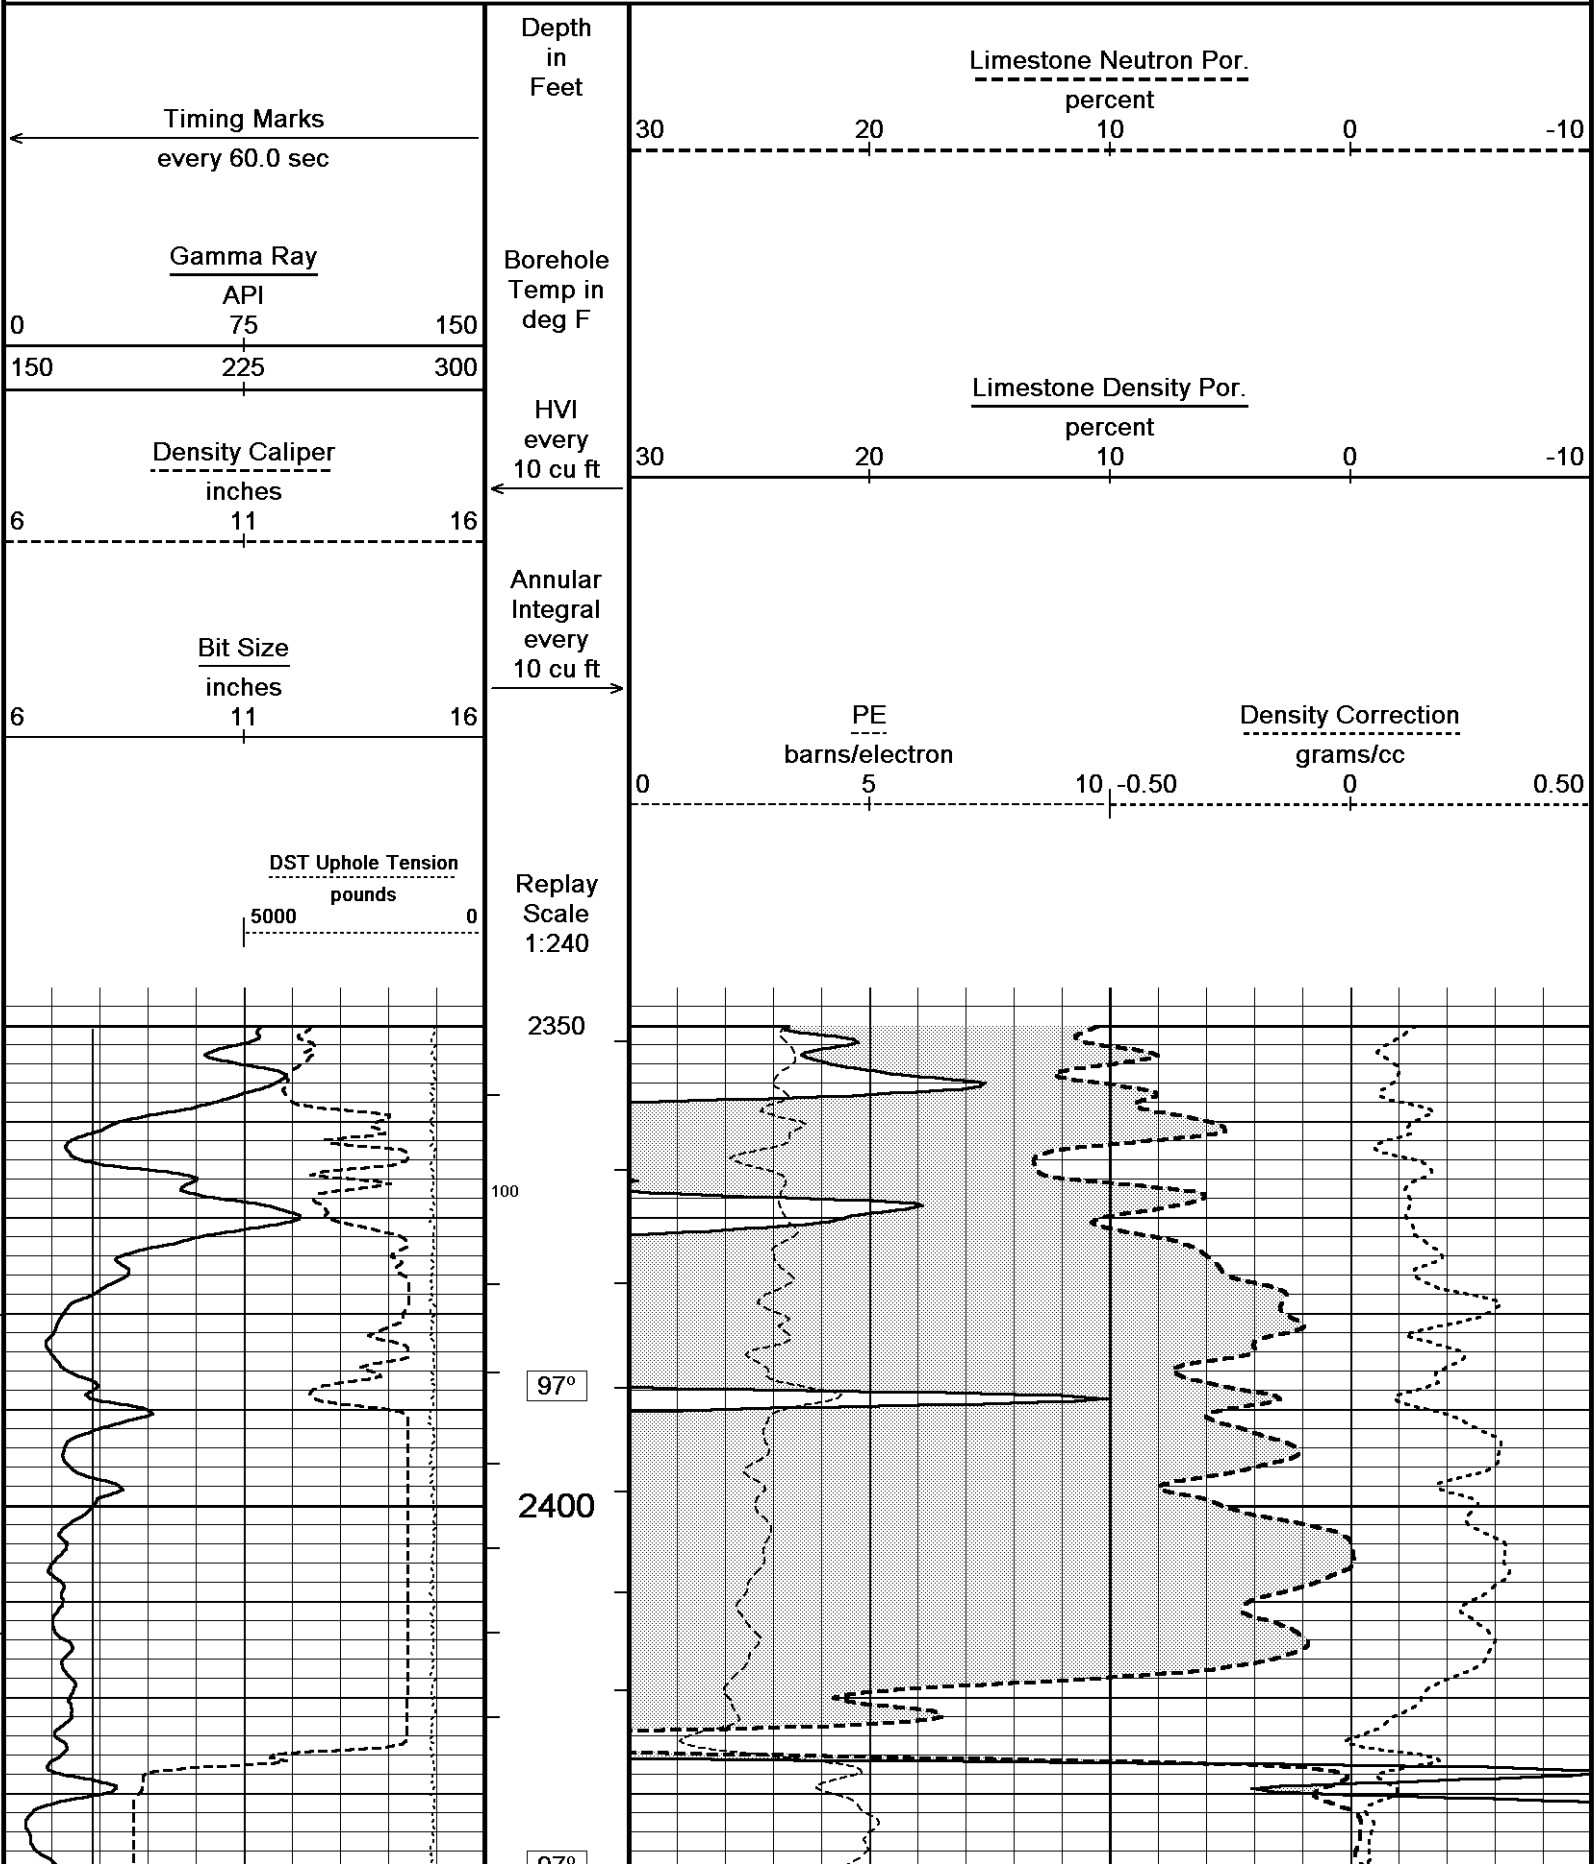

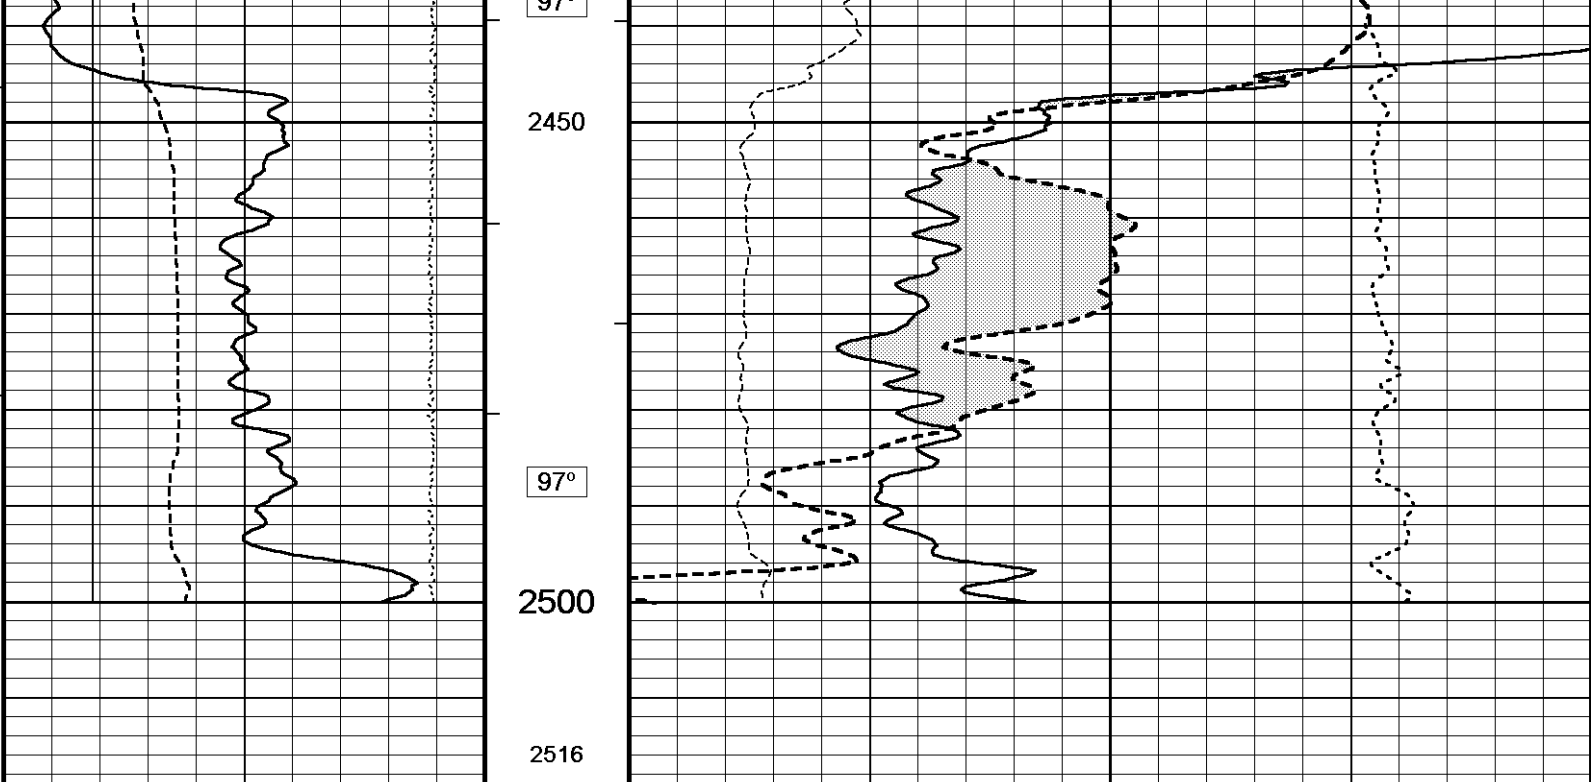


Timing Marks every 60.0 sec

<u>Gamma Ray</u>		
API		
0	75	150
150	225	300

<u>Density Caliper</u>		
inches		
6	11	16

<u>Bit Size</u>		
inches		
6	11	16

<u>DST Uphole Tension</u>		
pounds		
5000		
	0	





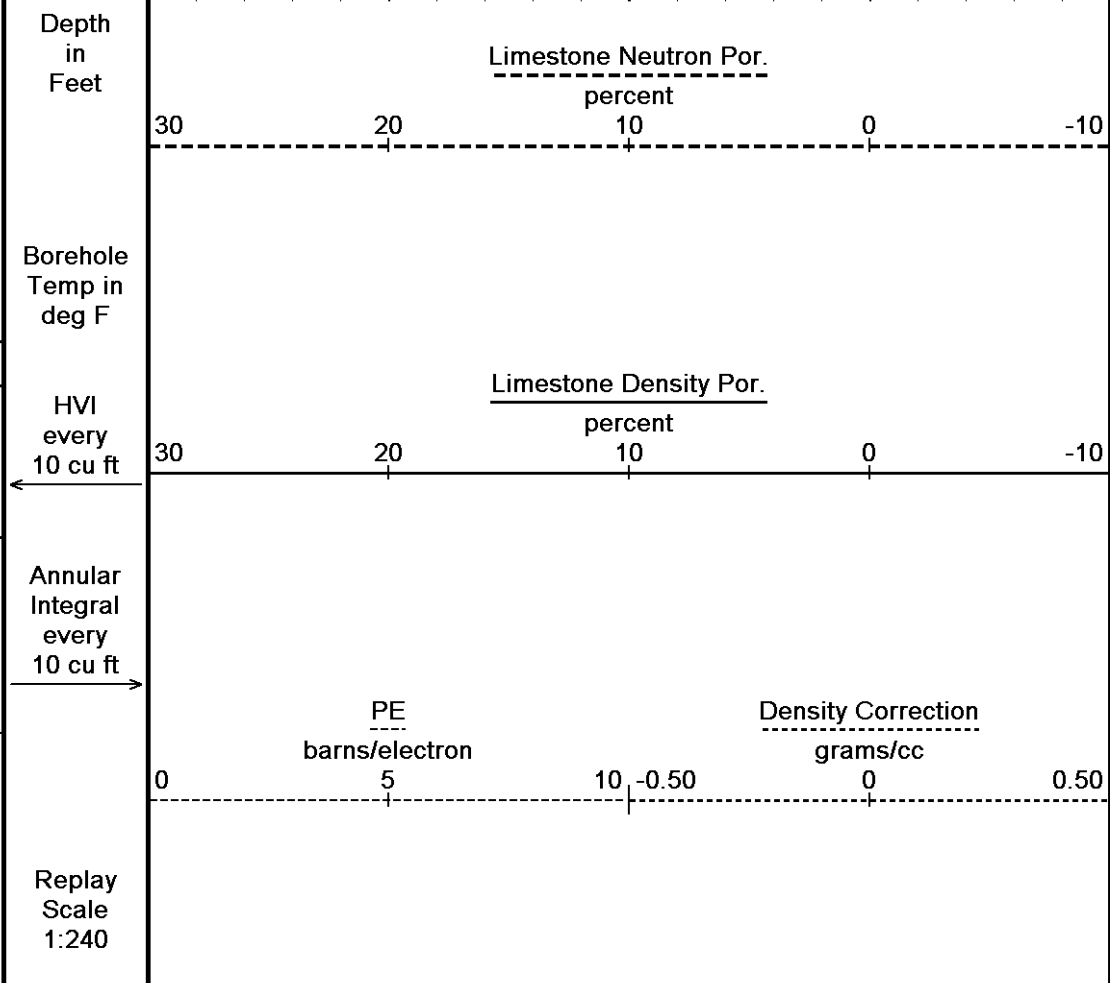



Depth Based Data - Maximum Sampling Increment 10.0cm  
 Plotted on 08-JAN-2013 12:07  
 Filename: C:\Minimus 13.04.8492\Data\Grand M...Grand Mesa Operating Company DBY 4-16\_002.dta  
 Recorded on 08-JAN-2013 09:38  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492


↑ 5 INCH MAIN ↑


↓ 5 INCH MAIN ↓


Depth Based Data - Maximum Sampling Increment 10.0cm  
 Plotted on 08-JAN-2013 12:07  
 Filename: C:\Minimus 13.04.8492\Data\Grand M...Grand Mesa Operating Company DBY 4-16\_002.dta  
 Recorded on 08-JAN-2013 09:38  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

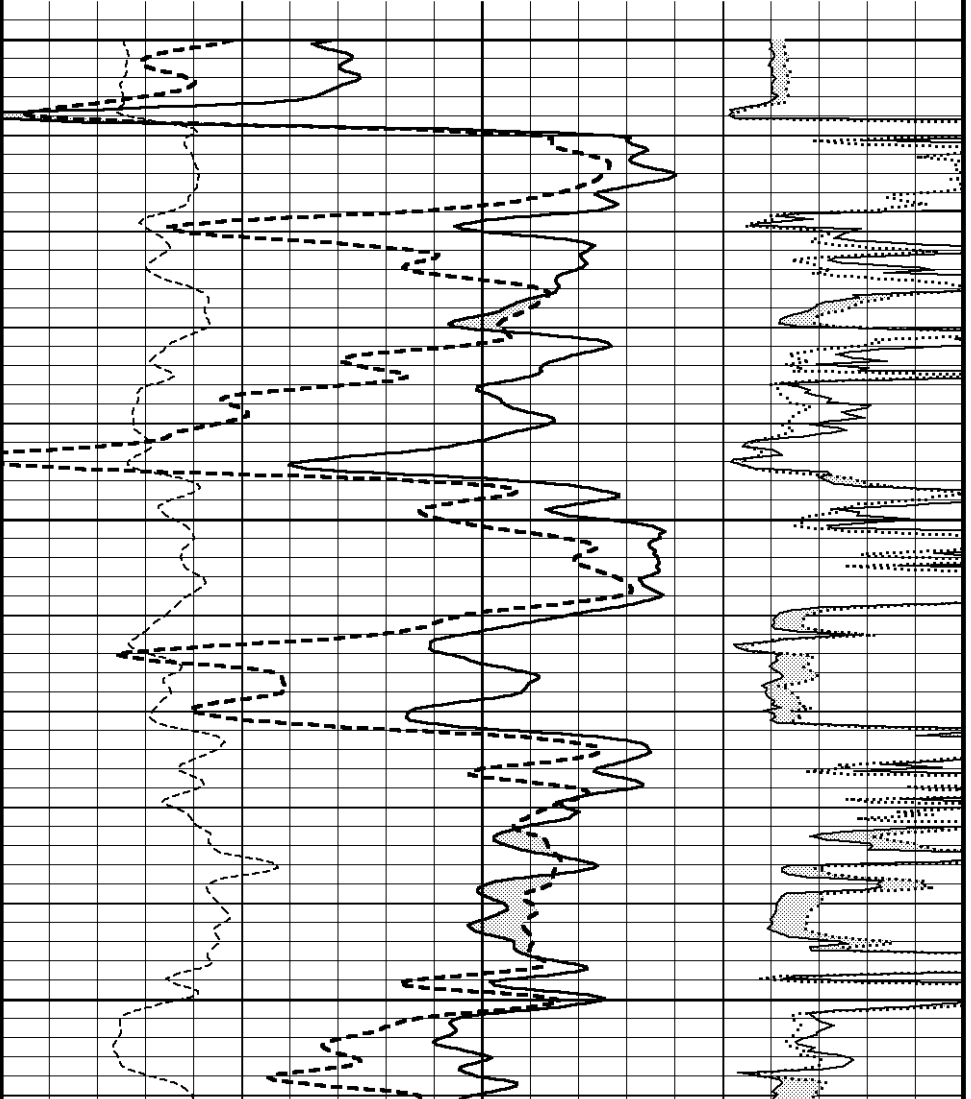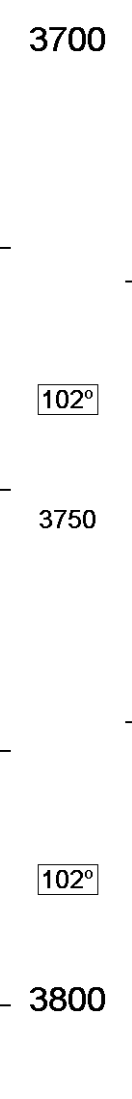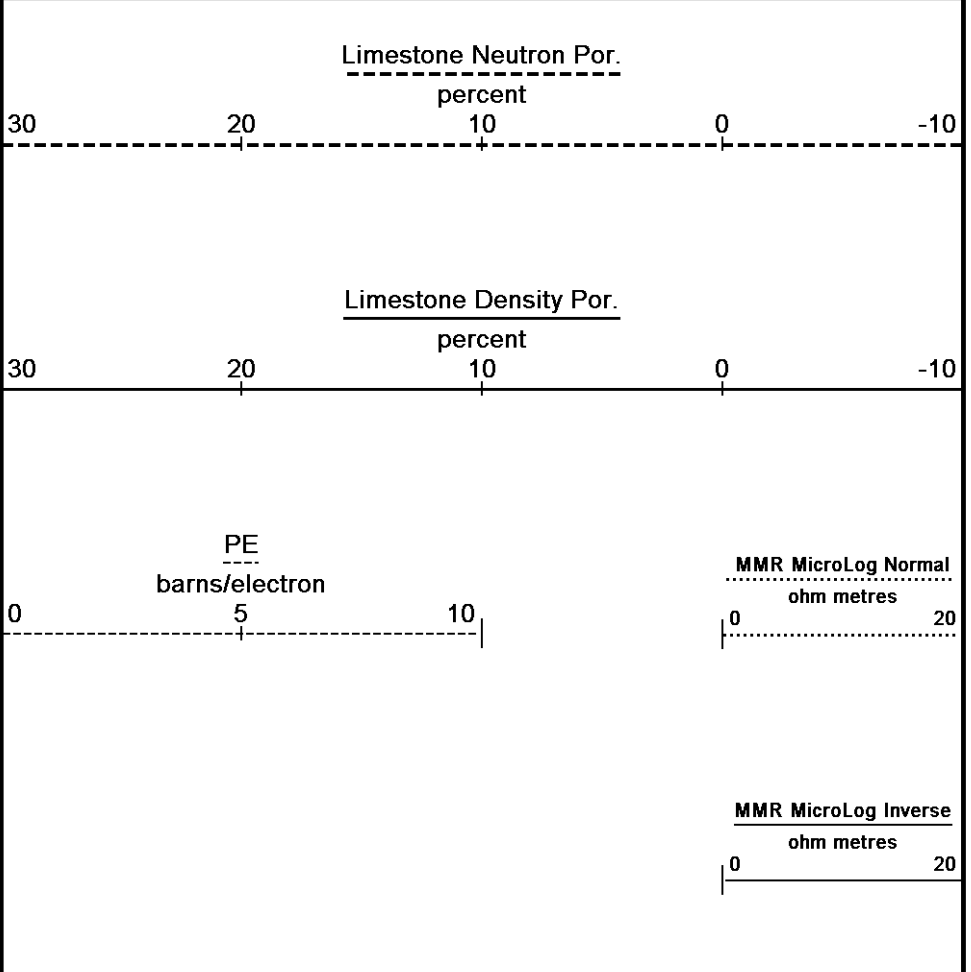
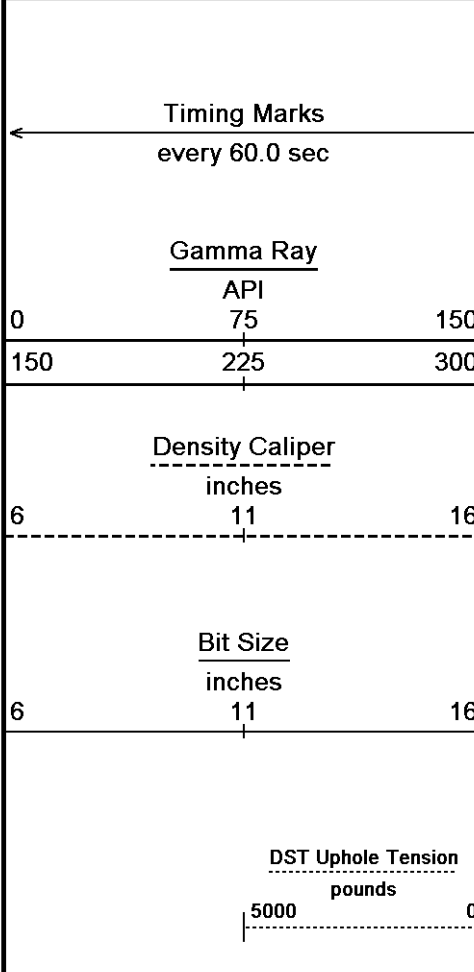


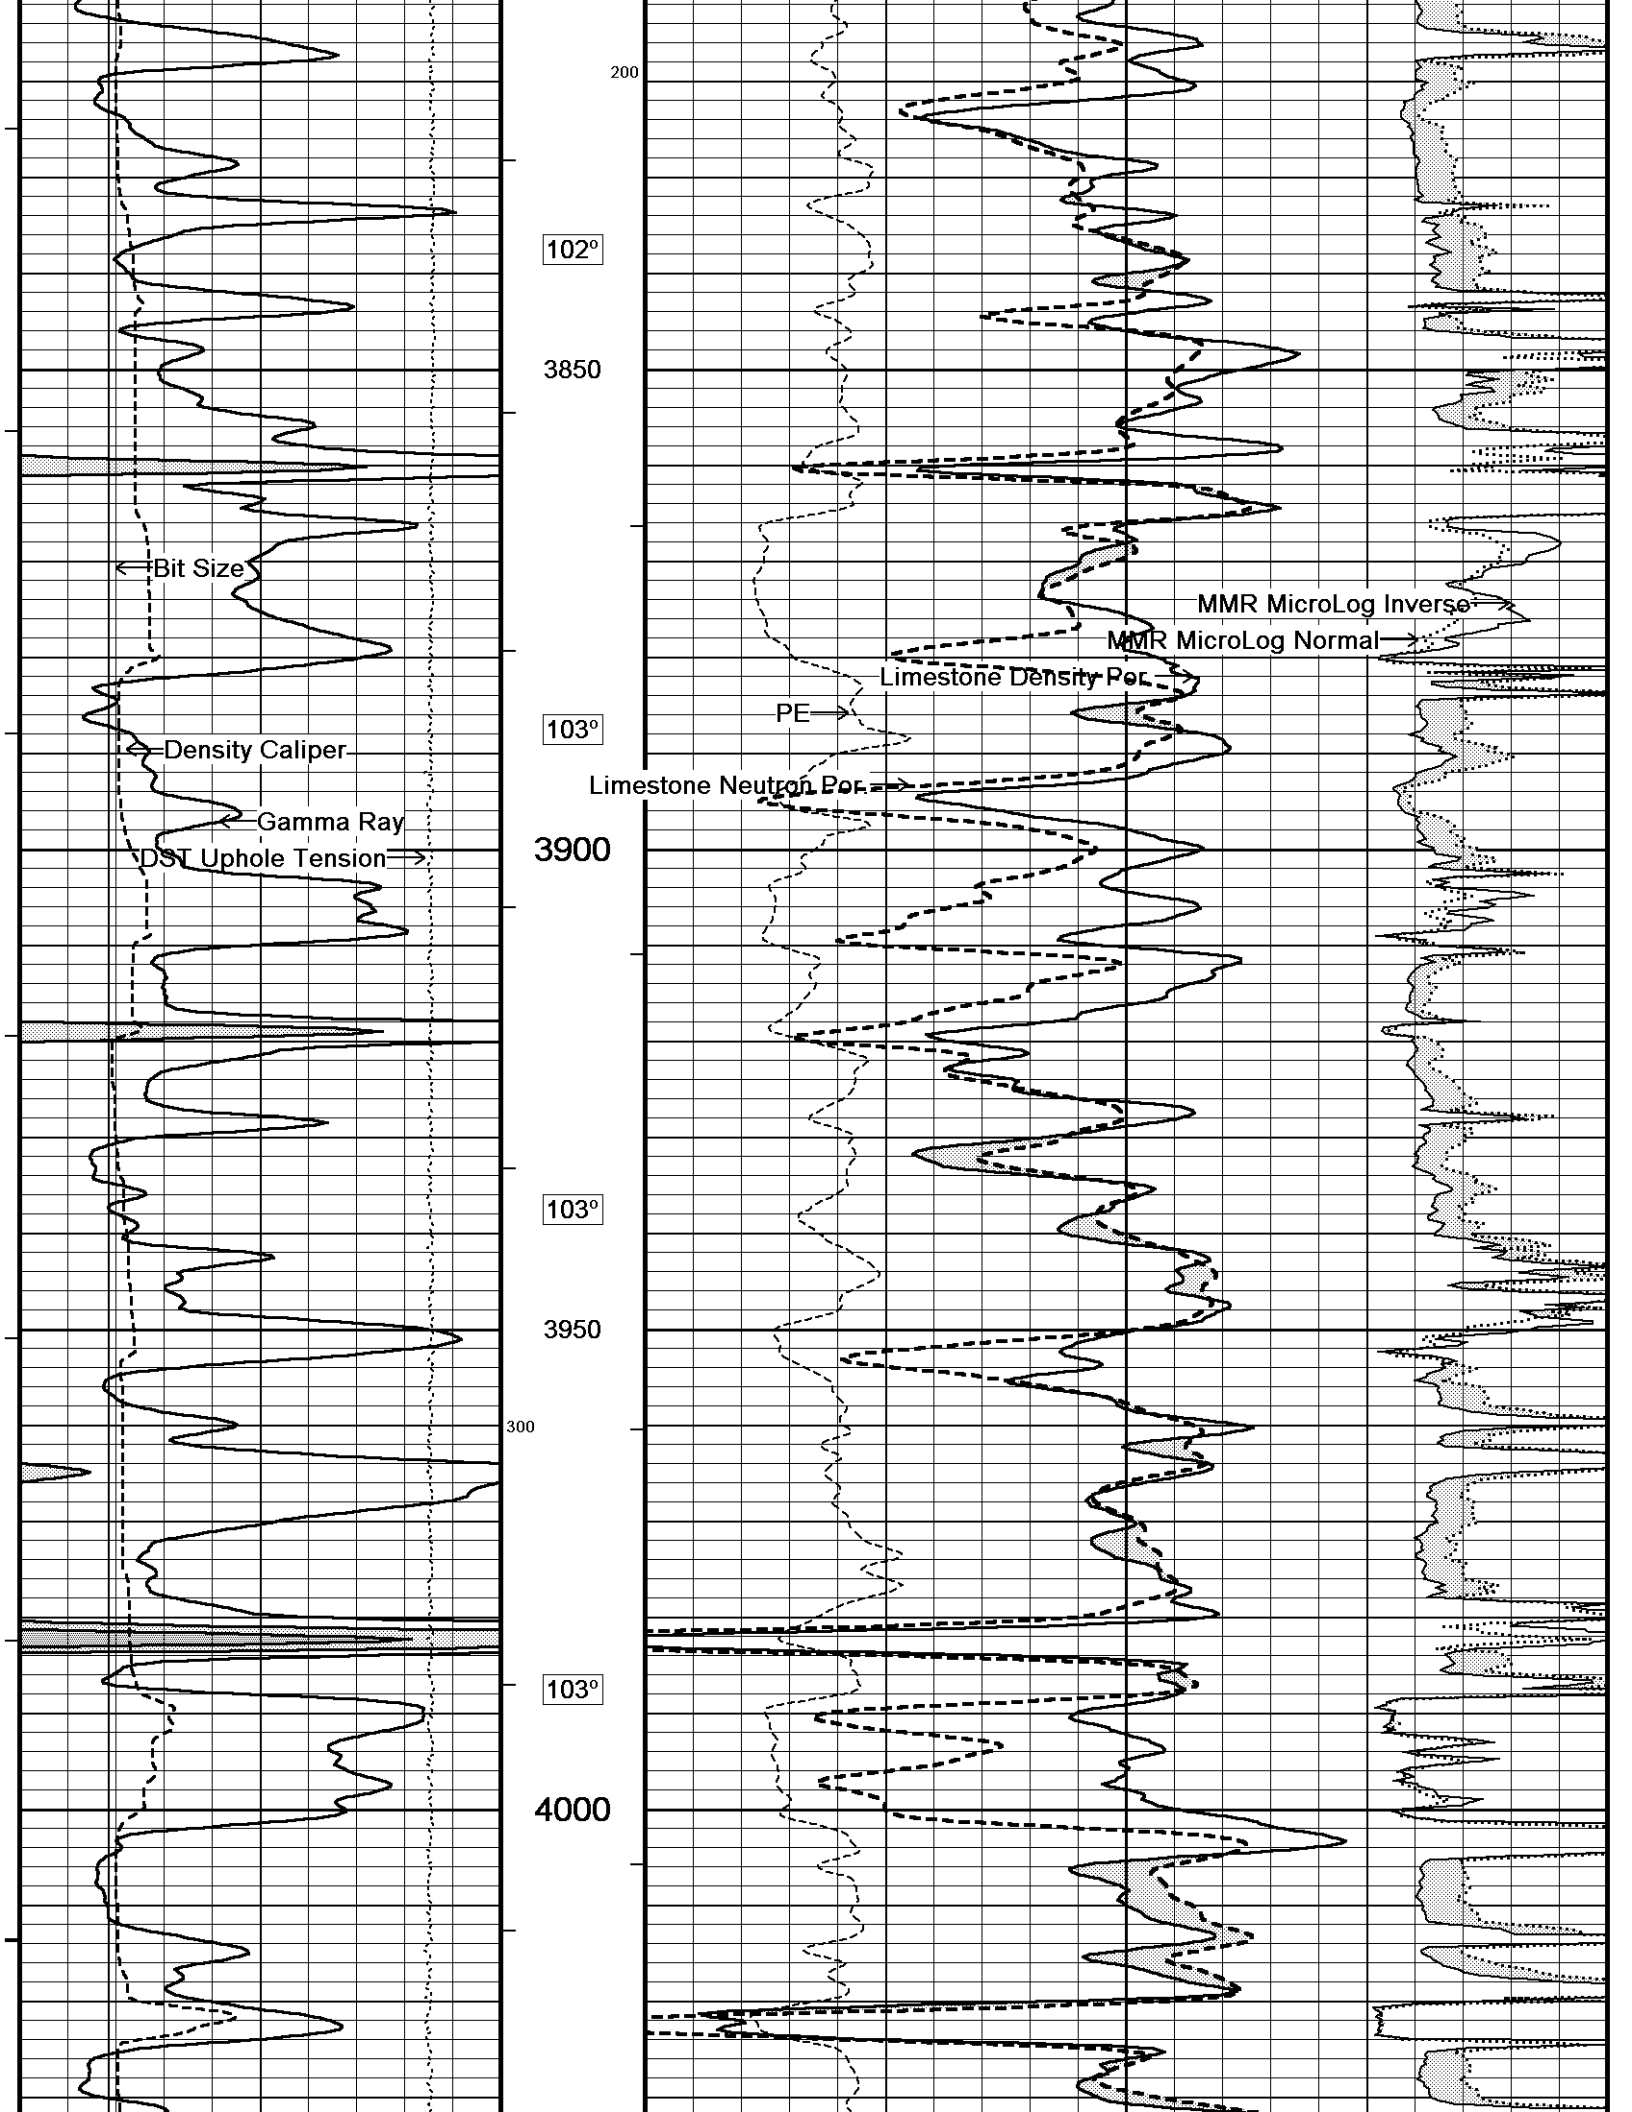

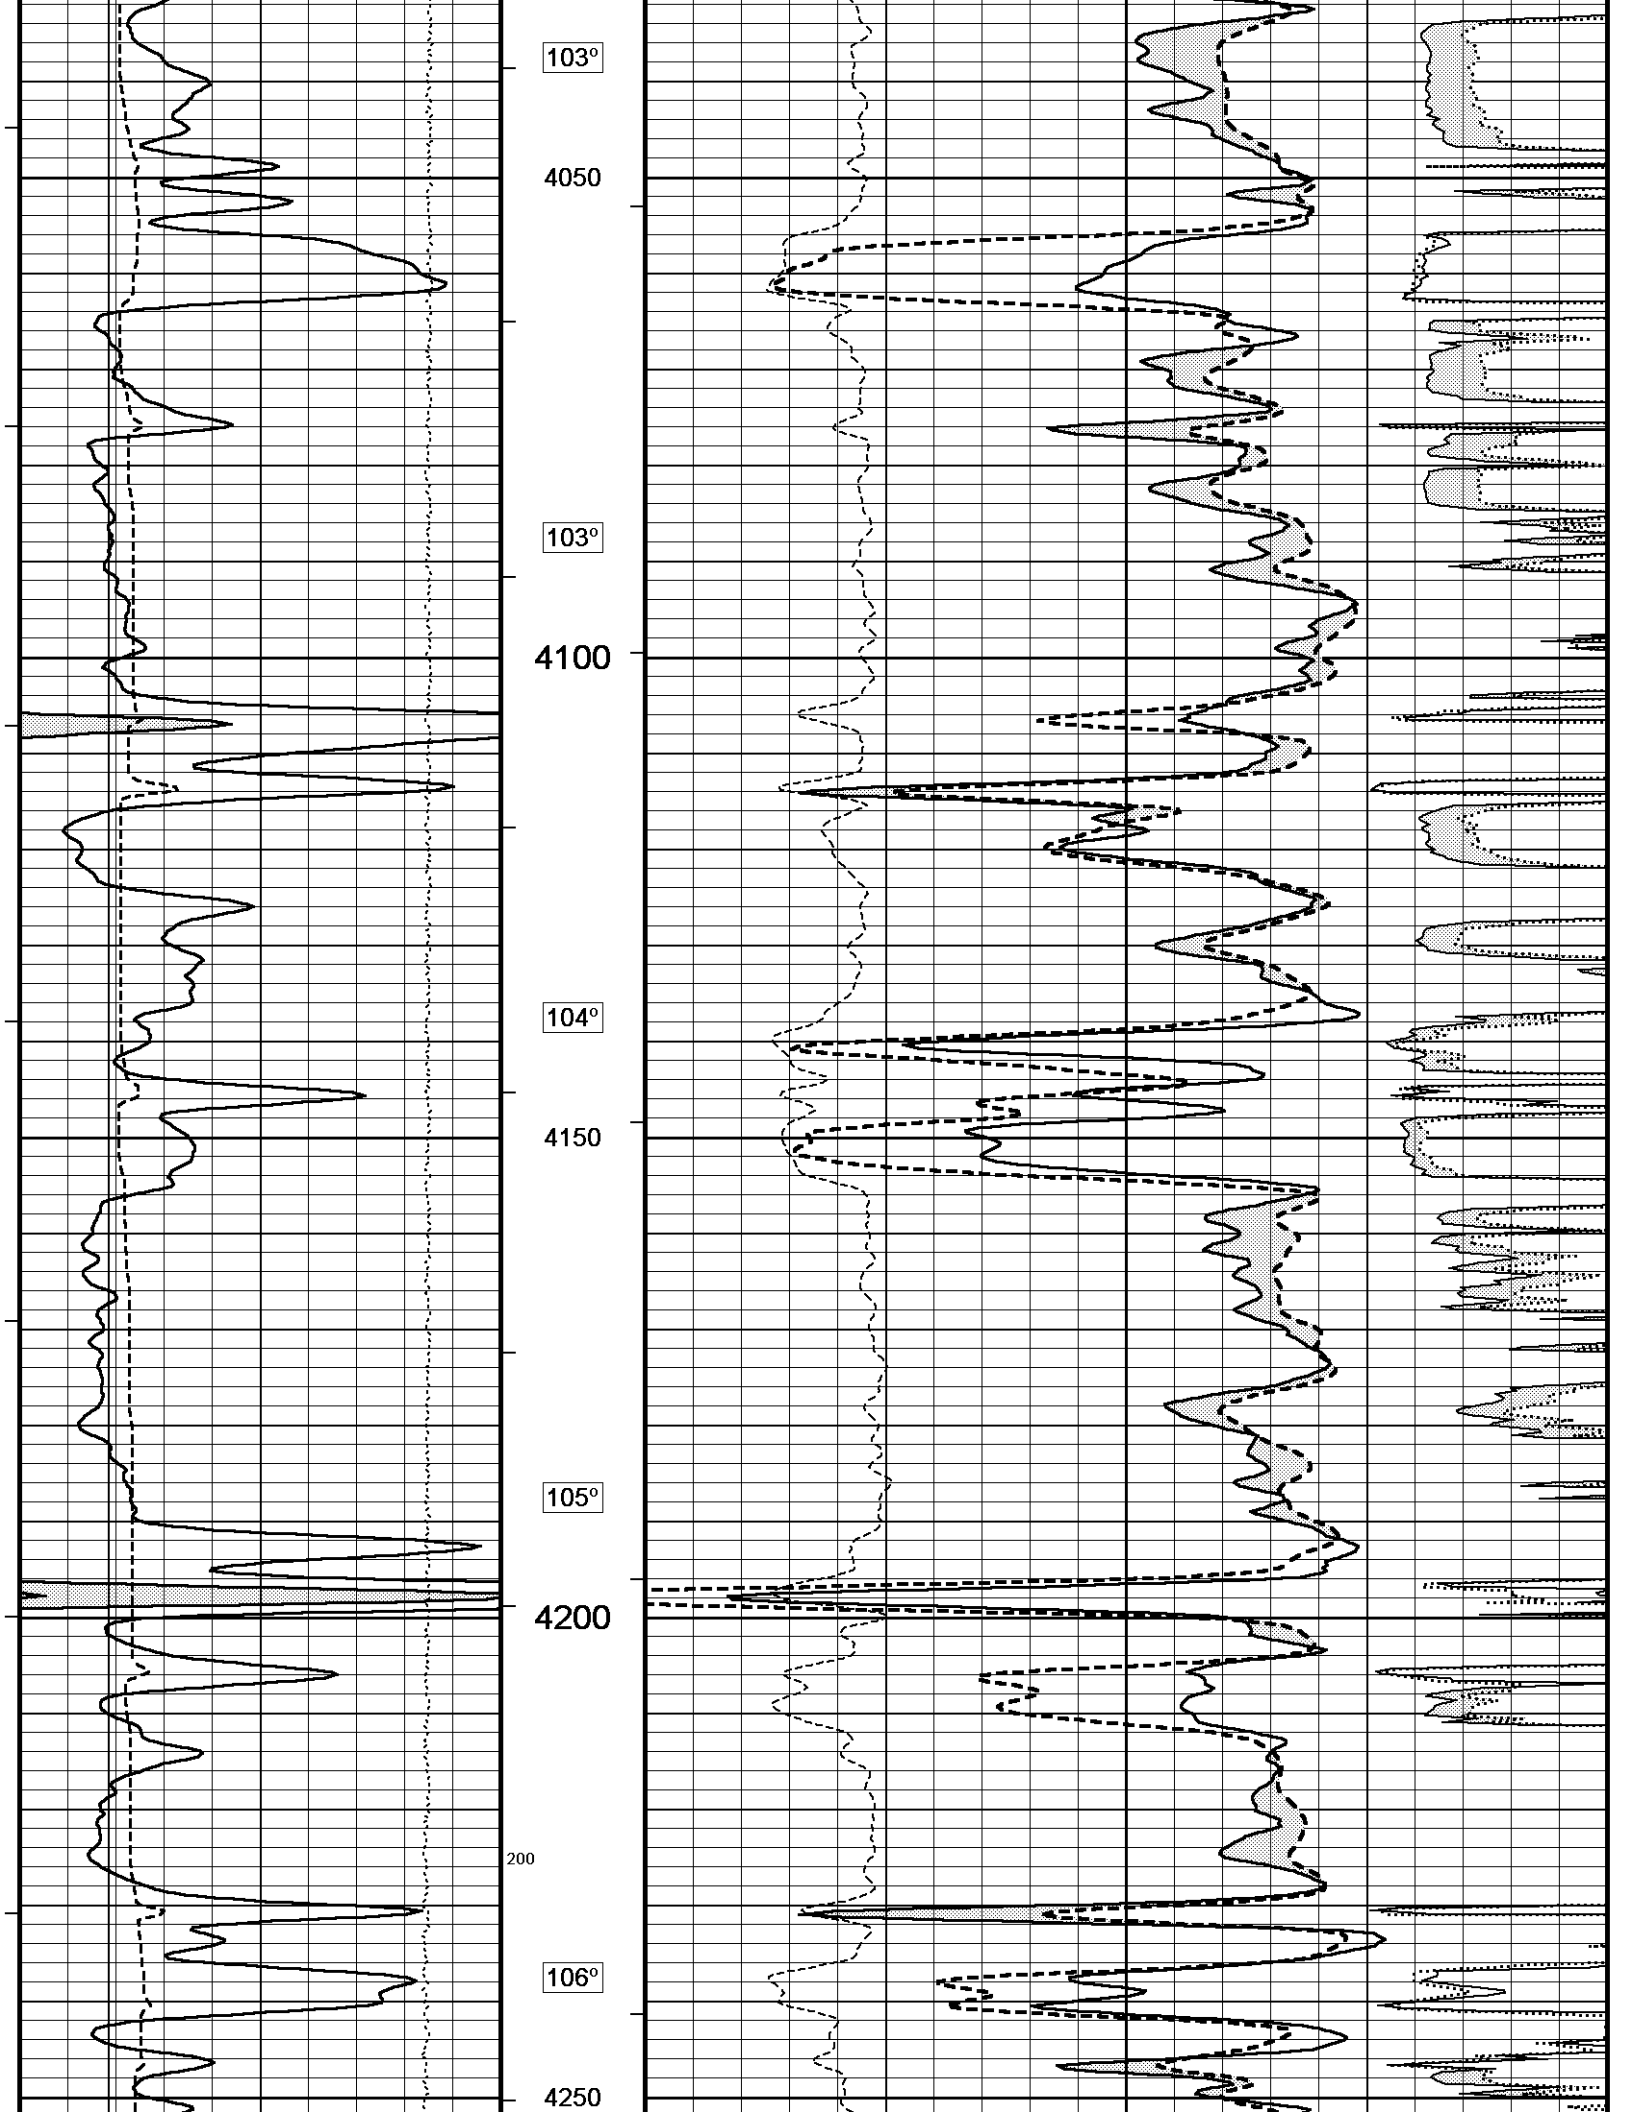

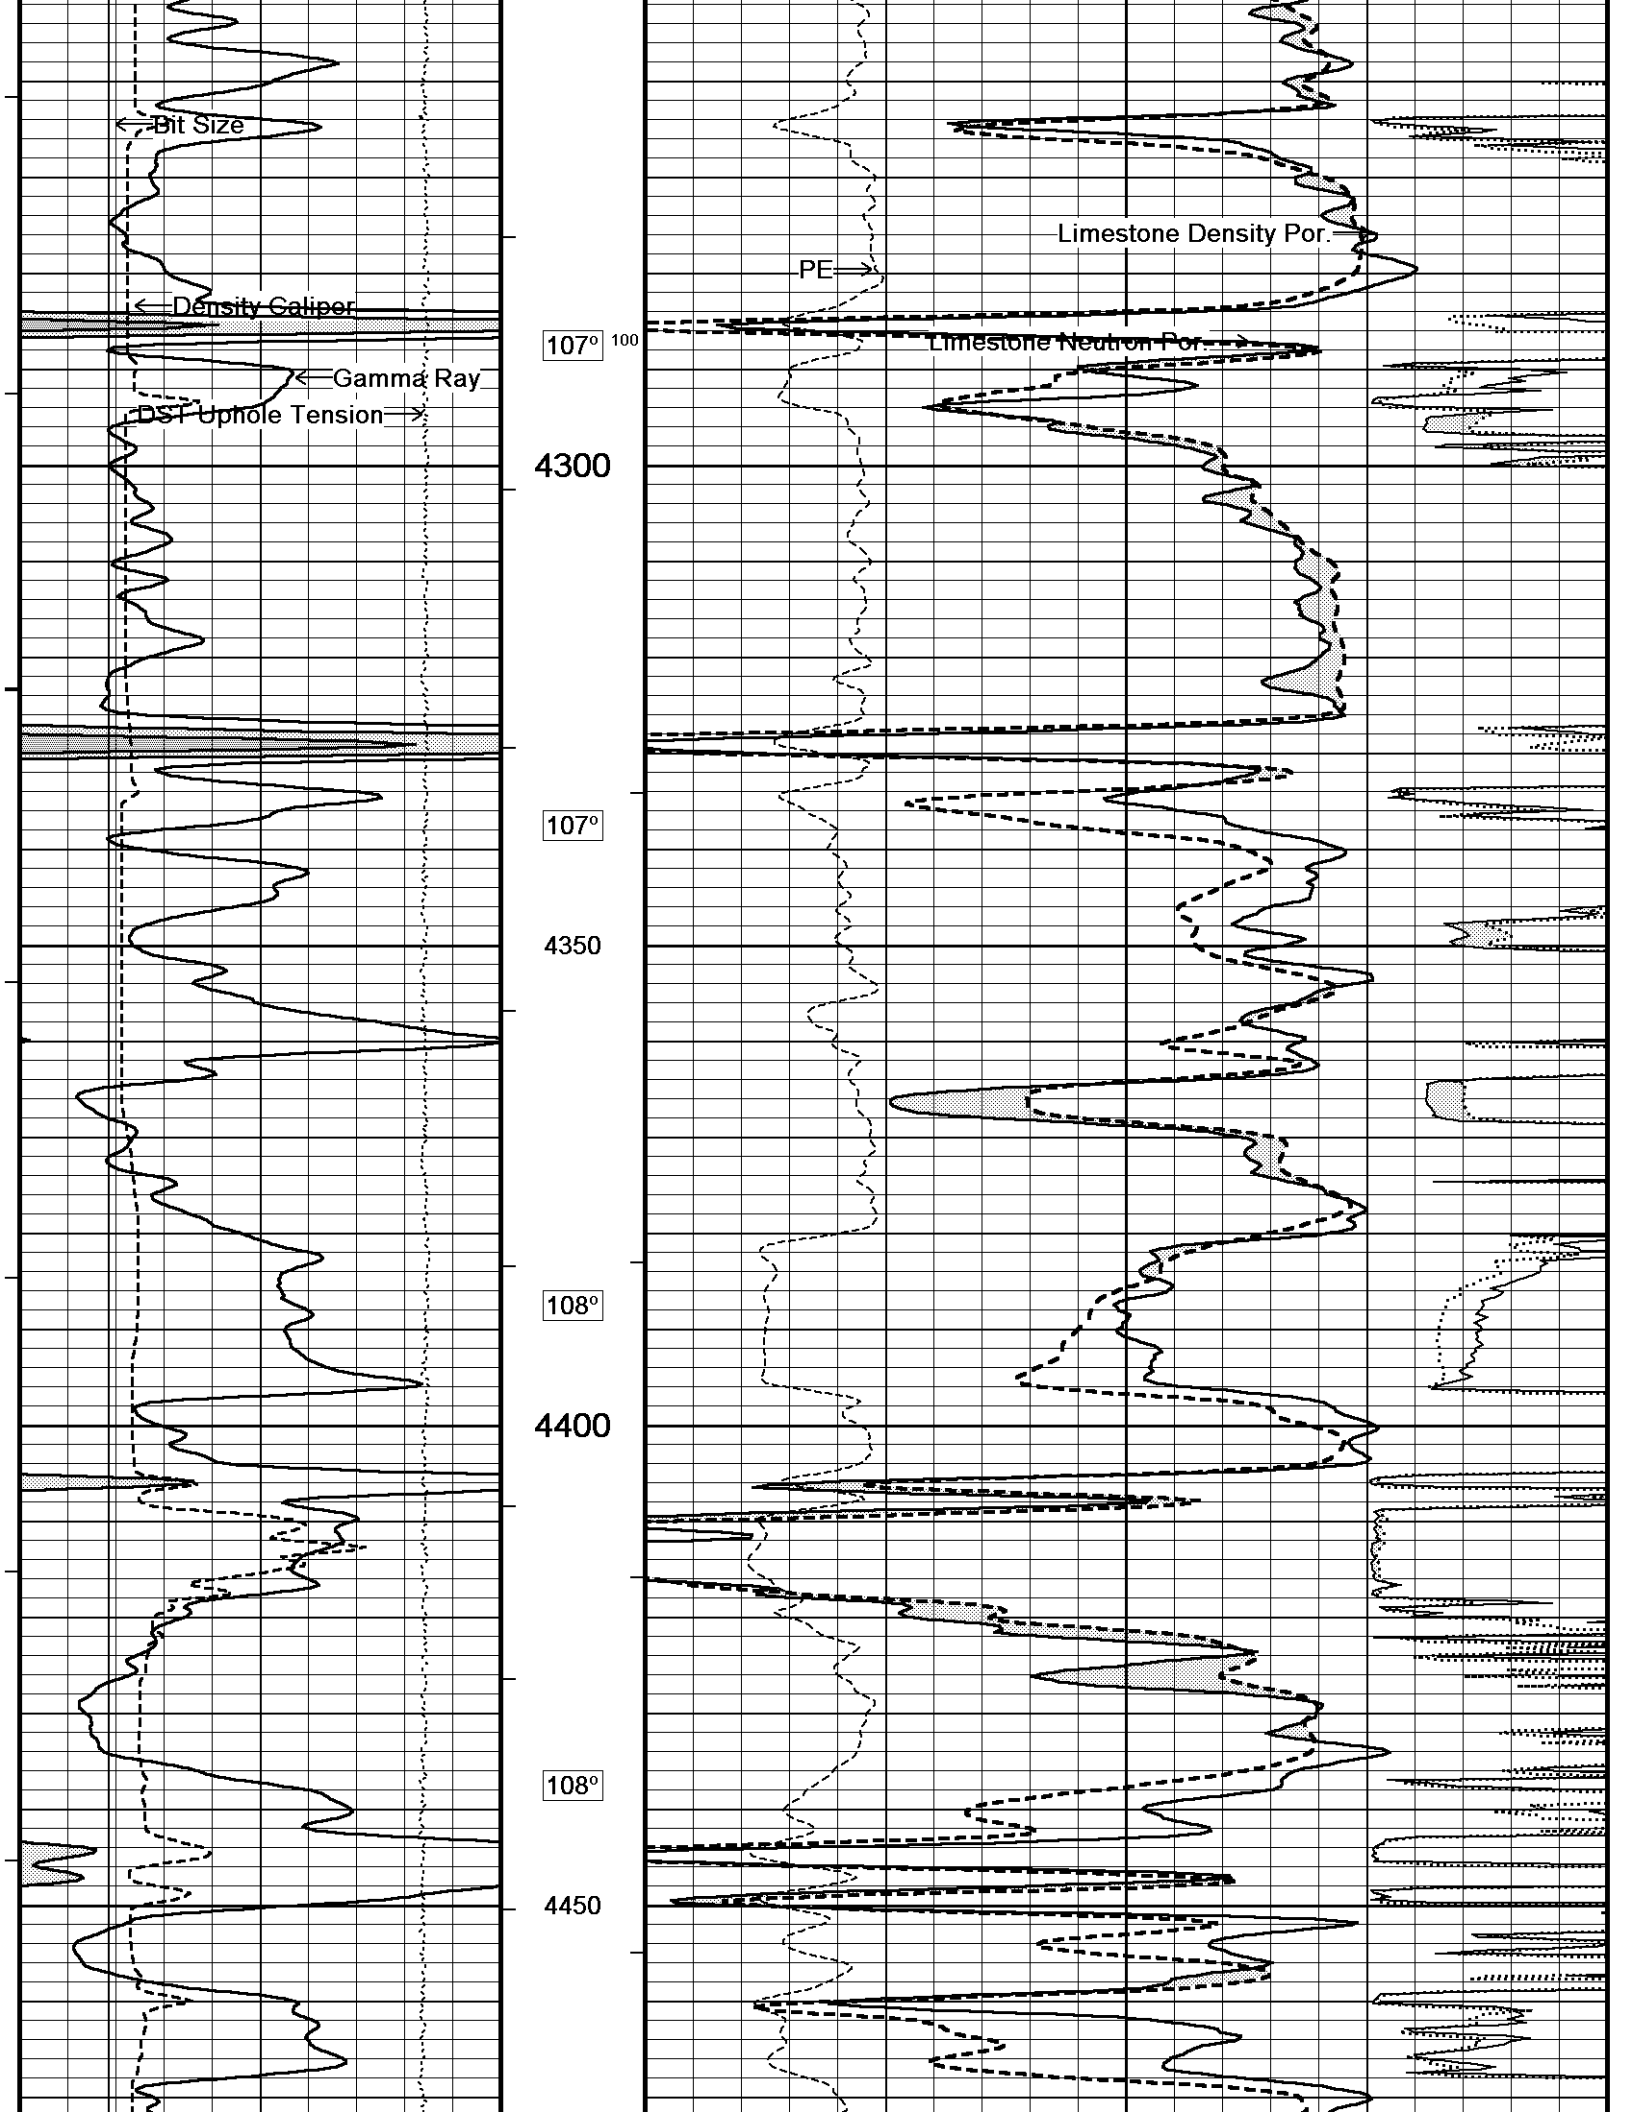

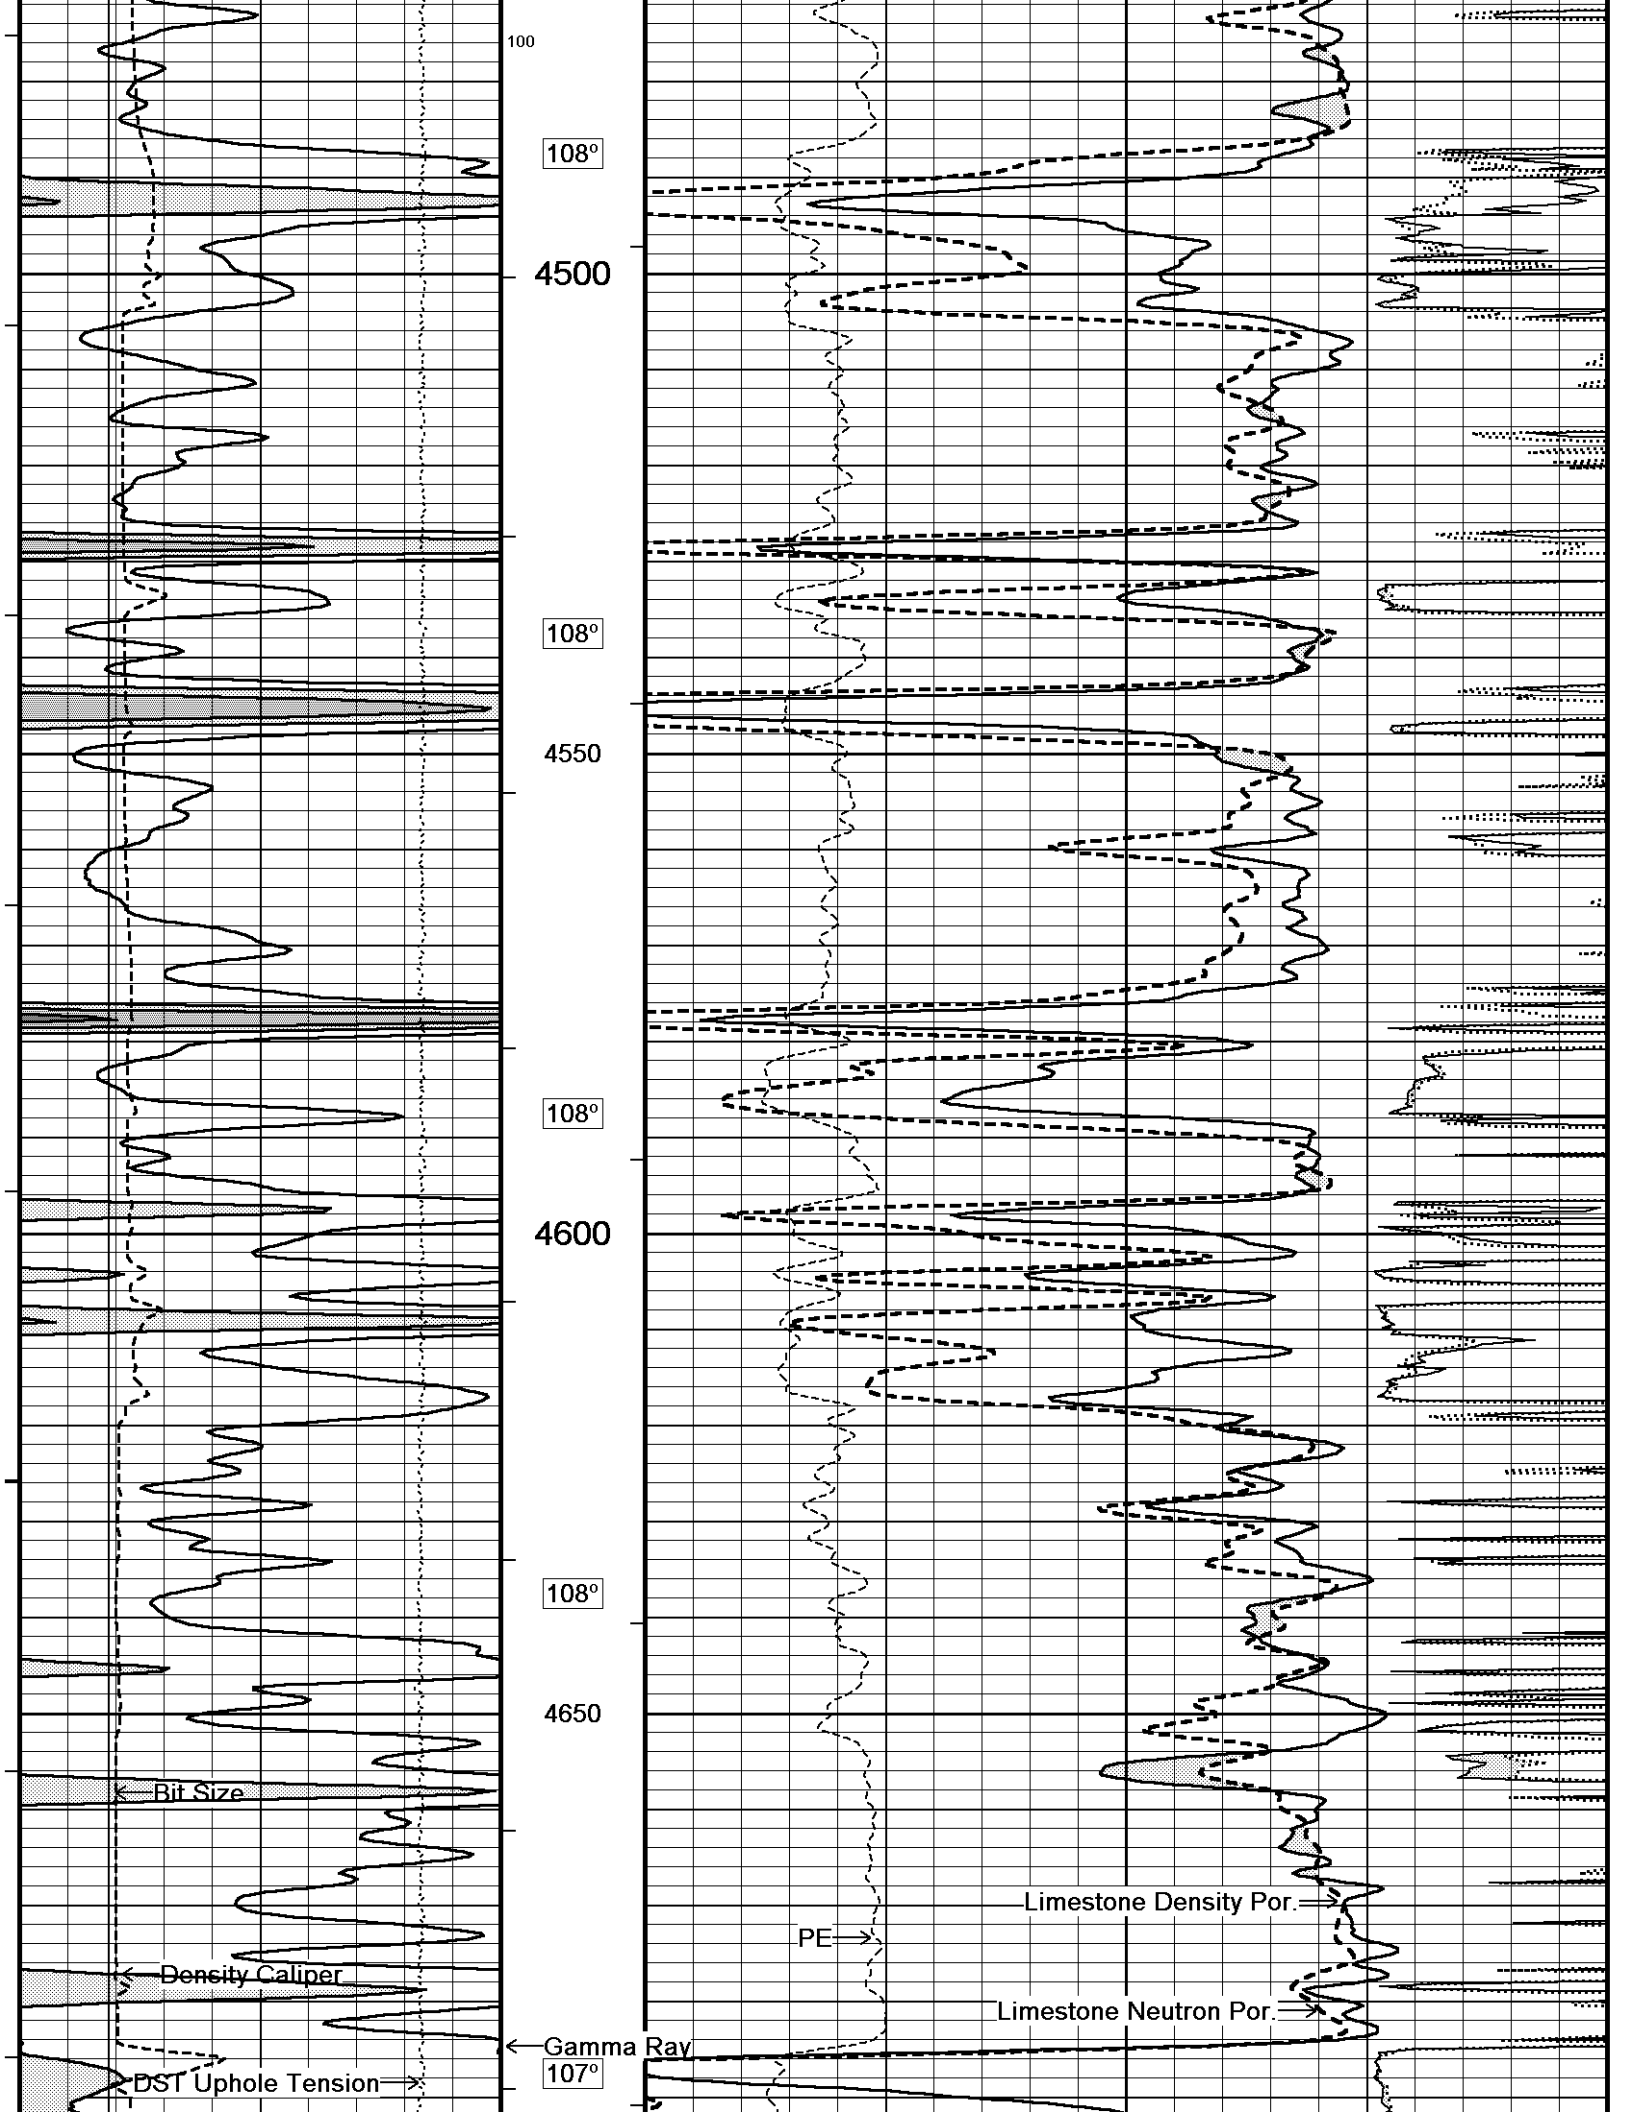

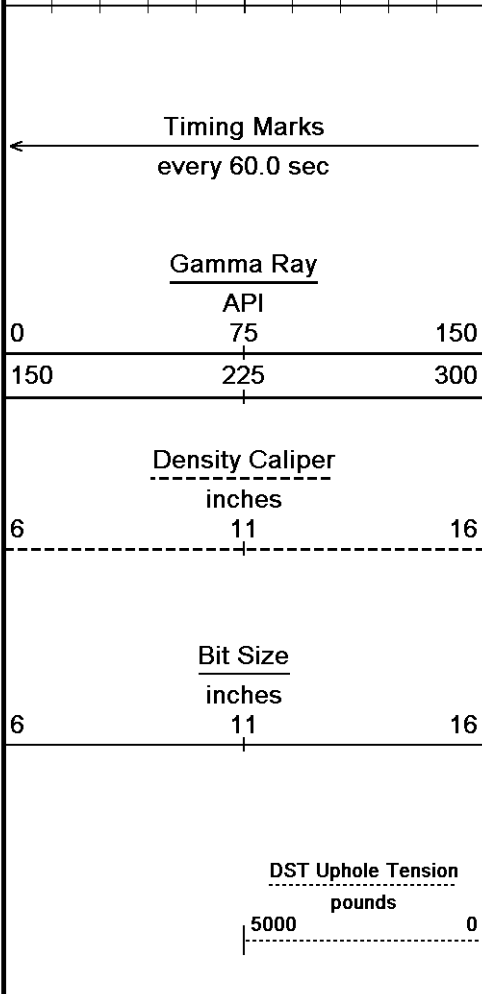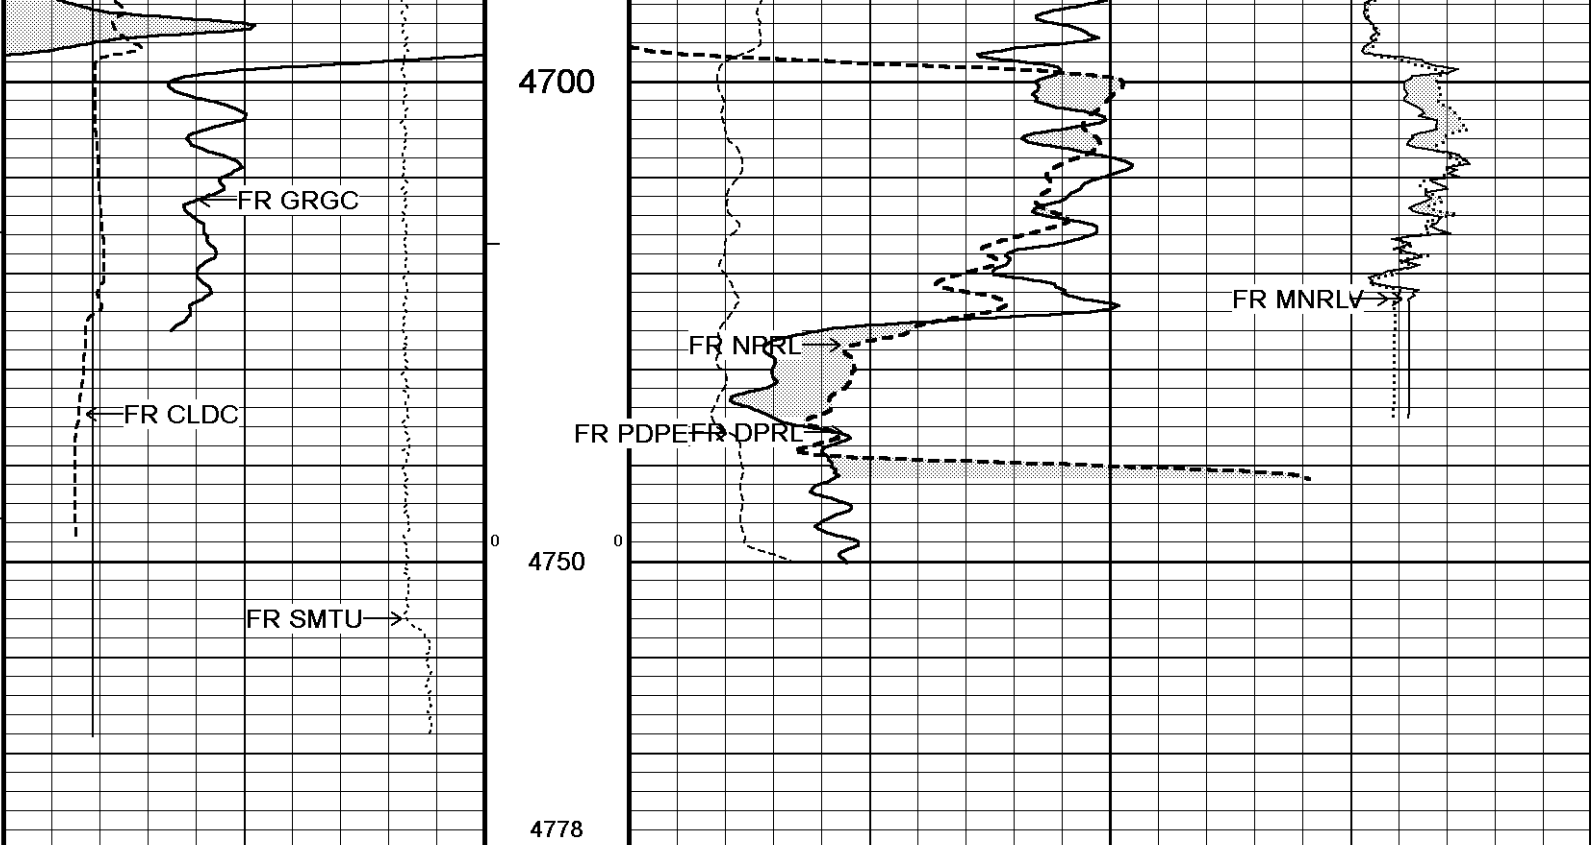


Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft


Replay Scale 1:240

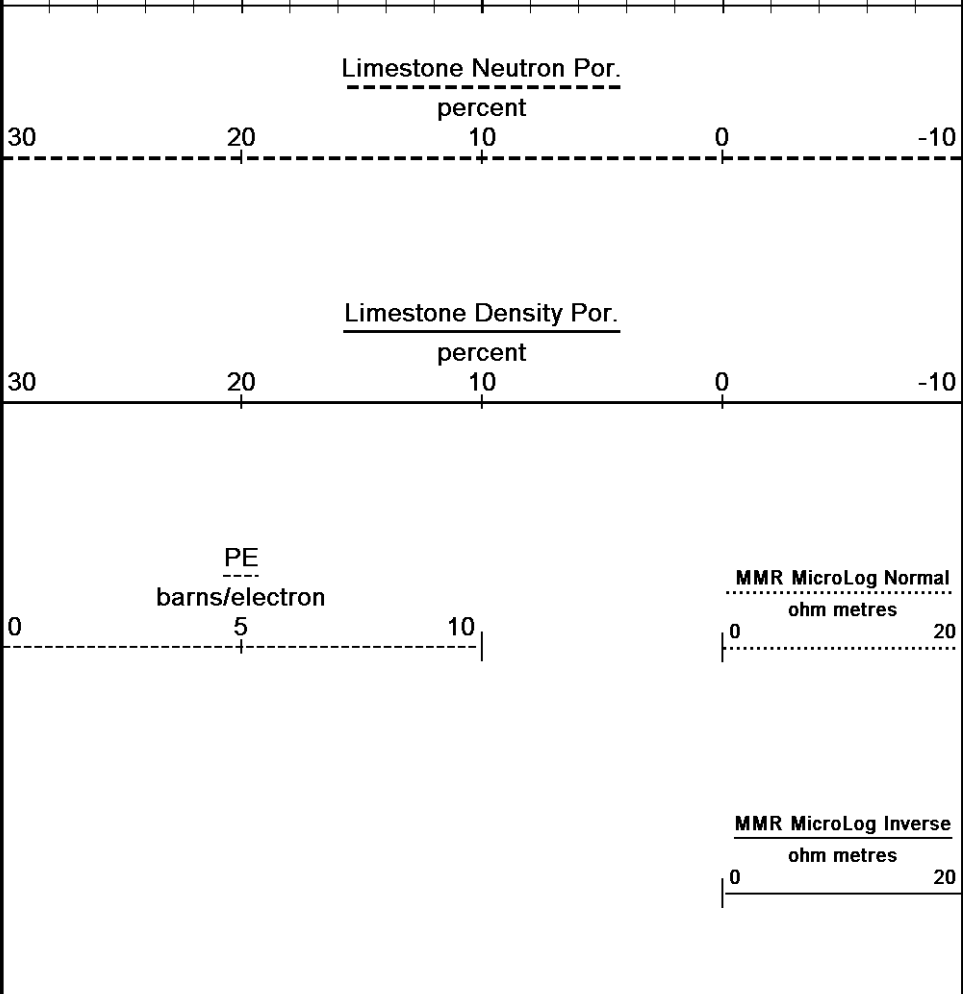




Depth Based Data - Maximum Sampling Increment 10.0cm  
 Plotted on 08-JAN-2013 12:07  
 Filename: C:\Minimus 13.04.8492\Data\Grand M...Grand Mesa Operating Company DBY 4-16\_002.dta  
 Recorded on 08-JAN-2013 09:38  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

↑ 5 INCH MAIN ↑


↓ REPEAT SECTION ↓

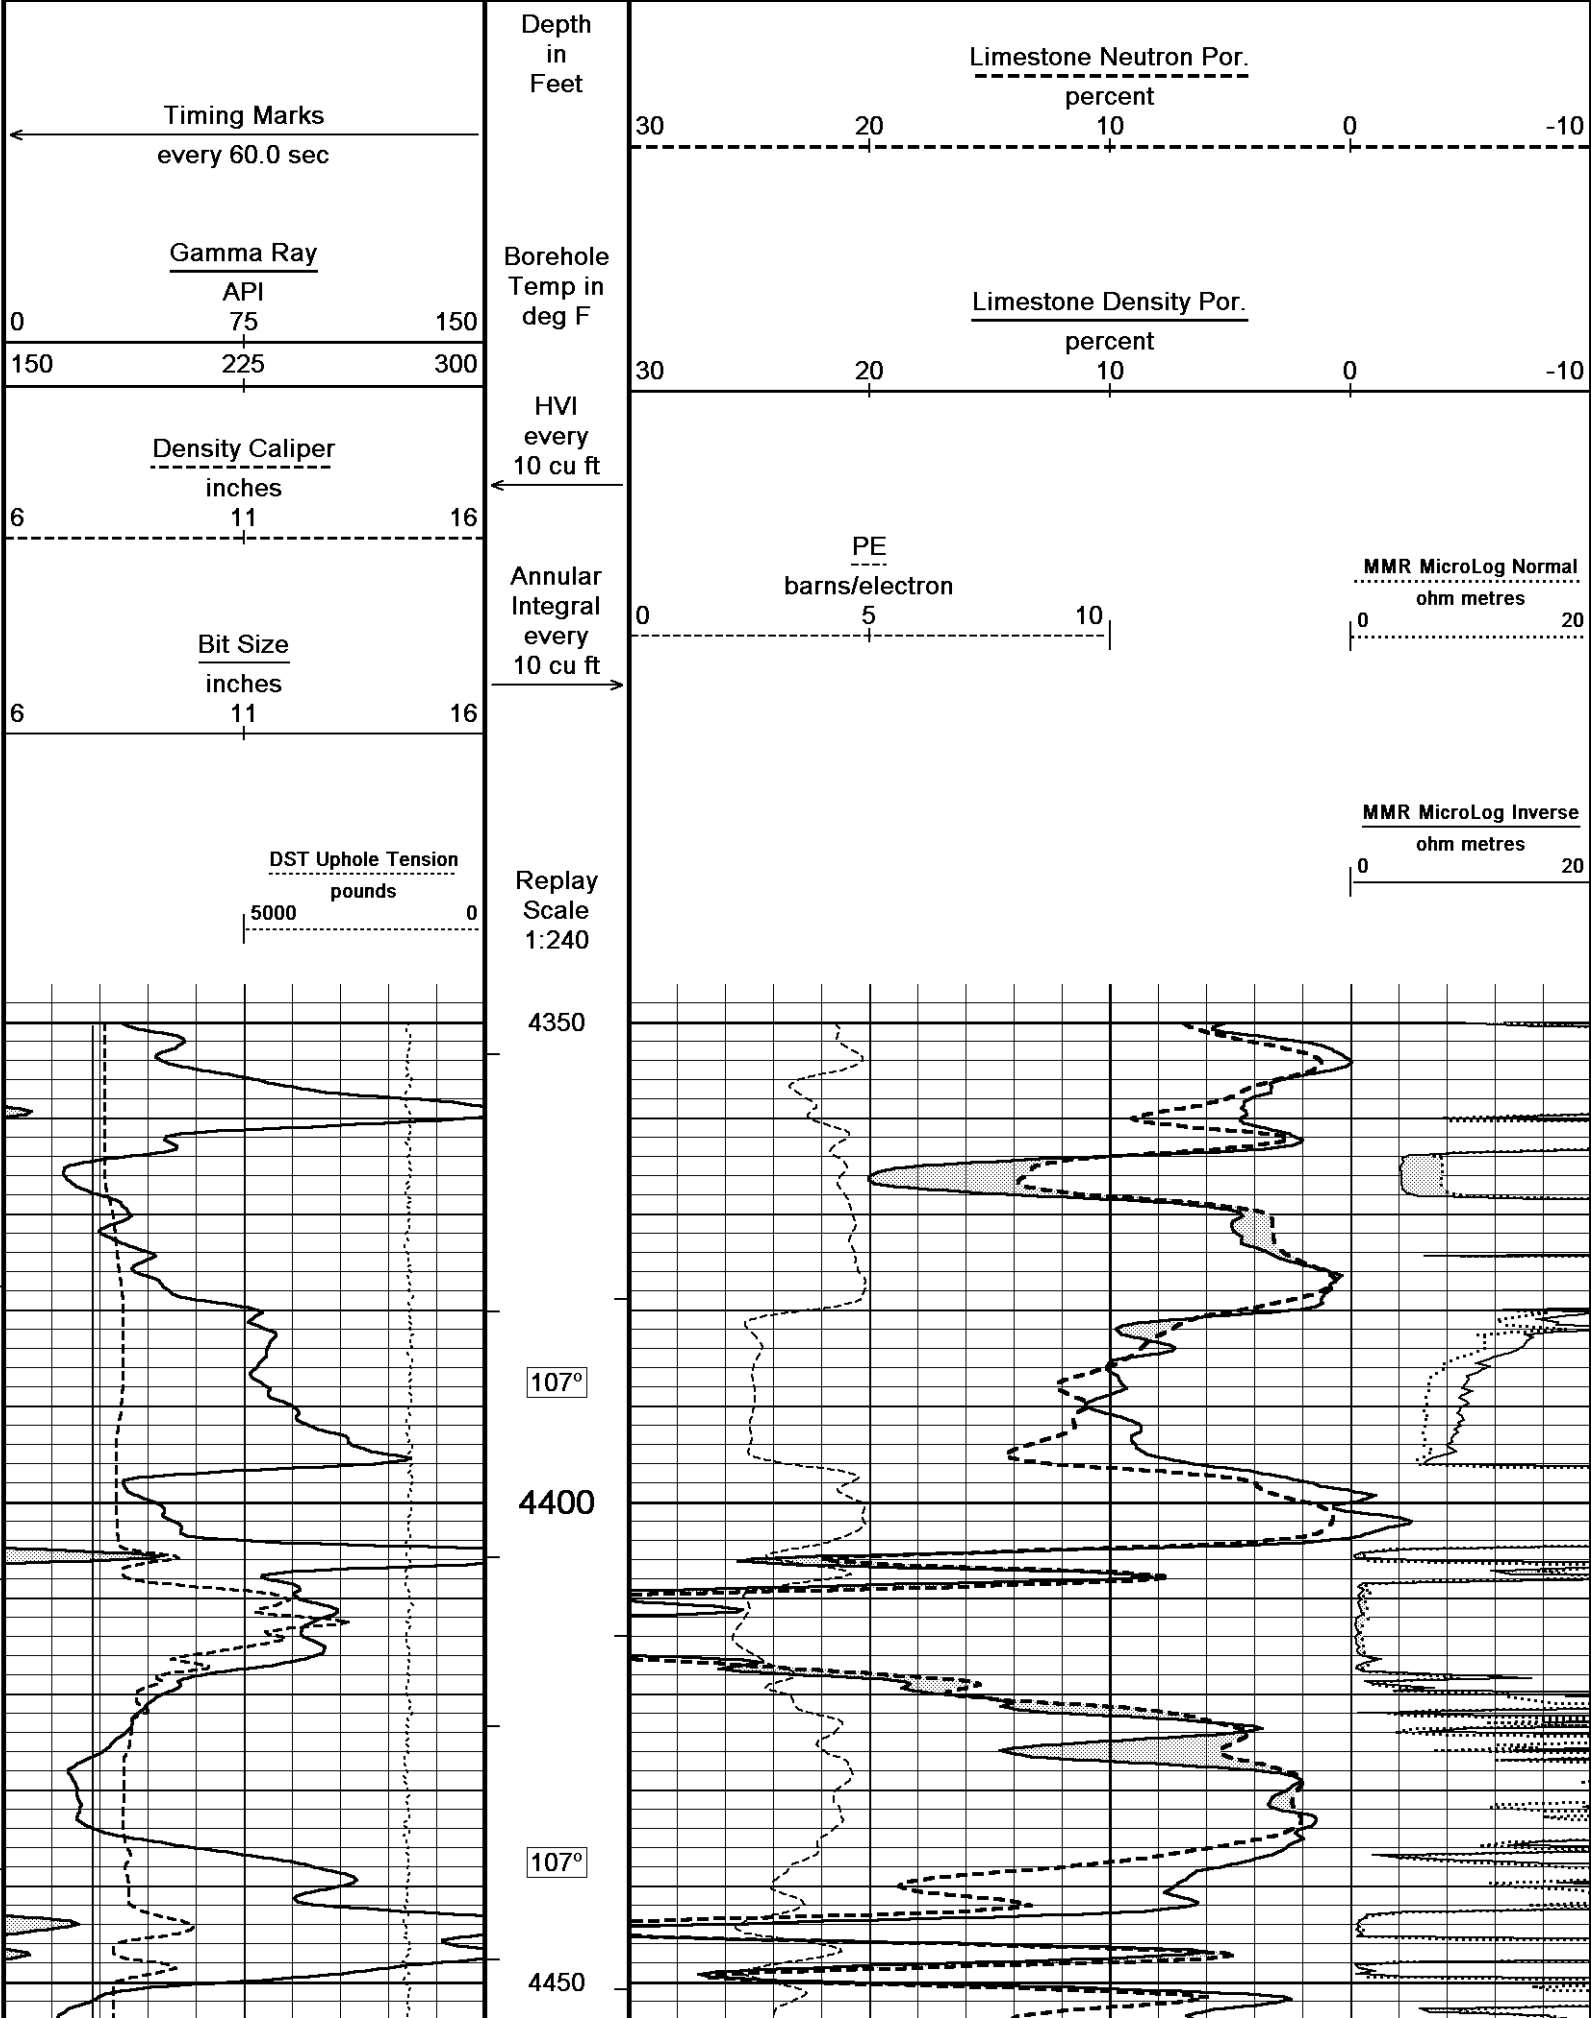

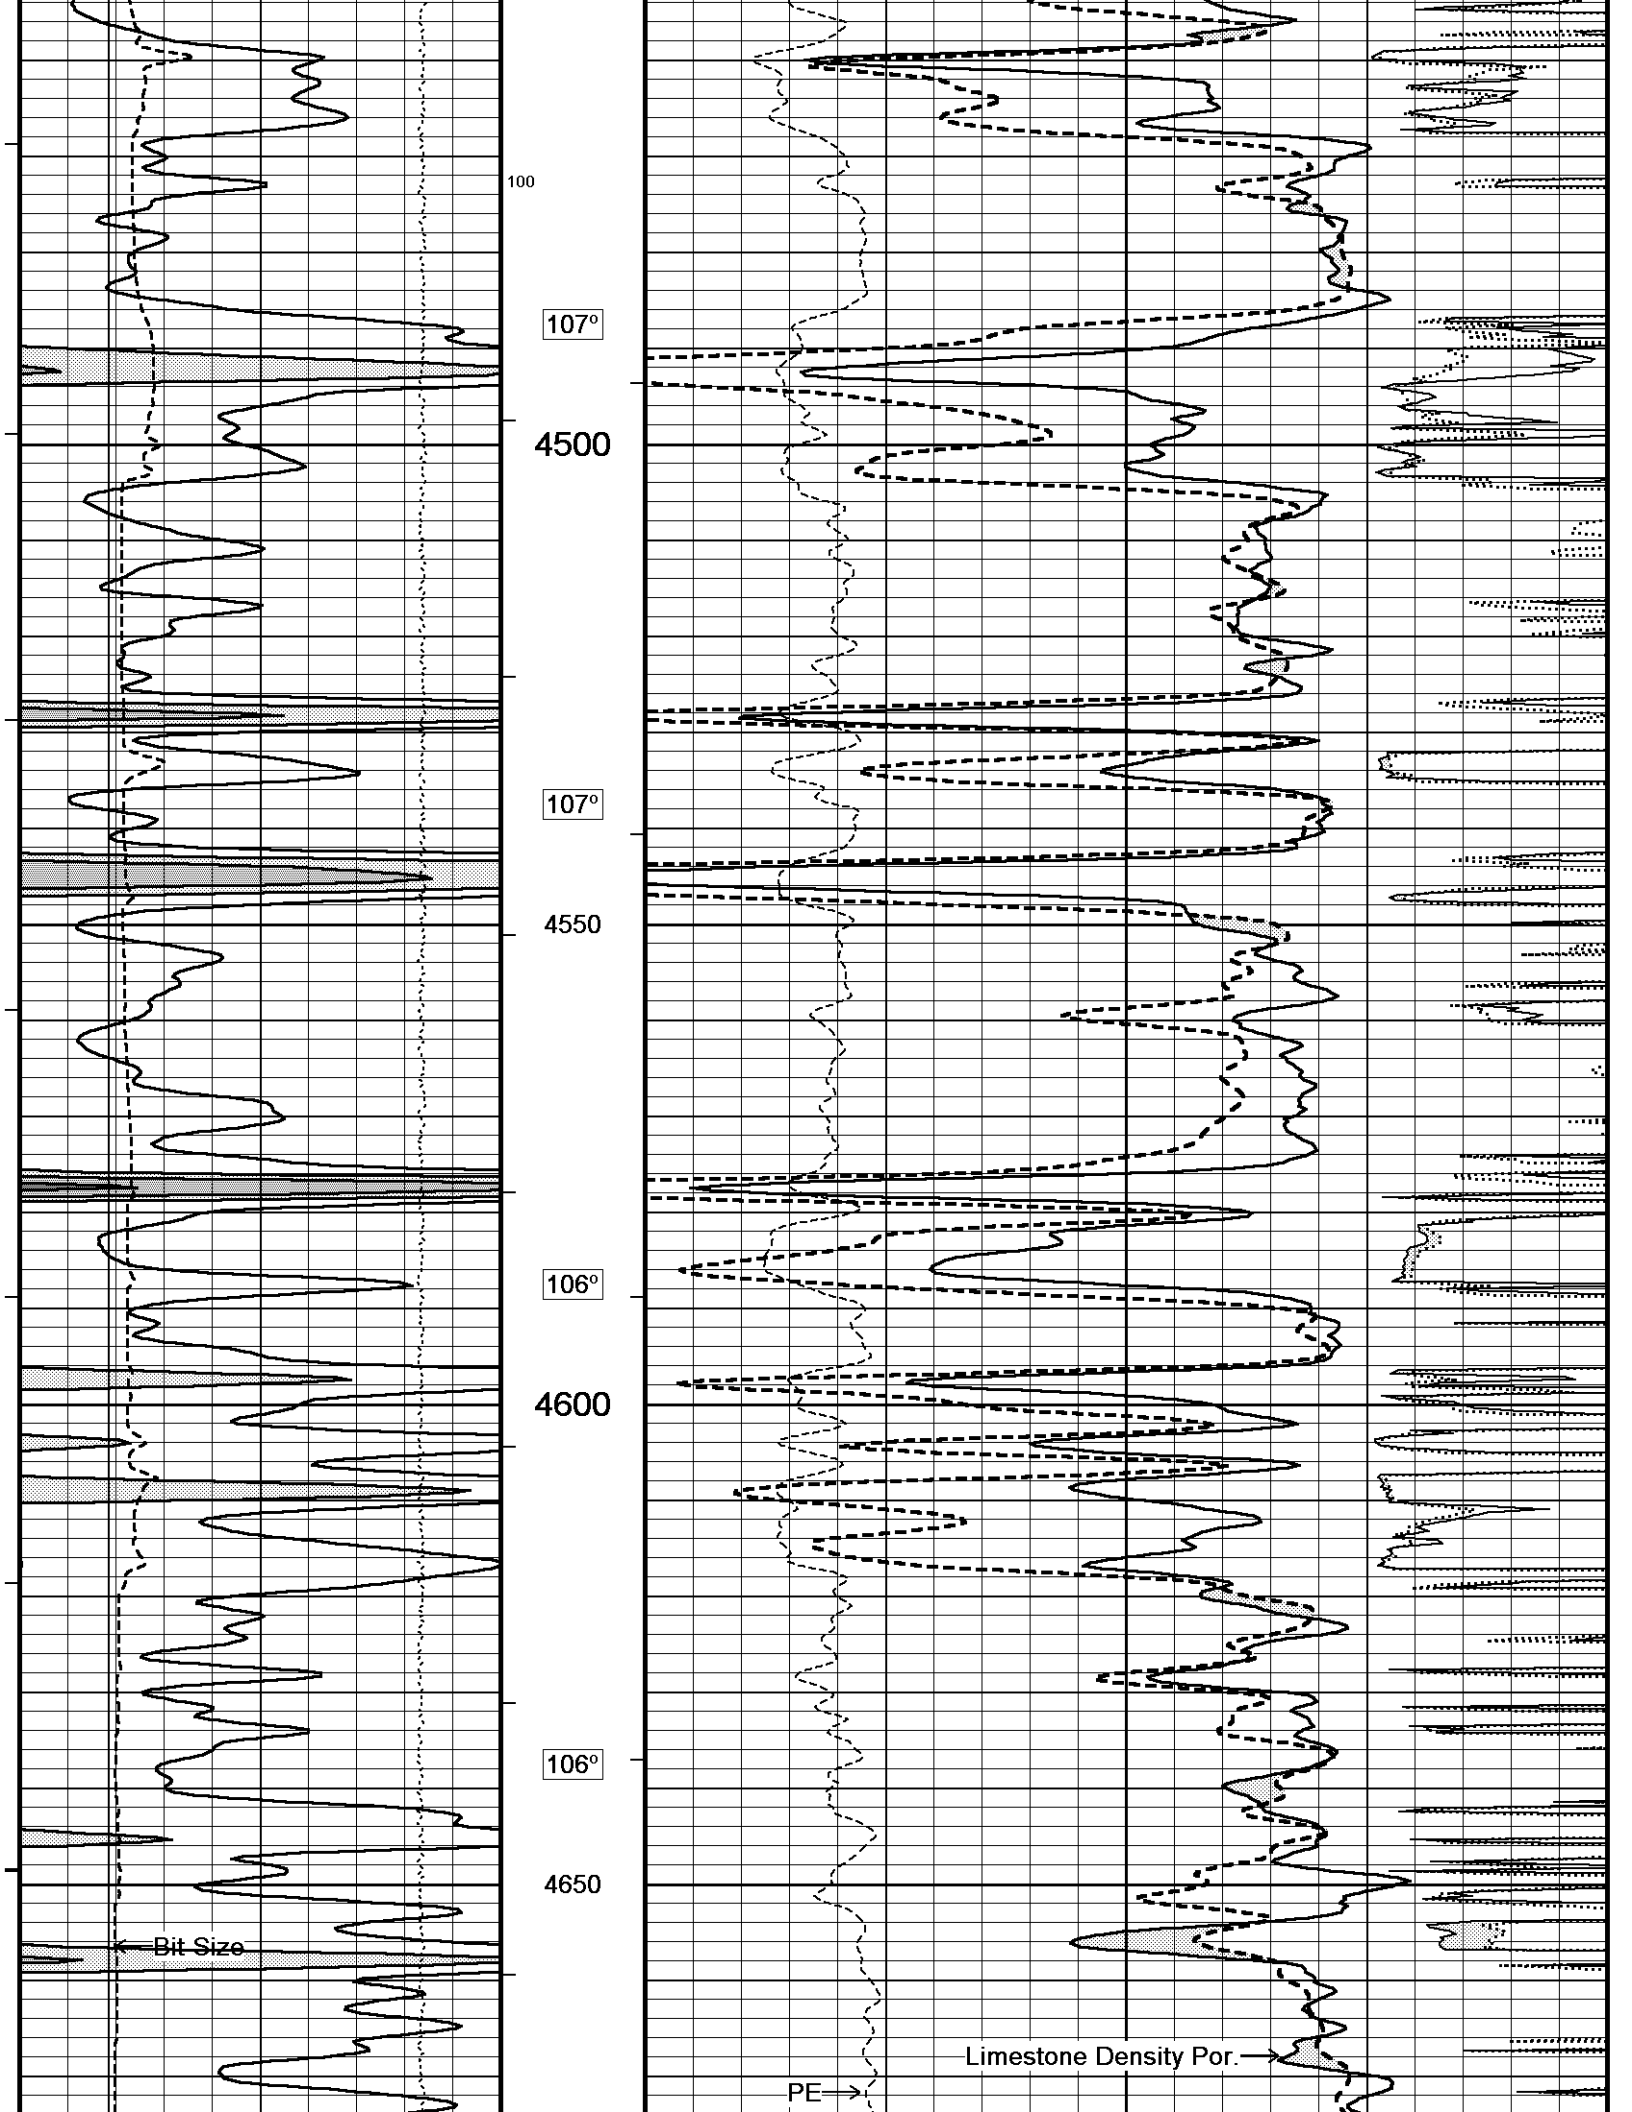

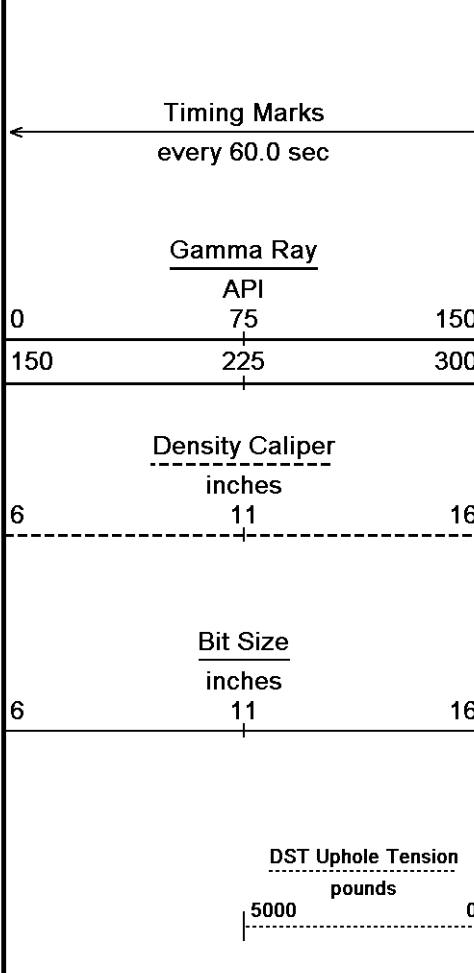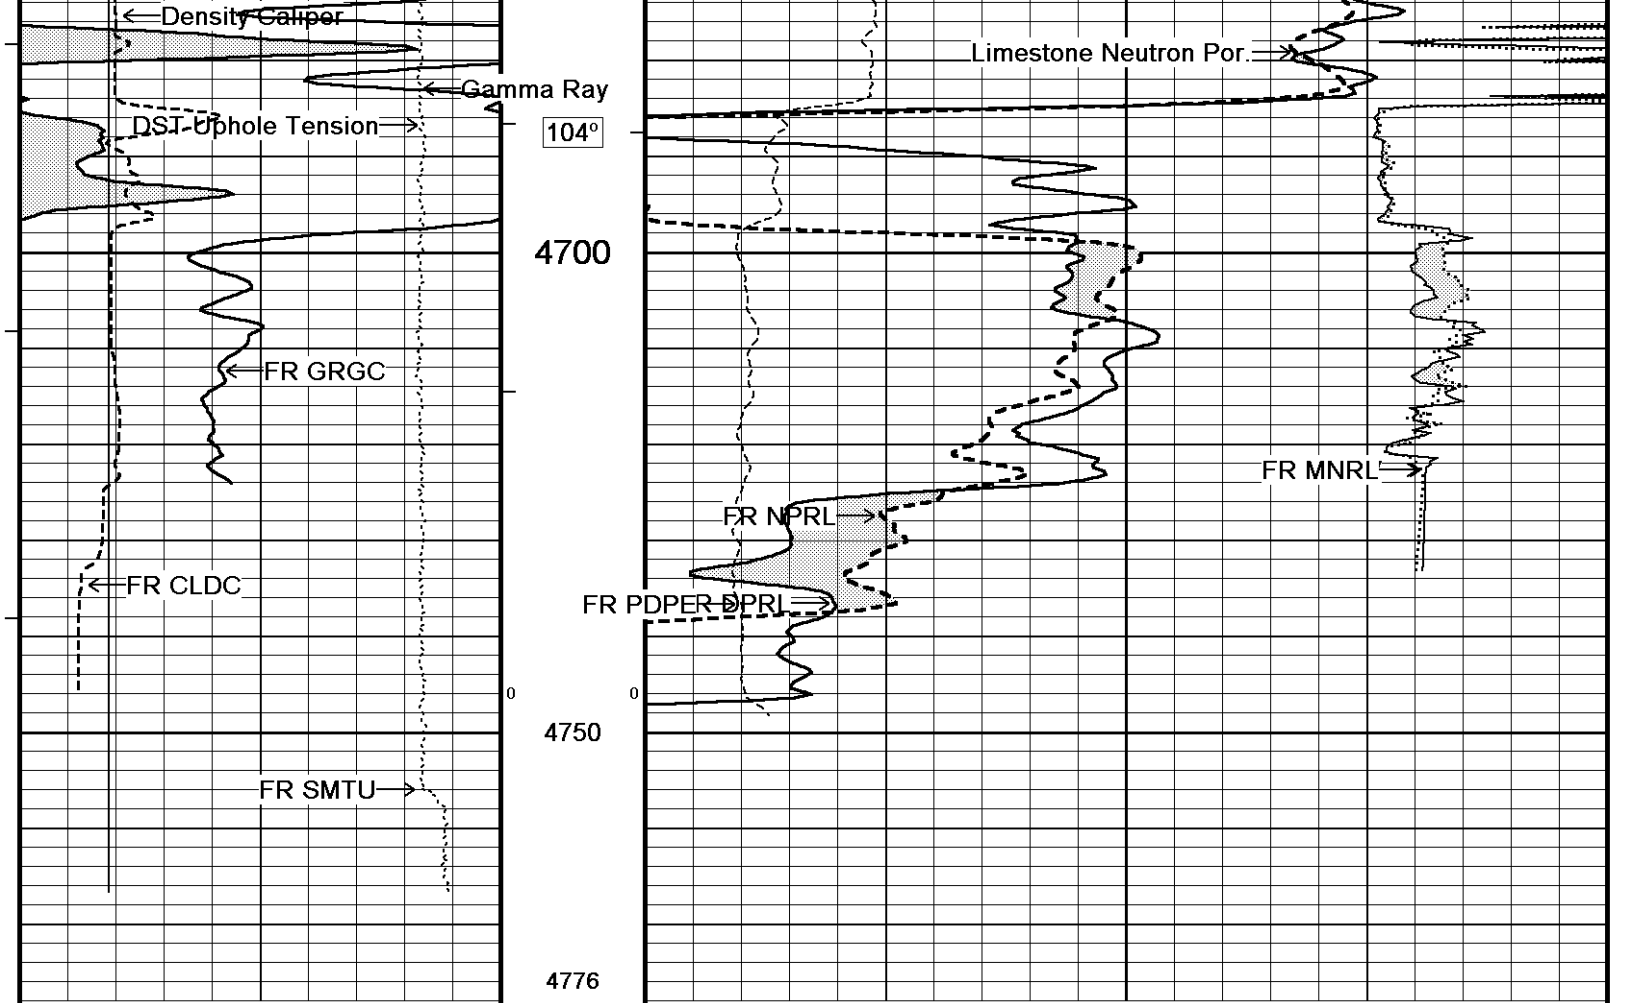

Depth in Feet  
 Borehole Temp in deg F  
 HVI every 10 cu ft  
 Annular Integral every 10 cu ft

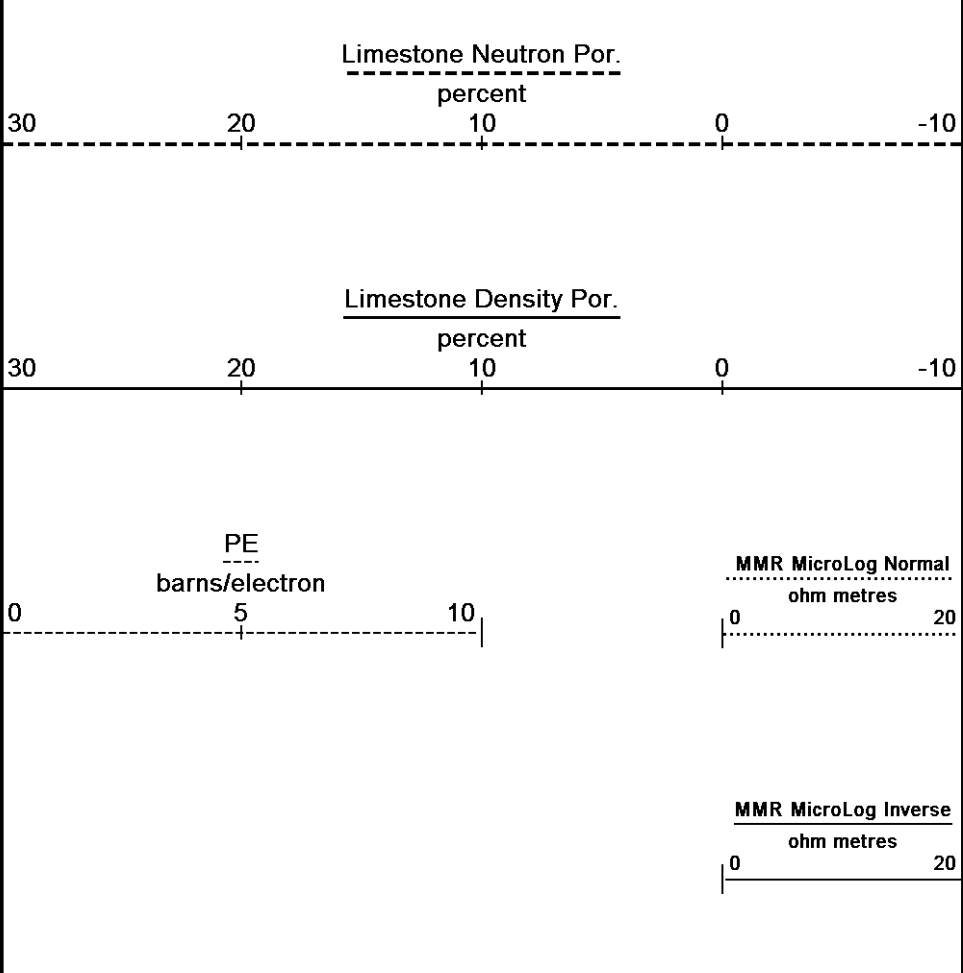

5 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 08-JAN-2013 12:07

Filename: C:\Minimus 13.04.8492\Data\Grand M...\Grand Mesa Operating Company DBY 4-16\_002.dta

Recorded on 08-JAN-2013 09:38

System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

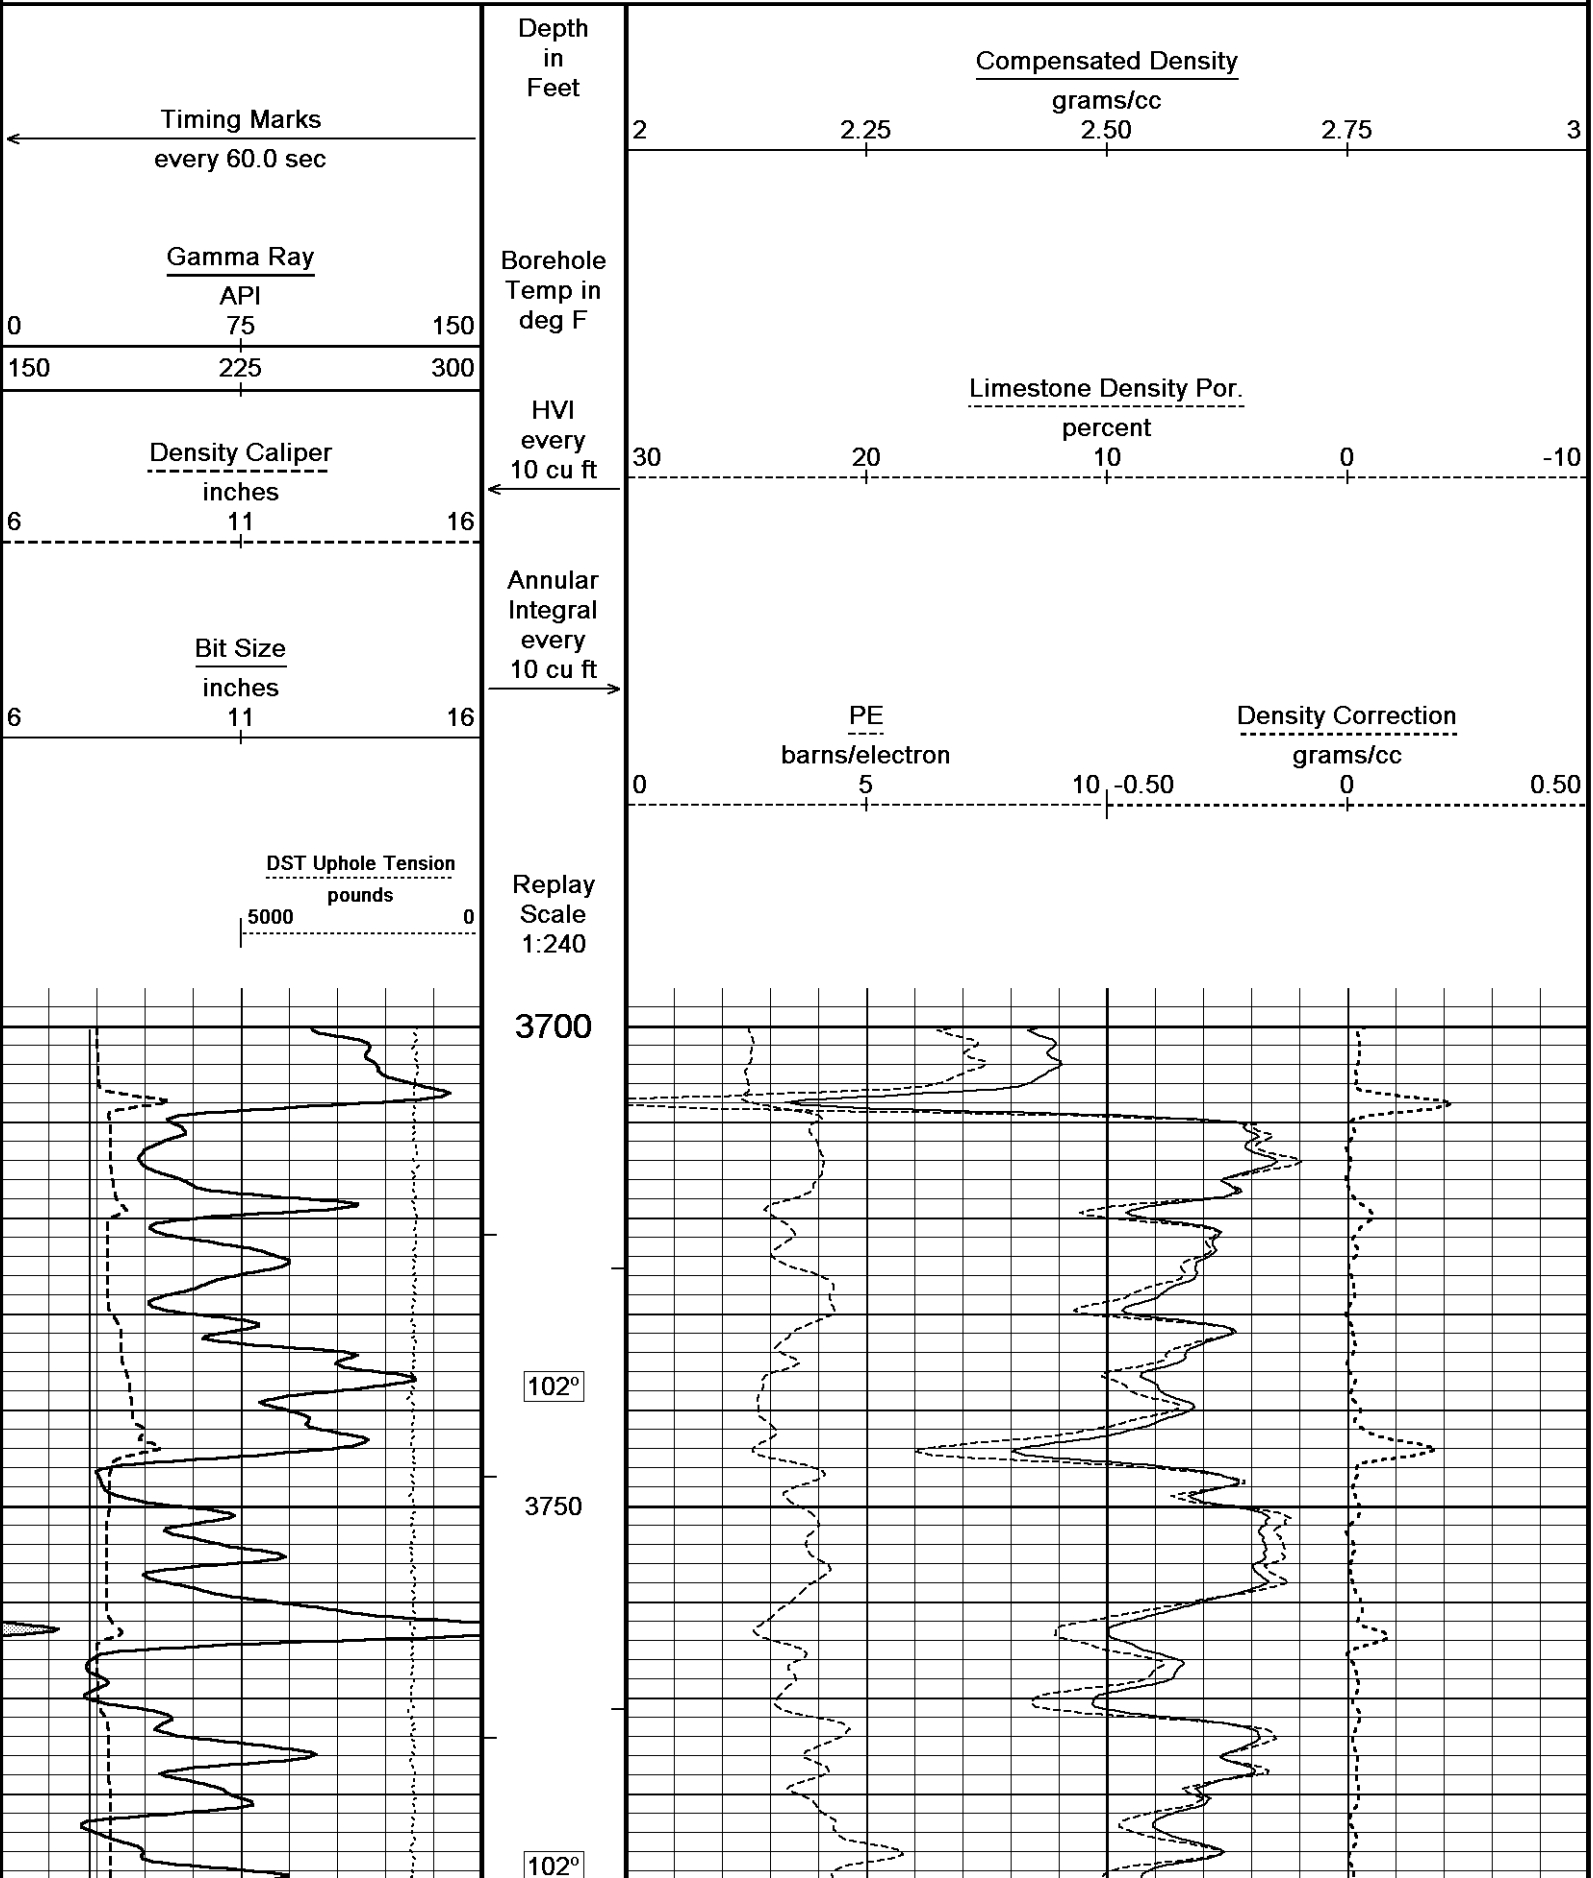

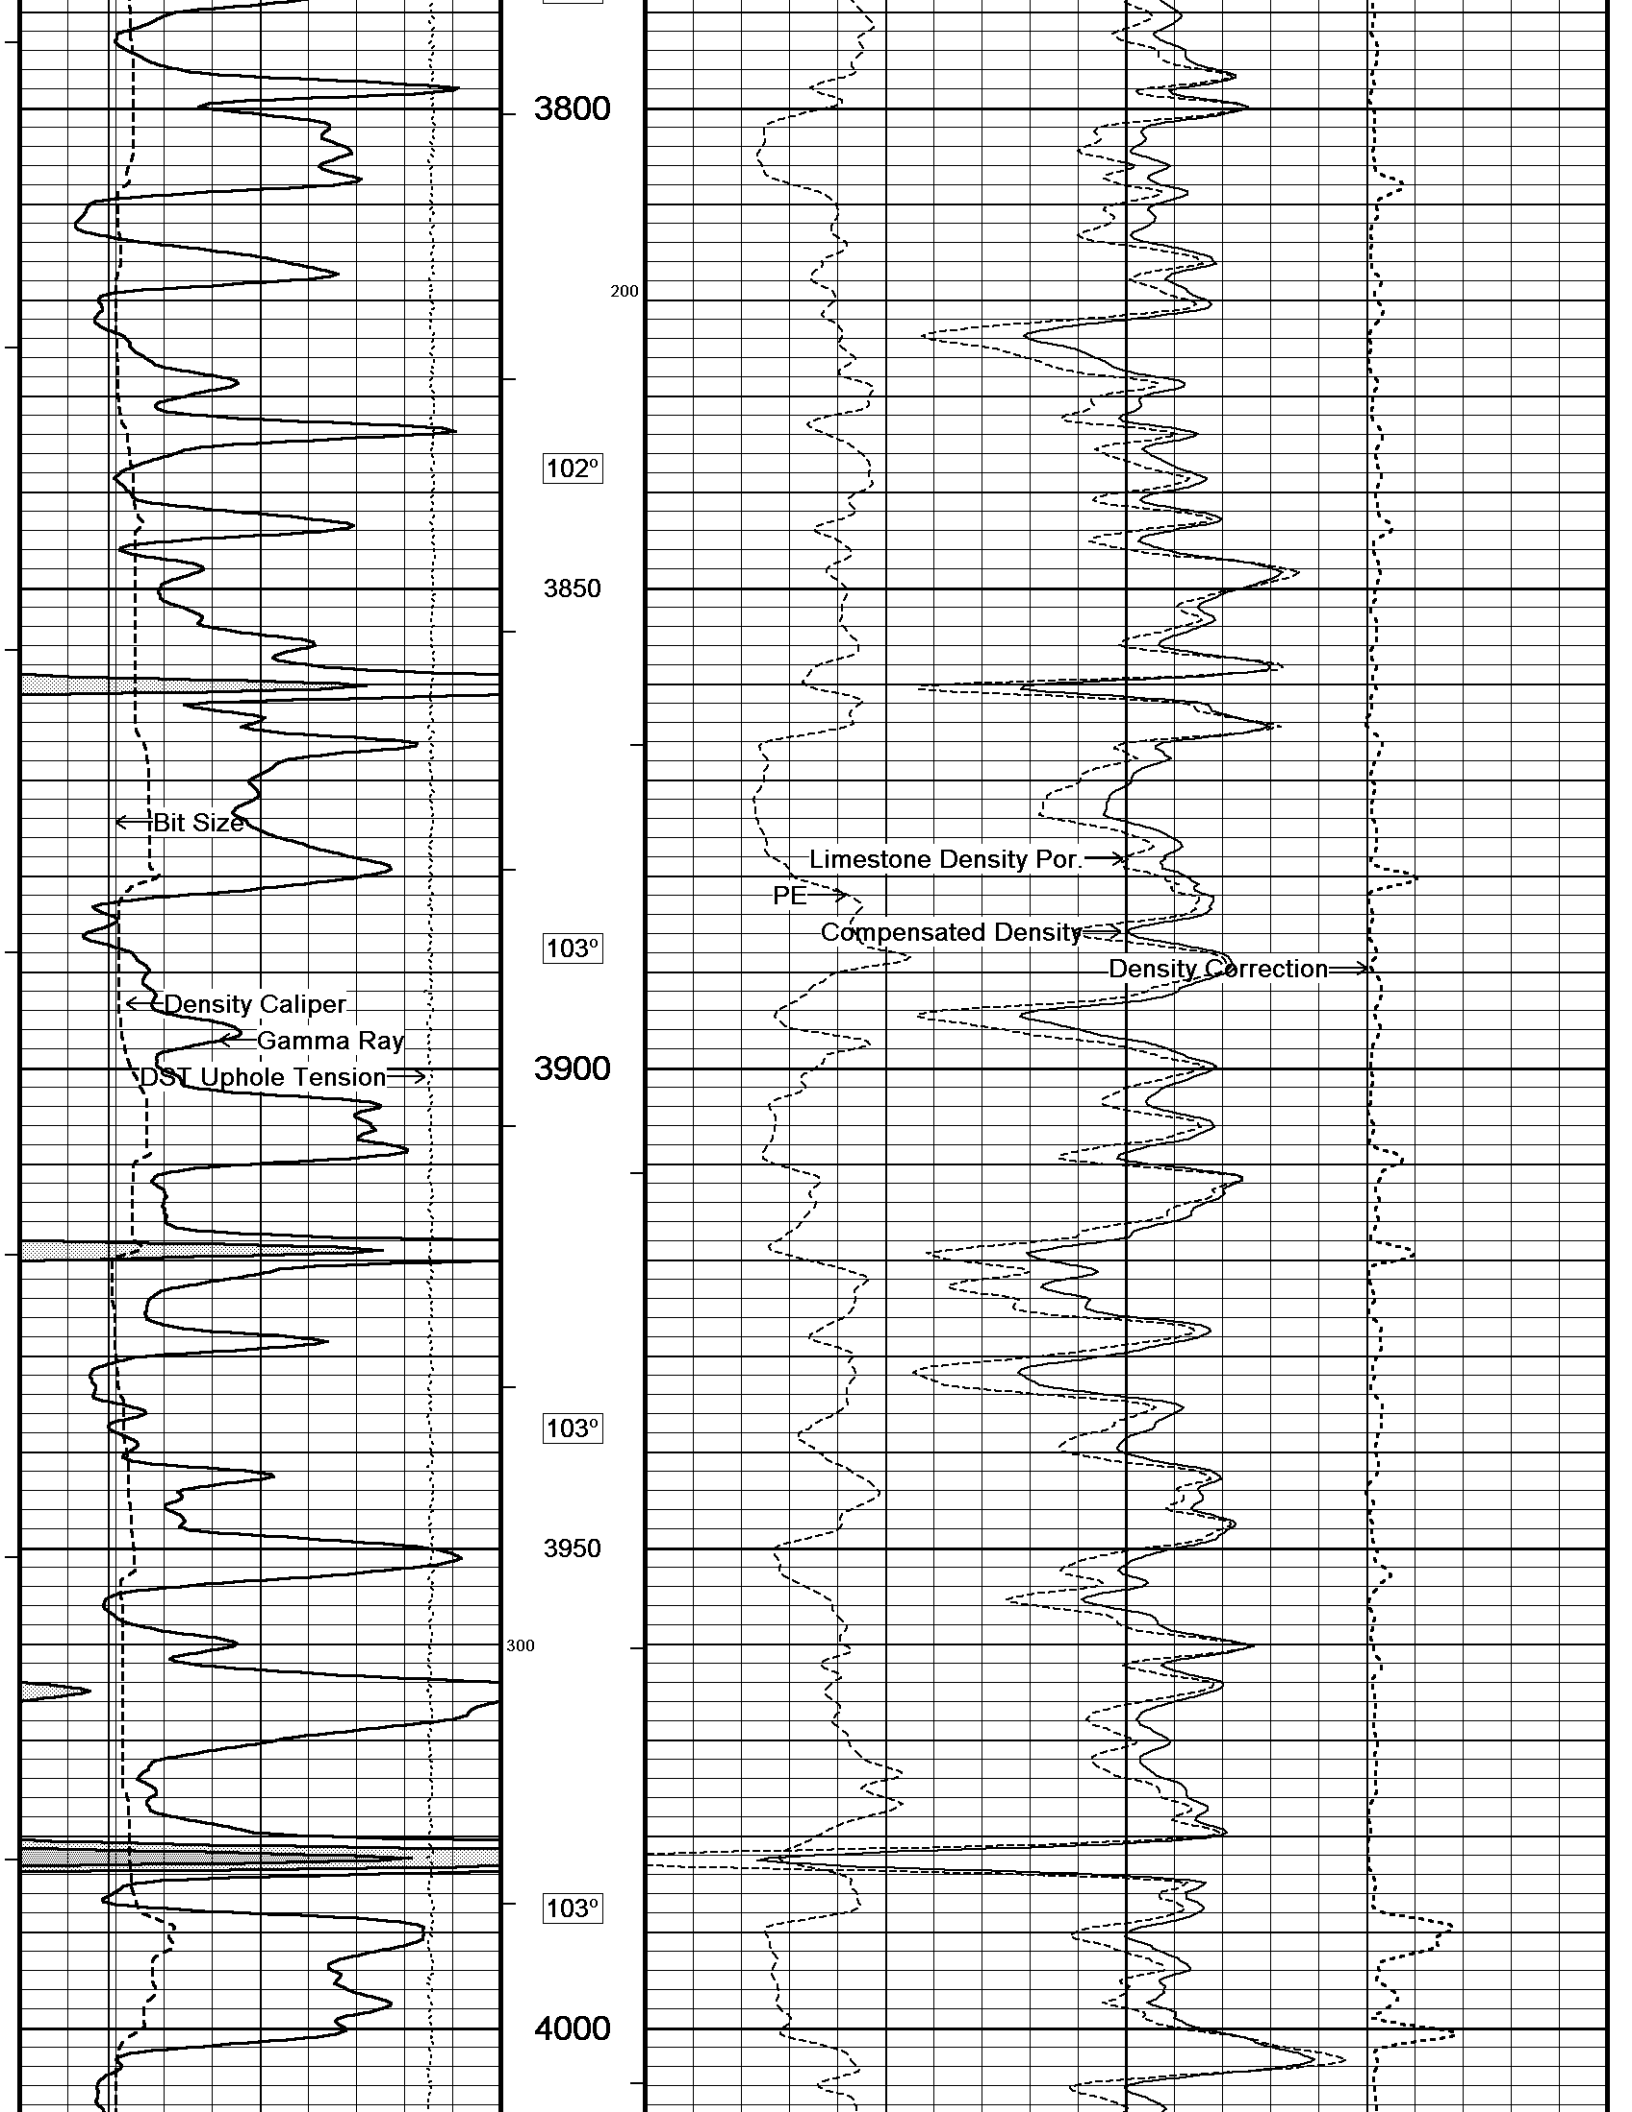

3800

200

102°

3850

← Bit Size

Limestone Density Por. →

PE →

103°

Compensated Density →

Density Correction →

← Density Caliper

← Gamma Ray

← DST Uphole Tension →

3900



103°



3950


300

103°


4000

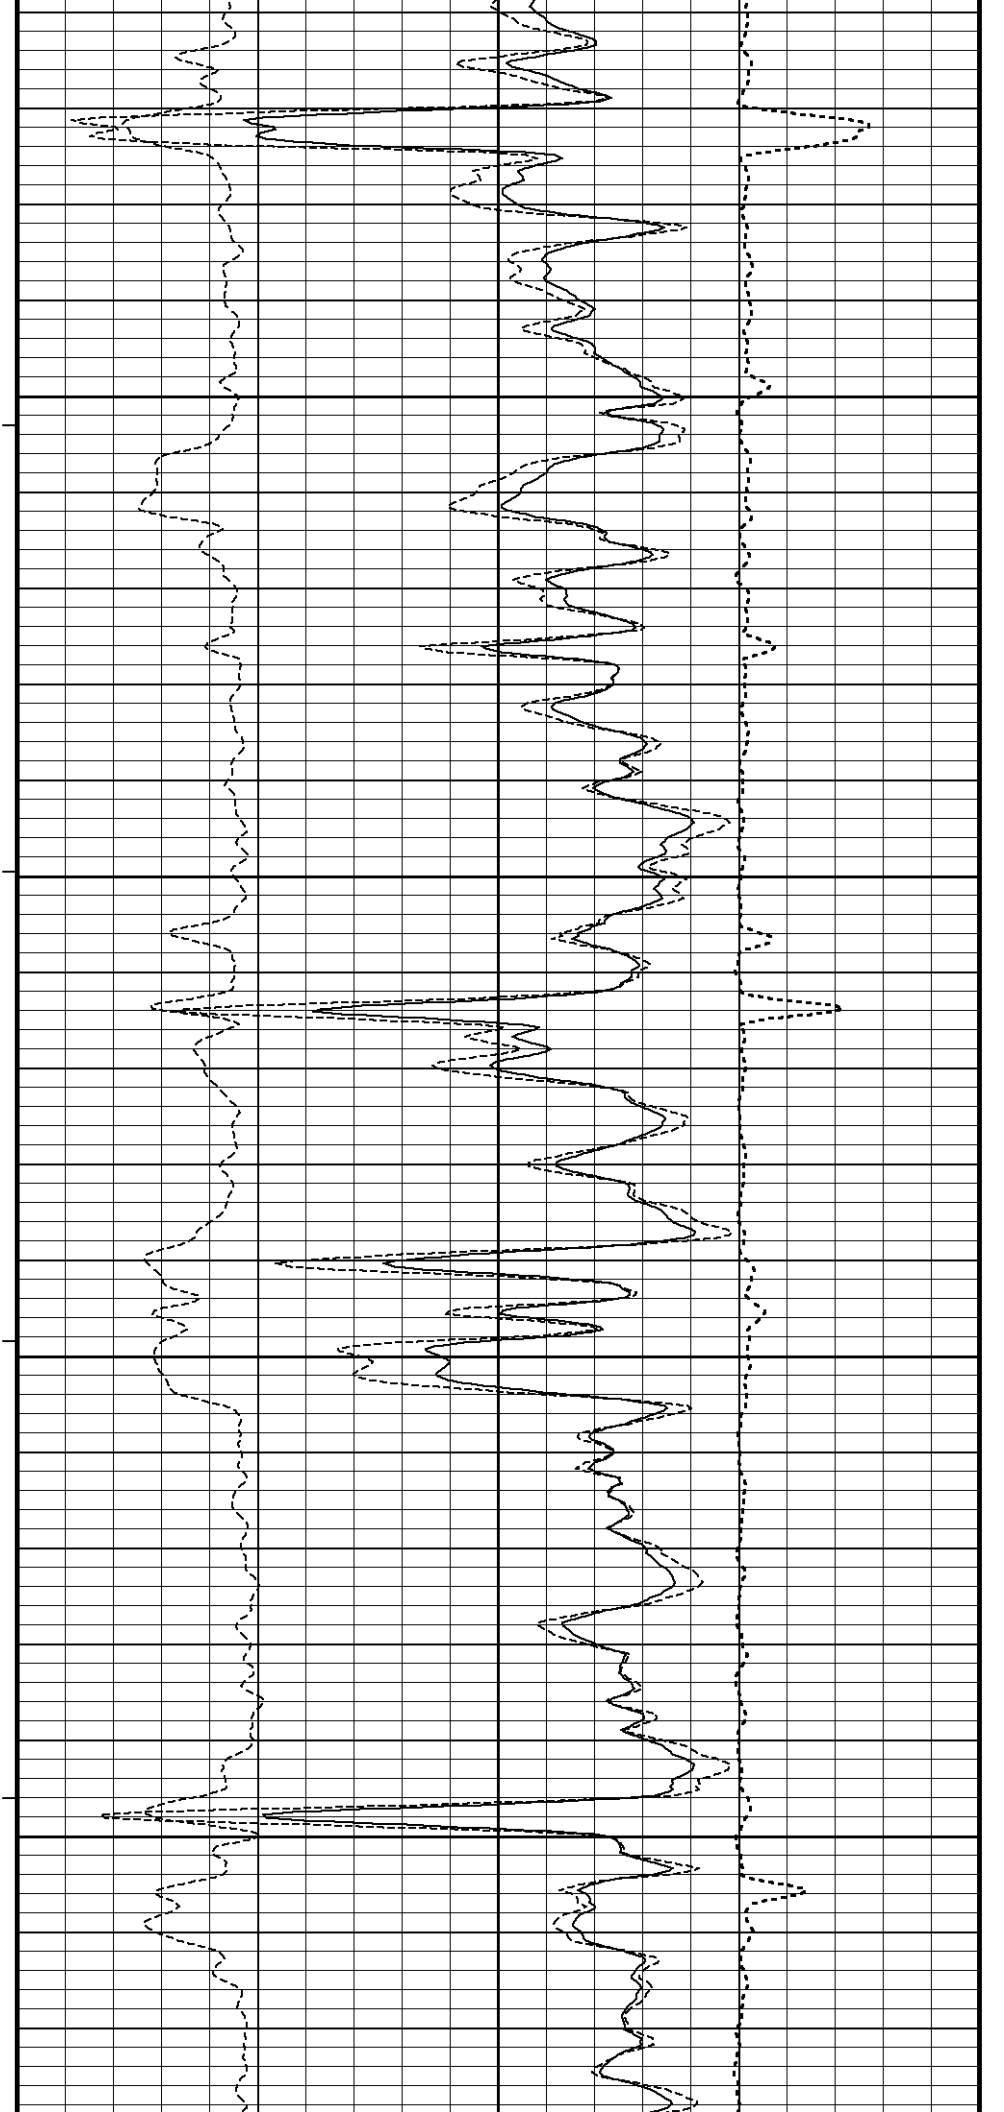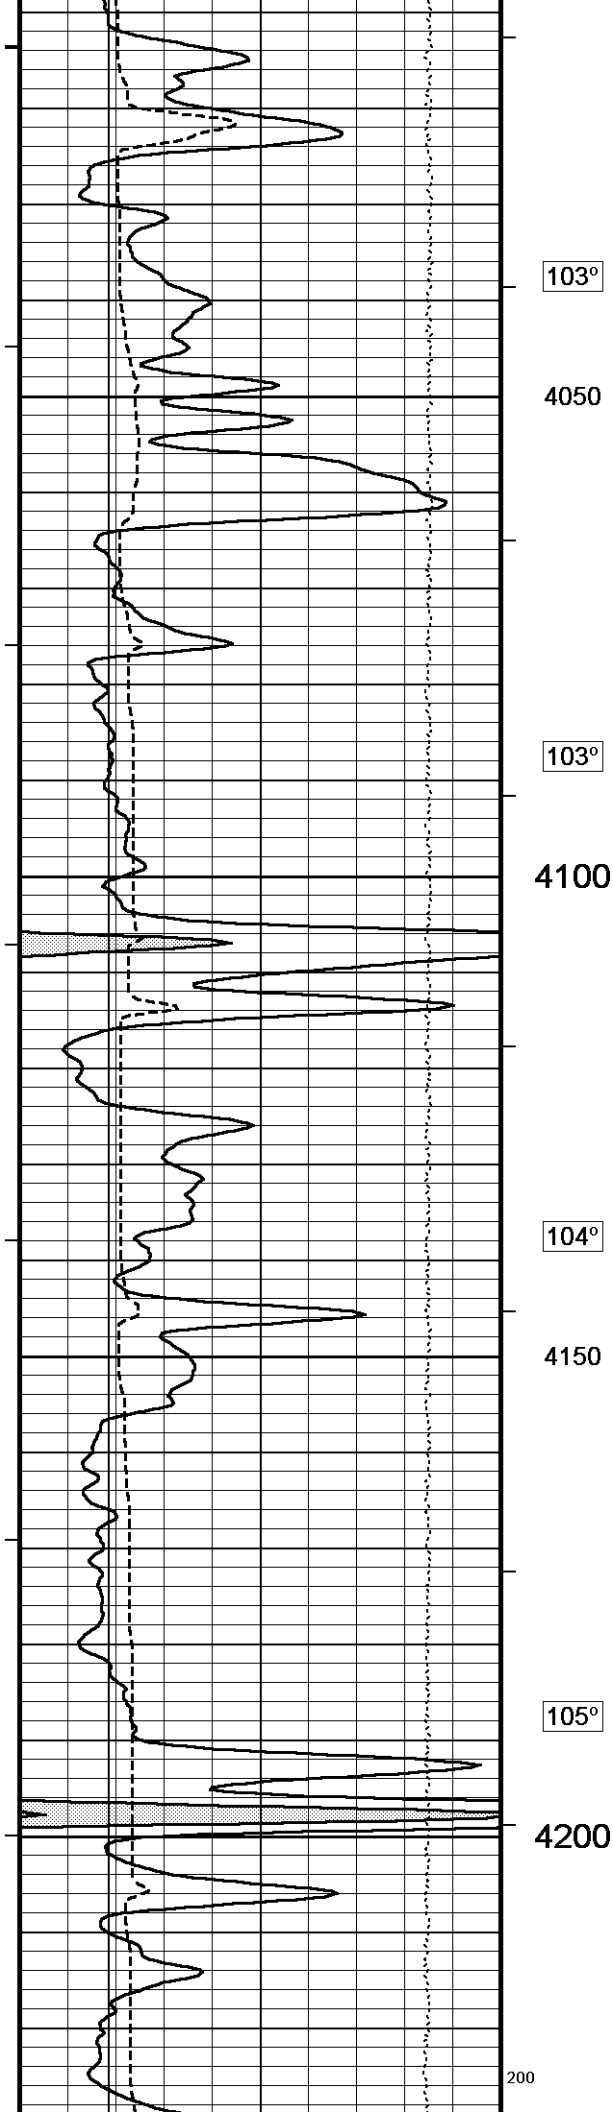

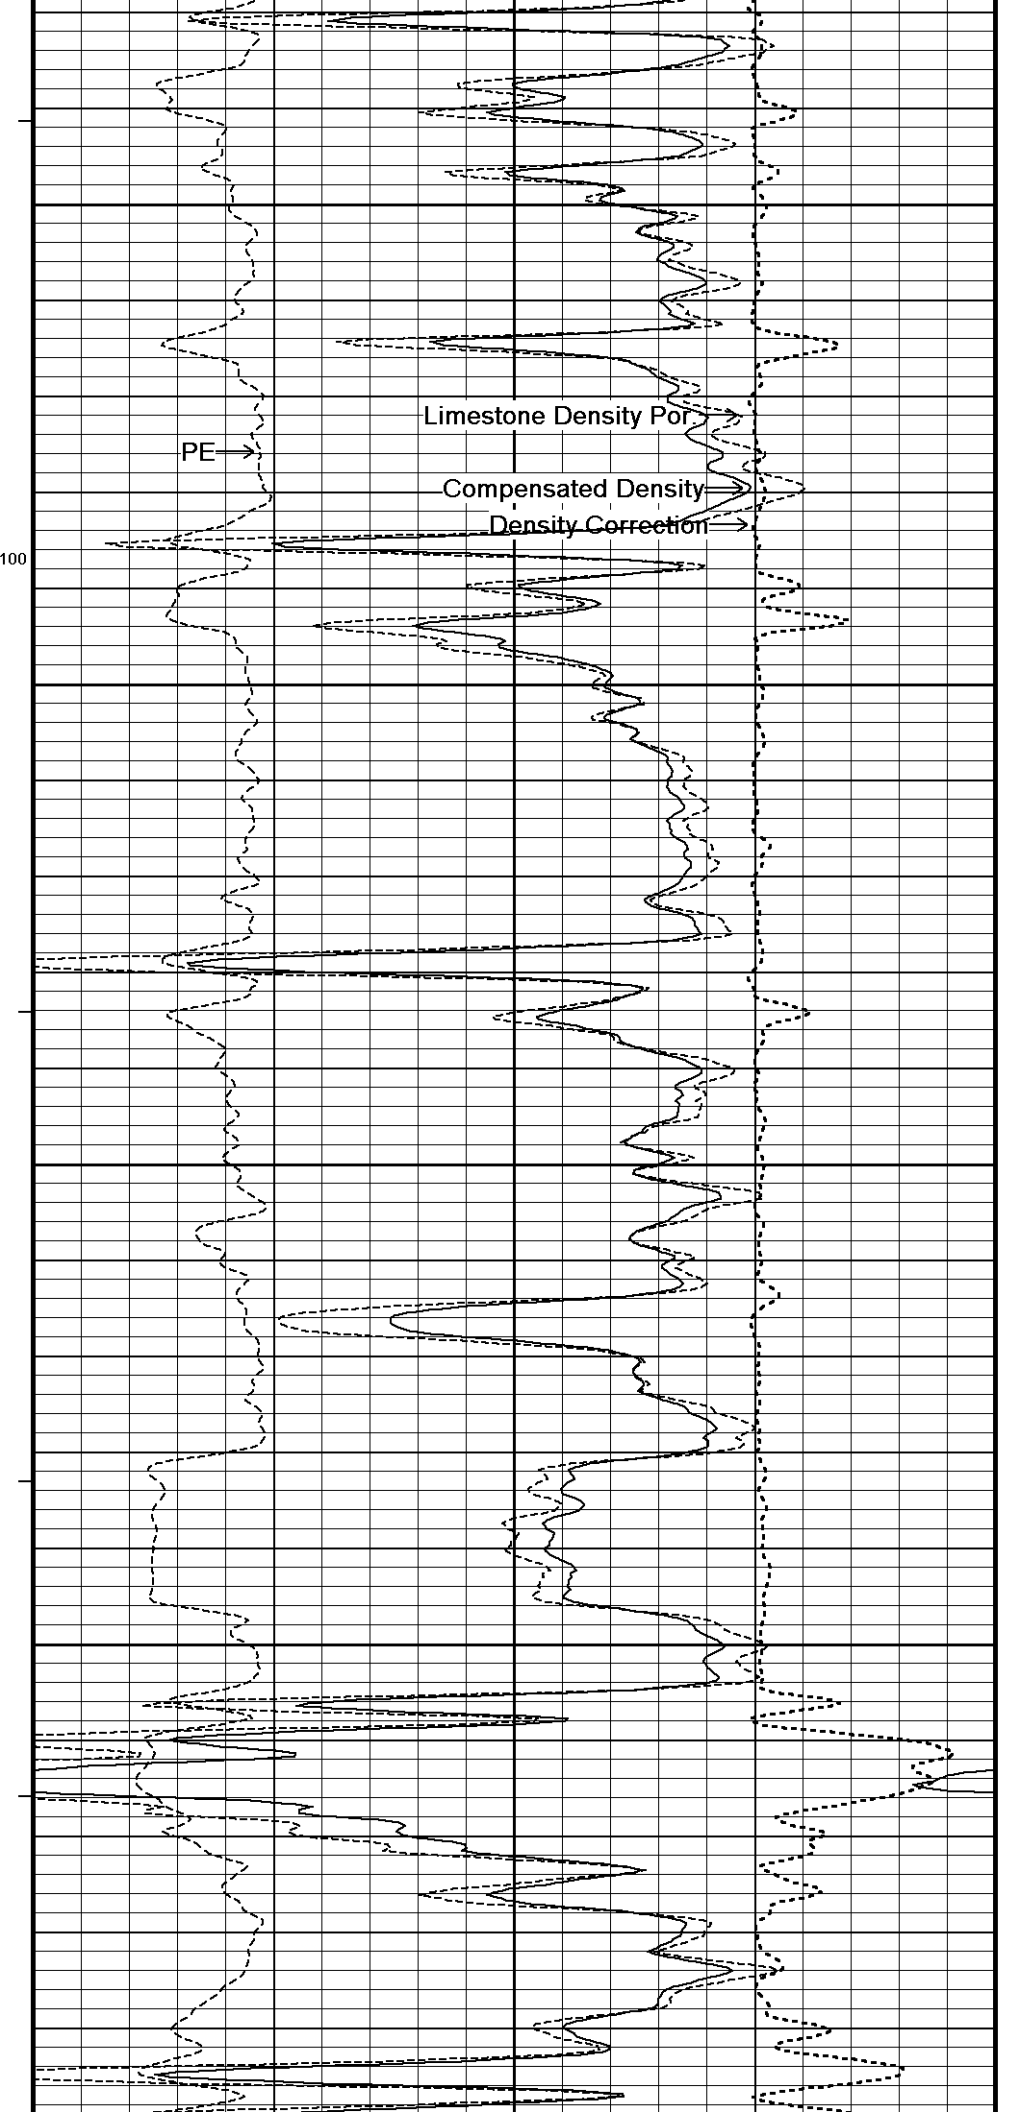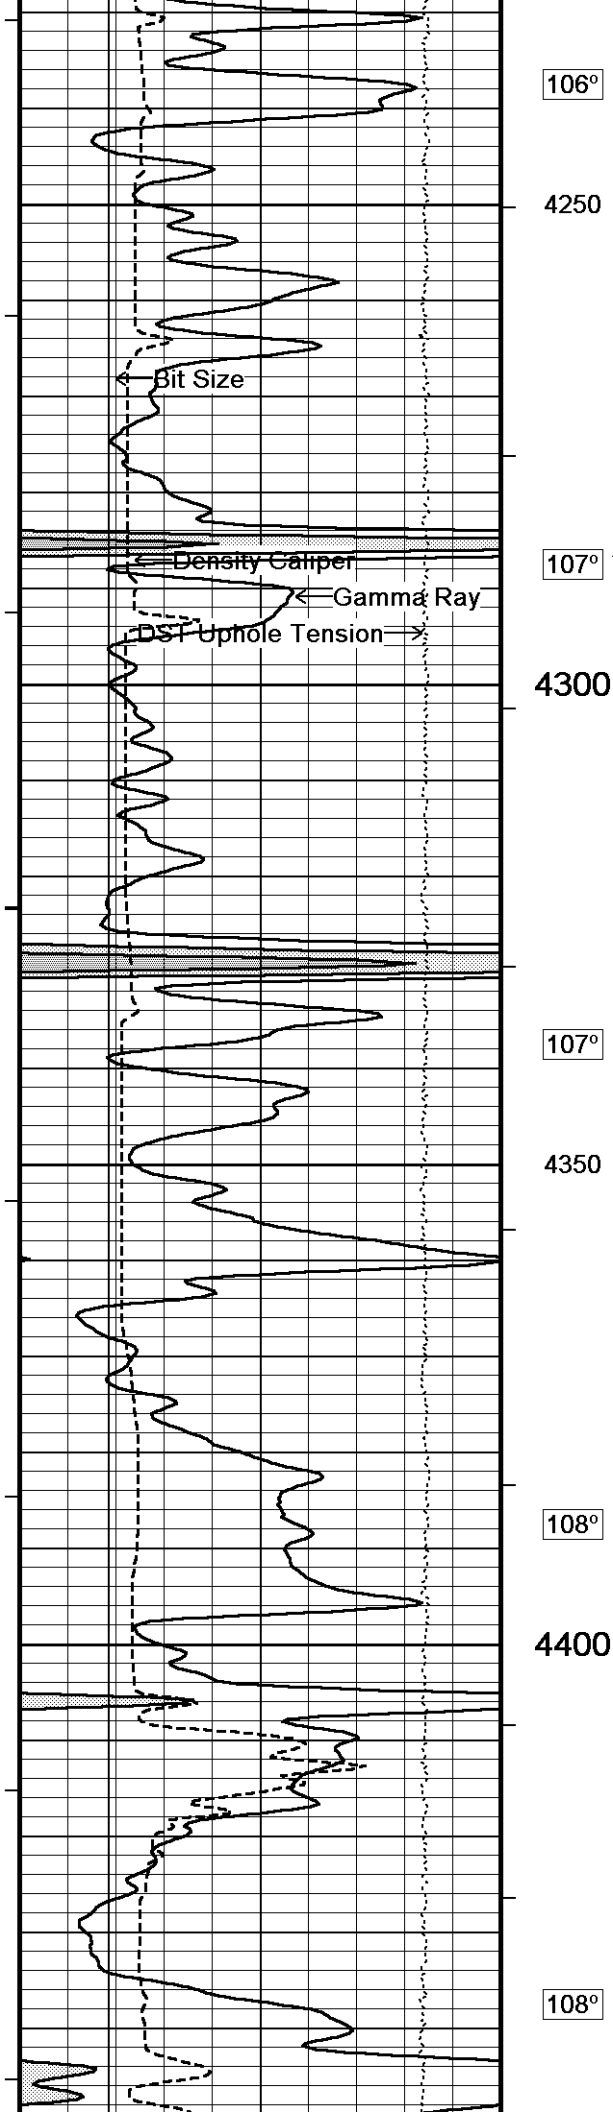


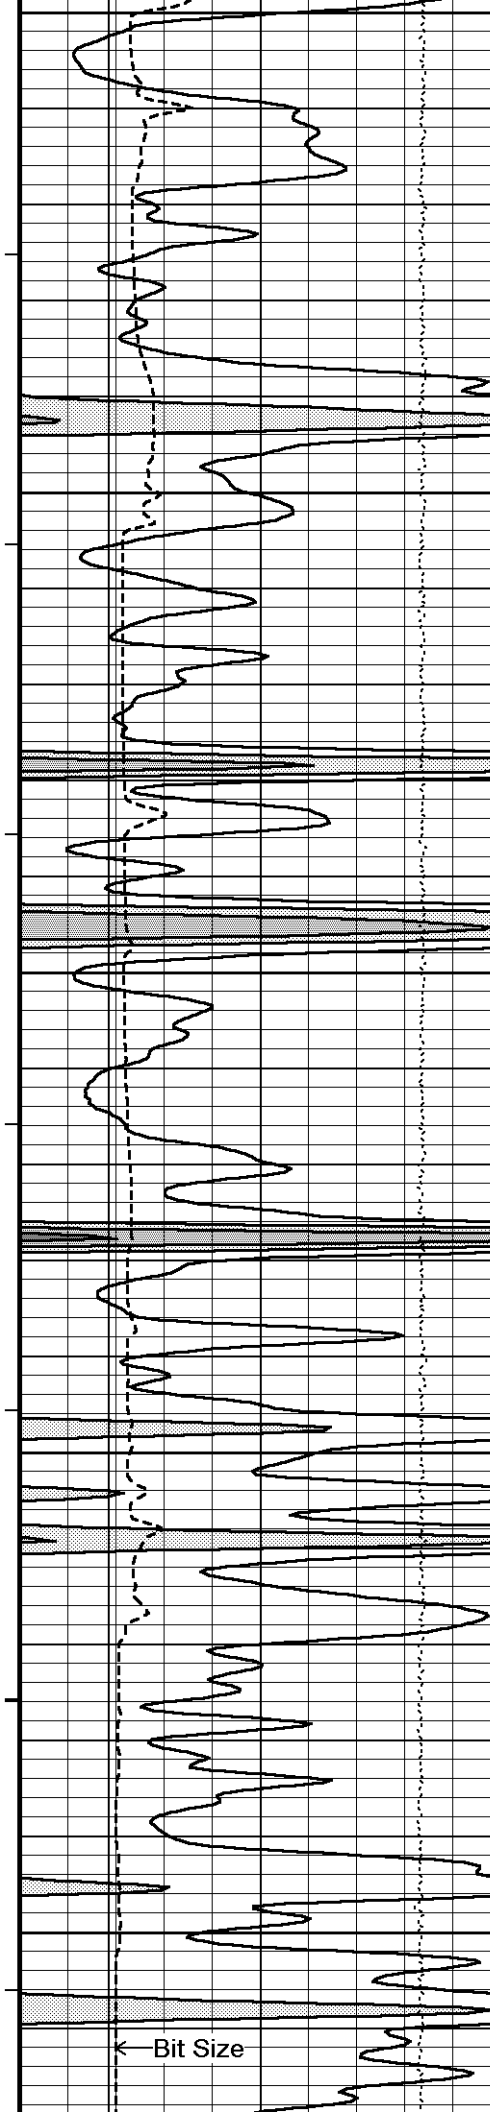

4450  
100  
108°  
4500  
108°  
4550  
108°  
4600  
108°  
4650

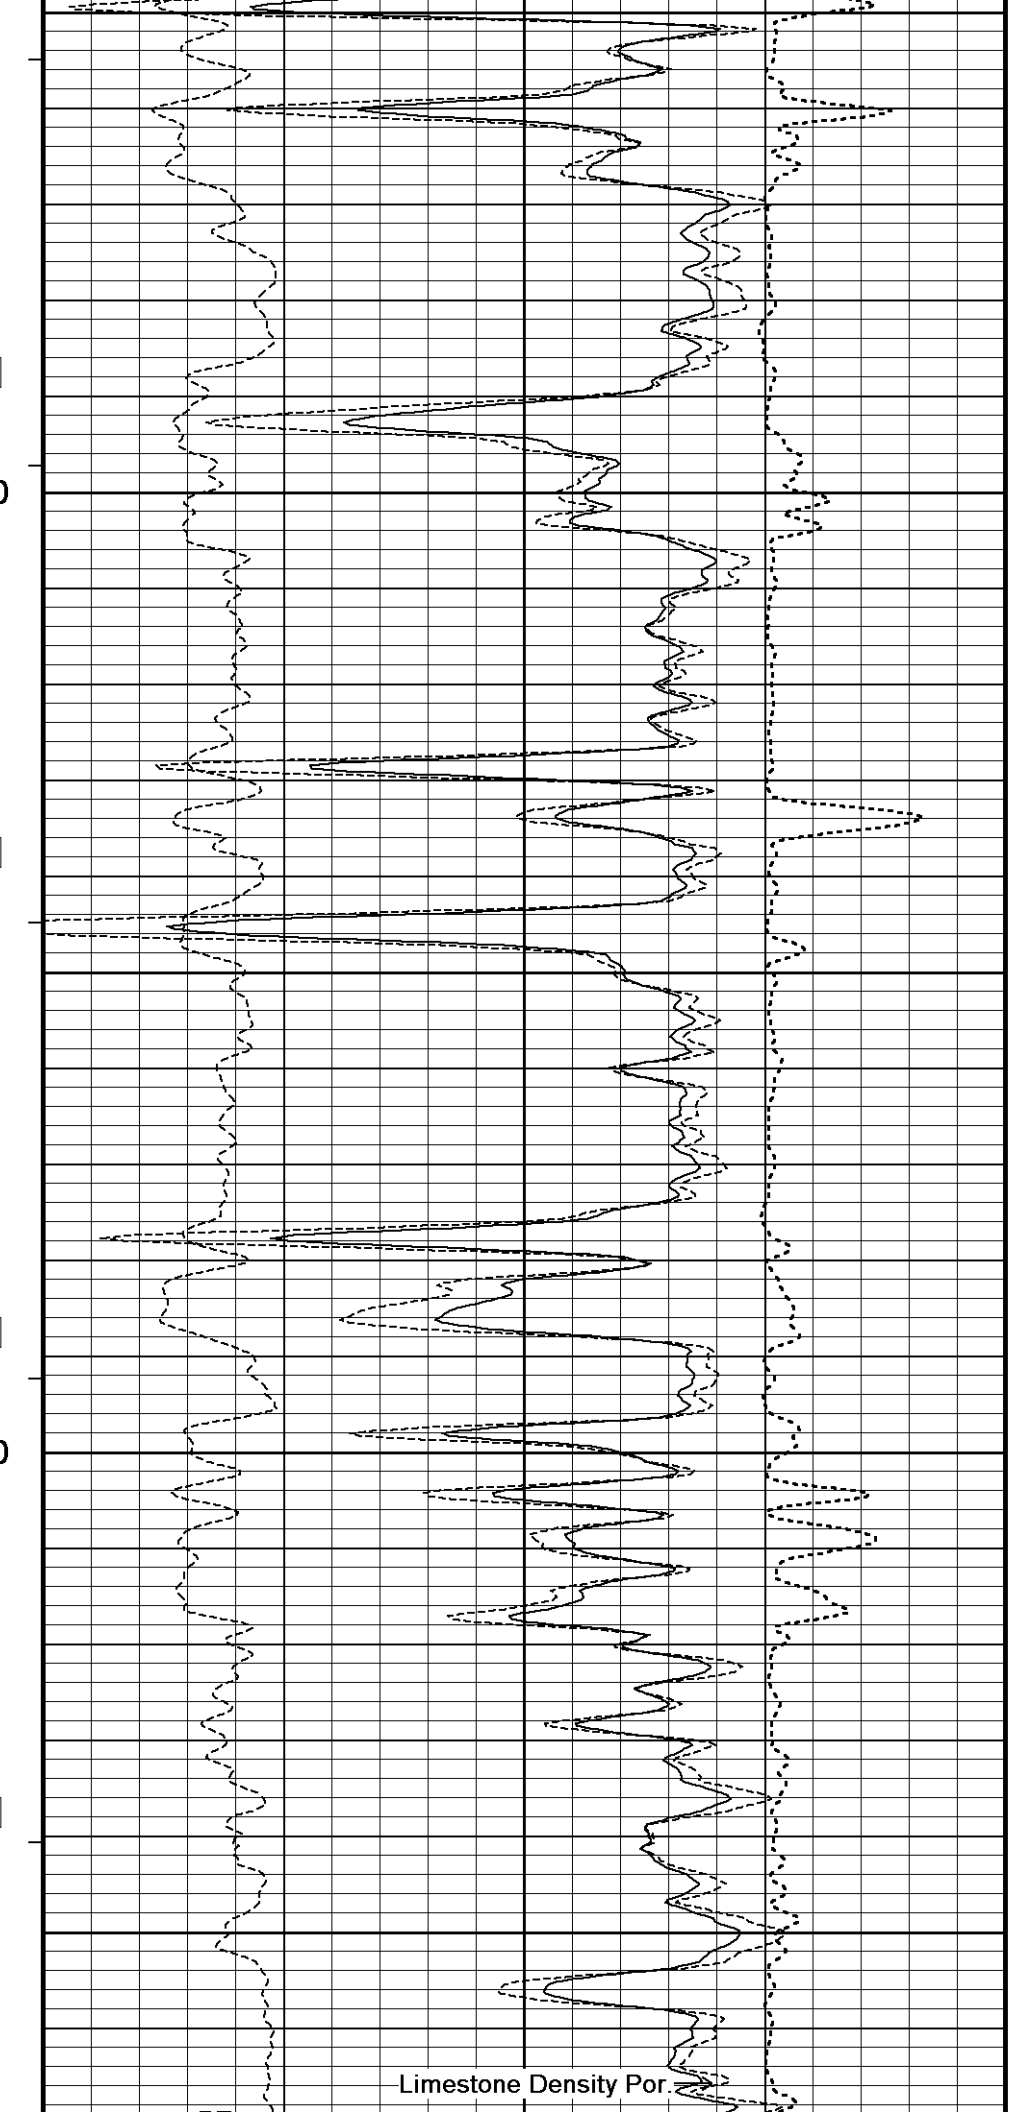


Limestone Density Por. →

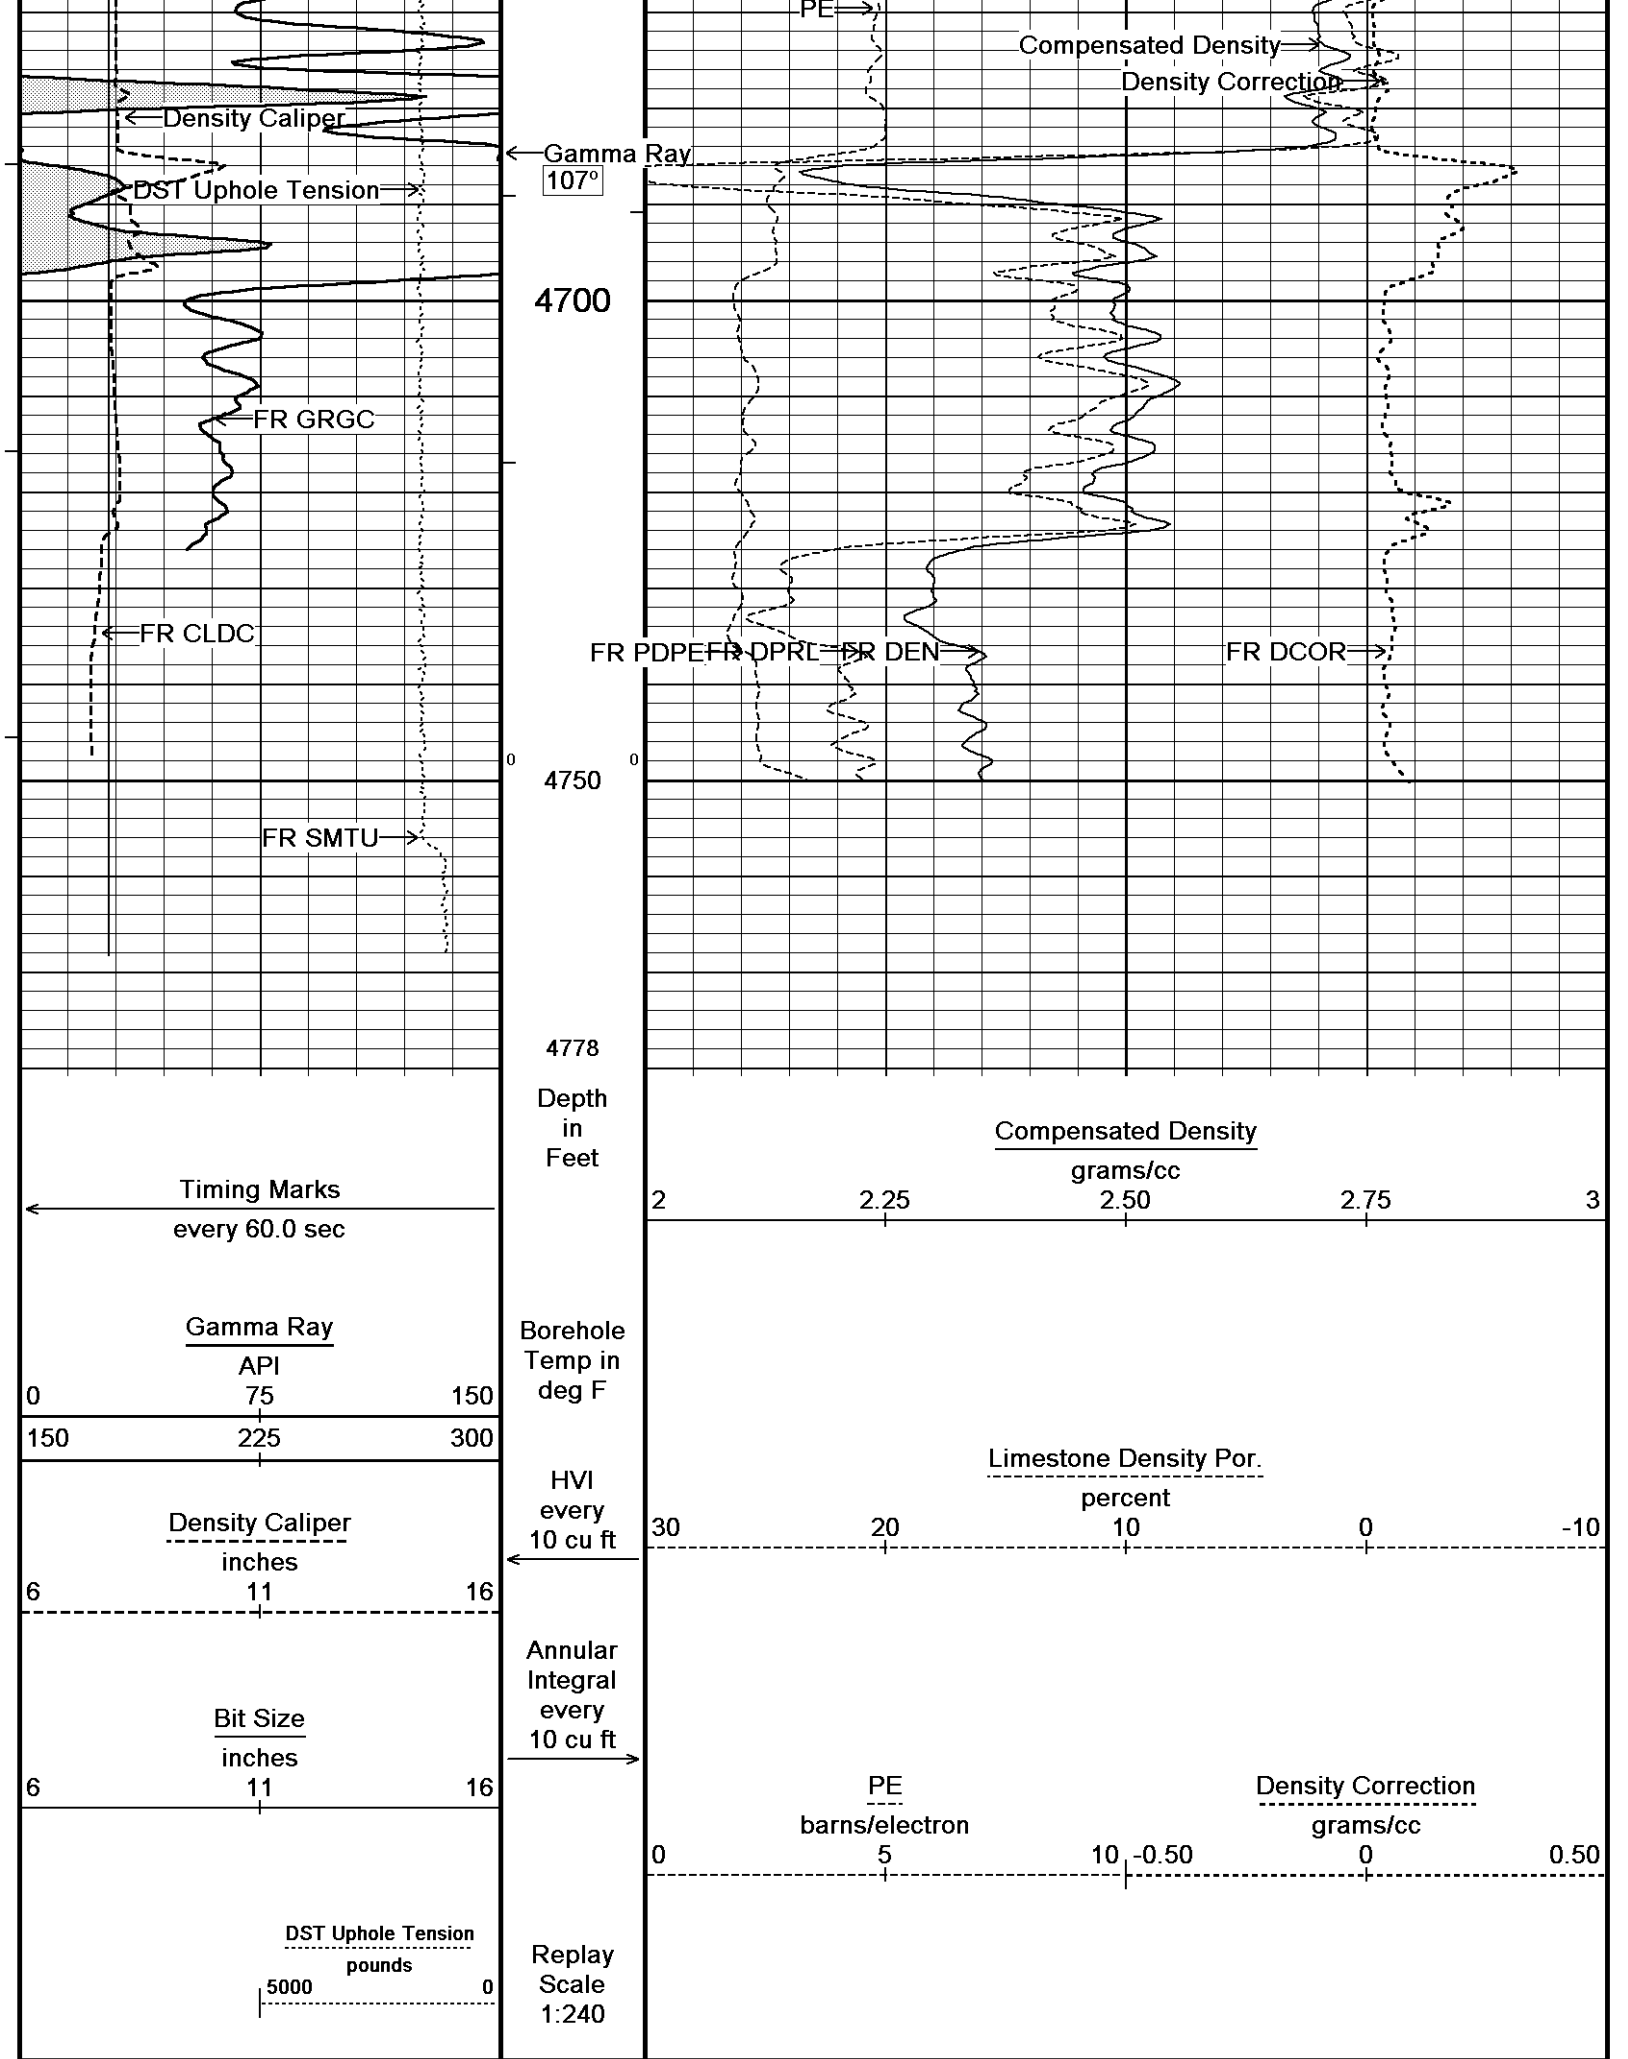


5 INCH MAIN


REPEAT SECTION



Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 08-JAN-2013 12:07  
 Filename: C:\Minimus 13.04.8492\Data\Grand M...Grand Mesa Operating Company DBY 4-16\_001.dta Recorded on 08-JAN-2013 09:18  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

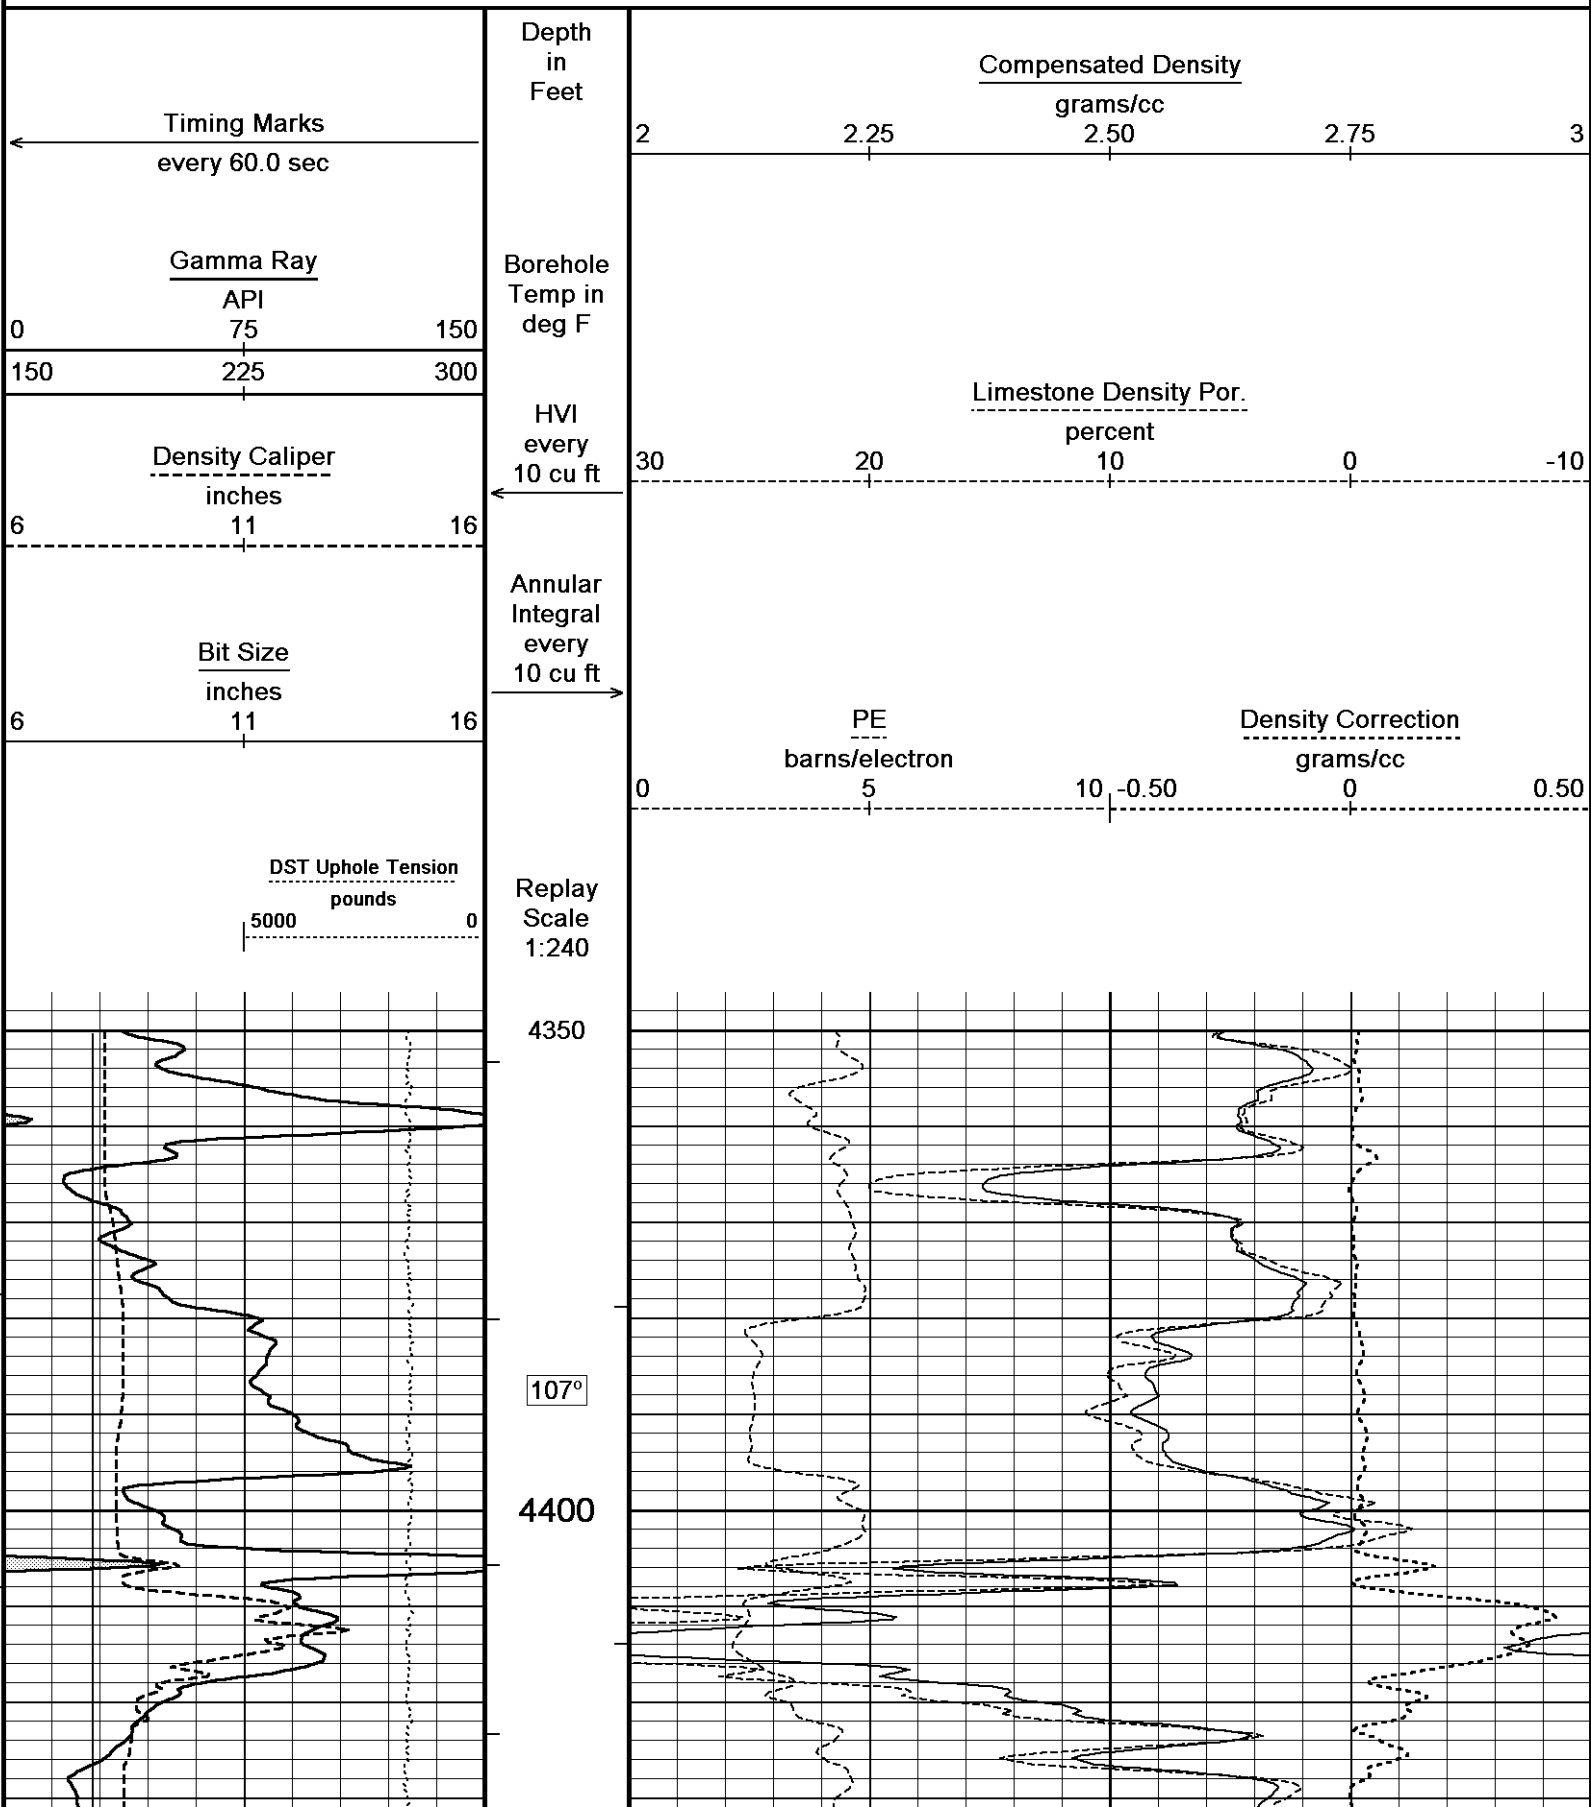

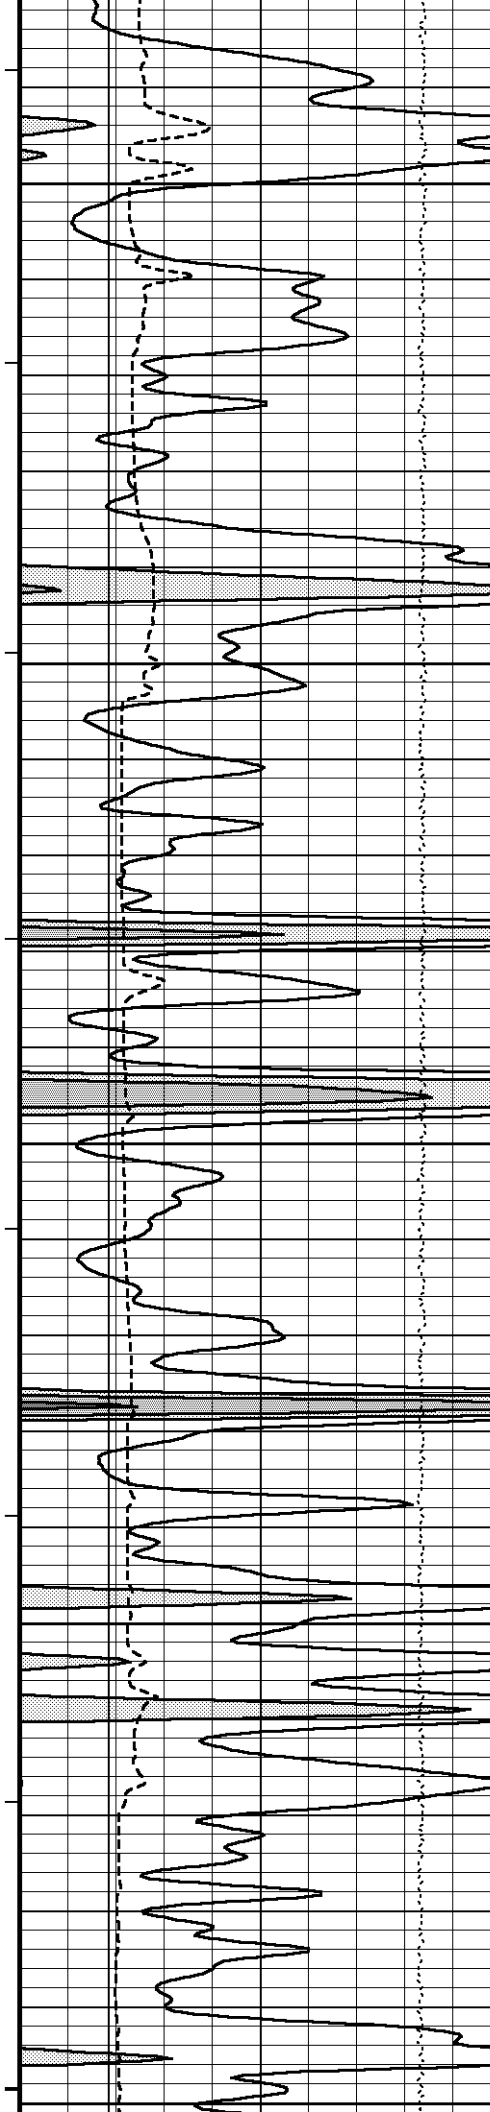

107°  
4450  
100  
107°  
4500  
107°  
4550  
106°  
4600  
106°  
4650

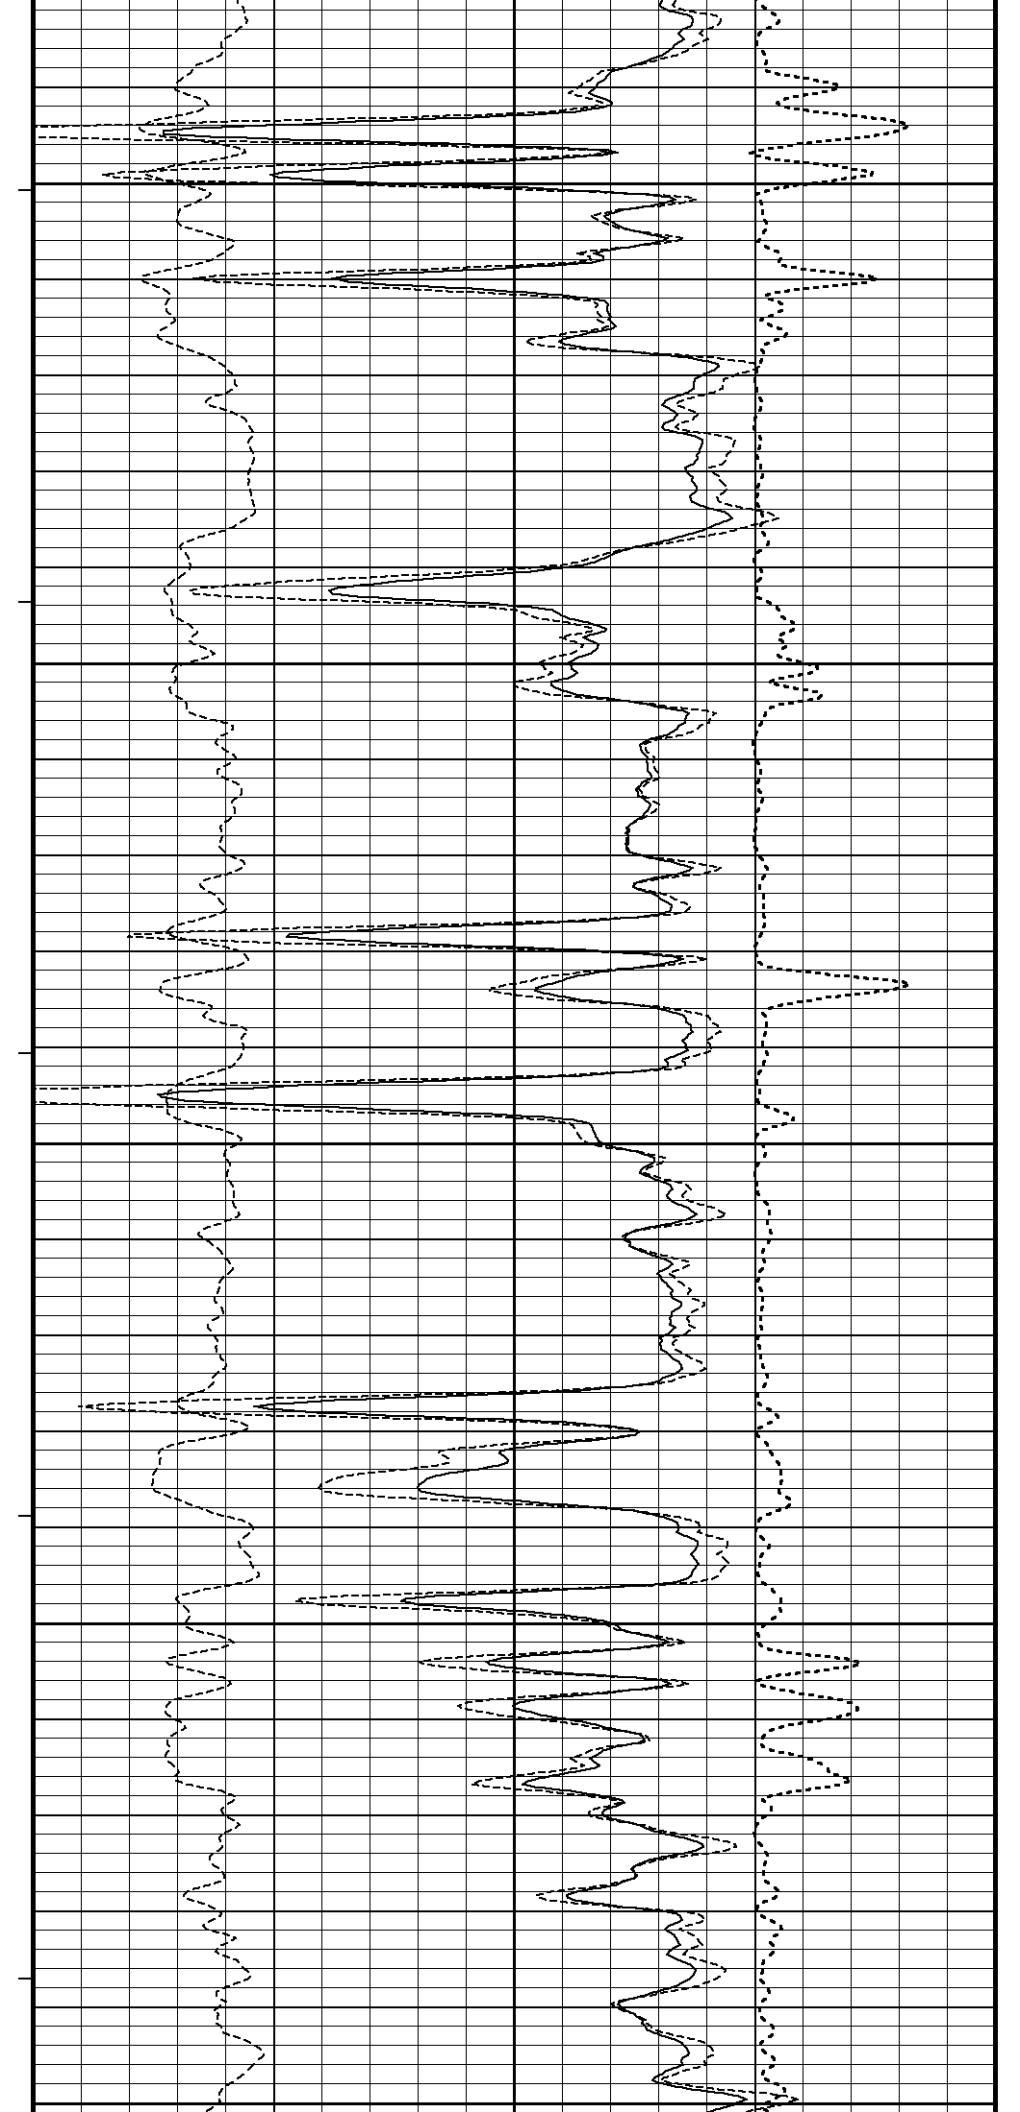

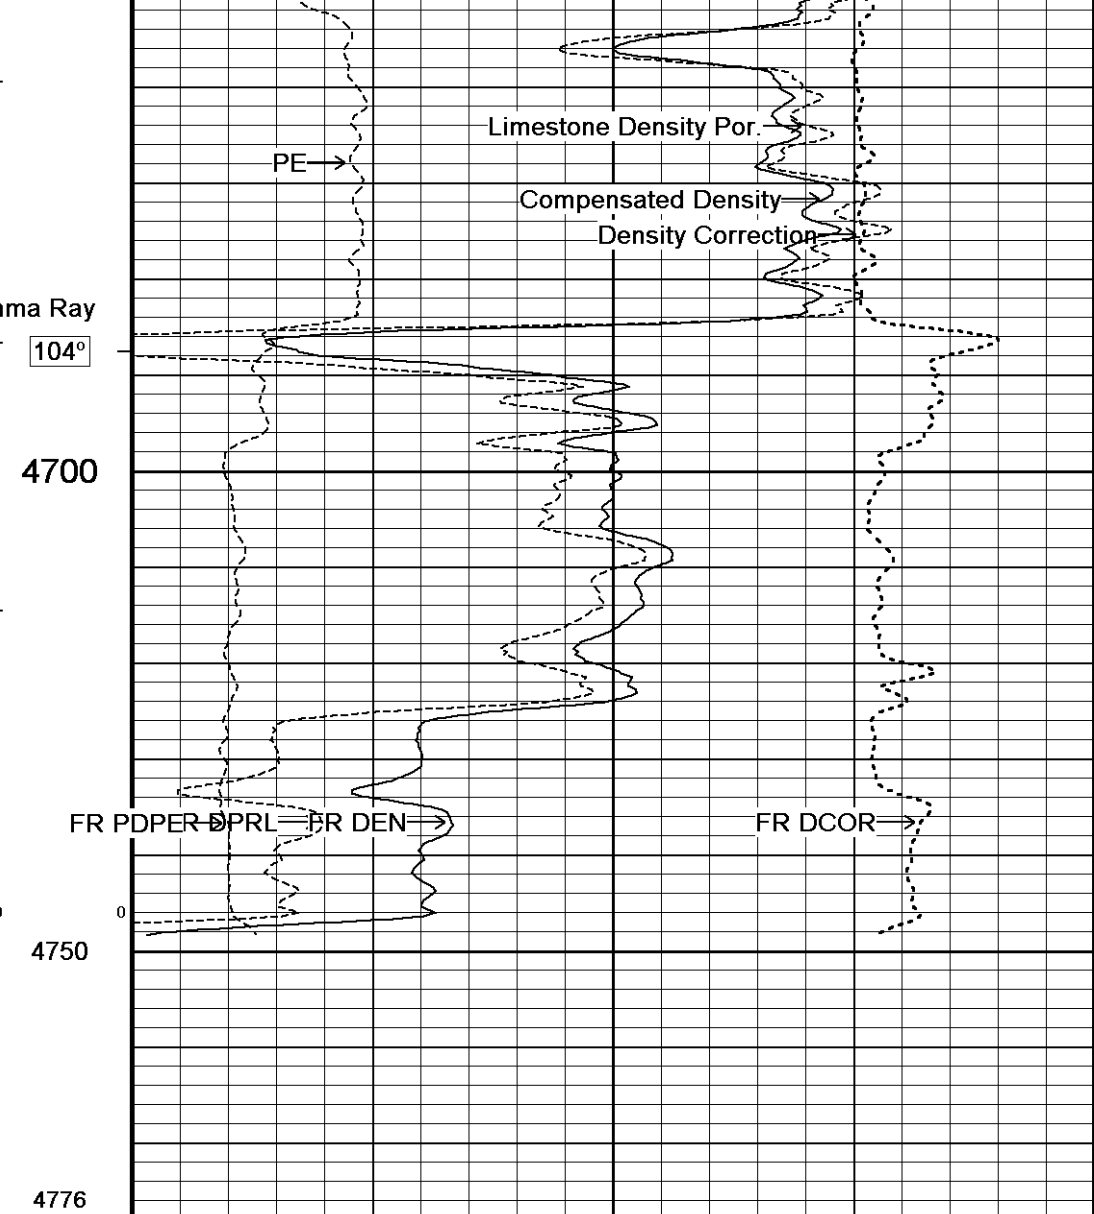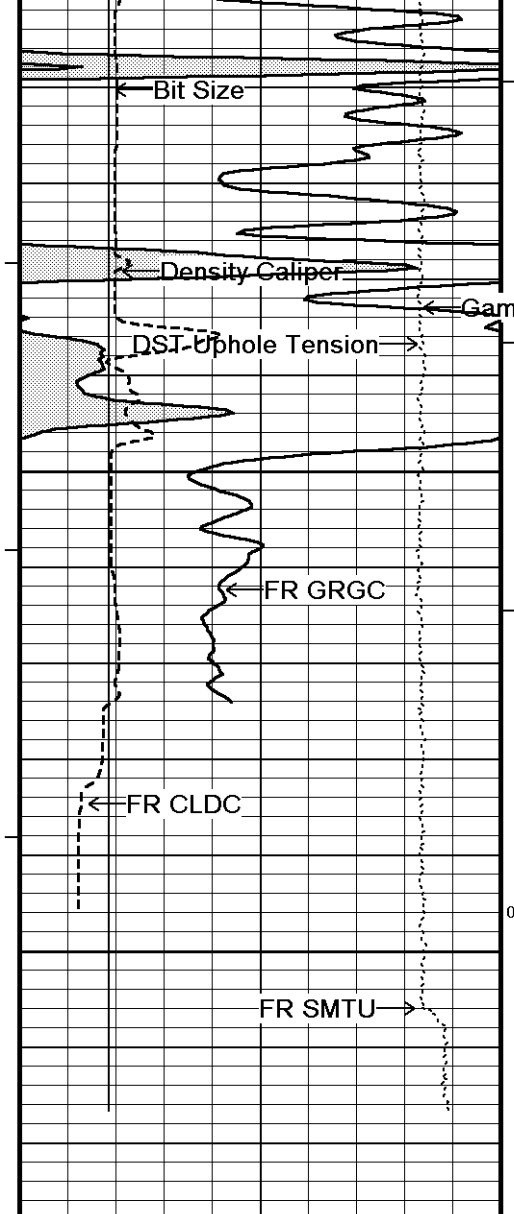





104°

4700

4750

4776

Depth in Feet

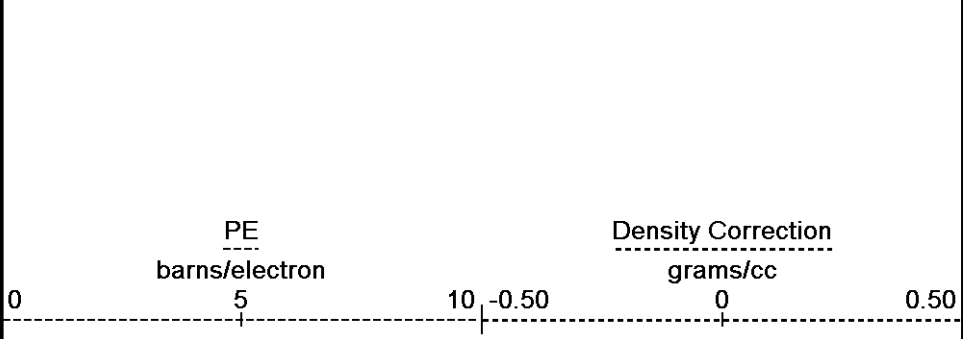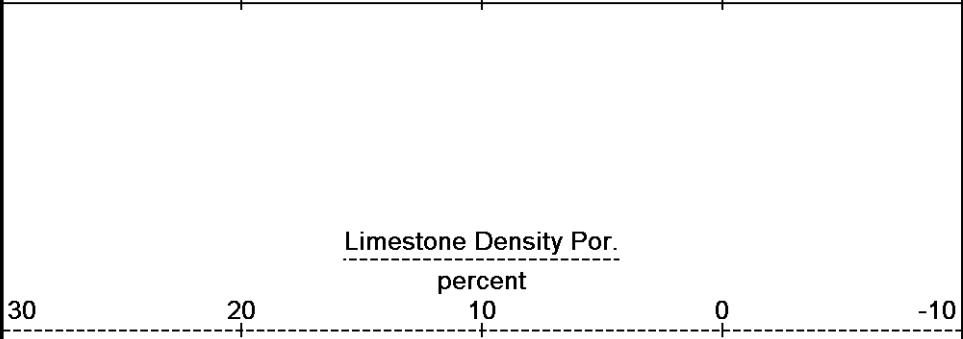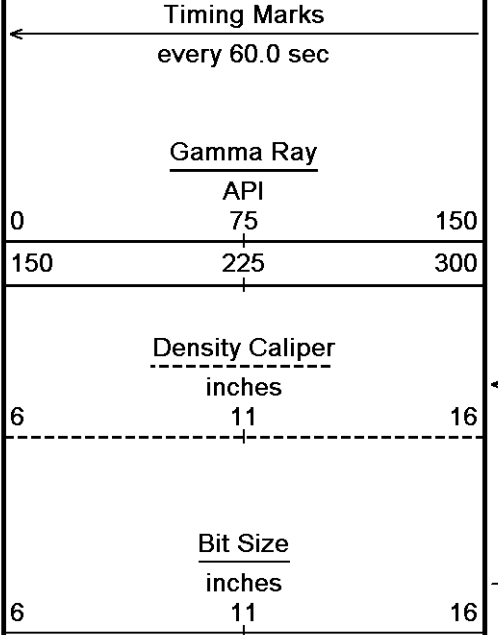

Replay

↑ REPEAT SECTION ↑

**BEFORE SURVEY CALIBRATION**  
 C:\Minimus 13.04.8492\Data\Grand Mesa DBY 4-16\Grand Mesa Operating Company DBY 4-16\_001.dta

General Constants All 000 Last Edited on 08-JAN-2013,08:01

General Parameters		
Mud Resistivity	0.740	ohm-metres
Mud Resistivity Temperature	77.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	
Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	Density Caliper	
Rwa Parameters		
Porosity used	Base Density Porosity	
Resistivity used	Array Ind. Four Res Rt	
RWA Constant A	1.000	
RWA Constant M	2.000	

Down-hole Tension Calibration SMS 0 Field Calibration on 29-DEC-2012 22:07

Reading No	Measured	Calibrated (lbs)
1	15337.85	0.00
2	15893.74	383.60

SP Calibration MCG-C 208 Field Calibration on 27-DEC-2012 10:06

	Measured	Calibrated (mV)
Reference 1	100.9	100.0
Reference 2	-100.6	-100.0

High Resolution Temperature Calibration MCG-C 208 Field Calibration on 05-NOV-2012,14:26

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-C 208 Last Edited on 05-NOV-2012,14:25

Pre-filter Length	11
-------------------	----

Gamma Calibration MCG-C 208 Field Calibration on 07-JAN-2013 15:22

	Measured	Calibrated (API)
Background	66	47
Calibrator (Gross)	1080	772
Calibrator (Net)	1015	725

Gamma Constants MCG-C 208 Last Edited on 08-JAN-2013,08:01

Gamma Calibrator Number	GR38	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

Micro Laterolog Calibration MMR-A 11 Base Calibration on 31-DEC-1999 00:00  
Field Check on 31-DEC-1999 00:00

Base Calibration

	Measured		Calibrated (ohm-m)	
	Ref 1	Ref 2	Ref 1	Ref 2
	0.0	0.0	0.0	0.0
Base Check (ohm-m)			Field Check (ohm-m)	
	0.0		0.0	

Micro Laterolog Constants MMR-A 11

Last Edited on 12-NOV-2012,01:59

Pad Type	6 in Solid Nylon B23059		
Micro Laterolog K Factor	0.0128		
Standoff Offset	0.0000	inches	

Mudcake Thickness Correction Constants

Mud Cake Source	Constant Value		
Mud Cake Thickness	0.4000	inches	
Mud Cake Thickness Caliper	N/A		
Mud Cake Resistivity	0.1500	ohm-m	
Mud Cake Resistivity Temp.	68.00	Deg F	
Mud Cake Resistivity Source	Constant Value		
Temp. Source Rmc Correc.	N/A		

Caliper Calibration MMR-A 11

Base Calibration on 12-DEC-2012 09:20  
Field Calibration on 07-JAN-2013 15:36

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	13821	5.98
2	17082	7.97
3	20336	9.86
4	24304	11.92
5	0	0.00
6	N/A	N/A

Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	5.95	5.98

Micro Normal and Micro Inverse Calibration MMR-A 11

Base Calibration on 12-DEC-2012 09:26  
Field Check on 07-JAN-2013 15:26

Base Calibration				
Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.3	59.8	5.0	25.0
Micro Inverse	15.5	77.5	5.0	25.0
Channel		Base Check (ohm-m)	Field Check (ohm-m)	
Micro Normal		76.5	76.5	
Micro Inverse		58.7	58.7	

Micro Normal and Micro Inverse Constants MMR-A 11

Last Edited on 05-NOV-2012,13:54

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	0.0000	inches	

Neutron Calibration MDN-A.B 65

Base Calibration on 13-DEC-2012 16:03  
Field Check on 07-JAN-2013 15:25

Base Calibration				
	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	2945	91	3714	110
Ratio	32.377		33.764	
Field Calibrator at Base			Calibrated (cps)	
			1743	2519
Ratio	0.692			
Field Check			Calibrated (cps)	
			1729	2508
Ratio	0.662			

Neutron Source Id	PN-521		
Neutron Jig Number	5824NE		
Epithermal Neutron	No		
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	Constant Value		
Formation Pressure	0.00	kpsi	
Temperature Source	Constant Value		
Temperature	68.00	degrees F	
Mud Salinity	0.00	kppm	
Salinity Correction	Not Applied		
Formation Fluid Salinity Source	Constant Value		
Formation Fluid Salinity	0.00	kppm	
Barite Mud Correction	Not Applied		

## FE Calibration MFE-B.J 352

Base Calibration on 12-DEC-2012 09:38

Field Check on 07-JAN-2013 15:29

## Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	963.4	126.8
Base Check		281.6
Field Check		281.6

## FE Constants MFE-B.J 352

Last Edited on 08-JAN-2013,08:01

Running Mode	No Sleeve		
MFE K Factor	0.1268		
Caliper Source for FE correction	Density Caliper		
Caliper Value for FE correction	N/A	inches	
Rm Source for FE correction	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Stand-off	0.5	inches	

## Induction Calibration MAI-A.A 45

Base Calibration on 26-JUL-2012,09:22

Field Check on 07-JAN-2013 15:28

## Base Calibration

Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	14.4	472.6	9.3	966.2
2	5.7	374.0	7.6	821.4
3	3.4	261.2	5.2	566.0
4	2.5	133.9	2.6	279.2
Array Temperature	78.4		Deg F	

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			18.9	3851.3
2			31.9	3629.2
3			28.8	3049.3
4			18.4	2079.2
Deep			16.2	1911.2
Medium			42.8	4060.4
Shallow			50.0	5482.8

Array Temperature	64.5	Deg F
-------------------	------	-------

## Induction Constants MAI-A.A 45

Last Edited on 08-JAN-2013,08:02

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		

Stand-off Type		Fins	
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source		Temperature Corr	
Temp. for Rm Corr.		MCG External Temperature	
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	

Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	

Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-A.A 45

Field Calibration on 13-DEC-2012,10:54

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MAI-A.A 45

Last Edited on 13-DEC-2012,10:53

Pre-filter Length	11
-------------------	----

Caliper Calibration MPD-B 31

Base Calibration on 13-DEC-2012 14:11  
Field Calibration on 07-JAN-2013 15:30

Base Calibration			
Reading No	Measured	Calibrator Size (in)	
1	15472	3.99	
2	24160	5.98	
3	32703	7.97	
4	41008	9.86	
5	50231	11.92	
6	N/A	N/A	

Field Calibration			
	Measured Caliper (in)	Actual Caliper (in)	
	5.95	5.98	

Photo Density Calibration MPD-B 31

Base Calibration on 13-DEC-2012 14:32  
Field Check on 07-JAN-2013 15:35

Density Calibration				
Base Calibration				
		Measured	Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	46489	23675	59556	30836
Reference 2	18873	1941	24941	2541

Field Check at Base			
	683.9	844.6	

Field Check			
	682.6	841.2	

PE Calibration

Base Calibration

	WS	Measured WH	Ratio	Calibrated Ratio
Background	126	608		
Reference 1	18821	46368	0.409	0.371
Reference 2	5566	18789	0.299	0.272

Field Check at Base

125.8      608.0

Field Check

125.7      605.8

Density Constants MPD-B 31

Last Edited on 08-JAN-2013,08:01

Density Source Id	254	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	

Matrix Density (gm/cc)	Depth (ft)
2.71	
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

DOWNHOLE EQUIPMENT

C:\Minimus 13.04.8492\Data\Grand Mesa DBY 4-16\Grand Mesa Operating Company DBY 4-16\_001.dta


Compact Comms Gamma  
MCG-C 208 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-Resistivity  
MMR-A 11 LG: 8.59 ft WT: 81.6 lb OD: 4.88 in

Compact Neutron  
MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper  
MPD-B 31 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focussed Electric

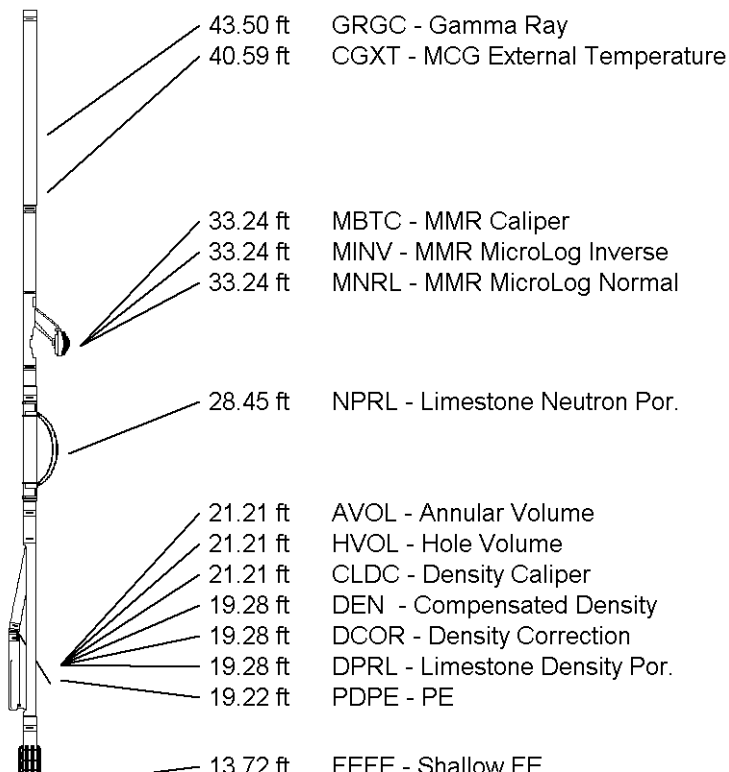

MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Induction

MAI-A.A 45 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 48.78 ft Weight: 383.6 lb



- 3.34 ft R400 - Array Ind. One Res 40
  - 3.34 ft RTAO - Array Ind. One Res Rt
  - 3.34 ft R600 - Array Ind. One Res 60
  - 0.23 ft SPCG - Spontaneous Potential
  - Tool Zero (0.13ft from bottom)
  - 0.13 ft SMTU - DST Uphole Tension
- All measurements relative to tool zero.

COMPANY GRAND MESA OPERATING COMPANY  
 WELL DBY #4-16  
 FIELD WILDCAT  
 PROVINCE/COUNTY SCOTT  
 COUNTRY/STATE U.S.A. / KANSAS

Elevation Kelly Bushing	3076.00	feet	First Reading	4736.00	feet
Elevation Drill Floor	3075.00	feet	Depth Driller	4756.00	feet
Elevation Ground Level	3071.00	feet	Depth Logger	4756.00	feet



**Weatherford**<sup>®</sup>

COMPACT PHOTO DENSITY  
 COMPENSATED NEUTRON  
 MICRORESISTIVITY LOG