
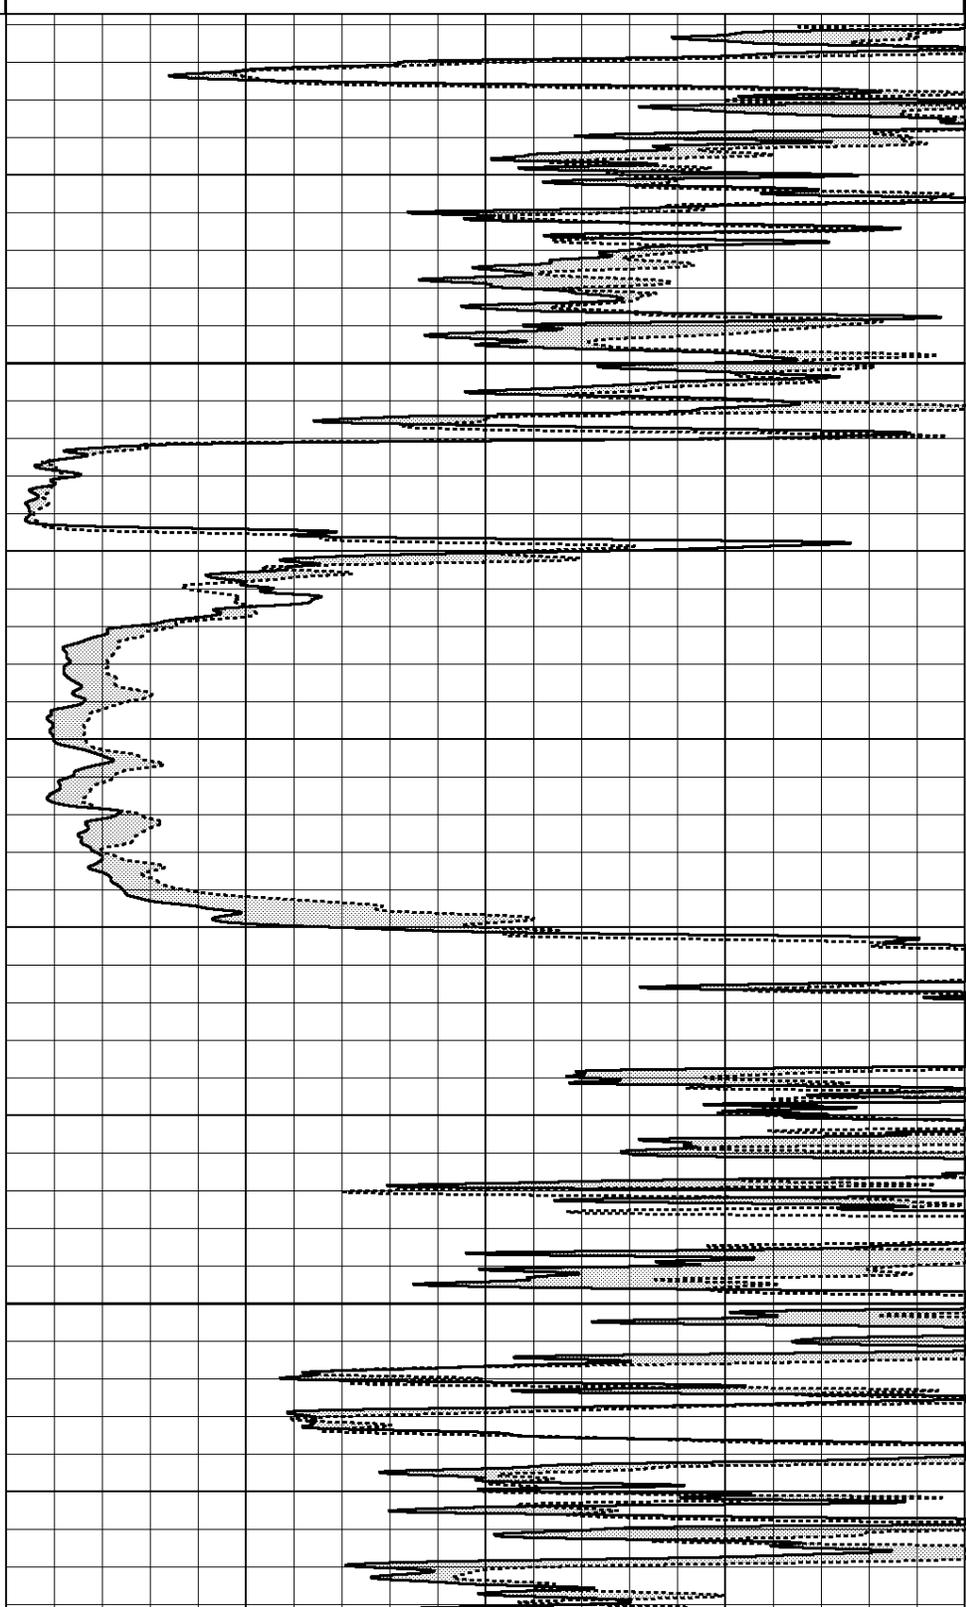



Microlog-Caliper		
6.	in	16.
Bit Size (BIT)		
6.	Ref in	16.
Tension (TENS)		
5000.	lbs	0.
Y-Caliper (CALY)		
6.	in	16.
Gamma Ray (GR)		
0.	API	150.

Micro-Normal{2"} (MNOR)		
0.	ohms	40.
Micro-Inverse{1"} (MINV)		
0.	ohms	40.

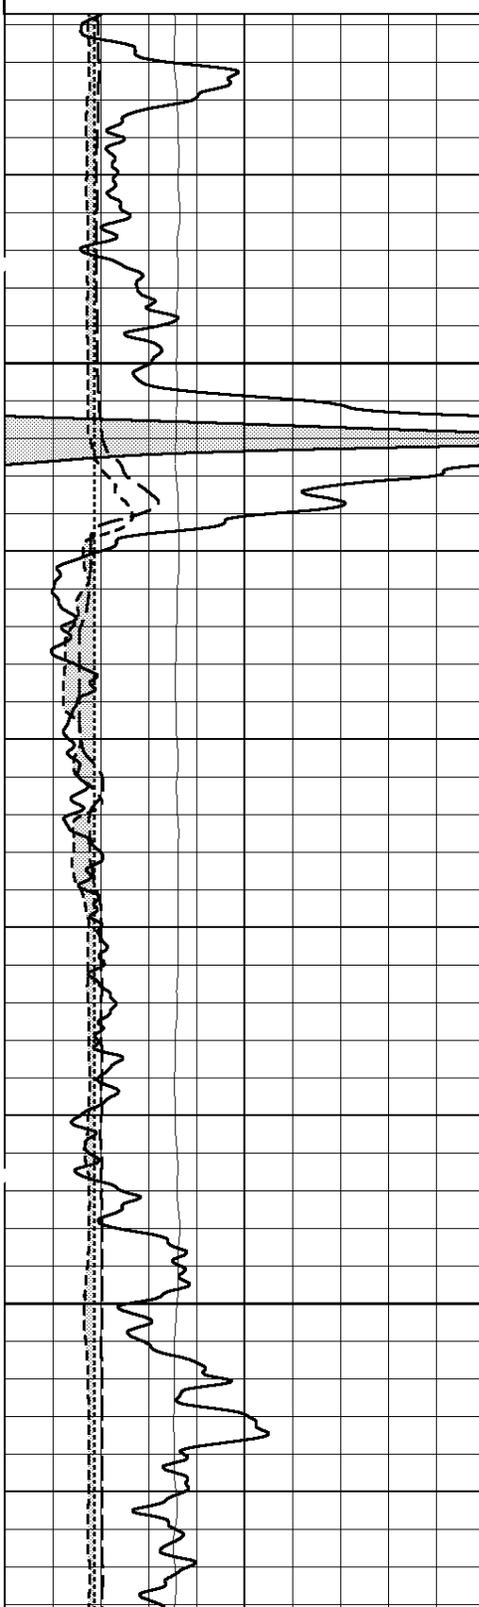


4200


4225

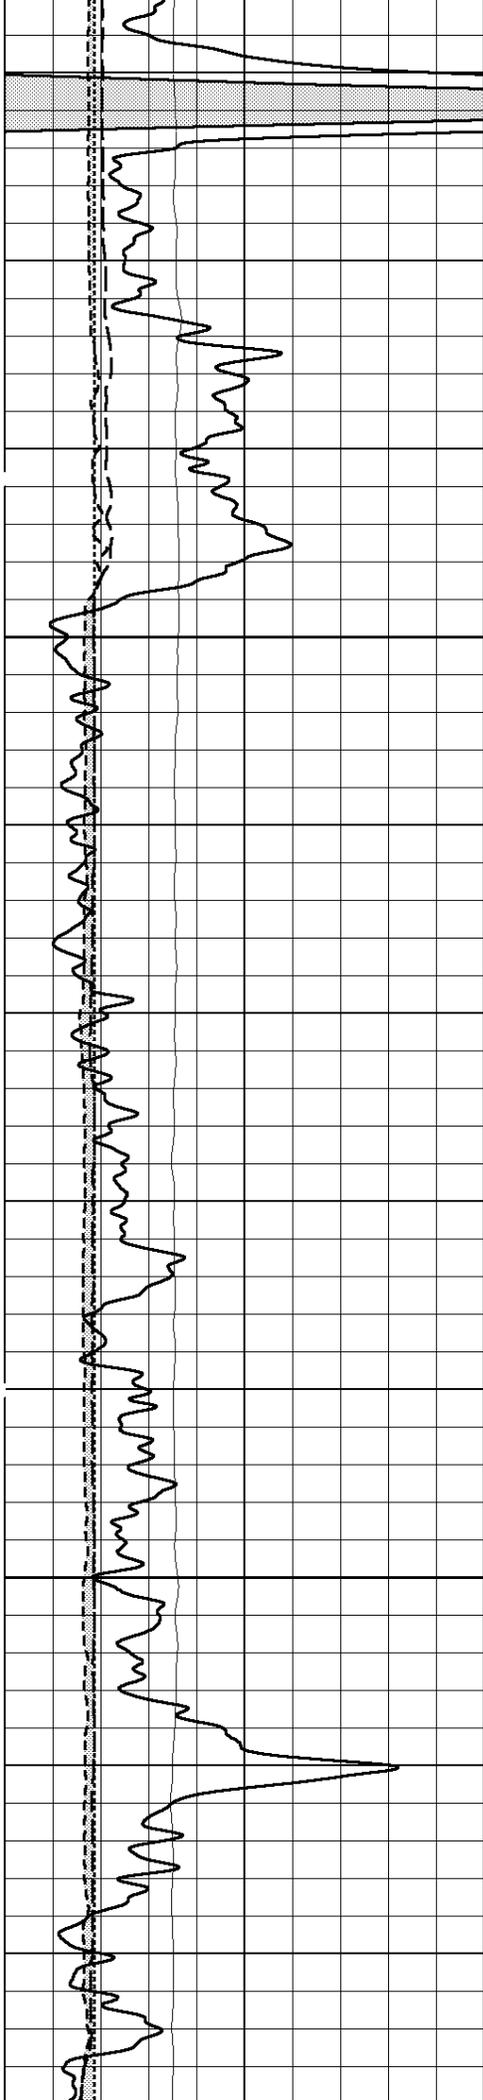


4250

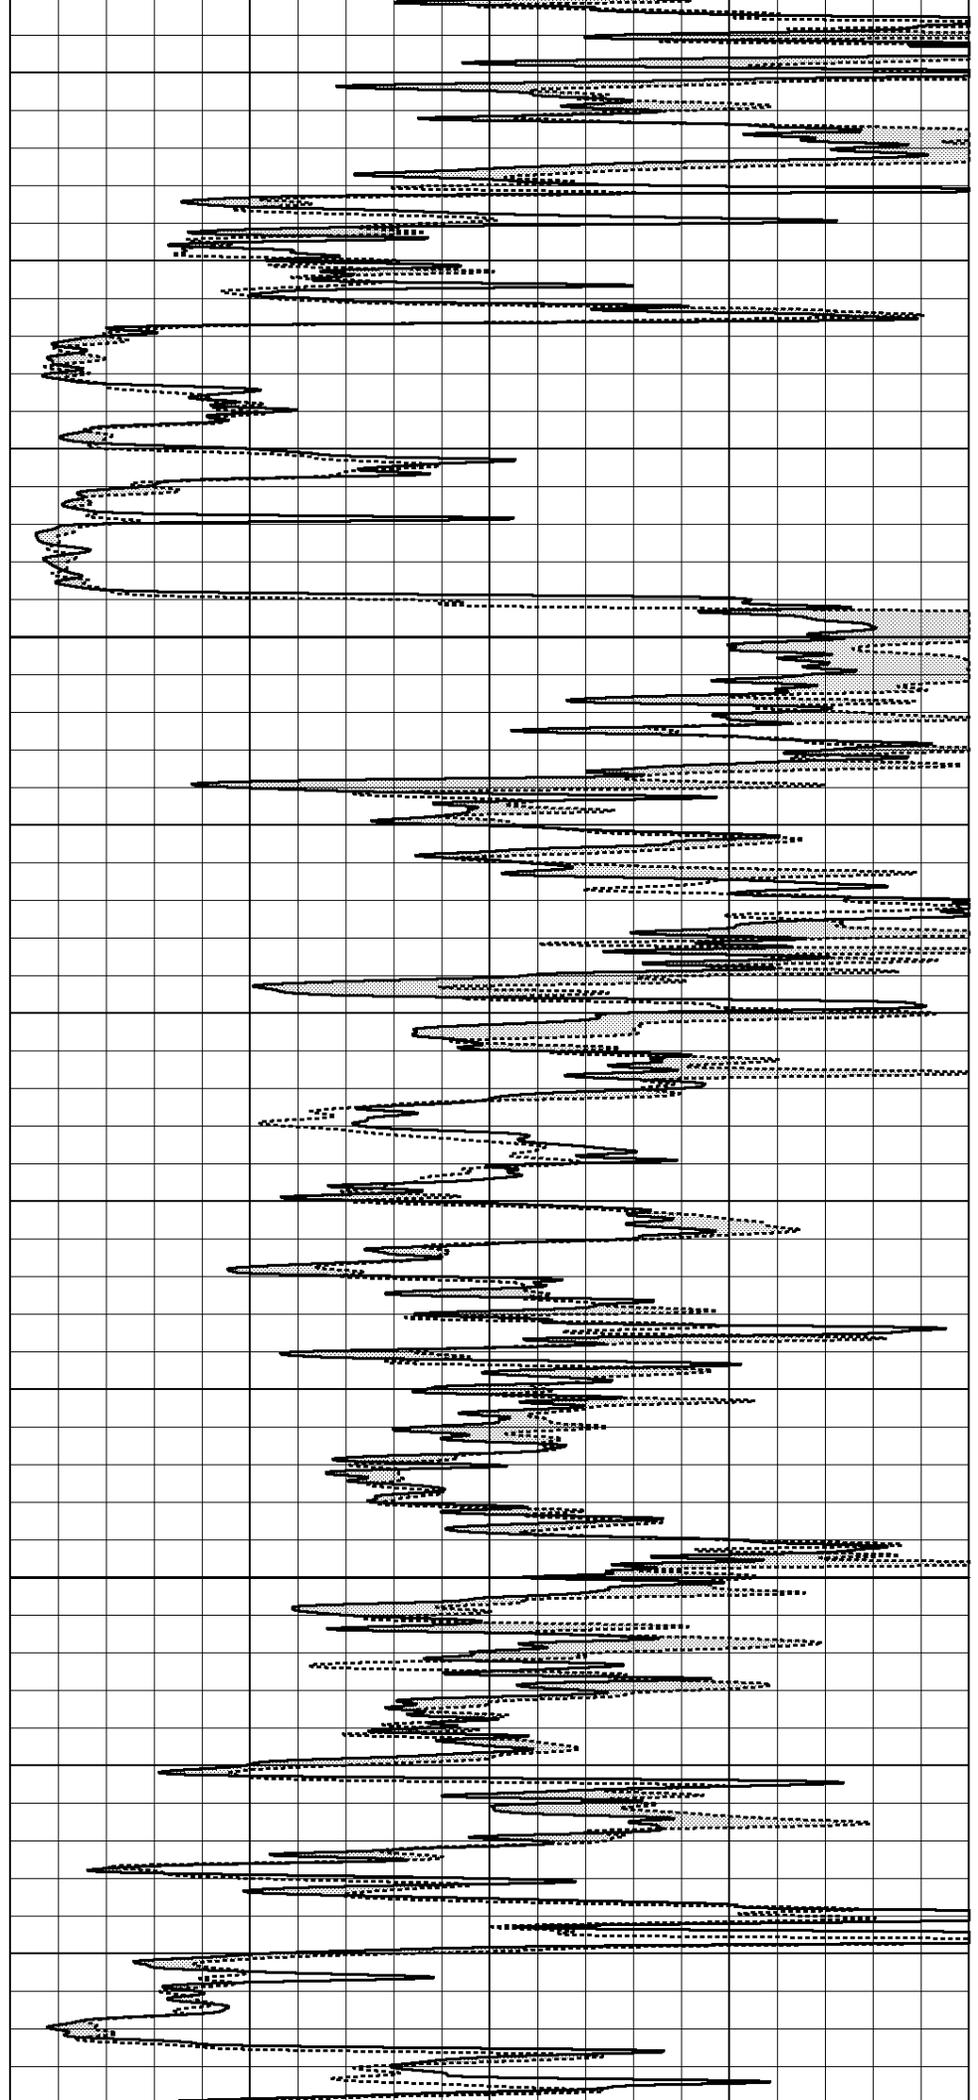


4275

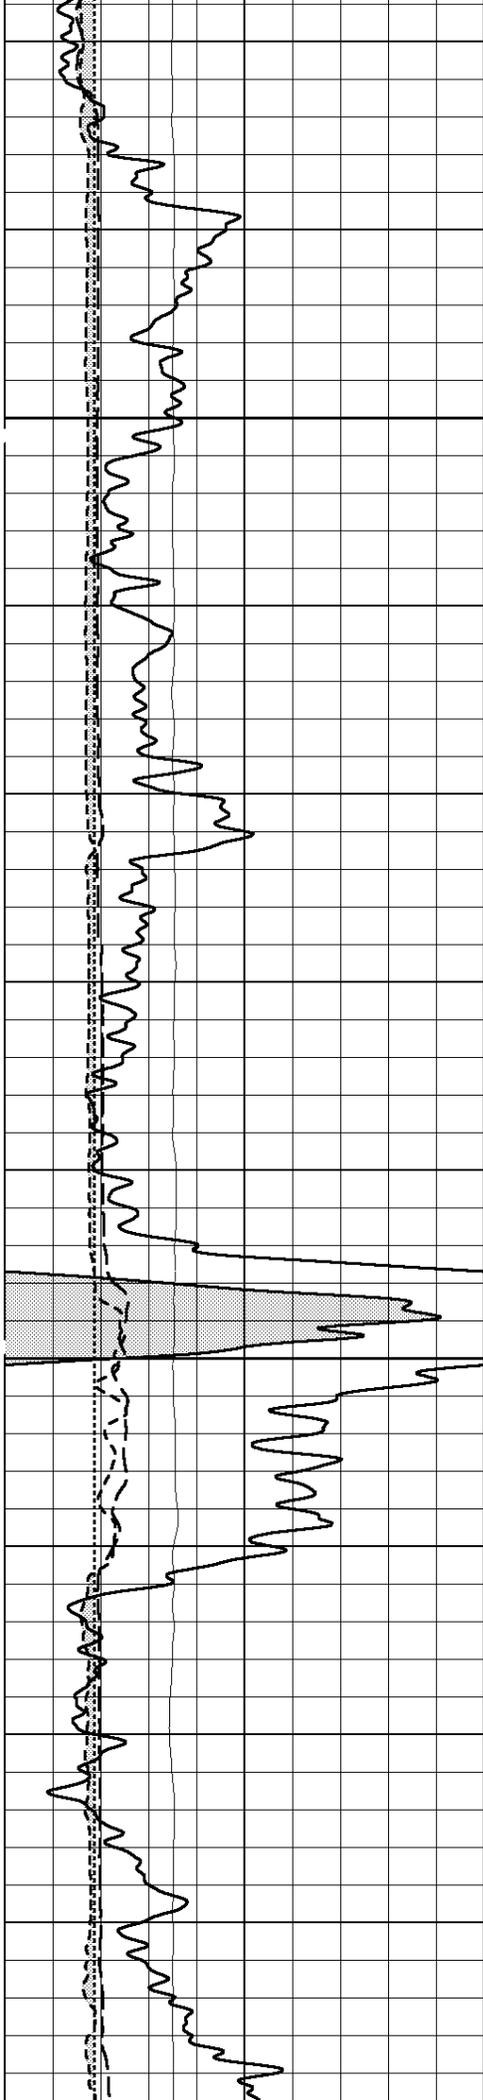


4300

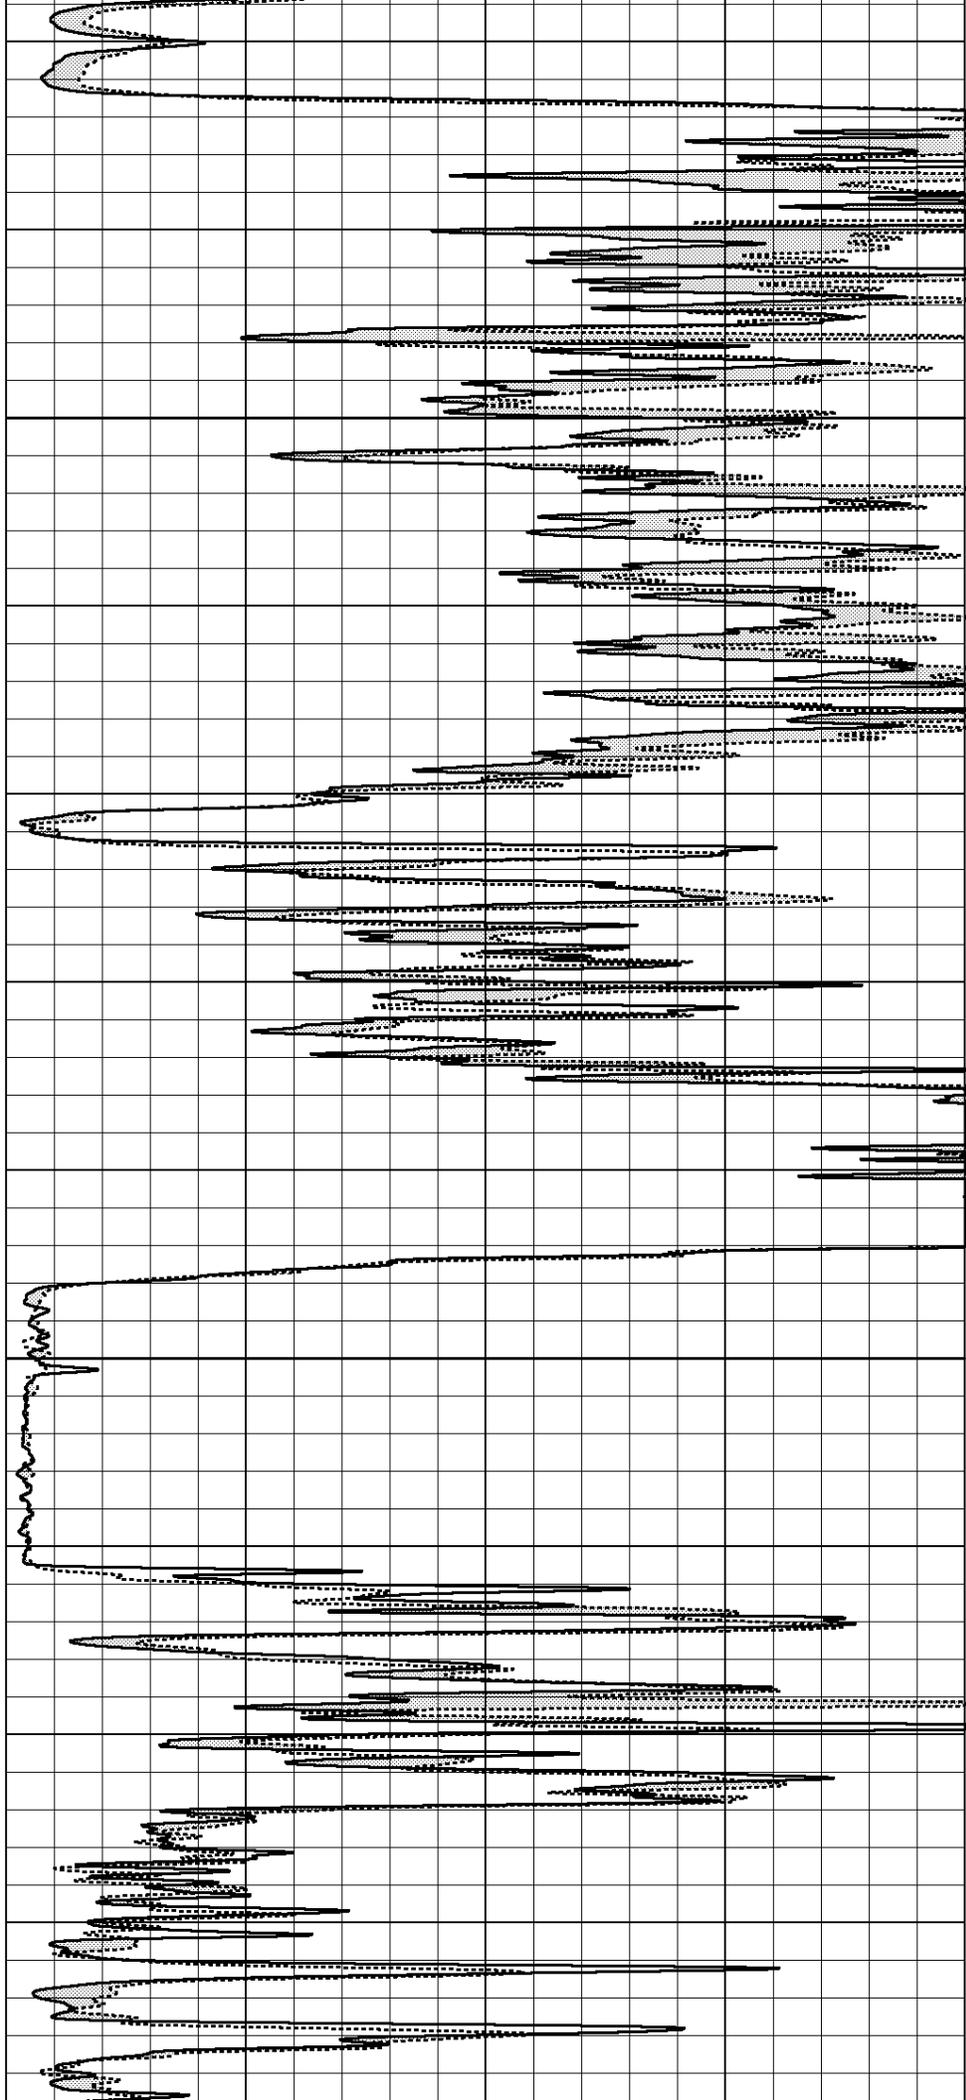

4325

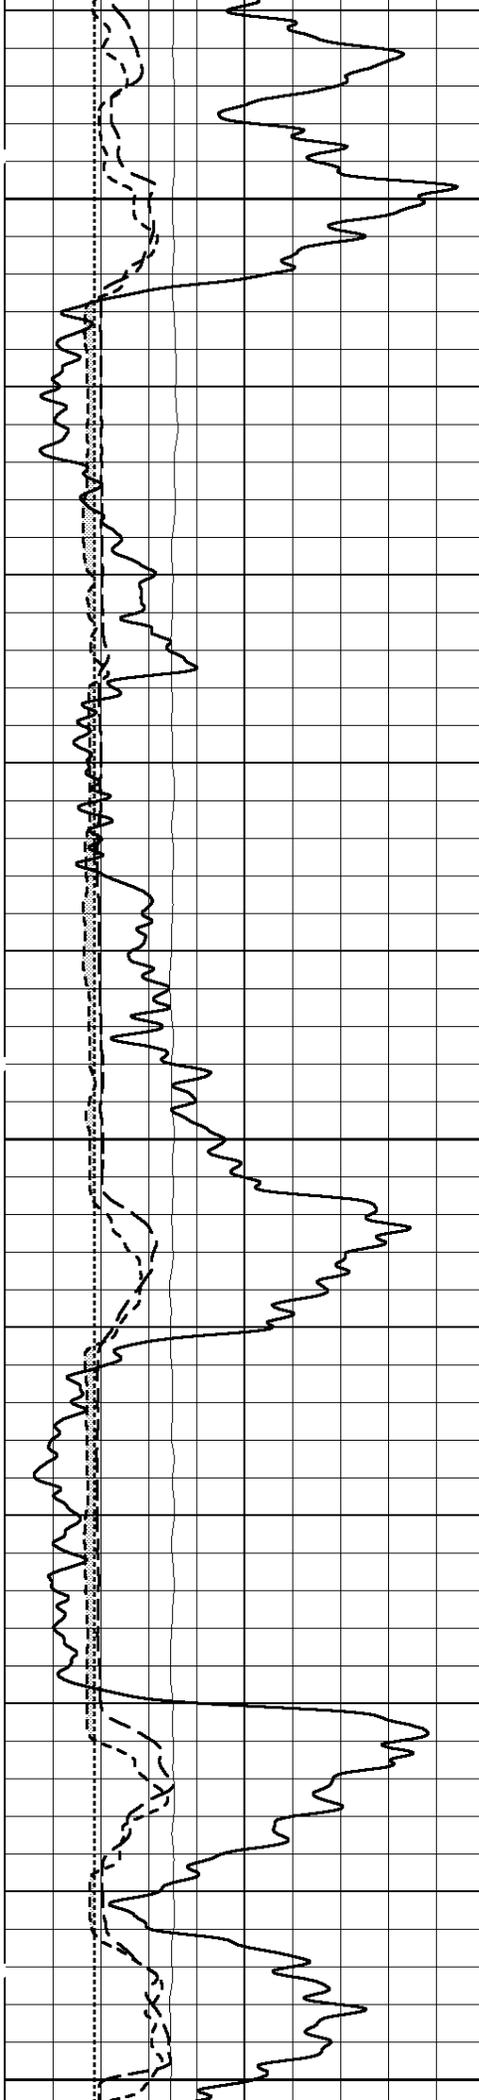


4350

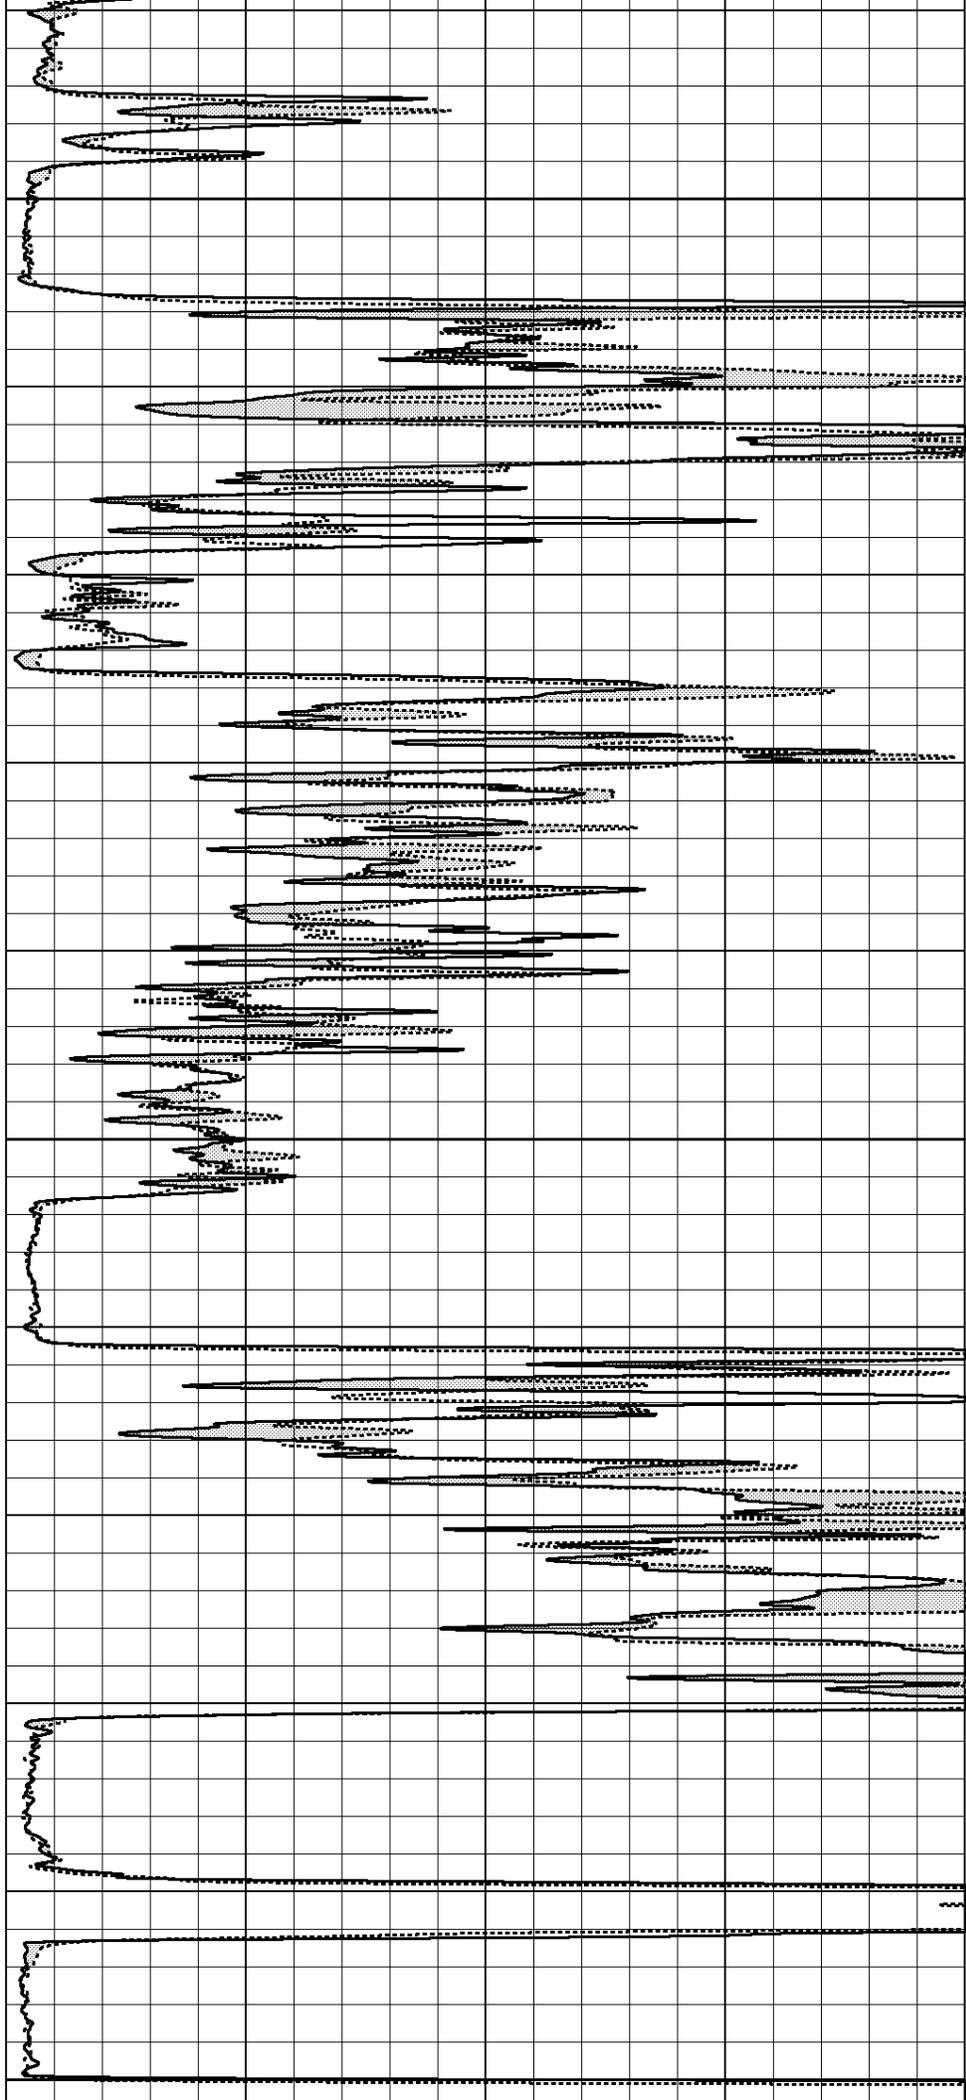


4375


4400

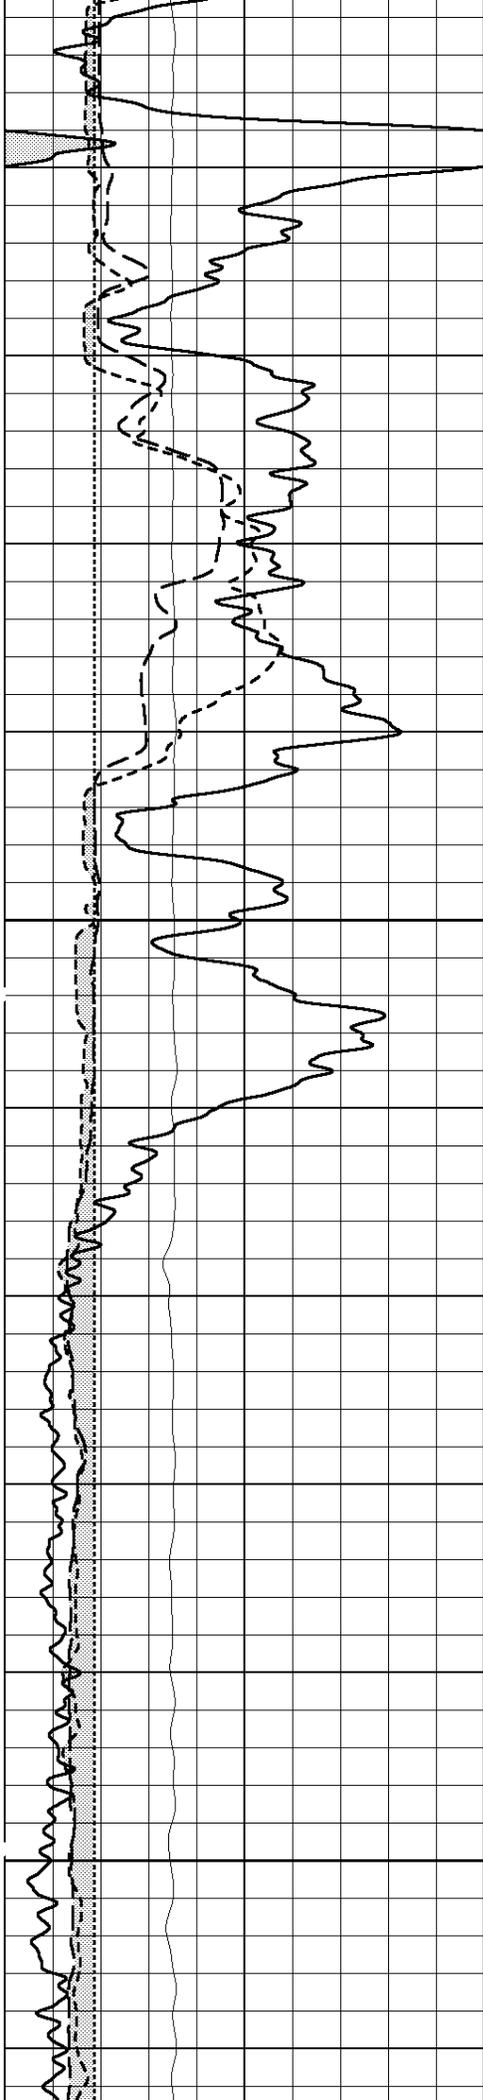

4425


4450

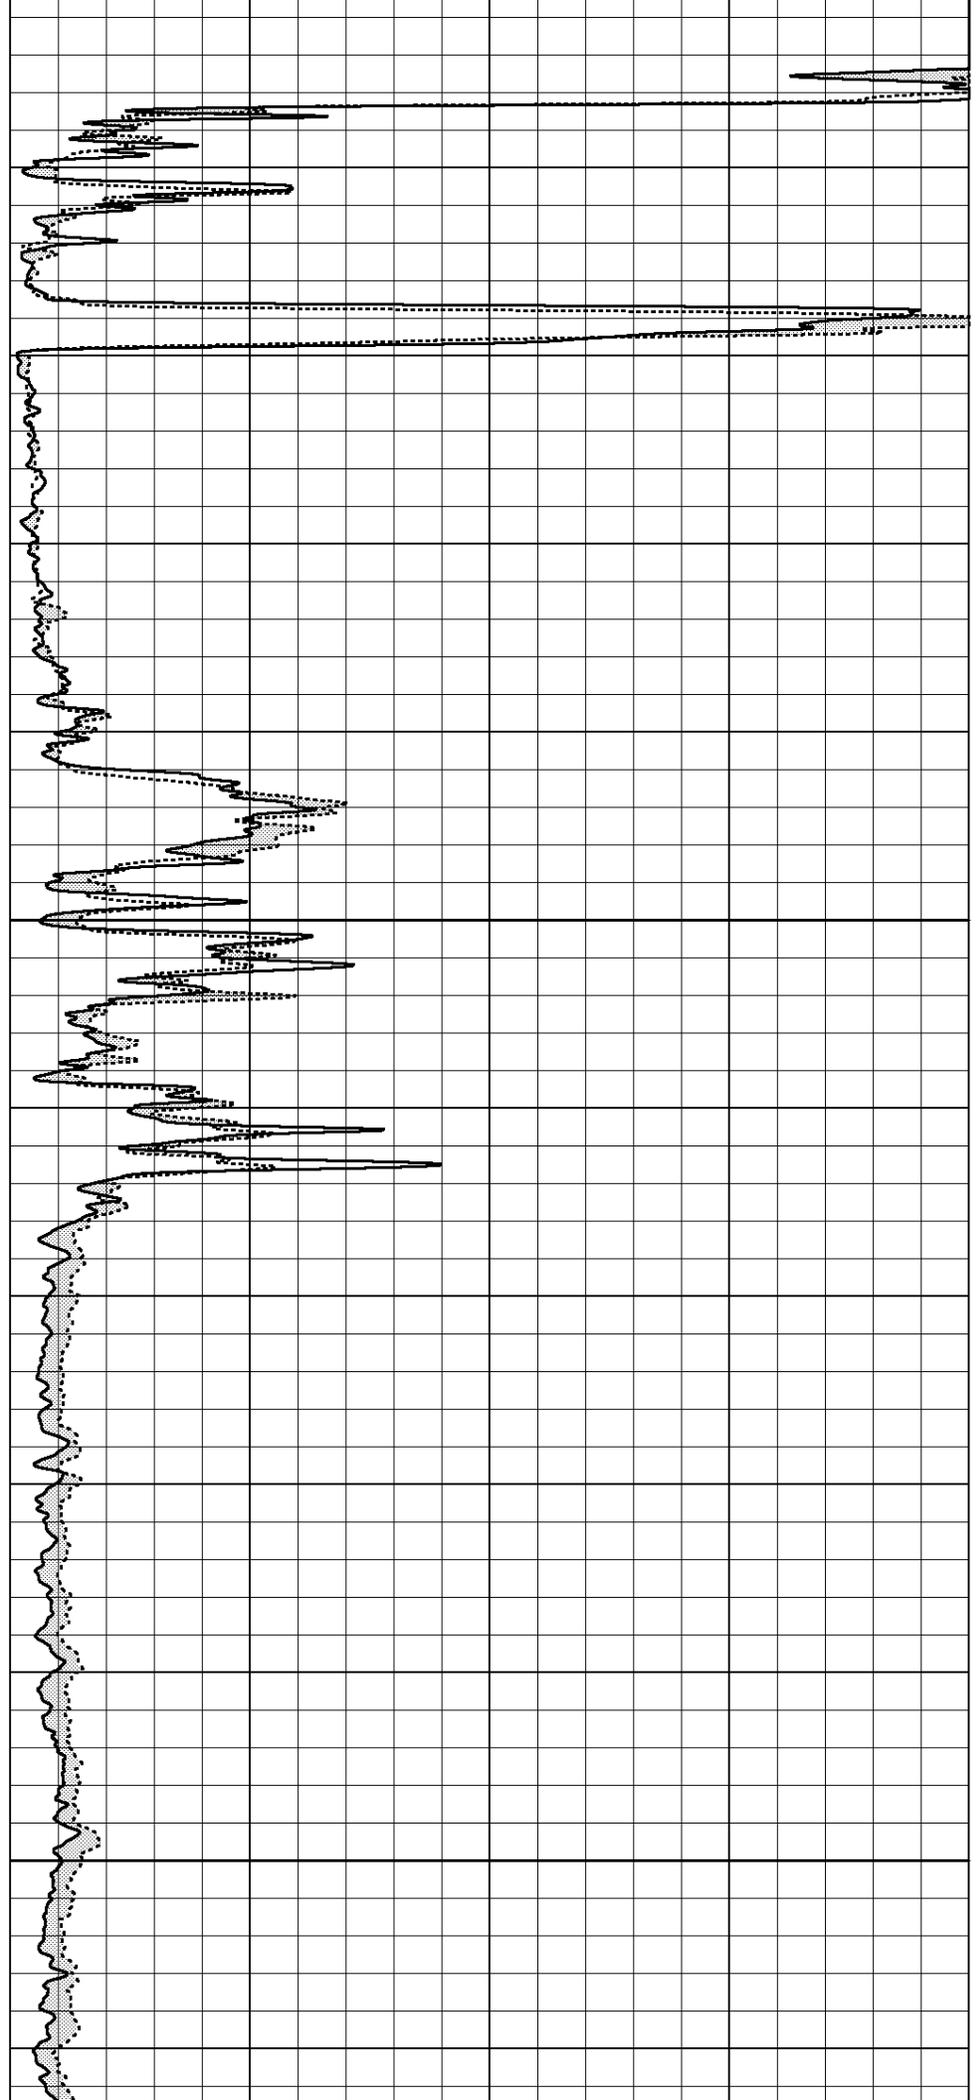


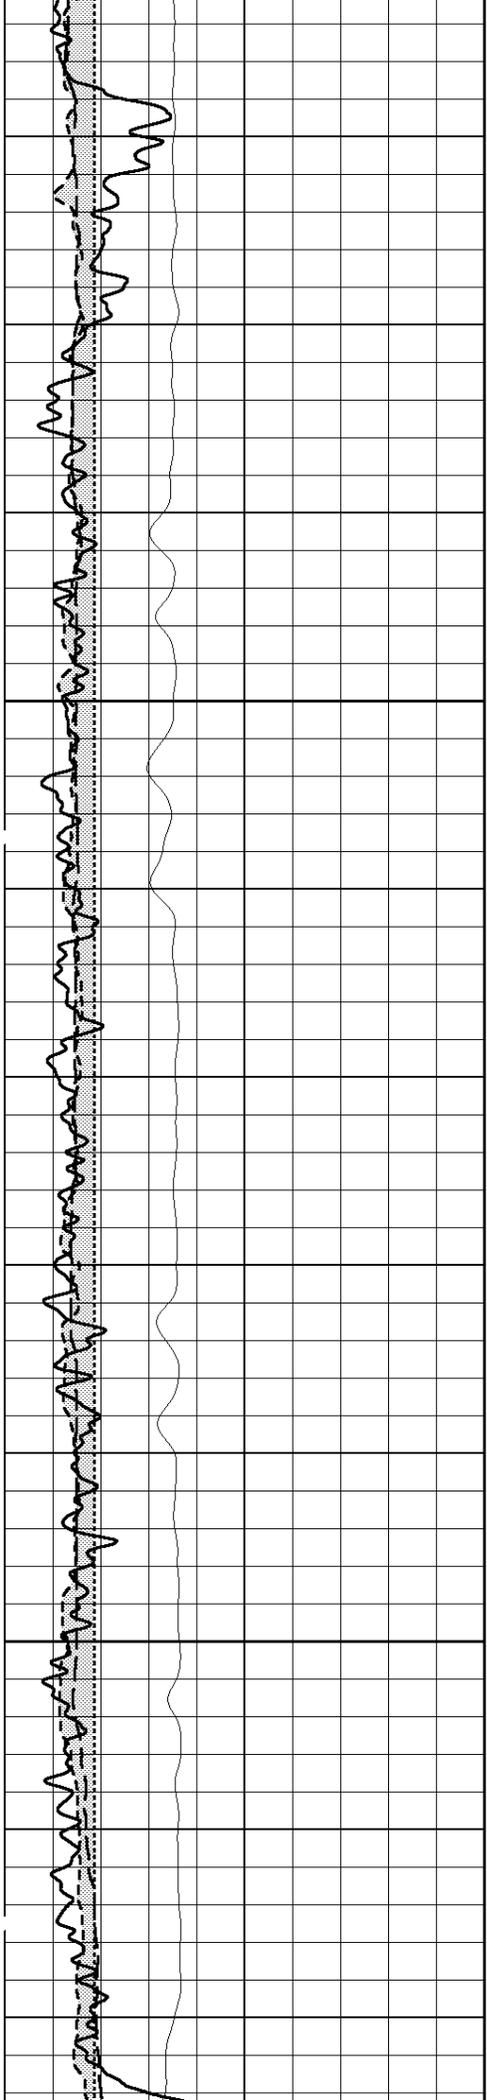

4475


4500

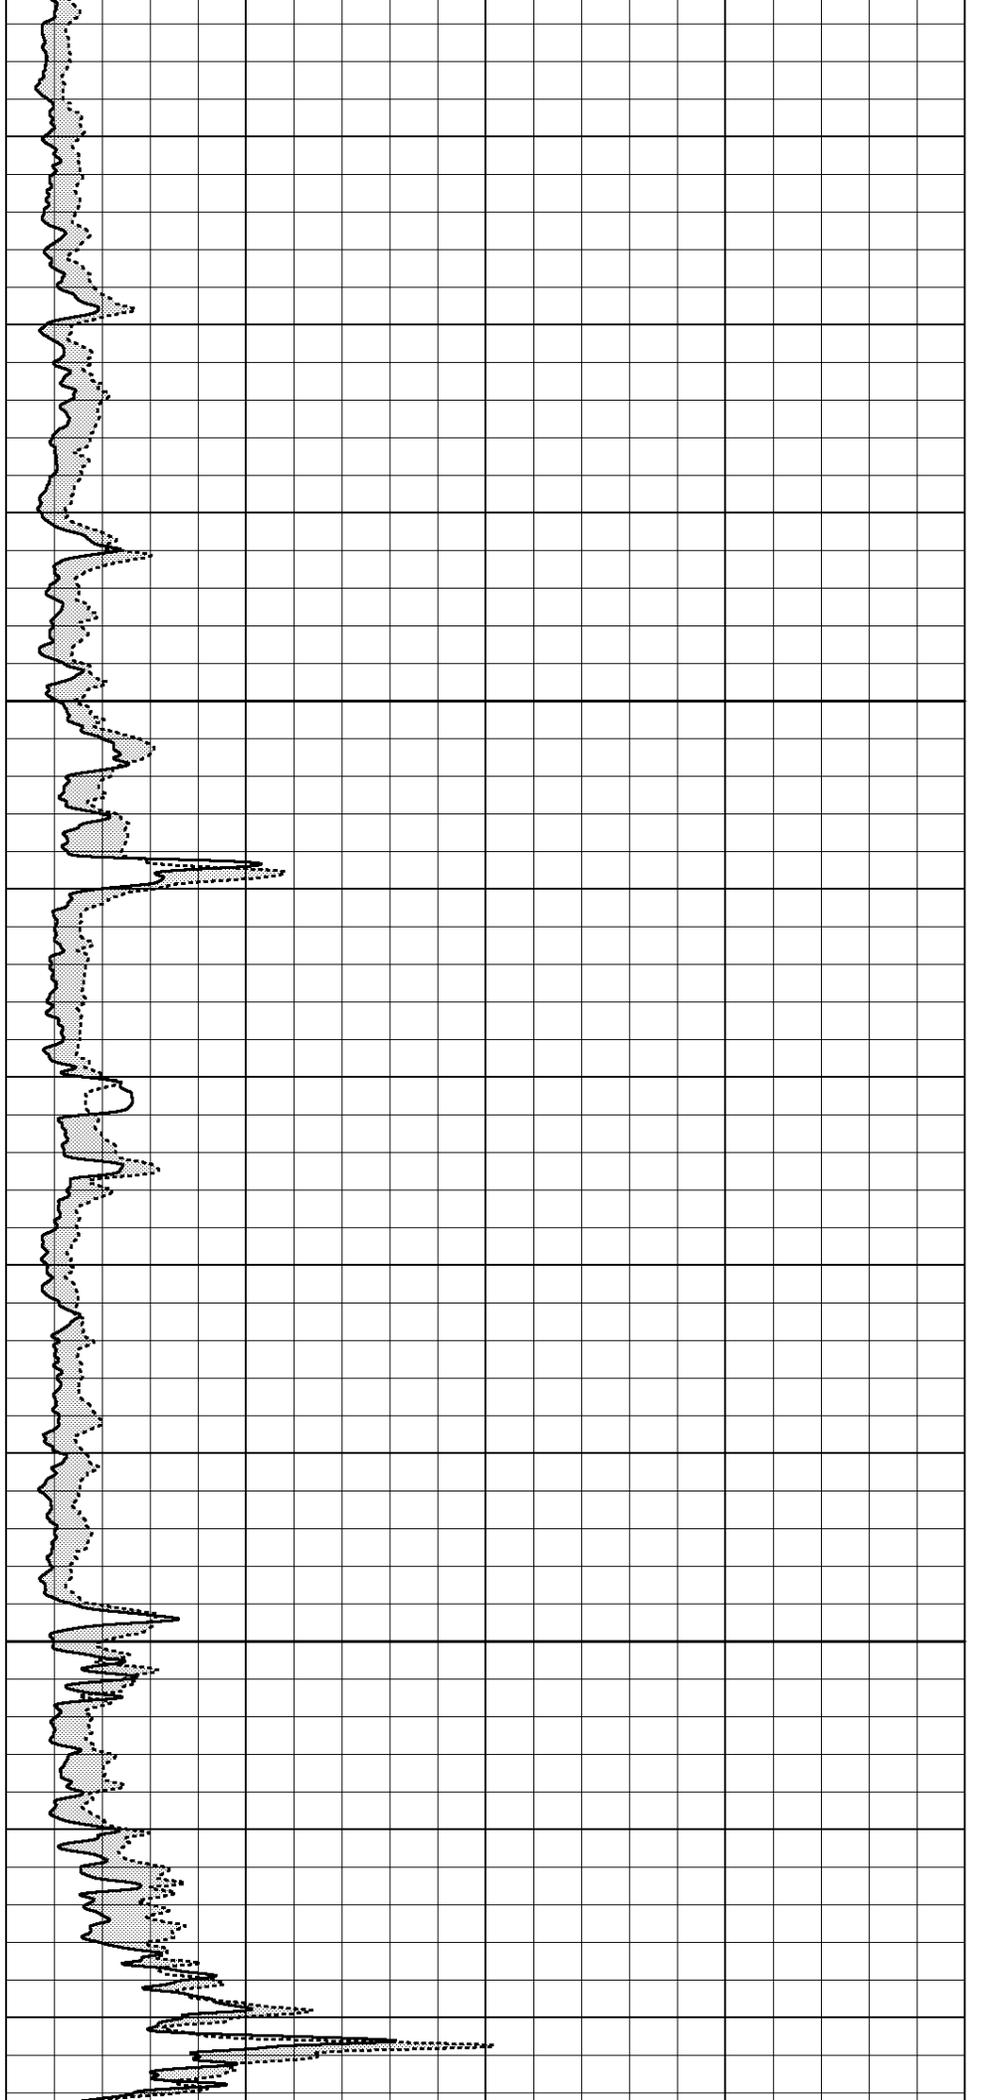


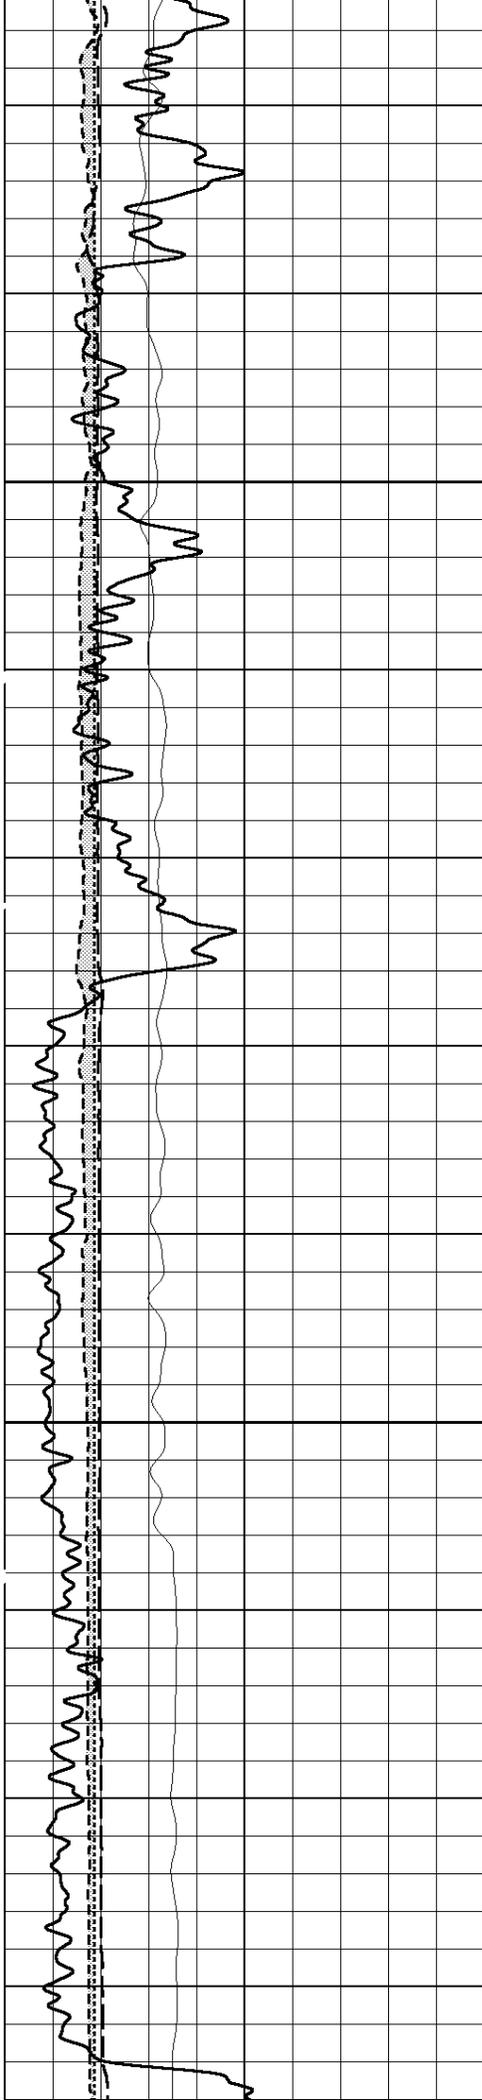

4525


4550

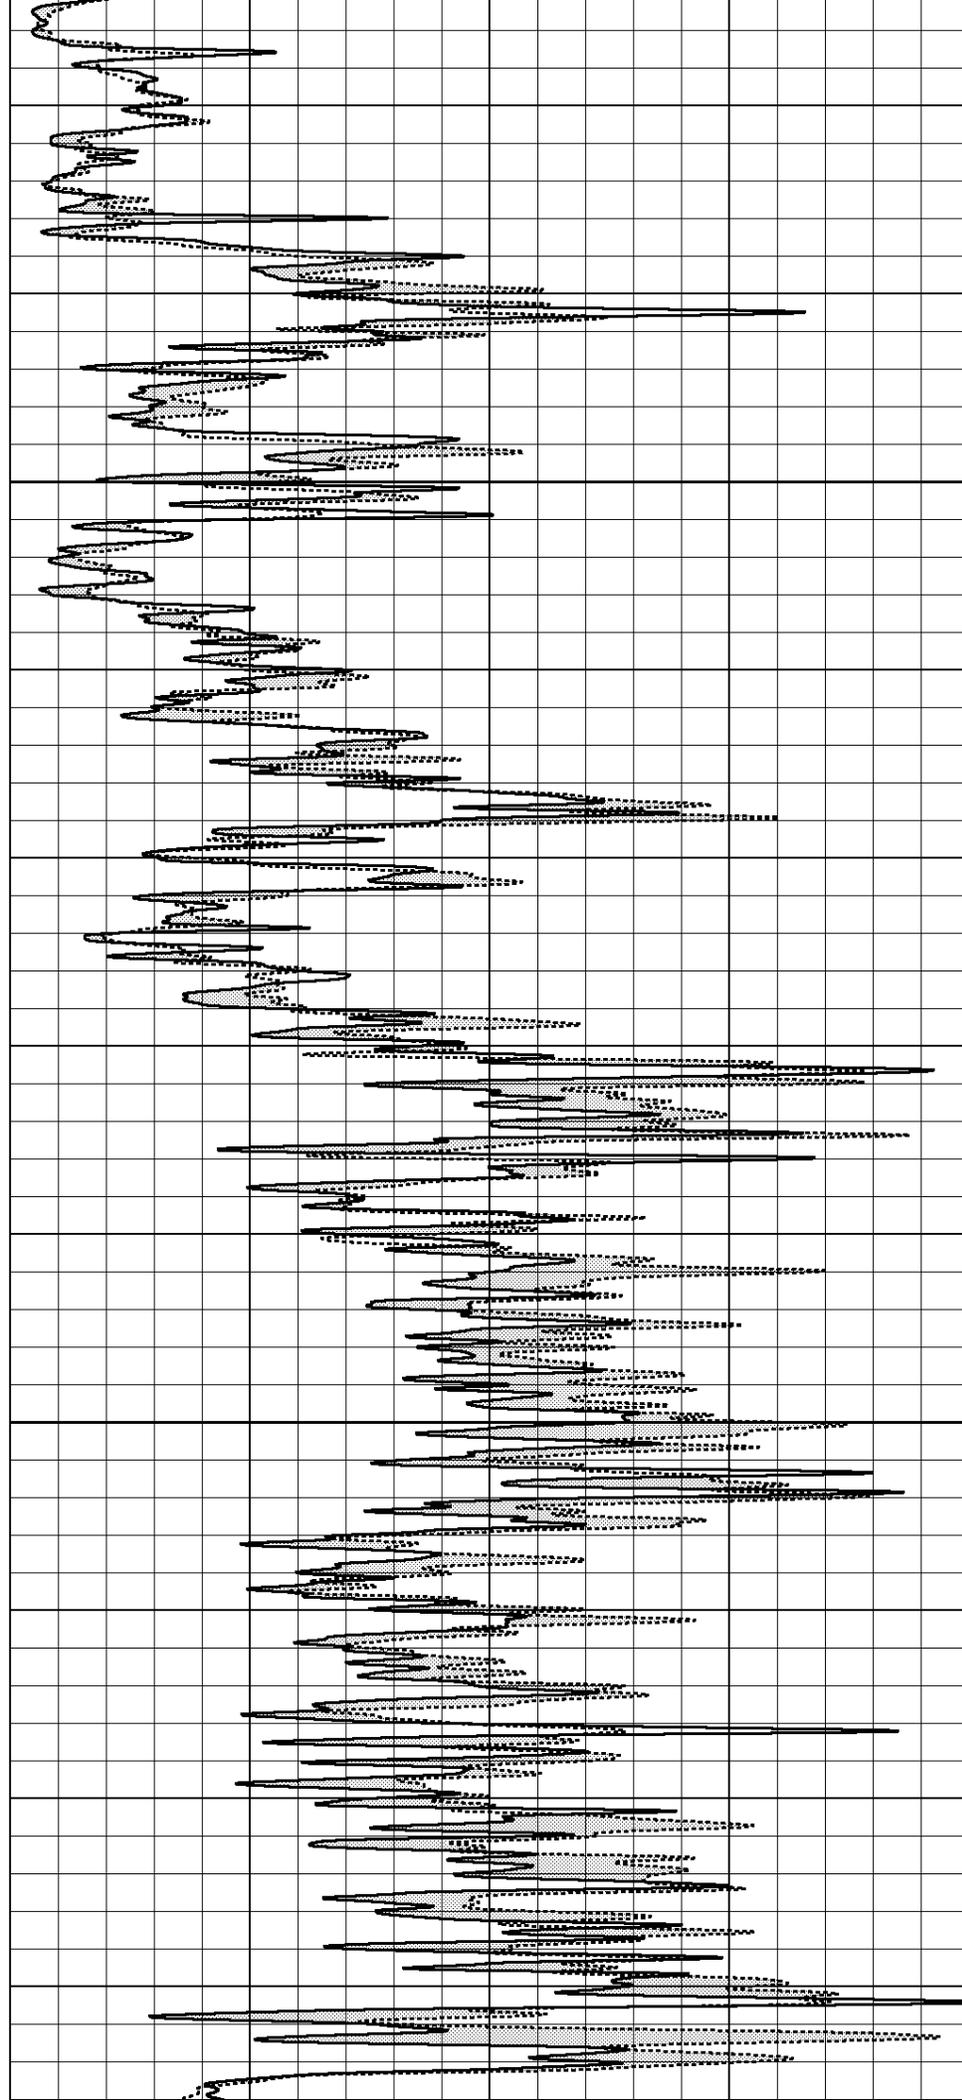


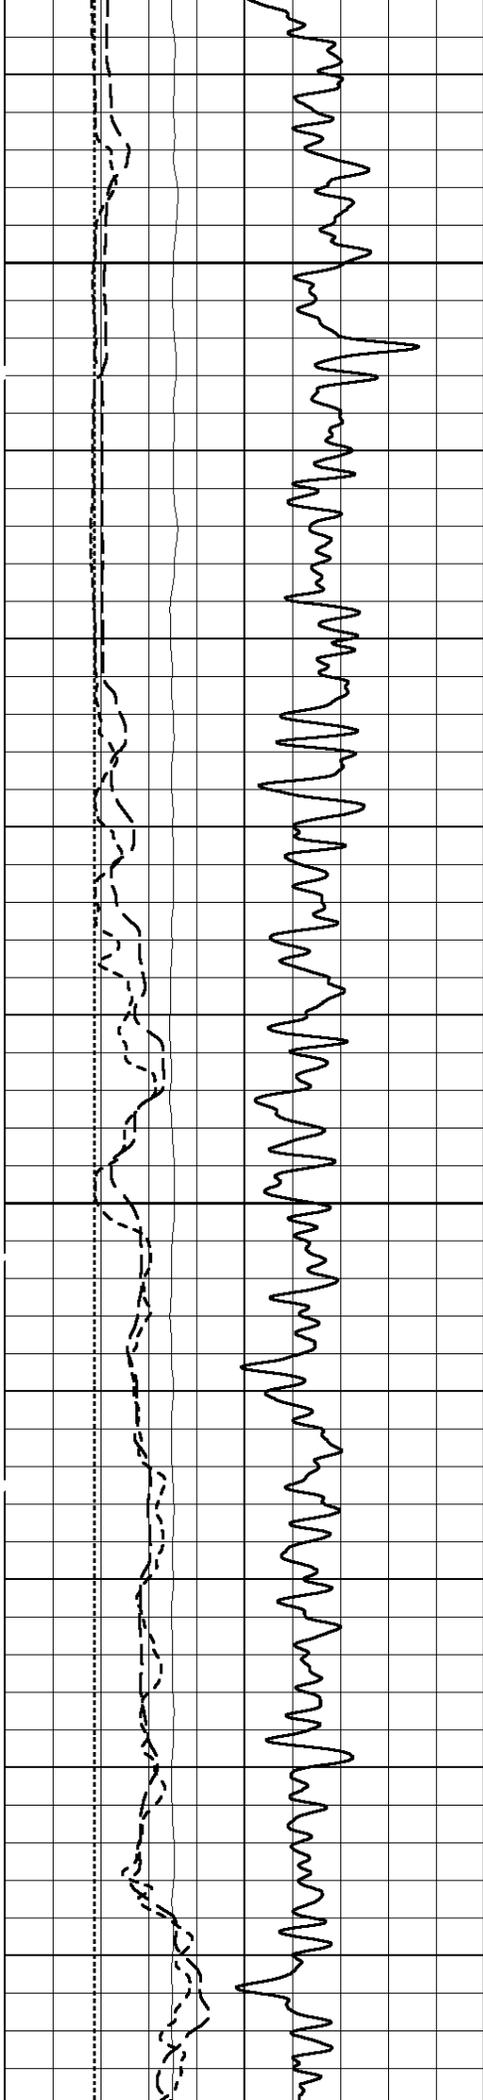

4575

4600

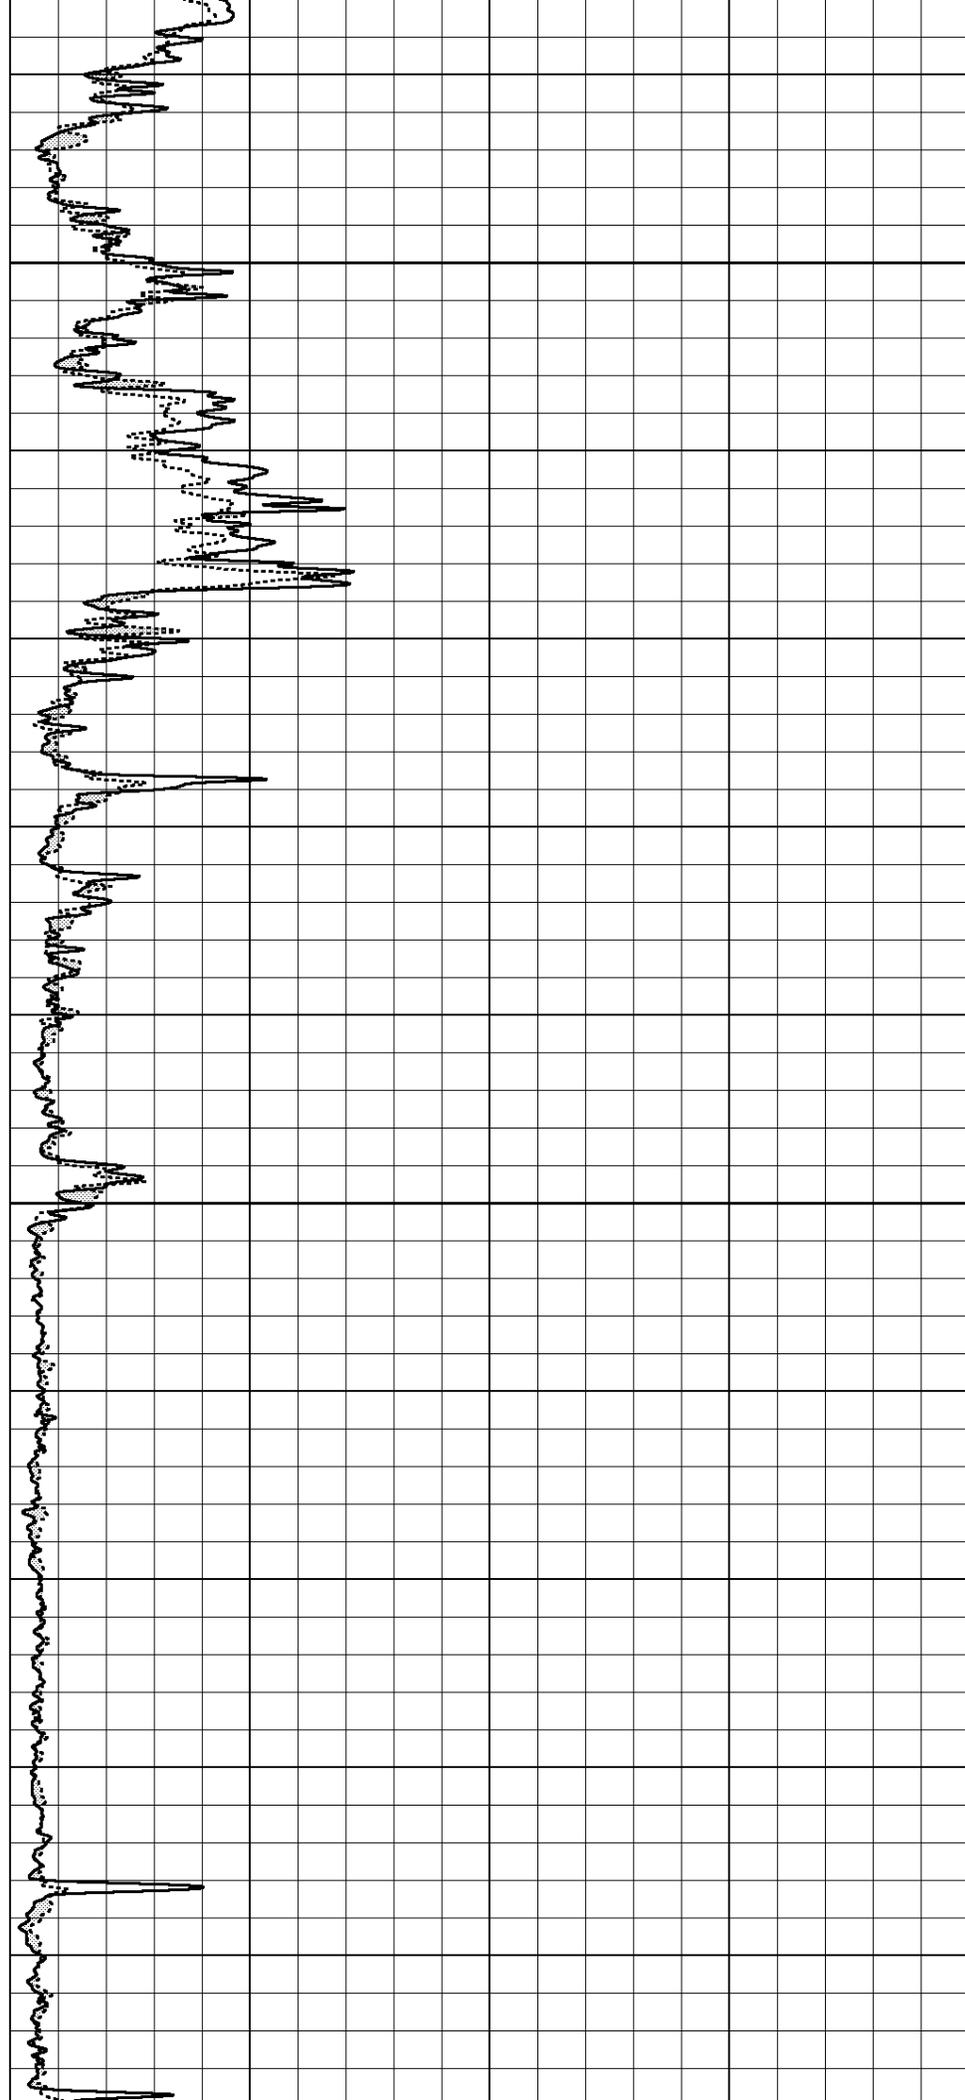


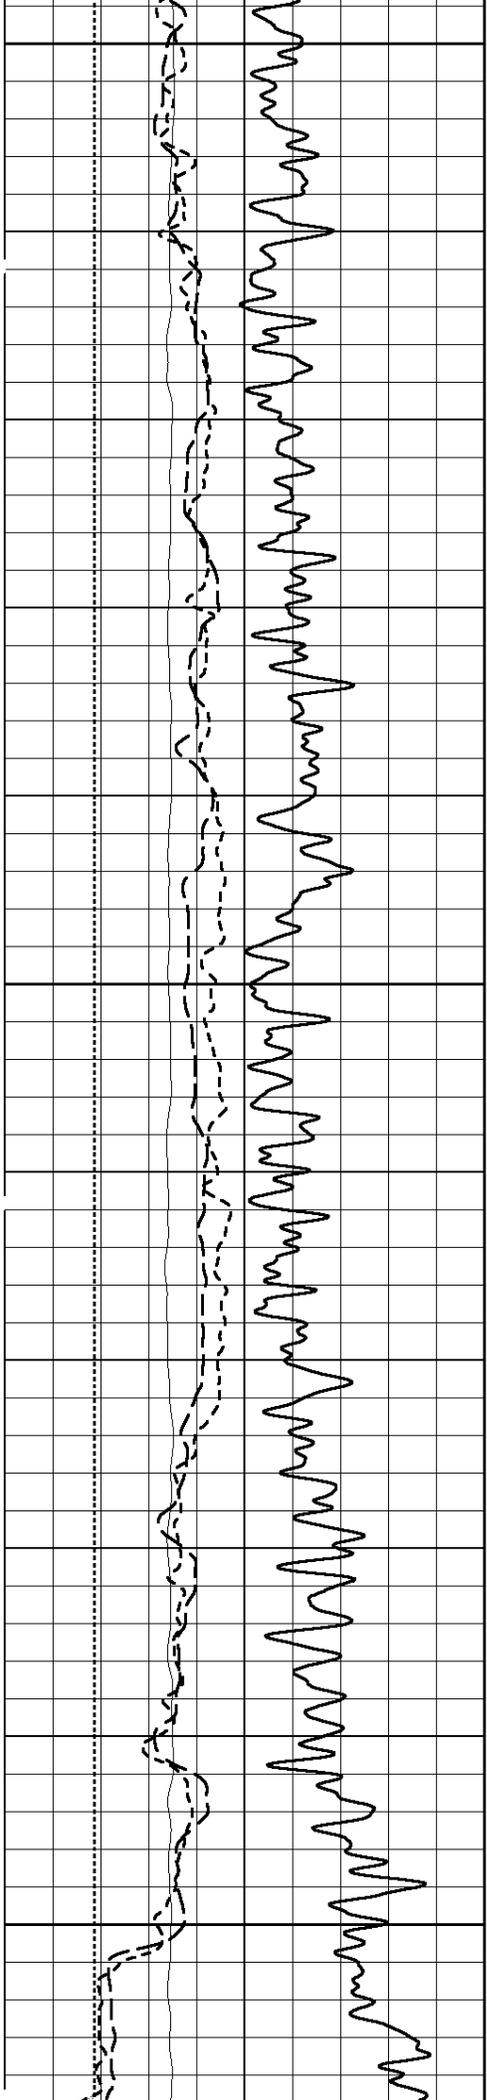


4625

4650


4675

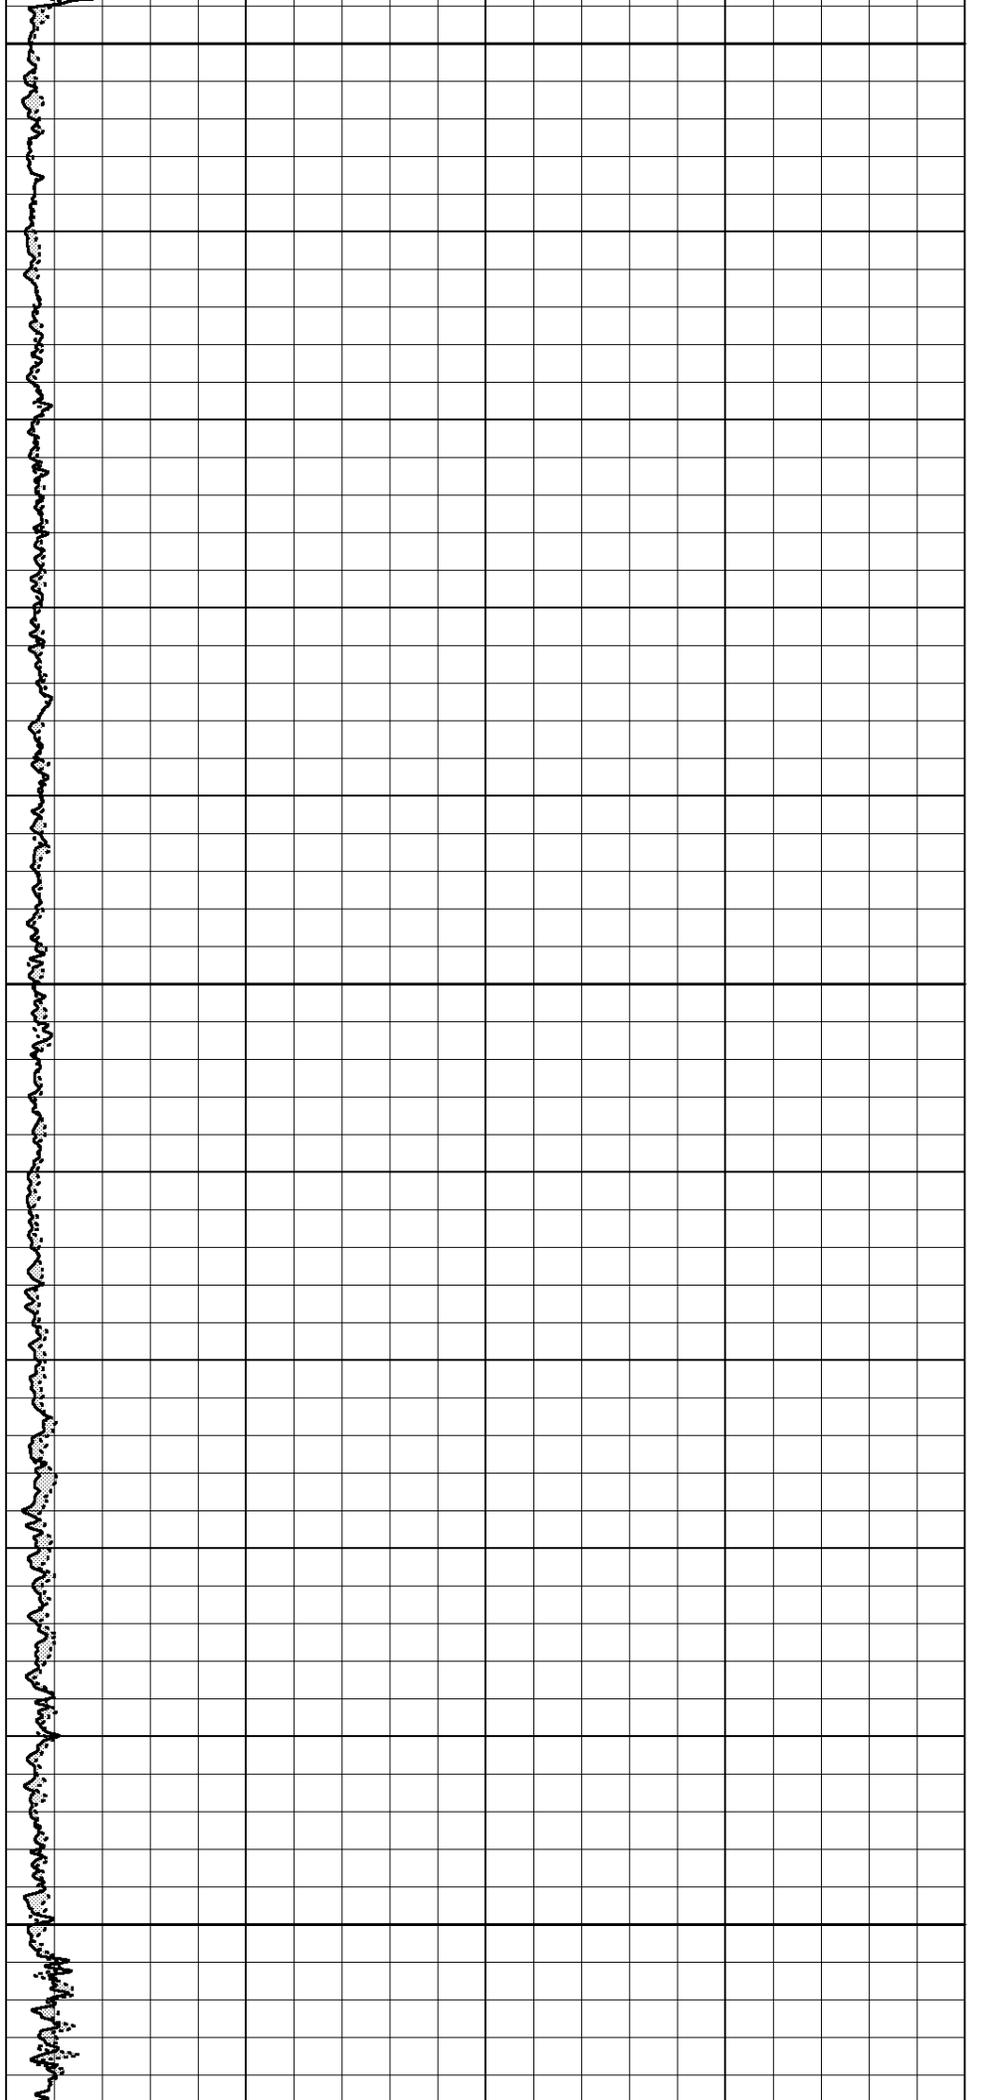


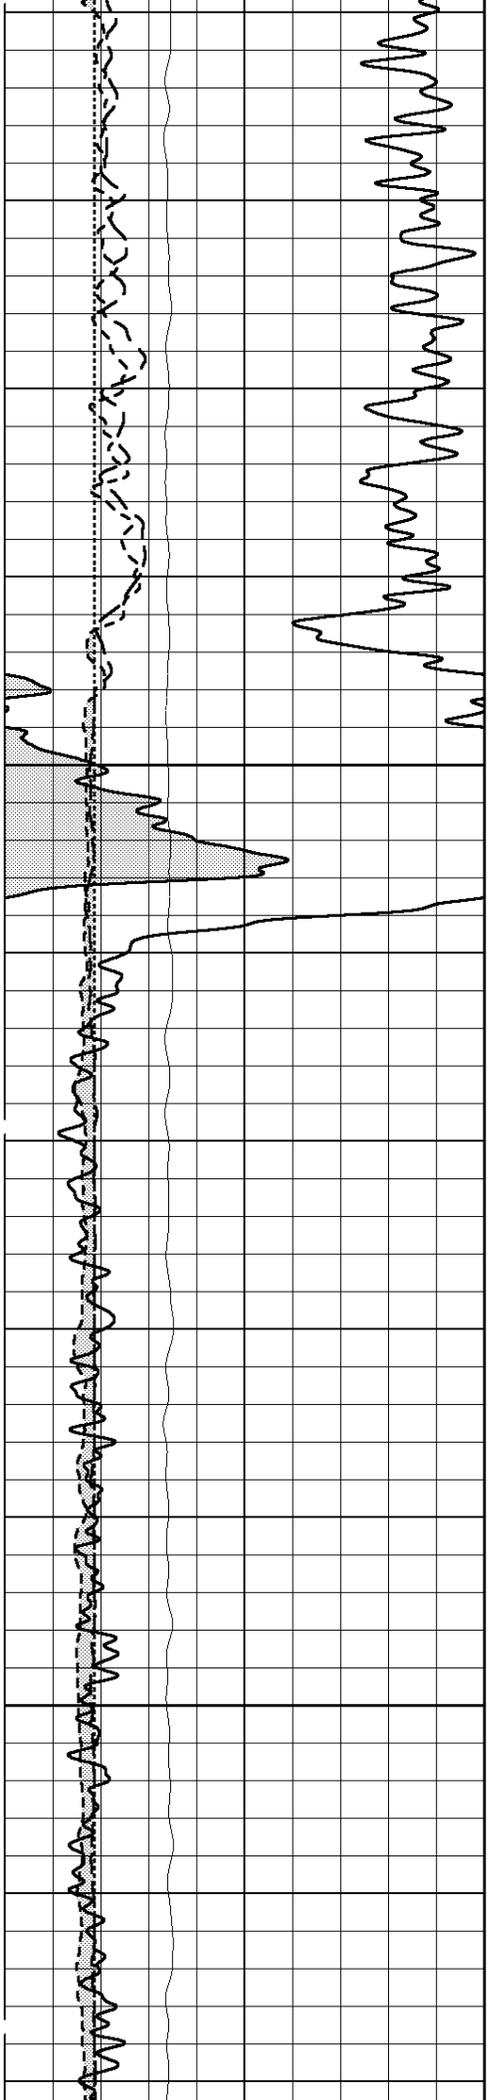


4700

4725

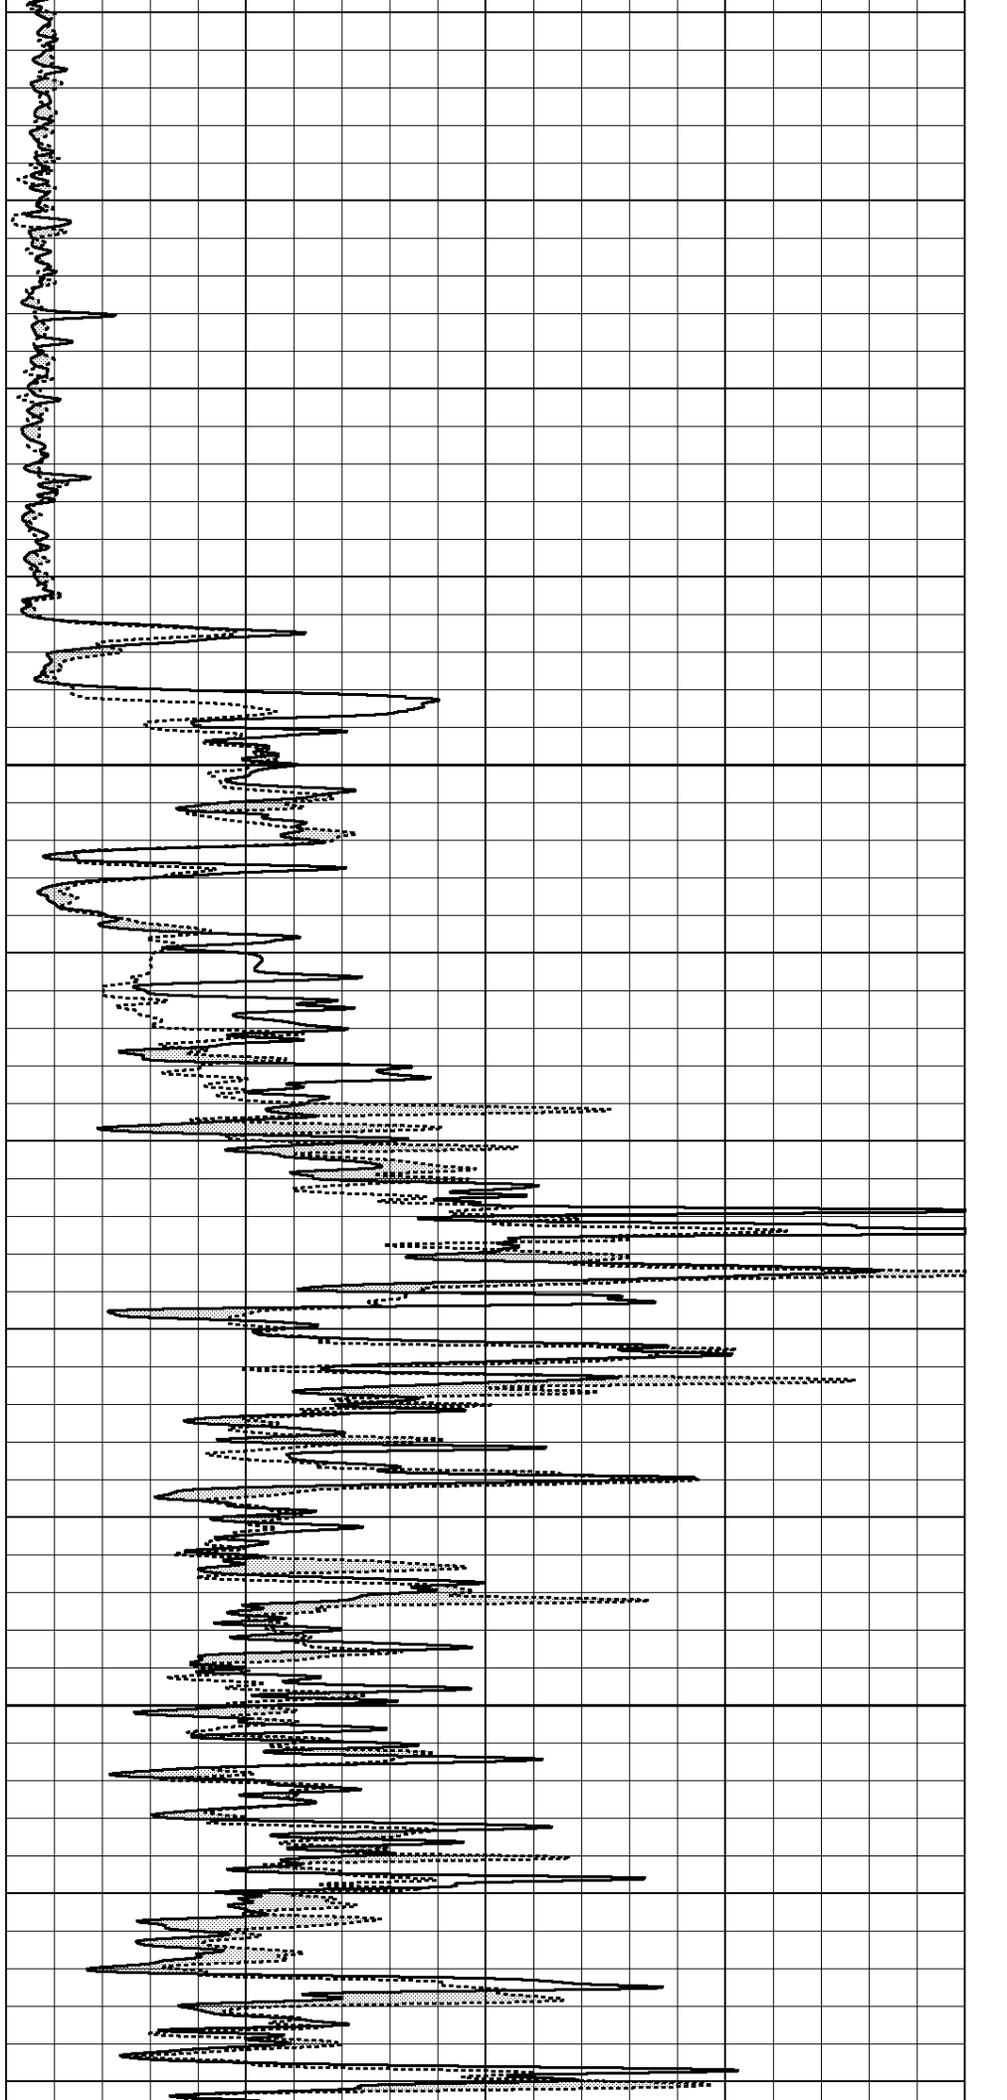


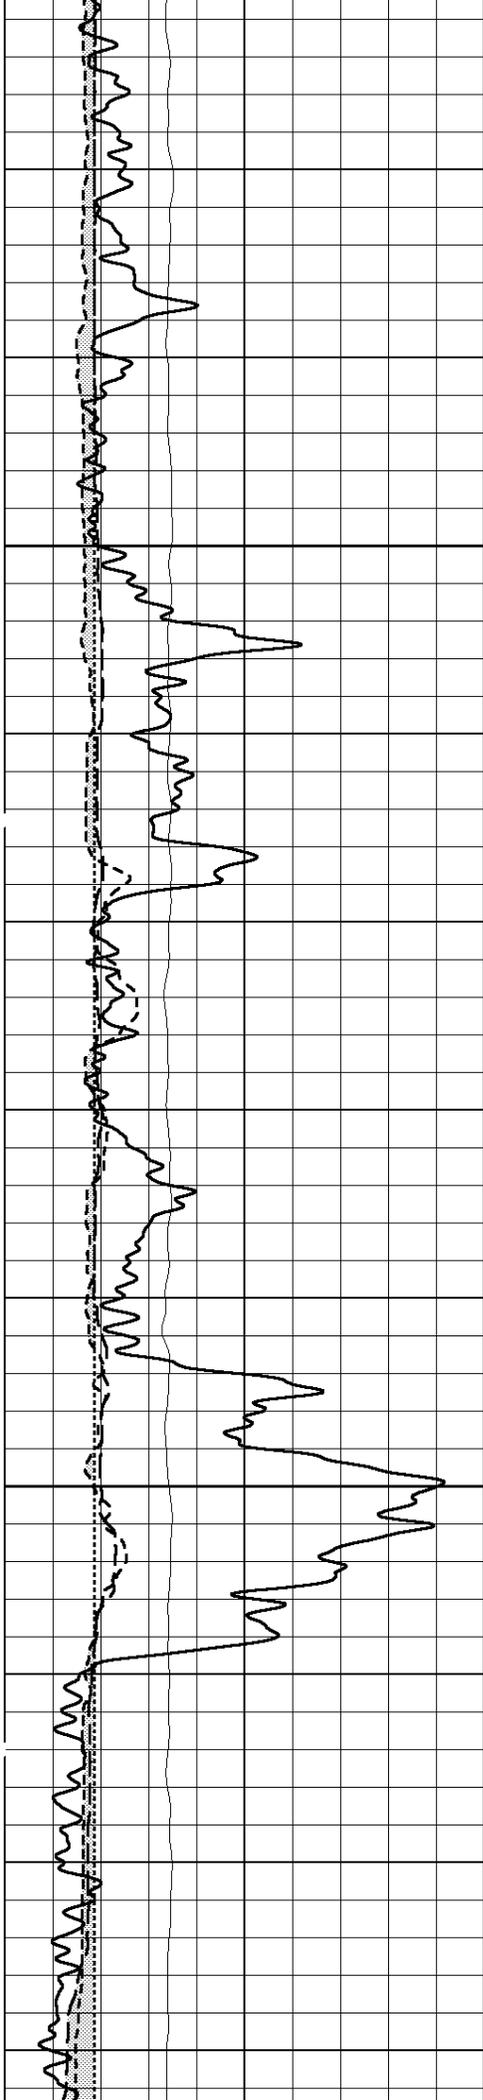

4750

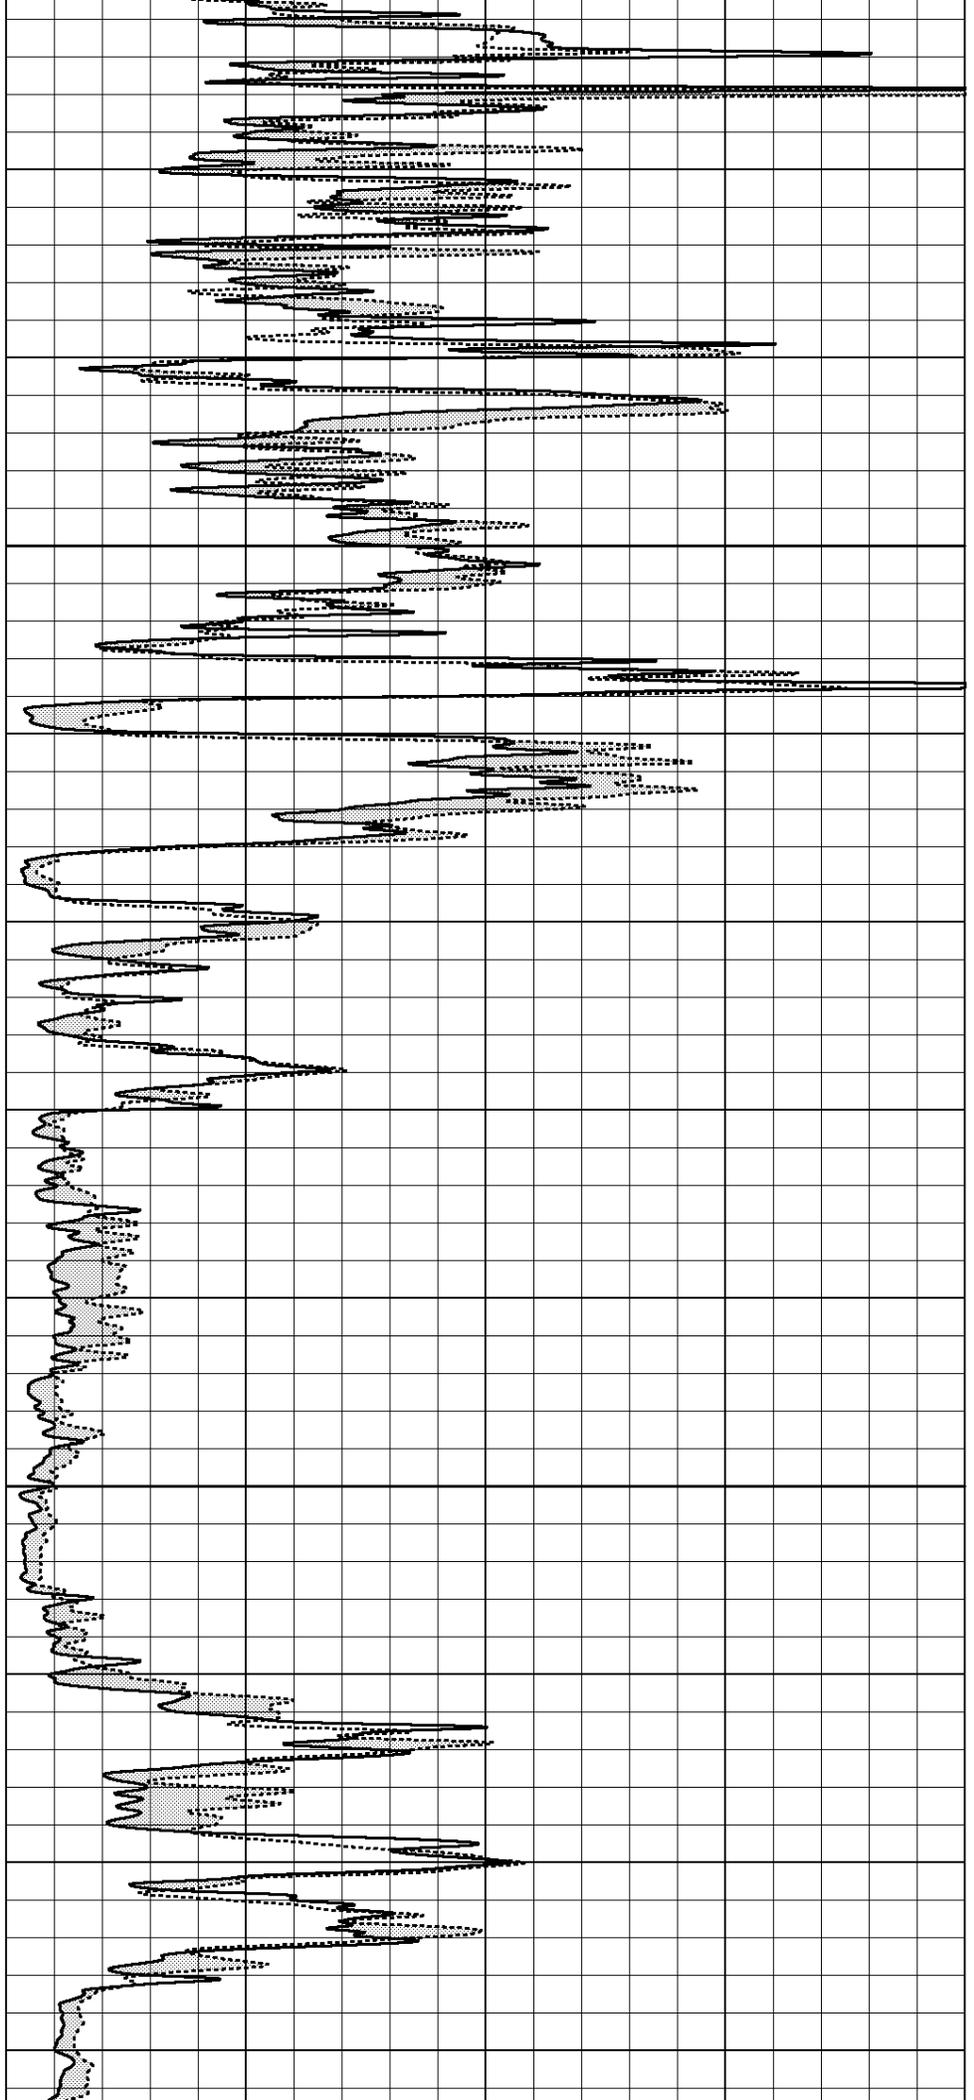

4775

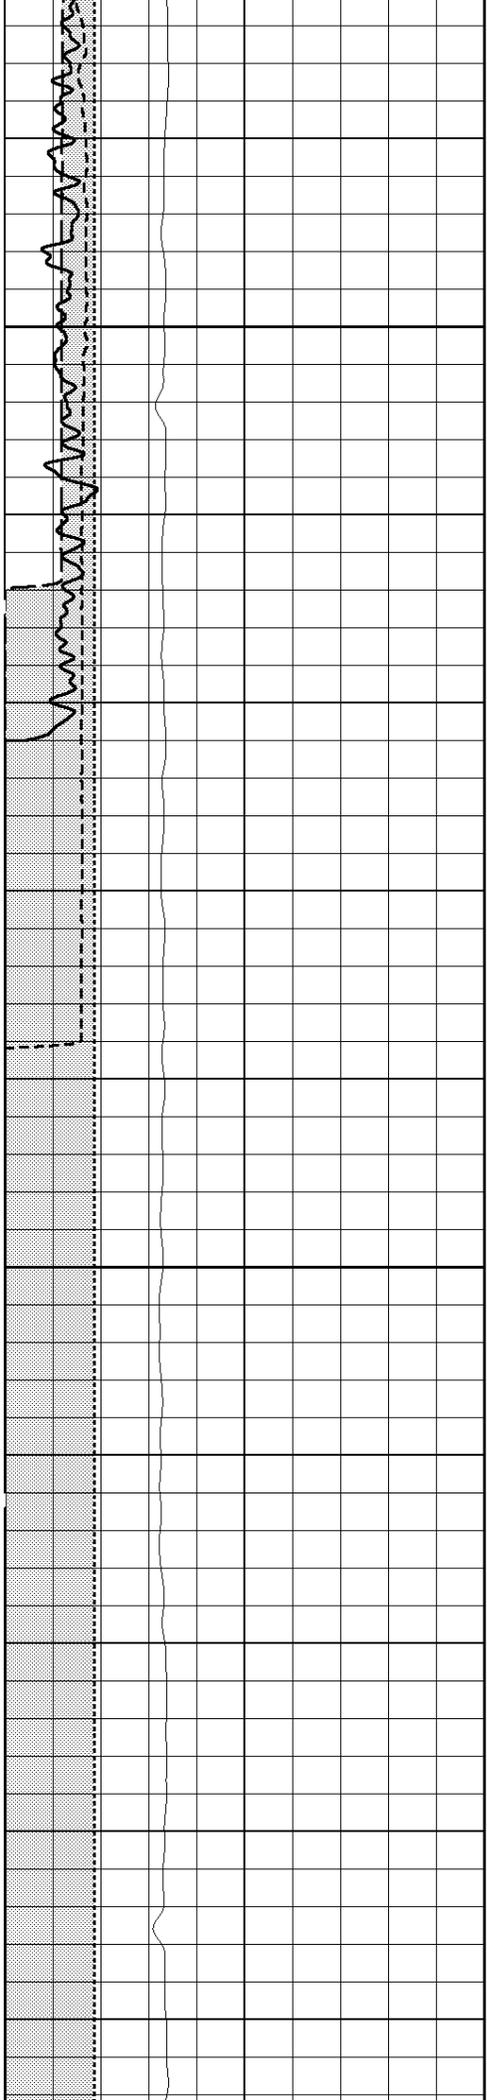

4800

4825

