

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-055-00769-00-00  
Spot: SWSWSWNE Sec/Twnshp/Rge: 20-23S-32W  
2490 feet from N Section Line, 2590 feet from E Section Line  
Lease Name: GEARHART GAS UNIT Well #: 1  
County: FINNEY Total Vertical Depth: 2576 feet

Operator License No.: 5952  
Op Name: BP AMERICA PRODUCTION COMPANY  
Address: 2225 WEST OKLAHOMA AVENUE  
ULYSSES, KS 67880

PROD Size: 5.5 feet: 2573 WITH 1000 SX CMT  
SURF Size: 8.625 feet: 963 WITH 600 SX CMT

12  
#83

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/13/2005 6:45 AM  
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES  
Proposal Rcvd. from: KEVIN STRUBE Company: BP AMERICA PRODUCTION CO. Phone: (620) 356-6955

Proposed Plugging Method: MIX & PUMP 300 SX CMT & 500# HULLS. FILL 5 1/2" FROM 0-2566'. EXTRA SX CMT FOR ANNULUS IF NEEDED.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/13/2005 8:00 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 250 SX CMT & 500# HULLS TO SURFACE. PRESSURE TO 330# AND HELD.  
HOOK UP TO 5 1/2" X 8 5/8" ANNULUS. PRESSURE TO 300# & HELD. 5 1/2" CASING FULL OF CMT.


Perfs:

Top	Bot	Thru	Comments
2526	2566		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON. NO CASING RECOVERED.

Plugged through: CSG

District: 01

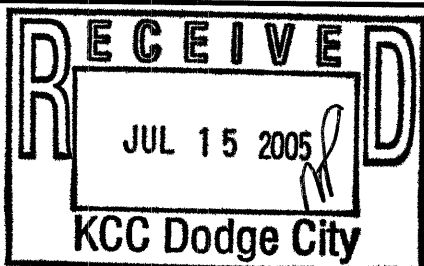

Signed

*Ken Jehlik*  
(TECHNICIAN)

RECEIVED

JUL 20 2005

KCC WICHITA

INVOICED

DATE

7-20-05

INV. NO.

2006060068

CP-2/3