

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21884-00-00
Spot: NESWSW Sec/Twnshp/Rge: 35-16S-28W
890 feet from S Section Line, 990 feet from W Section Line
Lease Name: BRUNS Well #: 1
County: LANE Total Vertical Depth: 4650 feet

Operator License No.: 6569
Op Name: SCHMITT, CARMEN, INC.
Address: PO BOX 47
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	219		

#151¹³

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/28/2005 10:00 PM
Plug Co. License No.: 5184 Plug Co. Name: SHIELDS OIL PRODUCERS INC
Proposal Rcvd. from: BURT BEERY Company: SHIELDS OIL PRODUCERS INC Phone: (785) 483-3141

Proposed Plugging Method: 1ST PLUG AT 2190' WITH 50 SX CMT. 2ND PLUG AT 1530' WITH 80 SX CMT. 3RD PLUG AT 870' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 40-0' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 07/29/2005 12:30 AM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG AT 2190' WITH 50 SX CMT. 2ND PLUG AT 1530' WITH 80 SX CMT. 3RD PLUG AT 870' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 40-0' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

RECEIVED
AUG 03 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

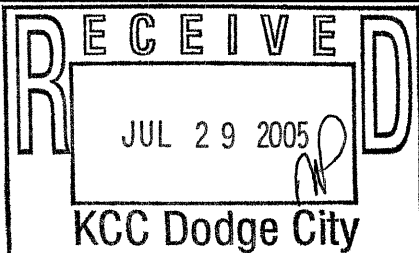

Signed

Steve Durrant
(TECHNICIAN)

INVOICED

DATE

8-3-05

INV. NO

2006060234