NABORS COMPLETION & PRODUCTION SERVICES CO.

COMPENSATED DENSITY / NEUTRON PE LOG

Company	RED OAK ENERGY, INC.
Well	PRAIRIE WIND #2
Field	WILDCAT
County	WALLACE
State	KANSAS

Company RED OAK ENERGY, INC.

Well PRAIRIE WIND #2

Field WILDCAT

County WALLACE State KANSAS

Location: API # : 15-199-20426-00-00
2569' FNL & 840' FWL
SW - SE - SW - NW
SEC 31 TWP 14S RGE 41W

Other Services: DIL/MEL

Permanent Datum: GROUND LEVEL Elevation 3836
Log Measured From: KELLY BUSHING 16.5' A.G.L.
Drilling Measured From: KELLY BUSHING

Elevation
K.B. 3852.5
D.F. 3850.5
G.L. 3836

Date	12/19/14		
Run Number	ONE		
Depth Driller	5200		
Depth Logger	5202		
Bottom Logged Interval	5478		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 389'		
Casing Logger	390'		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4400 PPM	
Density / Viscosity	9.4/54		
pH / Fluid Loss	10.0/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.50 @ 50F		
Rmf @ Meas. Temp	1.12 @ 50F		
Rmc @ Meas. Temp	2.01 @ 50F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.40 @ 127F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	127F		
Equipment Number	4010		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	KEVIN DAVIS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

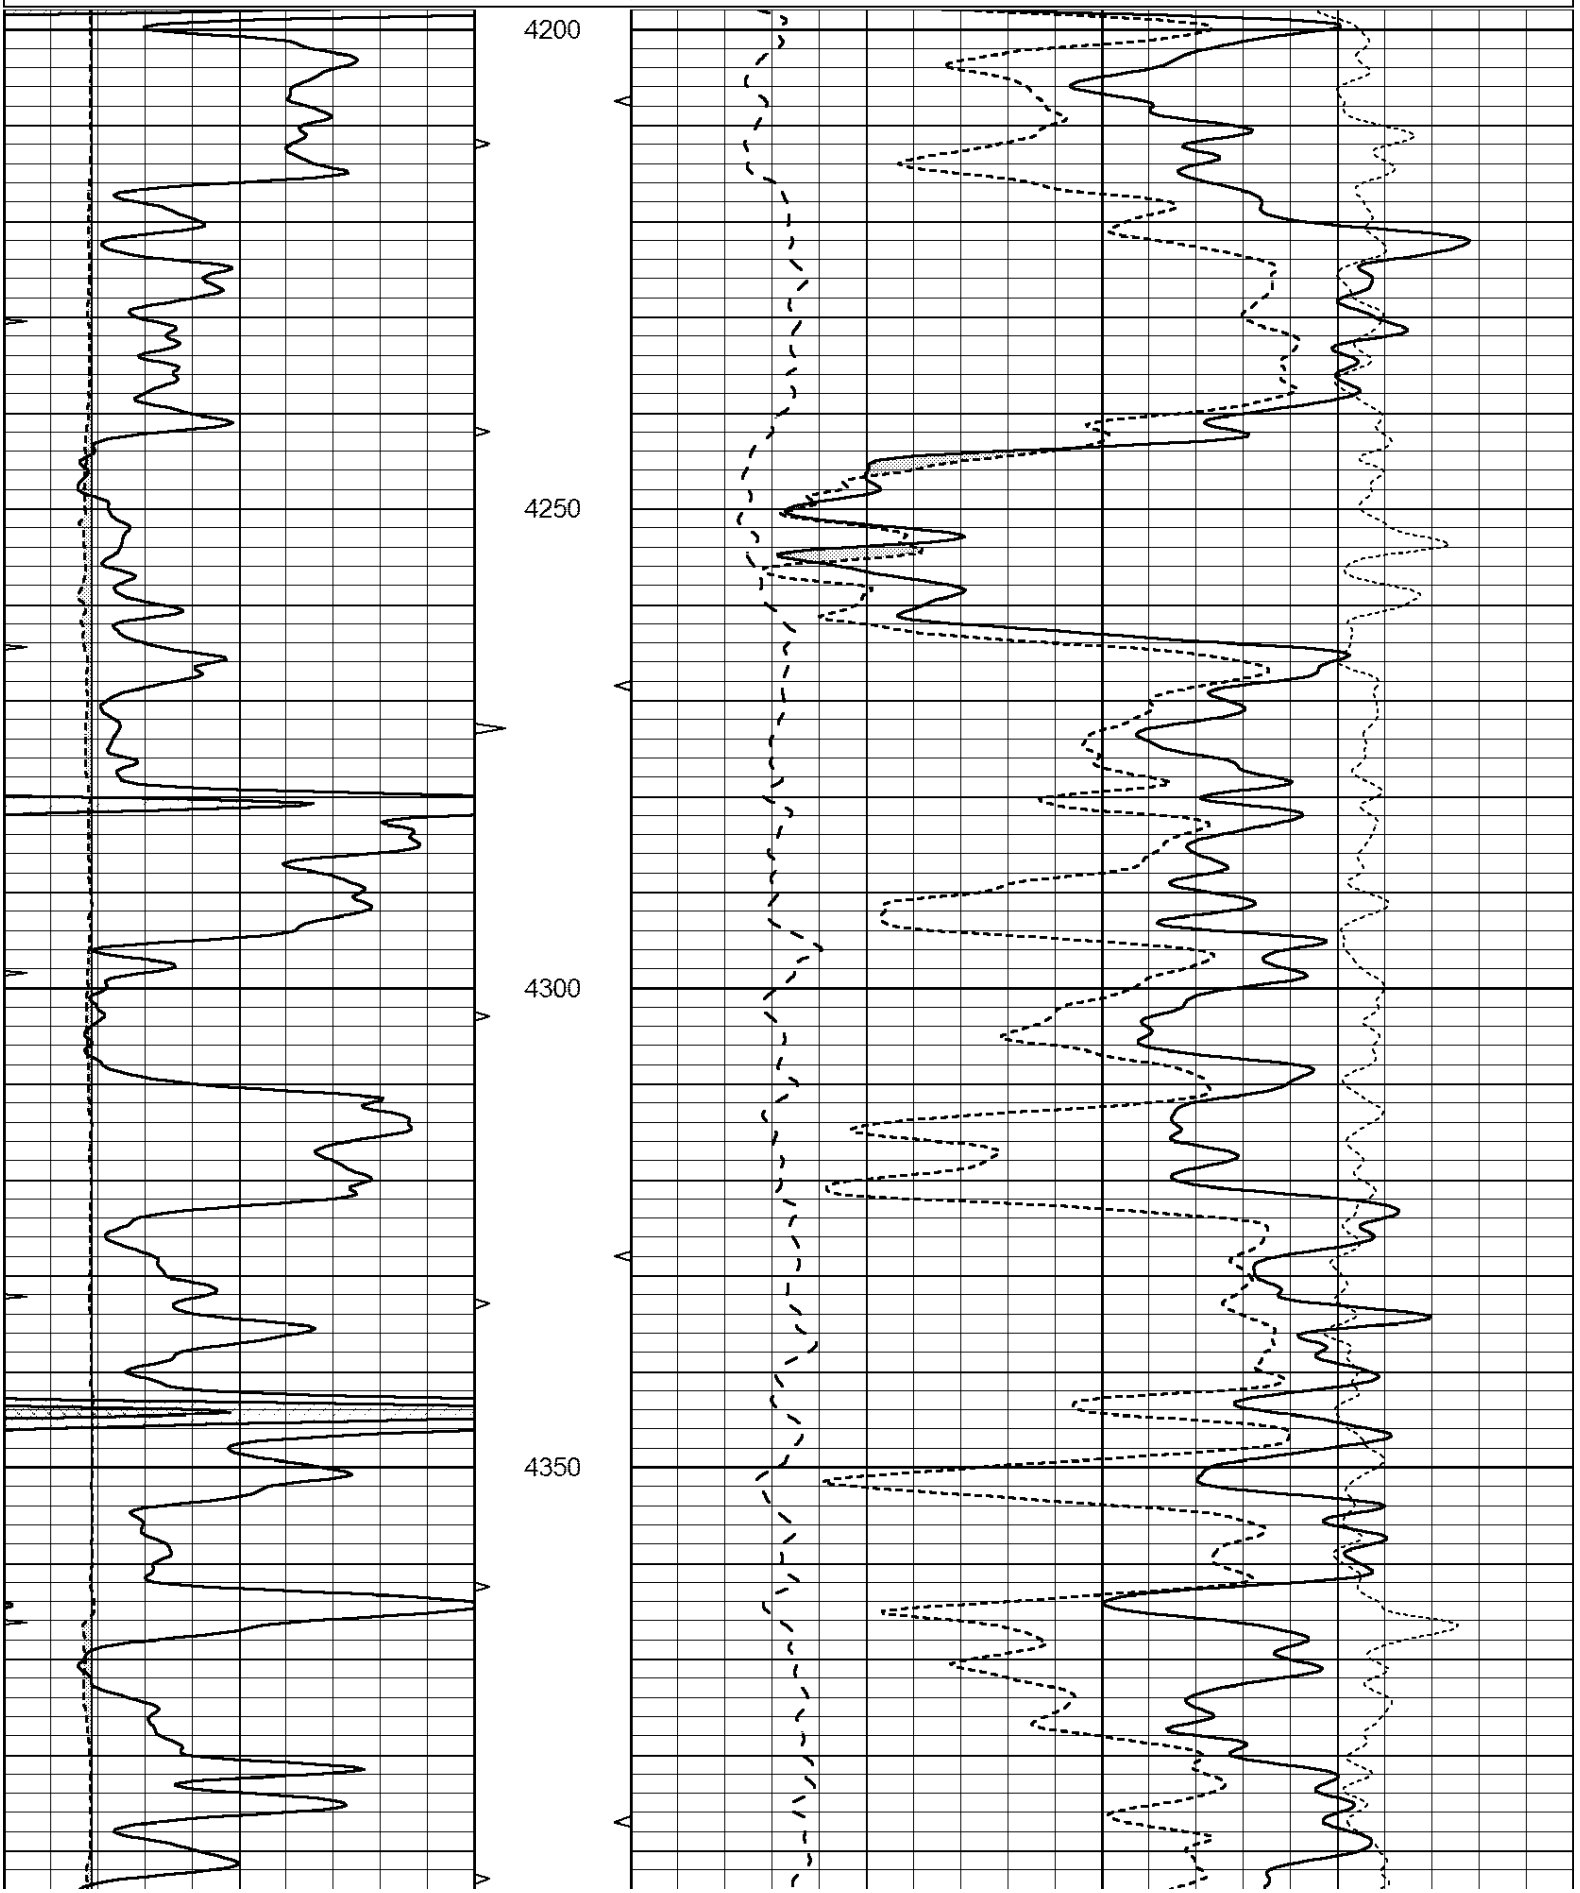
Comments

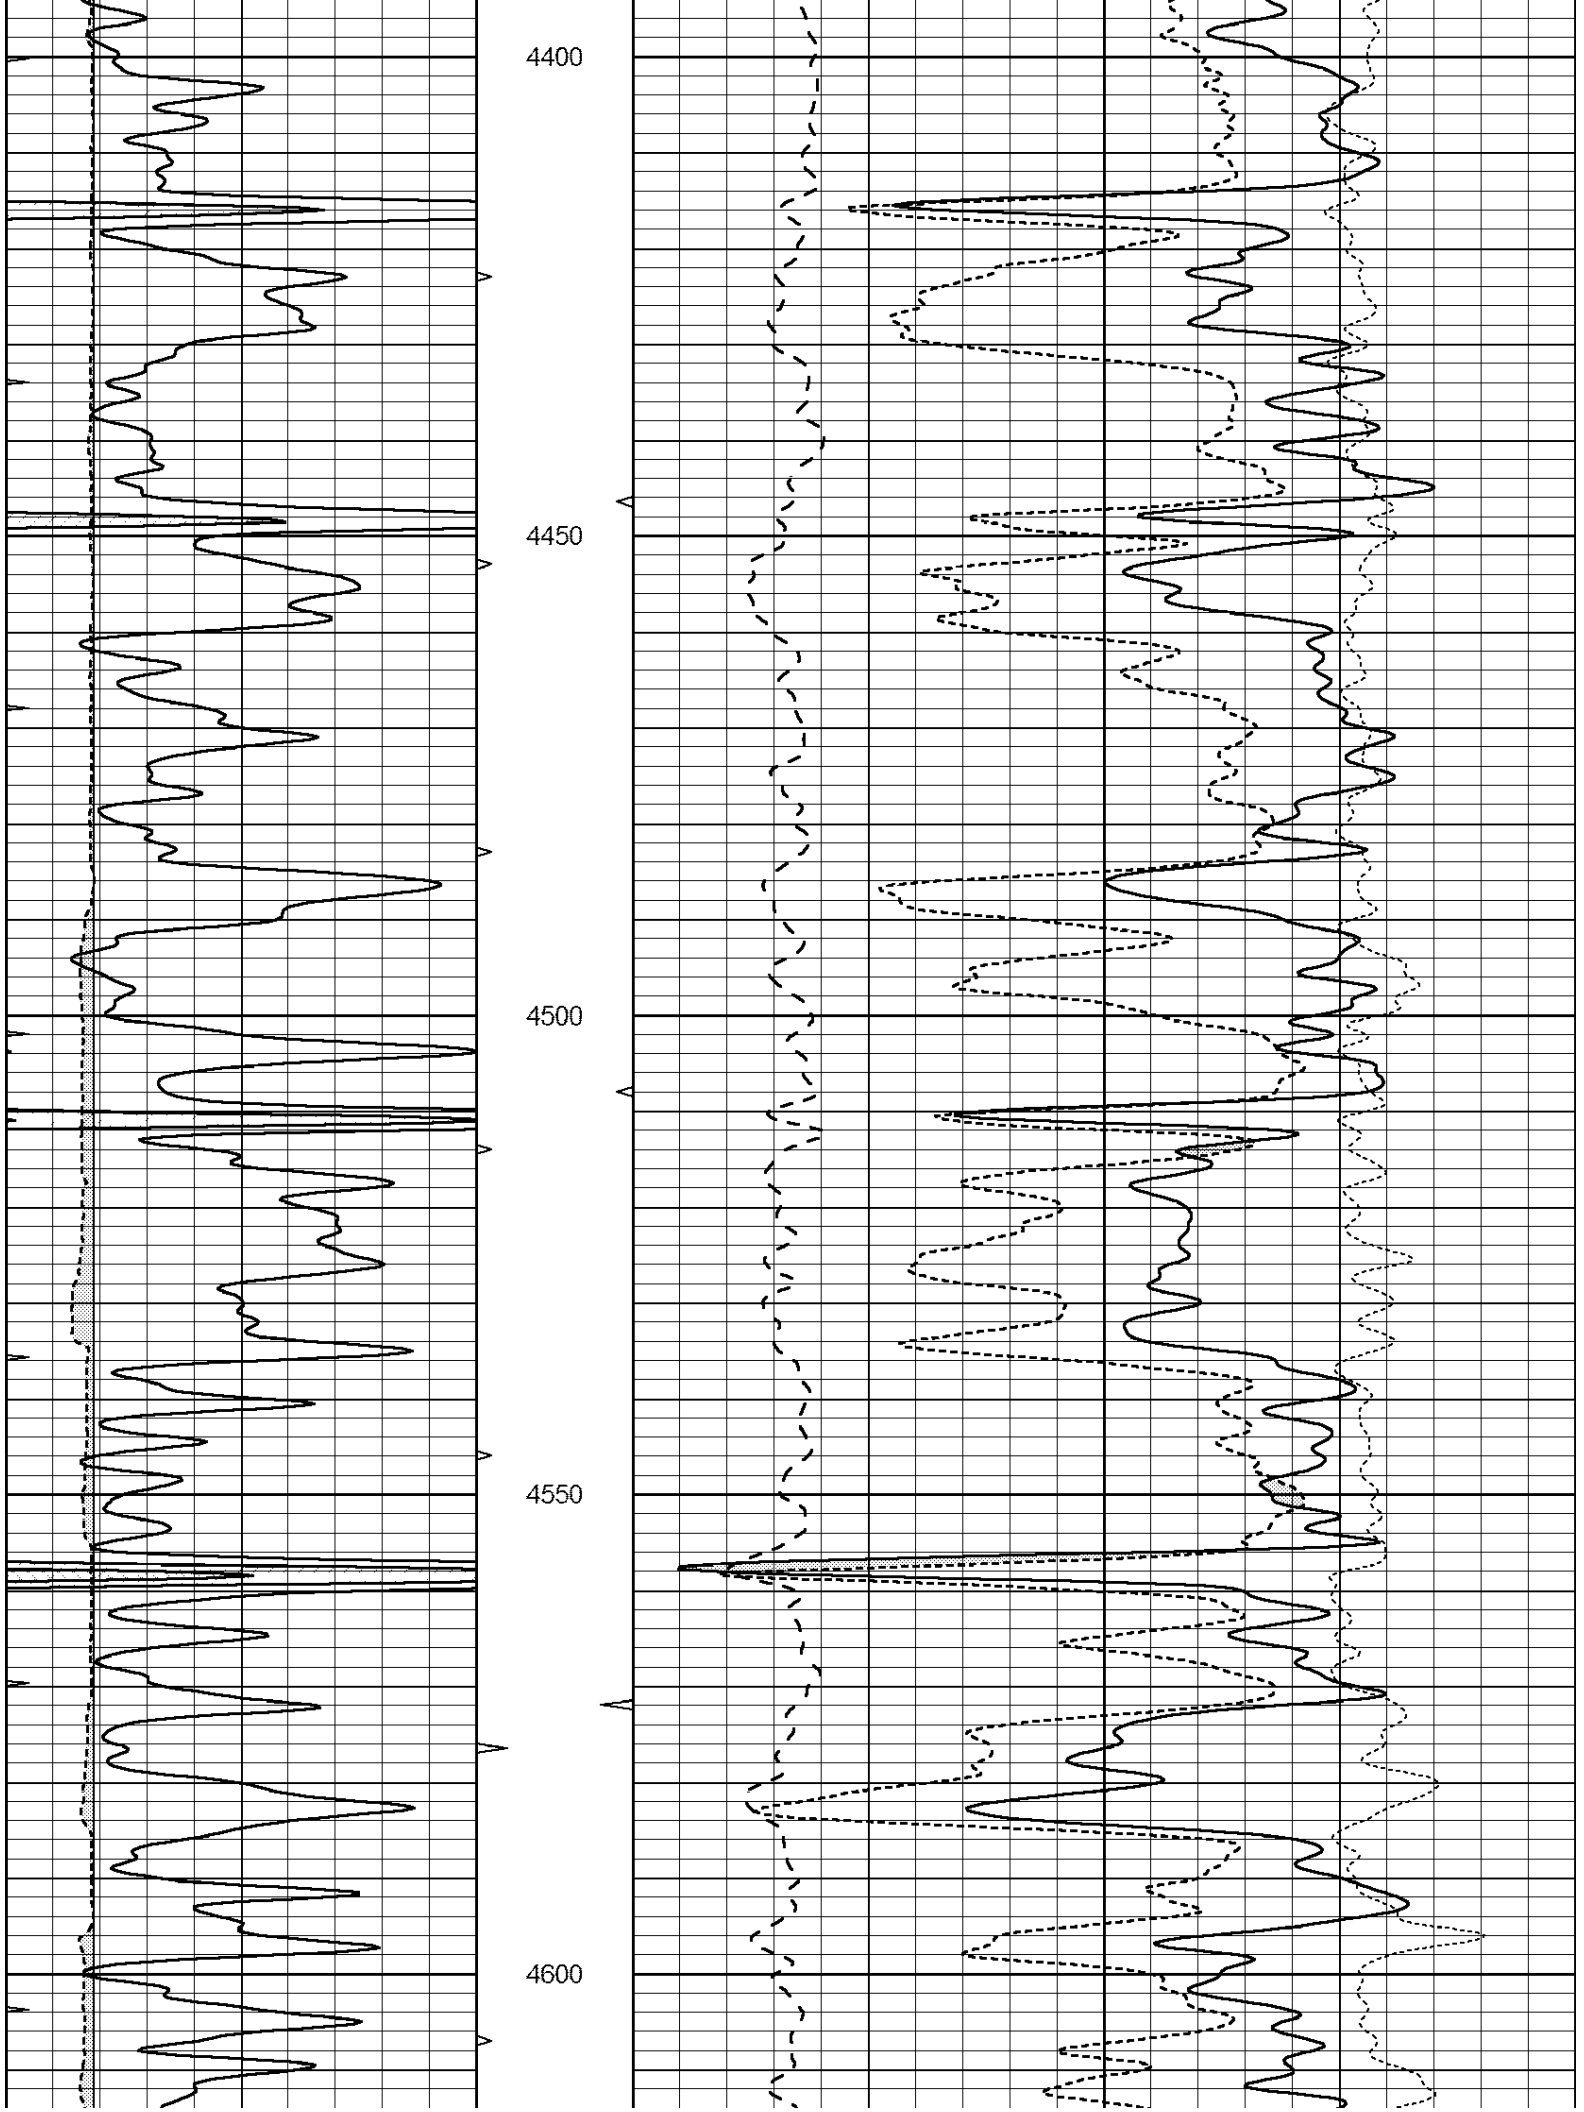
NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
SHARON SPRINGS, KS. - 8 MILES SOUTH - 6 MILES WEST - NORTH INTO

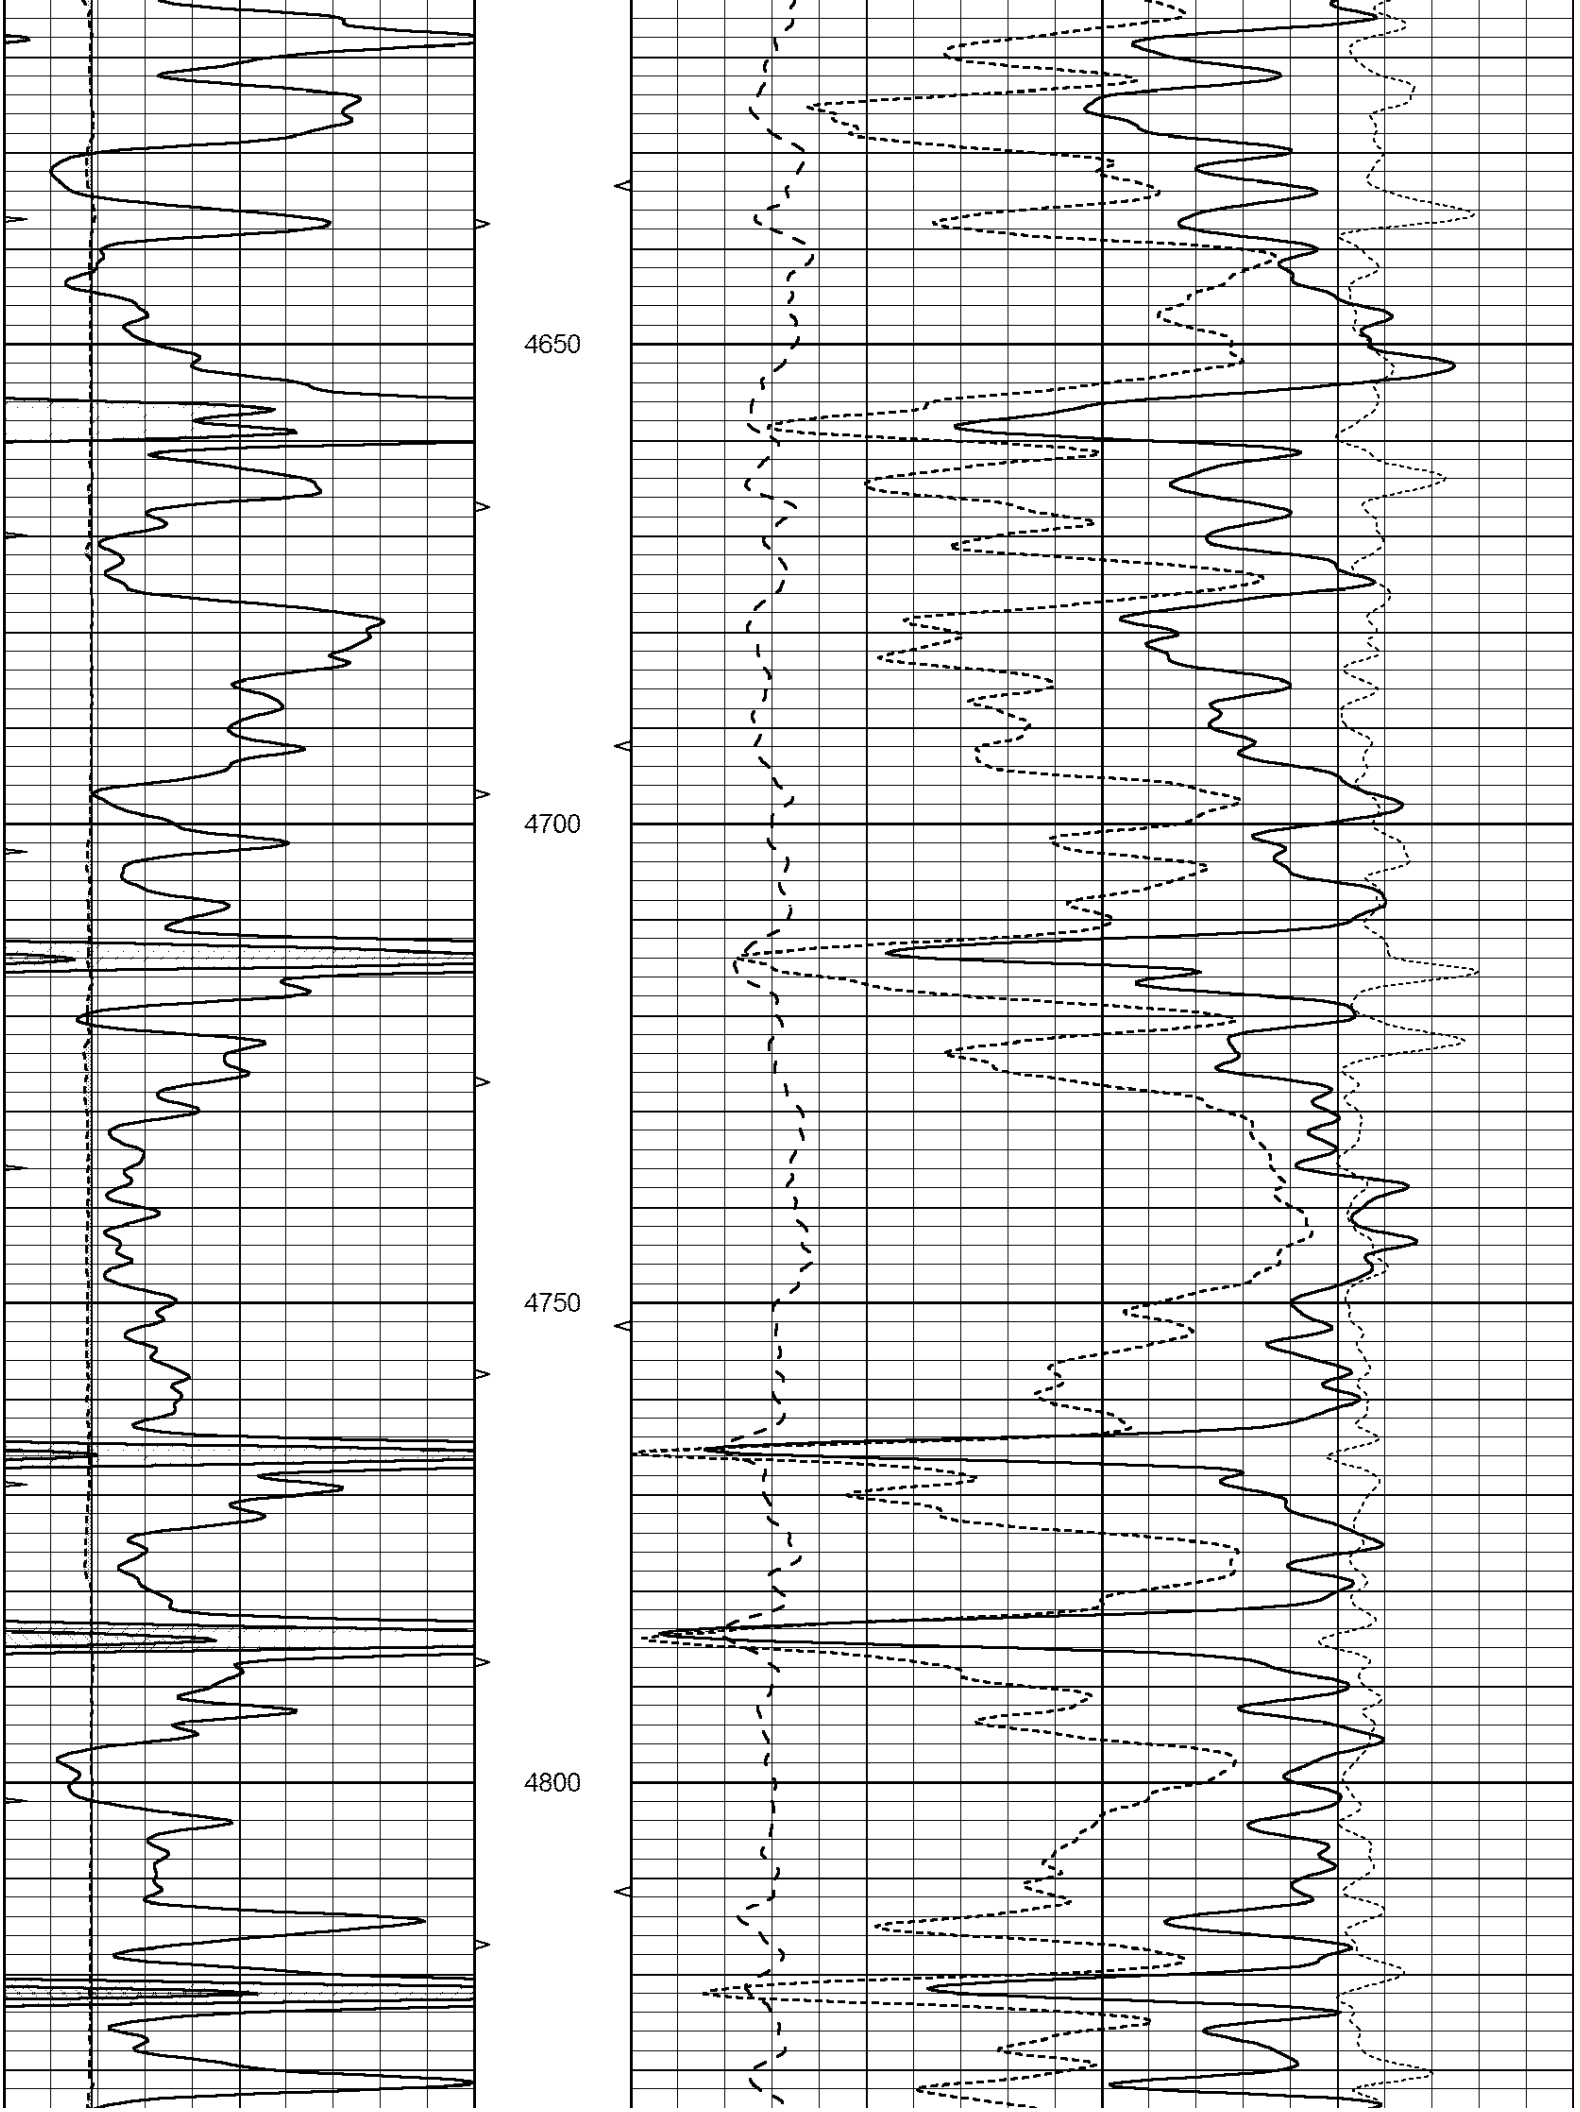
Database File:	26422pe.db
Dataset Pathname:	pass3.3
Presentation Format:	_ldt_neu
Dataset Creation:	Fri Dec 19 09:40:59 2014 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240

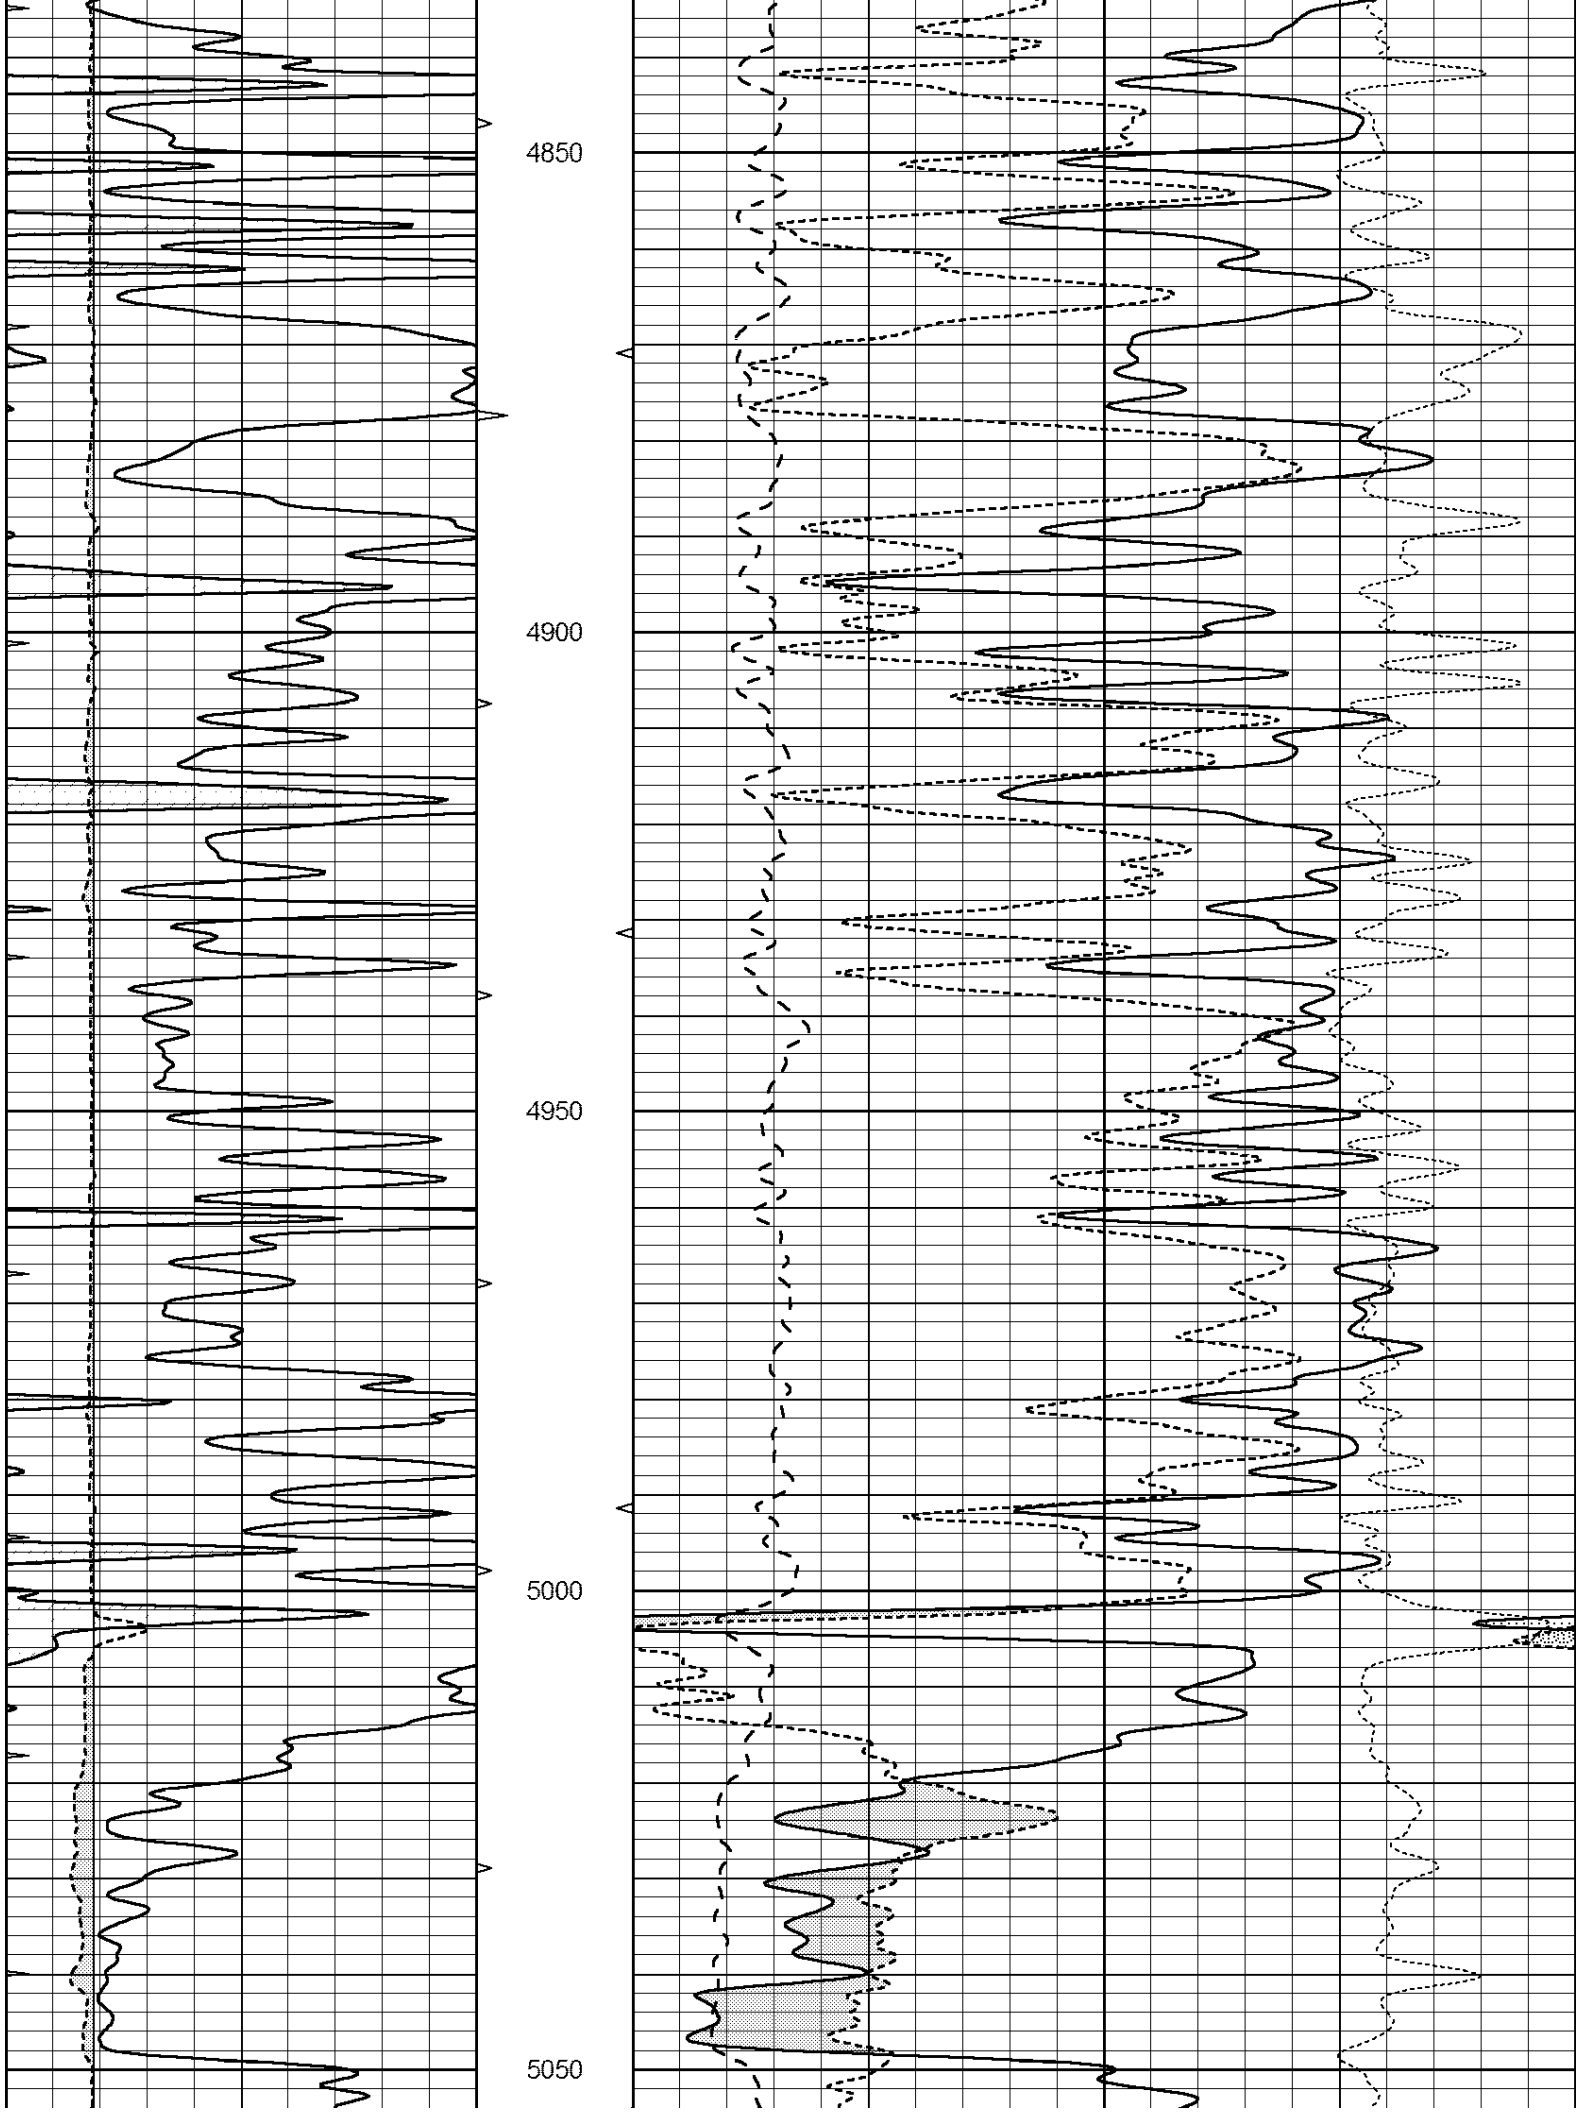
Charted by: Depth in Feet scaled 1:240

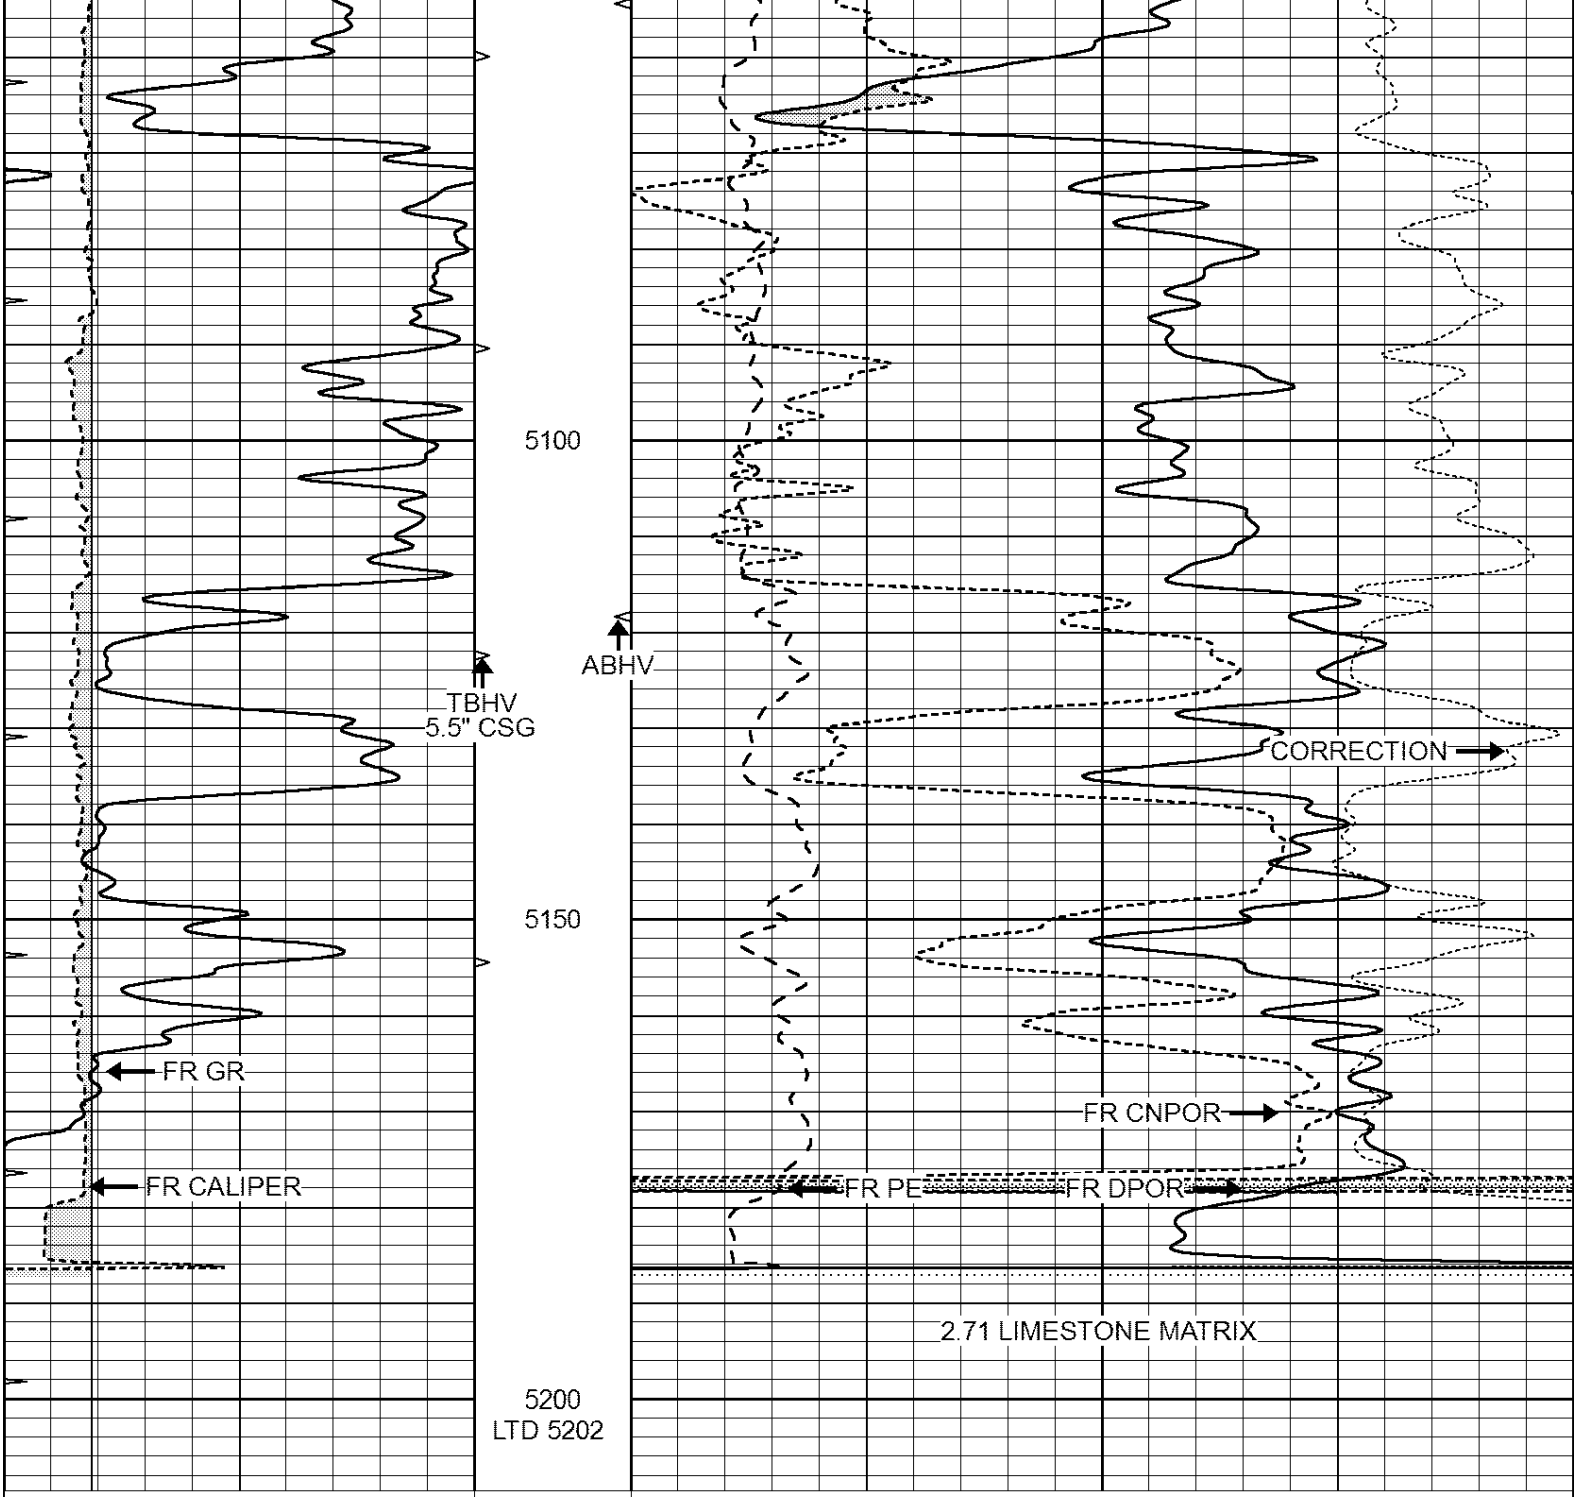
0	GAMMA RAY (GAPI)	150	ABHV		30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		0 PE 10	-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10			




4400
4450
4500
4550
4600


4650
4700
4750
4800

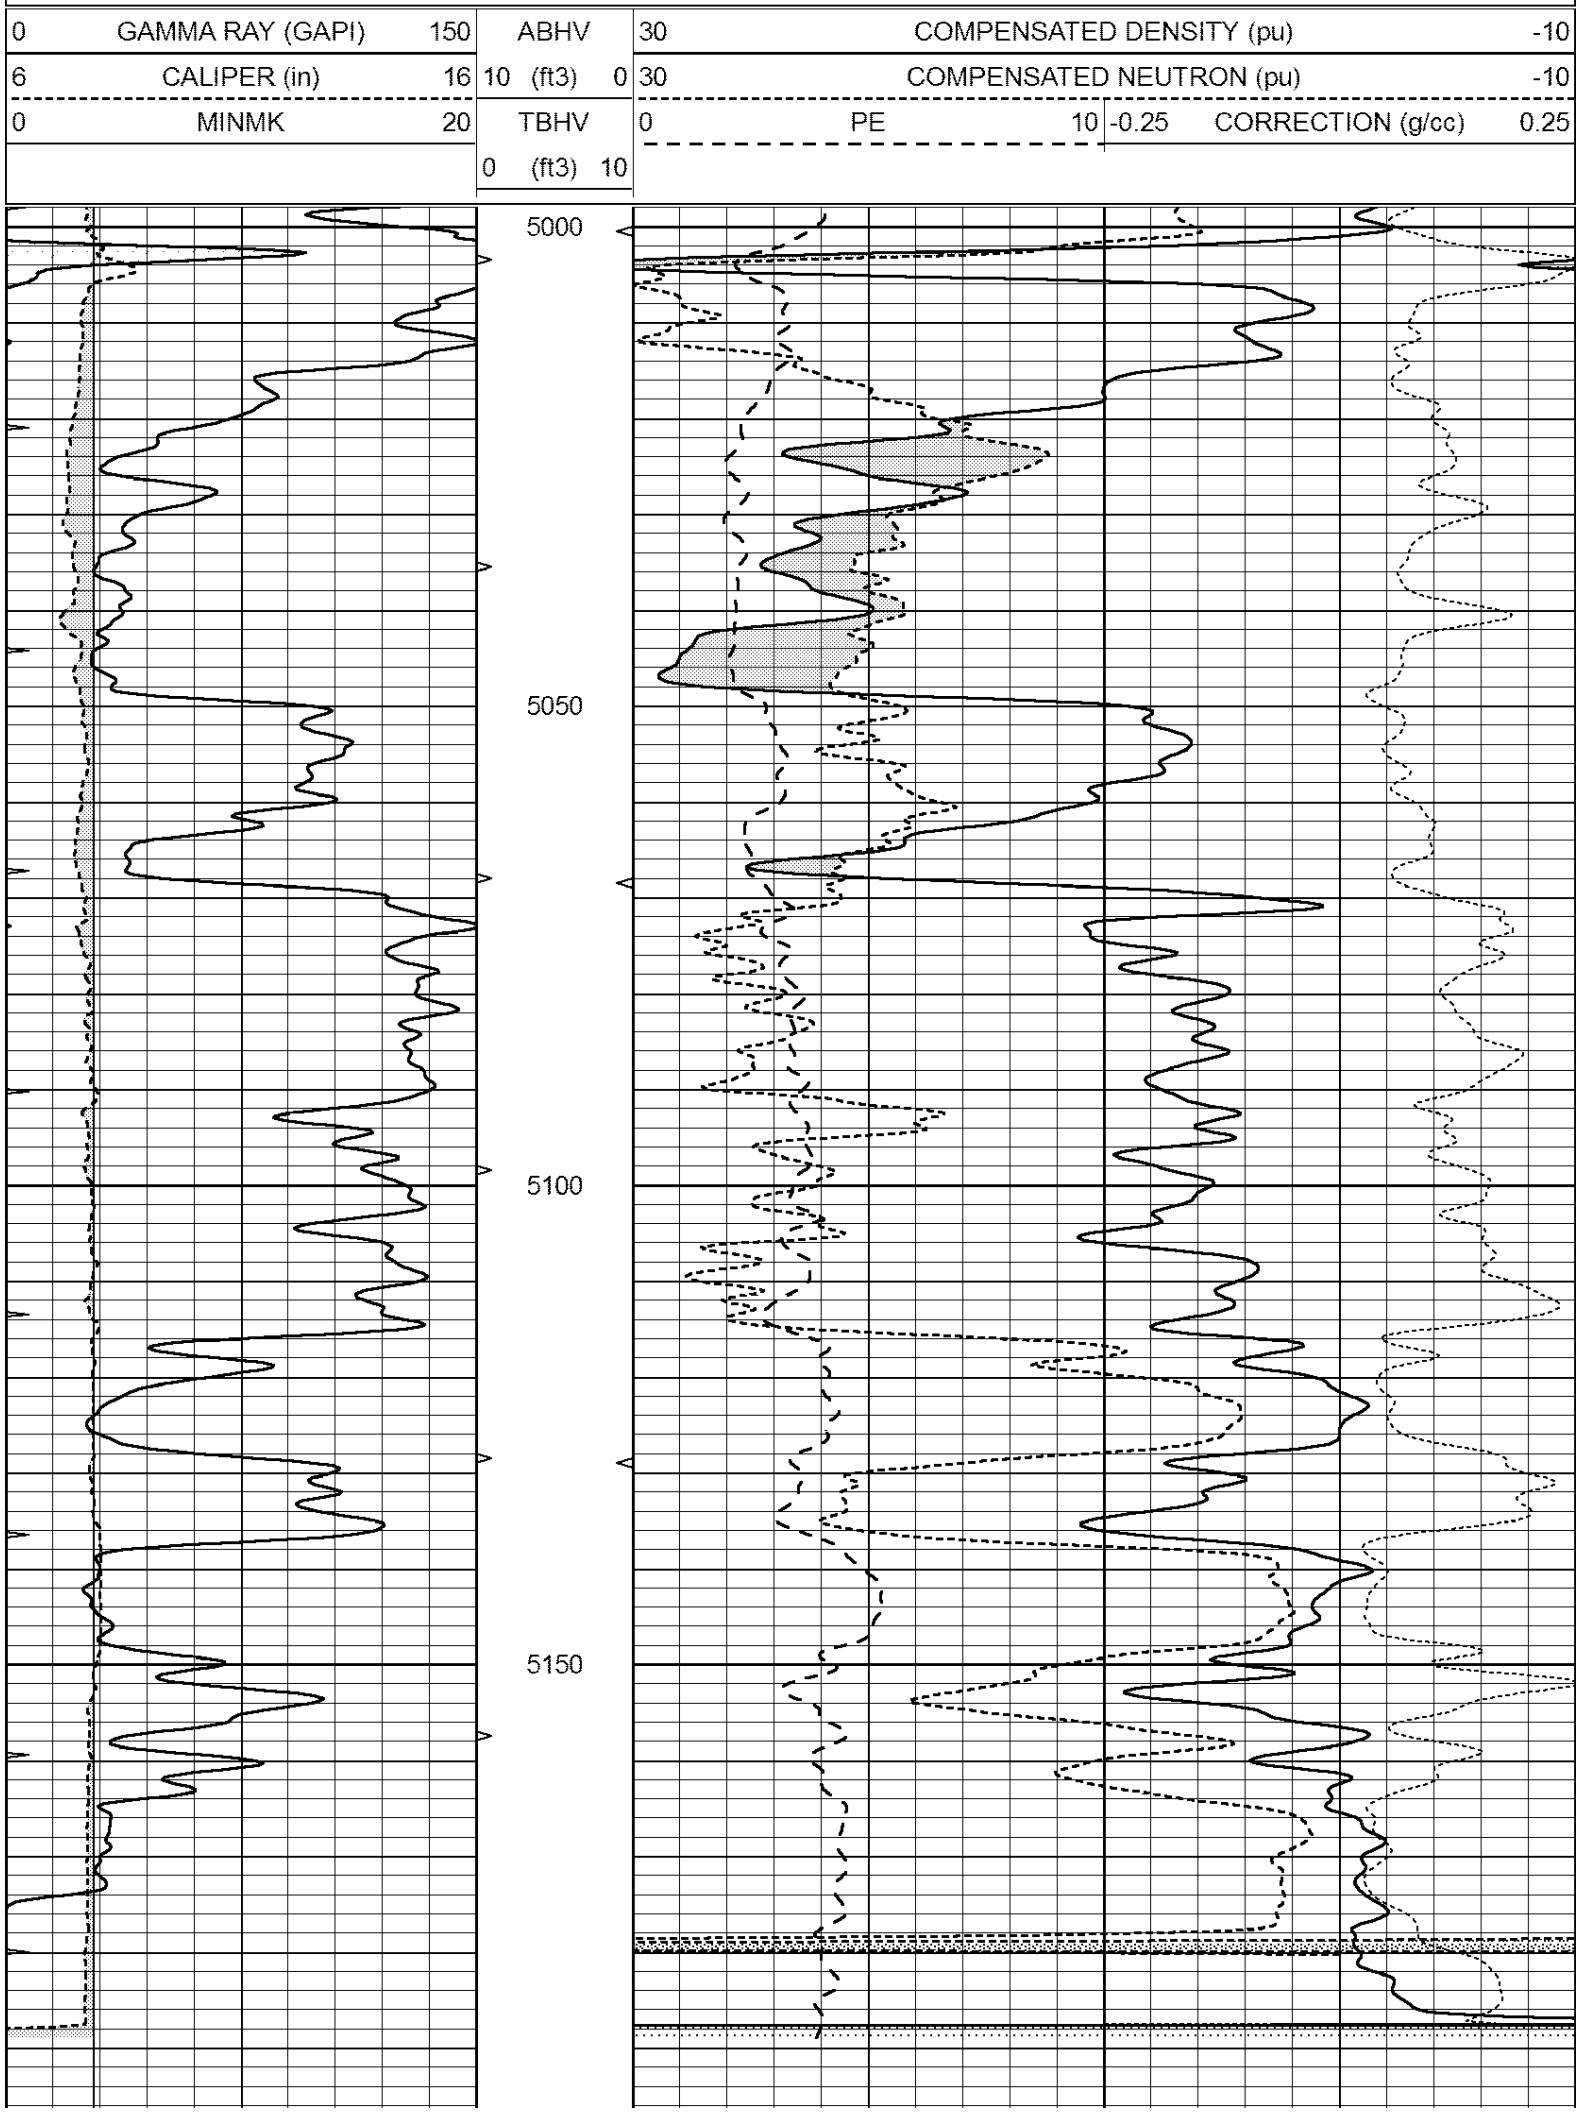

4850
4900
4950
5000
5050



NABORS
COMPLETION & PRODUCTION SERVICES CO.

REPEAT SECTION

Database File:	26422pe.db
Dataset Pathname:	pass2.3
Presentation Format:	_ldt_neu
Dataset Creation:	Fri Dec 19 09:17:17 2014 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240


0 GAMMA RAY (GAPI) 150
6 CALIPER (in) 16
0 MINMK 20
ABHV
10 (ft3) 0
TBHV
0 (ft3) 10
30 COMPENSATED DENSITY (pu) -10
30 COMPENSATED NEUTRON (pu) -10
0 PE 10
-0.25 CORRECTION (g/cc) 0.25
5000
5050
5100
5150

			5200						
0	GAMMA RAY (GAPI)	150	ABHV		30	COMPENSATED DENSITY (pu)			-10
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)			-10
0	MINMK	20	TBHV		0	PE	10	-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10					

Calibration Report

Database File: 26422pe.db
Dataset Pathname: pass3.3
Dataset Creation: Fri Dec 19 09:40:59 2014 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Sun Aug 17 08:09:53 2014
Downhole Cal Performed: Mon Jul 28 11:08:27 2008
After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	-2.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-16.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 006 Model: PRB

Master Calibration

Performed Wed Mar 12 14:26:38 2014

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1296.6	7199.0	2625.4	7833.2	cps
Window 2	1218.8	5956.6	2257.8	6372.0	cps

Window 3	926.7	2990.0	1318.7	3107.7	cps
Window 4	314.3	319.6	320.3	326.2	cps
Long Space	0.0	4737.9	1039.0	5153.3	cps
Short Space	1.3	1655.6	1074.2	1728.4	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle	: 44.1	Rib Slope	: 0.969	Density/Spine Ratio	: 0.562
Spine Angle	: 74.1	Spine Slope	: 3.507	Spine Intercept	: -17.5

Before Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps		pu	pu
2)	Short Space		cps			
	Long Space		cps		pu	
3)	Short Space		cps			
	Long Space		cps		pu	

POST-SURVEY VERIFICATION

	Detector	Readings		Measured		Target

1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Wed Dec 10 11:09:24 2014	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.8000	GAPI/cps