

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-20670-00-00
Spot: E2W2SW Sec/Twnshp/Rge: 15-28S-13W
1320 feet from S Section Line, 670 feet from W Section Line
Lease Name: LAWTON Well #: 1
County: PRATT Total Vertical Depth: 4601 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2872		WITH 2 SX CMT
CIBP		2960		
PROD	4.5	4009	1438	WITH 125 SX CMT
SURF	8.625	1003		WITH 100 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/27/2005 11:00 AM
Plug Co. License No.: 5893 Plug Co. Name: PRATT WELL SERVICE, INC.
Proposal Rcvd. from: GAROLD INSLEY Company: PRATT WELL SERVICE, INC. Phone: (620) 672-6520

Proposed Plugging Method: SET CIBP @ 2872' & 2 SX CMT. FREE POINT CASING. PULL TO 1020'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. PULL CASING TO 500' & PUMP 40 SX CMT. PULL CASING. FILL HOLE WITH CMT FROM 40' TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 07/27/2005 1:00 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

SET CIBP @ 2872' & 2 SX CMT. 1ST PLUG PULL CASING TO 1002'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. 2ND PLUG PULL CASING TO 508'. LOAD HOLE WITH MUD & PUMP 40 SX CMT. 3RD PLUG PULL CASING TO 40'. CIRCULATE CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
3904	3906		
2917	2921		
2894	2897		
2883	2888		

RECEIVED
AUG 03 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES.

Plugged through: CSG

District: 01

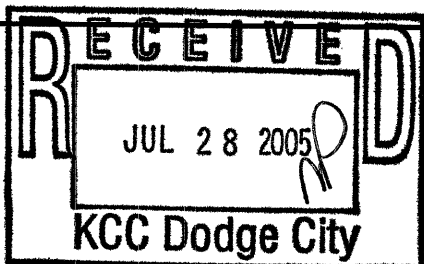

Signed

Steve Durrant
(TECHNICIAN)

INVOICED

DATE

8-3-05

NO. NO

2006060233