

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20730-00-00
Spot: NENENE Sec/Twnshp/Rge: 31-34S-26W
4950 feet from S Section Line, 330 feet from E Section Line
Lease Name: FINCHAM Well #: 4-31
County: MEADE Total Vertical Depth: 6300 feet

Operator License No.: 8060
Op Name: ZINKE & TRUMBO, INC.
Address: 1202 E. 33RD ST., STE 100
TULSA, OK 74105

String	Size	Depth (ft)	Pulled (ft)	Comment
COND	16	40		WITH 7 YDS CMT
PROD	4.5	6301	2246	WITH 150 SX CMT # 204 75
SURF	8.625	1511		WITH 470 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/26/2005 12:00 PM
Plug Co. License No.: 8733 Plug Co. Name: DUNKIN, JERRY, INC.
Proposal Rcvd. from: BUTCH DUNCAN Company: DUNKIN, JERRY, INC. Phone: (580) 237-6152

Proposed Plugging Method: 30 SX CLASS H NEAT W/150# HULLS @ 5900', 35 SX CLASS H NEAT W/150# HULLS @ 4500' SX CLASS HE NEAT @ 1520', 40 SX CLASS @ 750', 15 SX CLASS H NEAT FROM 40' TO 4' CEMENT MIXED @ 15.6 PPG.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/26/2005 4:30 PM KCC Agent: GREG PATTERSON

Actual Plugging Report:

6/28/05: 1ST PLUG RUN TUBING TO 5900' & PUMP 150# HULLS & 30 SX CMT. 2ND PLUG PULL TUBING TO 4500' & PUMP 150# HULLS & 35 SX CMT. RDMOU. 7/26/05: 3RD PLUG FREE POINT CASING & PULL TO 1545'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. 4TH PLUG PULL CASING TO 741' & LOAD HOLE WITH MUD & PUMP 40 SX CMT. 5TH PLUG PULL CASING TO 40' & CIRCULATE CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
5956	5986		

RECEIVED
AUG 03 2005
KCC WICHITA

Remarks: USED CLASS H CMT BY JERRY DUNCAN INC.

Plugged through: CSG

District: 01

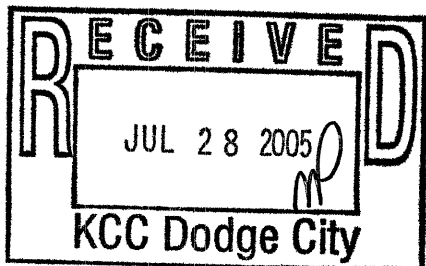

Signed

Greg Patterson
(TECHNICIAN)

INVOICED

DATE 8-3-05
2006060238

[Signature]
Form CP-2/3