

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-081-00382-00-00  
Spot: SESESENW Sec/Twnshp/Rge: 19-29S-32W  
2740 feet from S Section Line, 2740 feet from E Section Line  
Lease Name: VOSHELL Well #: 1  
County: HASKELL Total Vertical Depth: 2708 feet

Operator License No.: 32787  
Op Name: KANSAS NATURAL GAS OPERATING, I  
Address: PO BOX 818 1200 MAIN STREET  
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	7	2708	0	WITH 850 SX CMT
SURF	10.75	557	0	WITH 400 SX CMT <del>\$</del> 88 <sup>01</sup>

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/19/2005 8:00 AM  
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES  
Proposal Rcvd. from: STEVE LEHNING Company: KANSAS NATURAL GAS Phone: (785) 625-7353

Proposed Plugging Method: HOOK ONTO 7" CSG AND BULLHEAD 30 SX OF 40/60 POZMIX & 300# SOTTONSEED HULLS TO LOAD. HOOK ONTO 10-3/4" AND PUMP 100 SX OF 40/60 POZMIX TO SURFACE. CUT OFF 6' BELOW GROUND LEVEL & WELD CAP ON 10-3/4".

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/20/2005 9:00 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 300# HULLS & 50 SX CMT. PUMP 65 BBL GEL WATER SPACER TO 700'. MIX & PUMP 150 SX CMT FROM 700'. SAW NO PRESSURE. RIG UP TO BACKSIDE. PRESSURED UP IMMEDIATELY. BACKSIDE FULL. RAN WIRELINE & TAG TOC @ 1837'. SDON. 7/20/05: PUMP GEL SPACER FROM 1837' TO 700', FOLLOW WITH 115 SX CMT FROM 700' TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
2714	2721	OH	
2664	2682		
2632	2642		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

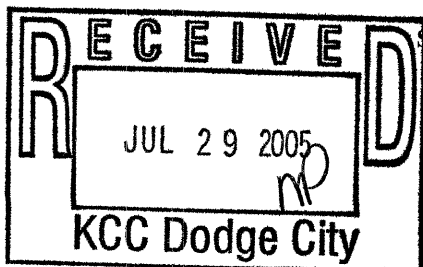

Signed Jim Holland PARTER  
(TECHNICIAN)  
RECEIVED AUG 08 2005  
INVOICED DATE 8-8-05 INV. NO. 2006060278  
Form CR-2/3