

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-00426-00-00
Spot: W2NWNWSE Sec/Twnshp/Rge: 24-29S-33W
2540 feet from S Section Line, 2540 feet from E Section Line
Lease Name: BIRNEY Well #: 1
County: HASKELL Total Vertical Depth: 2713 feet

Operator License No.: 32787
Op Name: KANSAS NATURAL GAS OPERATING, I
Address: PO BOX 818 1200 MAIN STREET
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	2698	0	WITH 900 SX CMT
SURF	8.625	557	0	WITH 400 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/19/2005 11:00 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: STEVE LEHNING Company: KANSAS NATURAL GAS Phone: (785) 625-7353

Proposed Plugging Method: HOOK ONTO 5-1/2" CASING AND BULLHEAD 30 SX OF 40/60 POZMIX AND 300# OF COTTONSEED HULLS TO LOAD CASING. HOOK ONTO 8-5/8" CASING AND PUMP 100 SX OF 40/60 POZMIS TO SURFACE. CUT OFF 6' BELOW GROUND LEVEL AND WELD CAP ON 8-5/8".

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/20/2005 11:00 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMPED 300# HULLS & 50 SX CMT. FOLLOW CMT WITH 35 BBL GEL WATER SPACER TO 700'. PUMPED 90 SX CMT & SHUT DOWN. NO PRESSURE. RIG UP TO BACKSIDE, PRESSURED IMMEDIATELY. RAN WIRELINE, TAG TOC @ 1863'. SDON. 7/20/05: PUMP GEL WATER SPACER FROM 1863' TO 700', FOLLOW WITH 75 SX CMT FROM 700' TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
2652	2676		
2626	2636		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

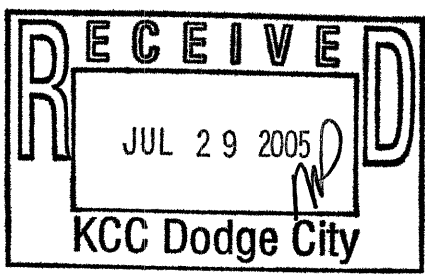

Signed Jim Holland PIRT # _____
(TECHNICIAN)

RECEIVED
AUG 08 2005
KCC WICHITA
INVOICE # _____
DATE 8-8-05
NO. 2006060278