


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-179-00091-00-00
WELL PLUGGING RECORD

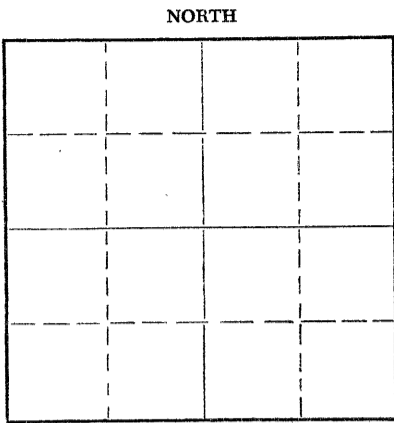

Locate well correctly on above Section Plat

Sheridan County, Sec. 11 Twp. 6S Rge. 30 (W)
Location as "NE/CNW/SW" or footage from lines C NW SE SE
Lease Owner Cities Service Petroleum Company
Lease Name Strohwig Well No. 1
Office Address Box 553, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/27/ 19 61
Application for plugging filed 12/27 19 61
Application for plugging approved 12/27 19 61
Plugging commenced 12/28 19 61
Plugging completed 12/28 19 61
Reason for abandonment of well or producing formation Non Commercial

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert P. Leiker
Producing formation Depth to top Bottom Total Depth of Well RTD 4540 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	320'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud 540' to 315' through drill pipe;
Set Howco wooden plug at 315';
Ran 20 sx. cement through drill pipe 315' to 260';
Filled hole with heavy mud through drill pipe 260' to 40';
Set Howco wooden plug at 40';
Put in 1/2 sack hulls at 40';
Filled hole with 10 sacks cement from 40' to base of cellar;
Job complete 12/28/61 - released rotary.

RECEIVED
STATE CORPORATION COMMISSION

JAN 24 1962

CONSERVATION DIVISION
Wichita, Kan.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers, Inc.
Address Hoisington, Kansas.

1-24-62

STATE OF KANSAS, COUNTY OF BARTON, ss.
M. M. Hardin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin

Box 553, Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of January, 1962

My commission expires March 18, 1963

Notary Public.

