

RECEIVED
AUG 08 2005
KCC WICHITA

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15-175-21612-0000 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 7/2/97 (completion).

Well Operator: Midwestern Exploration Co. KCC License #: 5263
(Owner / Company Name) (Operator's)

Address: 3500 S. Boulevard, Suite 2B City: Edmond

State: Oklahoma Zip Code: 73013 Contact Phone: (405) 340-4300

Lease: Dunlap Well #: 2-8 Sec. 8 Twp. 35 S. R. 34 East West

C - SW - NW Spot Location / QQQQ County: Seward

1980 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

660 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: 20" Set at: 70' Cemented with: 7 yds Sacks

Surface Casing Size: 8 5/8 Set at: 1620' Cemented with: 521 Sacks

Production Casing Size: 4 1/2 Set at: 6855' Cemented with: 460 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs 6676-82'/CIBP@6650' : Perfs 6538-46'/CIBP@ 6500' w/10'
CMT on top : Perfs 6254', 6264', 6290-96', 6314-34', Perfs 4354-70', 4398-4404' sq'd w/250 sx.

Elevation: 2944 (G.L. / K.B.) T.D.: 8200 PBDT: 6490 Anhydrite Depth: Approx. 1630'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed):
Per KCC instructions.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Billy Daugherty, Field Foreman
Phone: (620) 629-5710

Address: 1800 N. Cain Avenue City / State: Liberal, Kansas 67901

Plugging Contractor: Eagle Services, Inc. KCC License #: 7407
(Company Name) (Contractor's)

Address: P. O. Box 1597, Liberal, KS 67905 Phone: (620) 624-1904

Proposed Date and Hour of Plugging (if known?): September 1, 2005

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent
Date: 8/4/05 Authorized Operator Agent: Dale J. Lollar (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

6/06

6/06

Dunlap 2-8

1980' FNL & 660' FWL
SECTION 8-T355-R34D
SEWARD Co, KANSAS

ELEV. GROUND 2936'
KB 2944'

8 5/8" SURFACE PIPE
SA 1620' W/521 SX

RECEIVED
AUG 08 2005
KCC WICHITA

42-381 50 SHEETS 5 SQUARE
42-382 100 SHEETS 5 SQUARE
42-383 100 SHEETS 5 SQUARE
42-384 100 SHEETS 5 SQUARE
NATIONAL

DV Tool @ 4546'
w/ 125 SX

TOP OF CMT-TOP SECTION - 4180'

TORONTO PERFS 4354-70'
4398-4404'
SQ'd w/250 SX
CMT

TOP OF CMT-BTM SECTION 5770'

2 3/8" Tbg @ 6275'

Morrow Perfs 6254-64'
6290-96'

CHESTER PERFS 6314-34'

PLUG BACK DEPTH -
6490'

CAST IRON BRIDGE PLUG 6500'


BASAL CHESTER PERFS 6538-46'

CAST IRON BRIDGE PLUG 6650'

ST LOUIS PERFS -6676-82'

4 1/2" CSG SA 6855' w/460 SX

TOTAL DEPTH 8200'

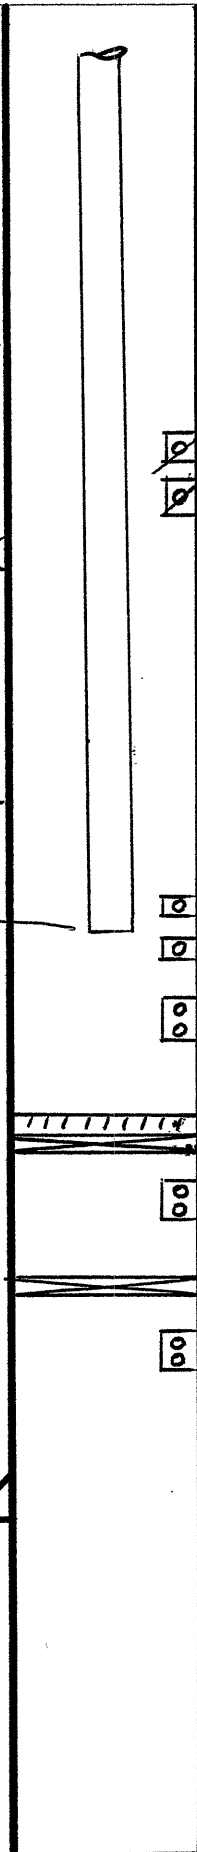

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Midwestern Exploration Company
3500 S Boulevard - Suite 2B
Edmond, OK 73013

August 08, 2005

Re: DUNLAP #2-8
API 15-175-21612-00-00
SWNW 8-35S-34W, 1980 FNL 660 FWL
SEWARD COUNTY, KANSAS

Dear Operator:


This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,


David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888