


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-179-05223-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

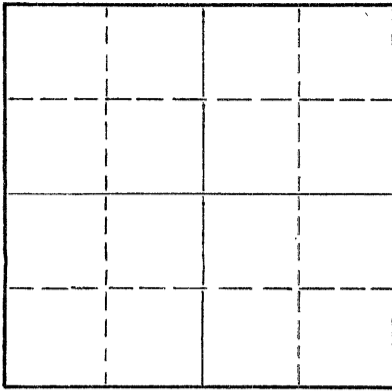

Locate well correctly on above
Section Plat

Sheridan County. Sec. 21 Twp. 6S Rge. (E) 29 (W)
Location as "NE/CNW%SW%" or footage from lines 330 S 330 W
Lease Owner Anderson-Plank-Arno
Lease Name Neff Well No. 1
Office Address P. O. Box 1735, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 9-7 19 54
Application for plugging filed 9-7 19 54
Application for plugging approved 9-7 19 54
Plugging commenced 9-7 19 54
Plugging completed 9-7 19 54
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production No 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldin Petty, Hays, Kansas
Producing formation None Depth to top Bottom Total Depth of Well 4,135 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>N</u>		0	262	8-5/8"	258	None
<u>O</u>						
<u>N</u>						
<u>E</u>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Surface casing set at 262'. Filled with mud to 260' then 1/2 sack of cotton hulls and Halliburton plug. Then 20 sacks of cement. Filled with mud to 40'; then 1/2 sack cotton hulls with Halliburton plug. Then cement to top of surface casing. Put 6" cap of cement in bottom of cellar.

Cement was spotted through the drill pipe on the bottom plug.

9-24-54

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Bill Hay Drilling Co.
Address Hoisington, Kansas

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
Novak Drilling Company, Inc. (employee of owner) or (~~owner~~) operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Burdette Jones

Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of September 1954

My commission expires June 17, 1955 Notary Public.

