

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22463-00-00
Spot: N2SWNE Sec/Twnshp/Rge: 11-23S-13W
3630 feet from S Section Line, 1980 feet from E Section Line
Lease Name: WESLEY Well #: 1
County: STAFFORD Total Vertical Depth: 3857 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3853	2400	WITH 100 SX CMT
SURF	8.625	260		WITH 165 SX CMT

35

#125

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/11/2005 3:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3800' & 5 SX CMT. PLUG AT 750' WITH 10 SX GEL & 50 SX CMT. PLUG AT 290' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/11/2005 5:19 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3800' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 750' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 290' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3853	3853	OH	


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED

DATE 8-24-05
INV. NO. 2006060382

District: 01

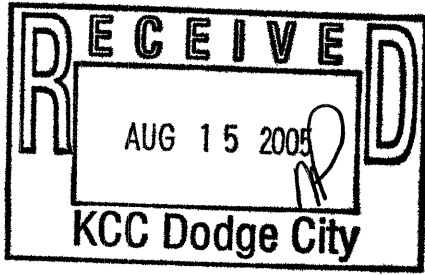

Signed Richard M. Lacey

(TECHNICIAN)
RECEIVED
AUG 24 2005
KCC WICHITA

Form CP-2/3