

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22496-00-00
Spot: S2S2SE Sec/Twnshp/Rge: 1-24S-12W
330 feet from S Section Line, 1320 feet from E Section Line
Lease Name: ROE Well #: 1
County: STAFFORD Total Vertical Depth: 3812 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3811	3220	WITH 100 SX CMT
SURF	8.625	227		WITH 165 SX CMT

#12389

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/09/2005 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3748' WITH 4 SX CMT. PLUG AT 700' WITH 50 SX CMT. PLUG AT 250' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT. 10 SX GEL FOR GEL SPACER.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/09/2005 2:50 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3748' & 4 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 700' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 250' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3798	3803		


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED

DATE 8-24-05
INV. NO. 2006060382

District: 01

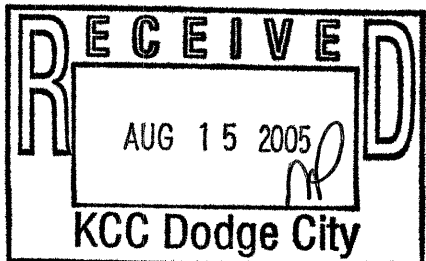

Signed

Richard W. Lacey

(TECHNICIAN)

RECEIVED
AUG 24 2005
KCC WICHITA

Form CR-23