

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-19028-00-01
Spot: S2SWSE Sec/Twnshp/Rge: 9-32S-15W
330 feet from S Section Line, 1980 feet from E Section Line
Lease Name: MARSH B Well #: 1OWWO
County: BARBER Total Vertical Depth: 974 feet

Operator License No.: 3842
Op Name: LARSON ENGINEERING INC DBA LARS
Address: 562 WEST STATE ROAD 4
OLMITZ, KS 67564

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	249		

#35⁰⁰

Well Type: LH UIC Docket No: _____ Date/Time to Plug: 08/15/2005 4:00 PM
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.
Proposal Rcvd. from: MIKE GODFREY Company: DUKE DRILLING CO., INC. Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 940' WITH 50 SX CMT. 2ND PLUG AT 280' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: NONE
Date/Time Plugging Completed: 08/15/2005 6:15 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

Perfs:


GOT OUT OF HOLE AT 943'. 1ST PLUG AT 940' WITH 50 SX CMT. 2ND PLUG AT 280' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

INVOICED
DATE 8.24.05
INV. NO. 2006060374

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: DP

District: 01

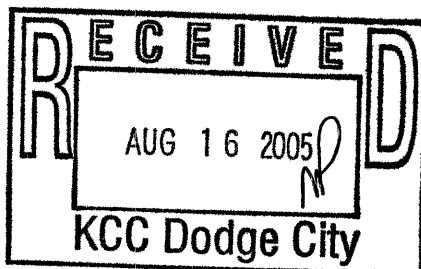

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED

AUG 24 2005

KCC WICHITA

Form CP 2/3