

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-067-00204-00-00
Spot: NENESW Sec/Twnshp/Rge: 6-30S-36W
2540 feet from S Section Line, 2540 feet from W Section Line
Lease Name: MCCLAREN Well #: 1-6
County: GRANT Total Vertical Depth: 2763 feet

Operator License No.: 4824
Op Name: PIONEER NATURAL RESOURCES USA.
Address: 5205 N. O'CONNOR BLVD.
IRVING, TX 75039

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2420		WITH 3 SX CMT
PROD	7	2744	0	WITH 900 SX CMT
SURF	10.75	656		WITH 300 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/05/2005 11:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: SET CIBP @ 2420'. MUD SPACER FROM CIBP TO 1700'. PUMP 20 SX CMT INSIDE 7". PULL STRETCH. PULL TO 700' & PUMP 75 SX CMT. PULL TO 40' PUMP 20 SX CMT TO SURFACE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: NONE
Date/Time Plugging Completed: 08/05/2005 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

CIBP SET AT 2420' WITH 3 SX CMT. HOLE WAS DRY TO TOP OF CMT ON CIBP. 1ST PLUG PUMP MUD SPACER TO 1700' & PUMP 25 SX CMT INSIDE 7". 2ND PLUG PUMP MUD SPACER TO 675' & PUMP 30 SX CMT INSIDE 7". 3RD PLUG PUMP MUD SPACER TO 50' & PUMP 20 SX CMT TO SURFACE. CMT TO SURFACE IN 7" X 10 3/4" ANNULUS.

Perfs:

Top	Bot	Thru	Comments
2479	2709		


INVOICED

DATE 8-24-05
INV. NO. 200606038

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 0

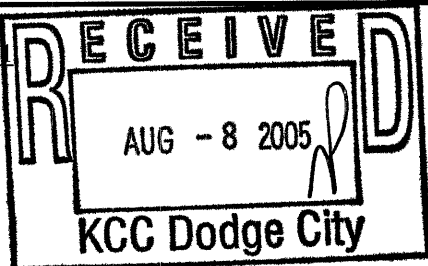

Signed

Jim Holland PART II
(TECHNICIAN)

RECEIVED
AUG 24 2005
KCC WICHITA

Form CP-23