

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-20599-00-00
Spot: SE Sec/Twnshp/Rge: 20-29S-34W
1250 feet from S Section Line, 1250 feet from E Section Line
Lease Name: ROY Well #: 13-20
County: HASKELL Total Vertical Depth: 2936 feet

Operator License No.: 4824
Op Name: PIONEER NATURAL RESOURCES USA.
Address: 5205 N. O'CONNOR BLVD.
IRVING, TX 75039

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2450		WITH 2 SX CMT
PROD	5.5	2935	0	WITH 525 SX CMT
SURF	8.625	644		WITH 300 SX CMT

#9542

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/17/2005 3:00 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 2450' WITH 2 SX CMT. PUMP 15 SX CMT AT 1700'. PUMP 75 SX CMT FROM 650' TO 0'. CHECK BACKSIDE

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/18/2005 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

5 1/2" CASING CEMENTED TO SURFACE. SET CIBP @ 2450' WITH 2 SX CMT. 1ST PLUG FILL WITH MUD TO 1750'. PUMP 15 SX CMT AT 1750'. 2ND PLUG PUMP MUD FROM 1620'-670'. CIRCULATE 70 SX CMT FROM 670' TO SURFACE. PRESSURE TO 500#. PUMP 20 SX CMT DOWN 5 1/2" X 8 5/8" ANNLULUS. PRESSURE TO 100#.

Perfs:


Top	Bot	Thru	Comments
2538	2788		

INVOICED

DATE 8.24.05
INV. NO. 2006060381

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

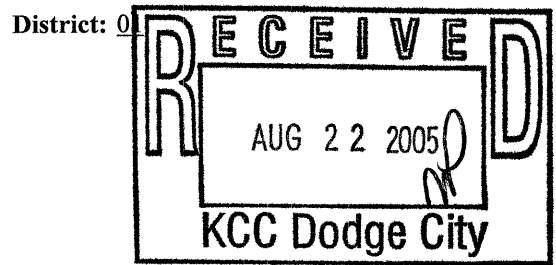

Signed Ken Jehlik
(TECHNICIAN)

RECEIVED
AUG 24 2005
KCC WICHITA

Form CP-3/3