

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-00164-00-00
Spot: NENESW Sec/Twnshp/Rge: 15-23S-37W
2490 feet from S Section Line, 2990 feet from E Section Line
Lease Name: SAUER Well #: B-1
County: KEARNY Total Vertical Depth: 2735 feet

Operator License No.: 32864
Op Name: XTO ENERGY INC.
Address: 210 PARK AVENUE - SUITE 2350
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2724		
PROD	5.5	2734	330	WITH 200 SX CMT
SURF	8.625	310		WITH 200 SX CMT

88 89

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/09/2005 12:00 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: JOHN Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 40 SX CMT & 400# HULLS. PLUG AT 850' WITH 50 SX CMT. PLUG AT 340' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: GREG PATTERSON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/10/2005 5:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 40 SX CMT & 400# HULLS AT 2220'. LET SET OVERNIGHT AND PRESSURE TO 500#. HELD. SHOOT 5 1/2" CASING AT 835'. PUMP 100 SX CMT. DISPLACE WITH 15 BBLS. DID NOT CIRCULATE. LET SET 1 HOUR. BLEED OFF PRESSURE. SHOOT 5 1/2" CASING AT 330'. SPOT 50 SX CMT AT 330'. HOLE CIRCULATED WHILE SPOTTING PLUG AT 330'. SPOT 10 SX CMT FROM 40' TO 0'.

Perfs:

Top	Bot	Thru	Comments
2690	2700		
2655	2665		
2596	2608		
2552	2562		
2528	2544		


Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

INVOICE!

DATE 8-24-05
INV. NO. 2006060 385

District: 01

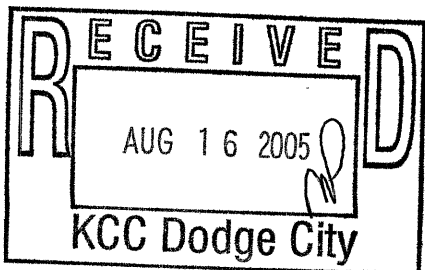

Signed

Ken Jehlik

(TECHNICIAN)

RECEIVED
AUG 24 2005
KCC WICHITA

Form CP-223